



Security and
access control
for all buildings

CATALOGUE 2019





Pioneering safety.

CISA, Costruzioni Italiane Serrature e Affini, was established in Florence in 1926 by Luigi Bucci. The brand soon became a household name, thanks to its patent of the very first electric controlled lock which revolutionised the principle of opening and closing doors and gates. Today CISA is one of the top brands in locking and access control systems and, since December 2013, one of the founders of the international group Allegion, together with leading brands in the security technology sector.

Research and innovation.

CISA offers a constantly evolving range of solutions, thanks to daily commitment to 100% Italian research and development. A significant number of international patents are registered every year to meet the highest regulatory standards.

Specific solutions for all needs.

From private residences to business centres, schools, hospitals and hotels, security is the number one priority for CISA and all its access control and management solutions are designed with this in mind. CISA leads the field in providing answers to all its customers' needs, whatever the environment, with dedicated solutions to prevent unlawful access to any kind of door or entrance. CISA also produces systems which provide safe egress to everyone, even those with reduced mobility, in the event of danger or difficulty.

Someone you can depend on.

CISA operates nationwide and is always on hand to assist security professionals: from security managers to architects, managers of technical departments and apartment building administrators, down to those who take the security of their homes seriously. It provides all round support thanks to its authorised "CISA Solution Partner" centres which provide experience, advice and services with the technology and solidity that has made CISA a household name.

More comfort and design.

CISA designs and manufactures master key systems (where one key opens several doors) for any premises, from individual homes to hospitals, to allow more convenient and economical management of multiple accesses, while still guaranteeing the highest security standards. This system is complemented by an effective system to control key duplication (Security Card). Thanks to its electro-mechanical solutions, accesses can be controlled in real time and credentials easily changed. And CISA also has an eye for design, with product ranges that blend into their surroundings and are available in a variety of colours and models.

Visit cisa.com



Catalogue 2019


Analytic index



Special executions



Key blanks



Cylinders



Padlocks



Locks for steel doors



Locks for aluminium doors



Locks for wooden doors




Locks for armour plated doors



Fire door locks and panic exit devices



Locks and panic exit devices



Door closers




Safes



Keying kits



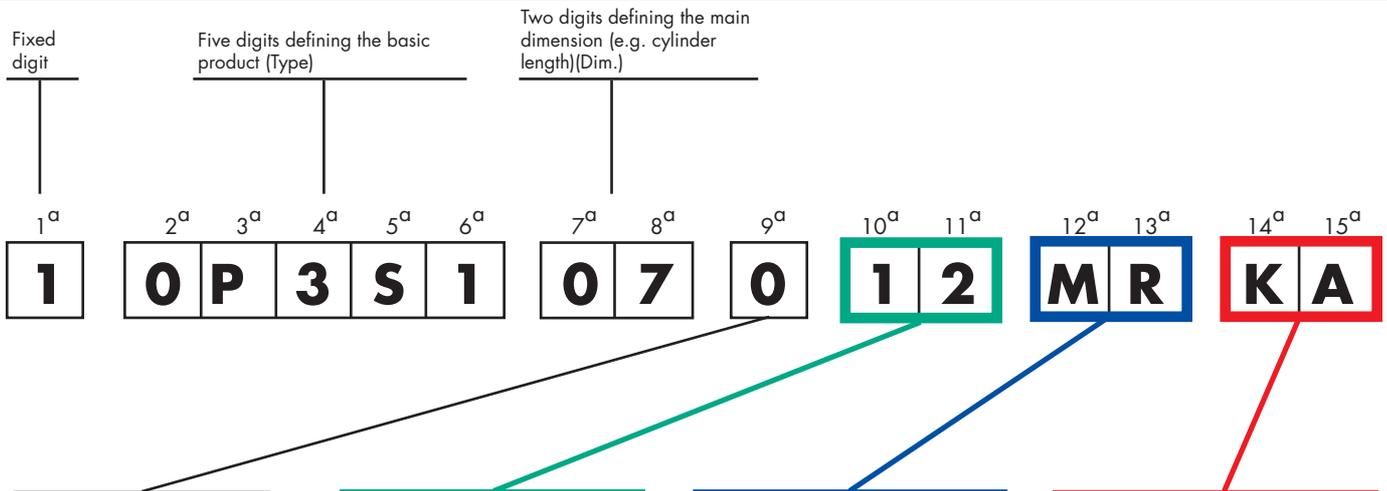

One digit for the hand:

Locks:

- 0 = reversible
- 1 = right hand inwards
- 2 = left hand inwards
- 3 = right hand outwards
- 4 = left hand outwards

Electric striker:

- 0 = reversible
- 1 = right hand inwards
- left hand outwards
- 2 = left hand inwards
- right hand outwards

Panic exit devices

- 0 = reversible
- 1 = right hand outwards
- 2 = left hand outwards

Two digits which **must always be the 10th and the 11th**, defining a **FINISH** other than the standard ones. Use the **green codes** from the finishes list.

Two digits which **must always be the 12th and the 13th**, defining **PERSONALIZATION**, if any. Any personalization must be **previously agreed upon with CISA** who will assign the relevant code.

Two digits which **must always be the 14th and the 15th**, defining any **SPECIAL EXECUTION**. Use the **red codes** from the special features list. Orders for uncoded special features must be accompanied by a description.

EXAMPLES:

1) When ordering a **basic item** from the list specify the code up to the hand digit. For example, to order a cylinder:

1 | 0M311 | 070 | | |

3) When ordering a personalized item, for example a **cylinder with a customer's design feature**, indicate:

1 | 0M311 | 070 | 00 | MR |

where MR is to be assigned by CISA

2) When ordering an item with a non-standard finish, for example a **nickel-plated cylinder**, indicate:

1 | 0M311 | 070 | 12 | |

4) When ordering a special item, for example a **KA cylinder**, indicate:

1 | 0M311 | 070 | 00 | MR | KA

EN STANDARDS OVERVIEW

For determination of the Classification Coding System



European standard EN 1303:2015
CYLINDERS




European standard EN 12209:2016
MECHANICAL LOCKS



European standard prEN 15685:2014
MULTIPOINT MECHANICAL LOCKS




European standard EN 14846:2008
ELECTRICAL LOCKS

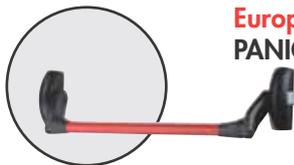

European standard EN 1125:2008
PANIC EXIT DEVICES



European standard EN 179:2008
PUSH PAD PANIC EXIT DEVICES

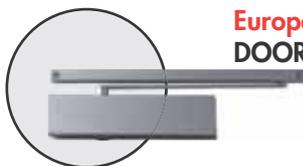

European standard EN 1154:1996 + A1:2002
DOOR CLOSERS



CYLINDERS

Example for AP4 S cylinders

1	2	3	4	5	6	7	8
1	6	0	B	0	C	6	D

1 Category of use

Grade 1: for use by people with a high incentive to exercise care

2 Durability

Grade 4: 25 000 cycles
 Grade 5: 50 000 cycles
 Grade 6: 100 000 cycles

3 Door mass

Grade 0: all

4 Suitability for use on fire/smoke doors

Grade 0: Not approved for use on fire/smoke door
 Grade A: Suitable for use on smoke door assemblies
 Grade B: Suitable for use on fire/smoke door assemblies

5 Safety

Grade 0: all

6 Corrosion resistance and temperature

Grade 0: No defined corrosion resistance, no temperature requirement
 Grade A: High corrosion resistance, no temperature requirement
 Grade B: No defined corrosion requirement, temperature requirement: -25°C to +65°C
 Grade C: High corrosion resistance; temperature requirement: -25°C to +65°C

7 Key related security

Grade 1: 100 effective differs, minimum 2 mobile elements
 Grade 2: 300 effective differs, minimum 3 mobile elements
 Grade 3: 15,000 effective differs, minimum 5 mobile elements
 Grade 4: 30,000 effective differs, minimum 5 mobile elements
 Grade 5: 30,000 effective differs, minimum 6 mobile elements
 Grade 6: 100,000 effective differs, minimum 6 mobile elements

8 Attack resistance

Grade 0: No defined resistance to drilling and mechanical attack
 Grade A: Resistance to drilling for 3/5 mins and mechanical attack, excluding plug extraction
 Grade B: Resistance to drilling for 5/10 mins and mechanical attack, excluding plug extraction
 Grade C: Resistance to drilling for 3/5 mins and mechanical attack
 Grade D: Resistance to drilling for 5/10 mins and mechanical attack

MECHANICAL LOCKS

Example for a Multitop PRO lock, series 49225

1 2 3 4 5 6 7 8
| 3 | X | 9 | 0 | 0 | G | 6-7 | 0 |



1 Category of use

- Grade 1: For use by people with a high incentive to exercise care and with a small chance of misuse, e.g. residential doors
- Grade 2: For use by people with some incentive to exercise care but where there is some chance of misuse, e.g. office doors
- Grade 3: For use by the public where there is little incentive to exercise care and where there is a high chance of misuse, e.g. doors in public buildings

2 Durability

- Grade A: 50 000 test cycles no force on latch bolt, or for locks without latchbolt
- Grade B: 100 000 test cycles no force on latch bolt, or for locks without latchbolt
- Grade C: 200 000 test cycles no force on latch bolt, or for locks without latchbolt
- Grade L: 100 000 test cycles 25 N load on latchbolt
- Grade M: 200 000 test cycles 25 N load on latchbolt
- Grade R: 100 000 test cycles 50 N load on latchbolt
- Grade S: 200 000 test cycles 50 N load on latchbolt
- Grade W: 100 000 test cycles 120 N load on latchbolt
- Grade X: 200 000 test cycles 120 N load on latchbolt

3 Door mass and closing force

- Grade 0: Locks without a latchbolt
- Grade 1: Up to 100 kg door mass 50 N maximum closing force
- Grade 2: Up to 200 kg door mass 50 N maximum closing force
- Grade 3: Above 200 kg door mass or as specified by the manufacturer 50 N maximum closing force
- Grade 4: Up to 100 kg door mass 25 N maximum closing force
- Grade 5: Up to 200 kg door mass 25 N maximum closing force
- Grade 6: Above 200 kg door mass or as specified by the manufacturer 25 N maximum closing force
- Grade 7: Up to 100 kg door mass 15 N maximum closing force
- Grade 8: Up to 200 kg door mass 15 N maximum closing force
- Grade 9: Above 200 kg door mass or as specified by the manufacturer 15 N maximum closing force

4 Suitability for use on fire resisting and/or smoke control doorset

- Grade 0: Not verified for use on fire resisting /smoke control doorset assemblies;
- Grade A: For use on smoke control doorset assemblies based on a test in accordance with EN 1634-3 where the lock contributes to the integrity
- Grade B: For use on smoke control and fire resisting doorset assemblies based on a test in accordance with EN 1634-1 or EN 1634-2 where the lock contributes to the integrity;
- Grade N: For use on smoke control and fire resisting doorset assemblies based on tests where the lock does not contribute to keeping the door in a closed position during the fire resisting and/or smoke control test;

5 Safety

- Grade 0: No safety requirement

6 Corrosion Resistance and Temperature

- Grade 0: No defined corrosion resistance, no temperature requirement
- Grade A: Low corrosion resistance (24 h), no temperature requirement
- Grade C: High corrosion resistance (96 h), no temperature requirement
- Grade D: Very high corrosion resistance (240 h), no temperature requirement
- Grade F: High corrosion resistance (96 h), Temperature requirement: -10°C to +60°C
- Grade G: Very high corrosion resistance (240 h), Temperature requirement: -10°C to +60°C

7 Security and drill resistance

Grade	Side force on deadbolt	Disengaging force	Deadbolt projection	In case of hook, resistance for pulling of antiseperation bolt	In case of hook, resistance to forcing of antilifting device in sliding door lock	Drill resistance
0	-	-	-	-	-	-
1	1 kN	1 kN	10 mm	1 kN	1 kN	no
2	3 kN	2 kN	12 mm	3 kN	3 kN	no
3	5 kN	4 kN	14 mm	5 kN	3 kN	no
4	7 kN	5 kN	20 mm	7 kN	5 kN	no
5	7 kN	5 kN	20 mm	7 kN	5 kN	yes
6	10 kN	6 kN	20 mm	10 kN	6 kN	no
7	10 kN	6 kN	20 mm	10 kN	6 kN	yes

note: 1kN = 100 kg


8 Key identification of lever locks

- Grade 0: No requirement
- Grade A: Minimum three detaining elements
- Grade B: Minimum five detaining elements
- Grade C: Minimum five detaining elements, extended number of effective differs
- Grade D: Minimum six detaining elements
- Grade E: Minimum six detaining elements, extended number of effective differs
- Grade F: Minimum seven detaining elements
- Grade G: Minimum seven detaining elements, extended number of effective differs
- Grade H: Minimum eight detaining elements, extended number of effective differs

MULTIPOINT MECHANICAL LOCKS

Example for a Multitop PRO lock, series 9400/49500/49600/49700

1 2 3 4 5 6 7 8 9 10
| 3 | X | 9 | A | 0 | G | 6-7 | 0 | 1 | 3 |

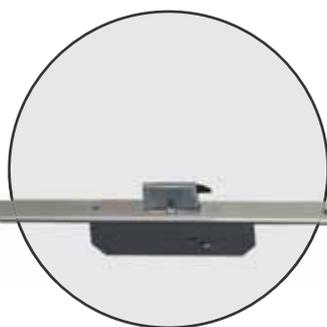

1 Category of use

- Grade 1: for use by people with a high incentive to exercise care and with a small chance of misuse, e.g. residential doors
- Grade 2: for use by people with some incentive to exercise care but where there is some chance of misuse, e.g. office doors.
- Grade 3: for use by the public where there is little incentive to exercise care and where there is a high chance of misuse, e.g. doors in public buildings.

2 Durability

- Grade A: 50 000 test cycles; no load on latch bolt; or for multipoint locks without latchbolt;
- Grade B: 100 000 test cycles; no load on latch bolt; or for multipoint locks without latchbolt;
- Grade C: 200 000 test cycles; no load on latch bolt; or for multipoint locks without latchbolt;
- Grade L: 100 000 test cycles; 25 N load on latch bolt;
- Grade M: 200 000 test cycles; 25 N load on latch bolt;
- Grade R: 100 000 test cycles; 50 N load on latch bolt;
- Grade S: 200 000 test cycles; 50 N load on latch bolt;
- Grade W: 100 000 test cycles; 120 N load on latch bolt;
- Grade X: 200 000 test cycles; 120 N load on latch bolt.

3 Door mass and closing force

- Grade 0: Multipoint locks without a latch bolt (latching function)
- Grade 1: up to 100 kg door mass 50 N maximum closing force
- Grade 2: up to 200 kg door mass 50 N maximum closing force
- Grade 3: above 200 kg door mass 50 N maximum closing force
as specified by the manufacturer
- Grade 4: up to 100 kg door mass 25 N maximum closing force
- Grade 5: up to 200 kg door mass 25 N maximum closing force
- Grade 6: above 200 kg door mass 25 N maximum closing force
as specified by the manufacturer
- Grade 7: up to 100 kg door mass; 15 N maximum closing force
- Grade 8: up to 200 kg door mass; 15 N maximum closing force
- Grade 9: above 200 kg door mass 15 N maximum closing force
as specified by the manufacturer

4 Suitability for use on fire resistance and smoke control doors

- Grade 0: not verified for use on fire resisting /smoke control door set assemblies;
- Grade A: for use on smoke control door set assemblies based on a test in accordance with EN 1634-3 where the multipoint lock contributes to the integrity;
- Grade B: for use on smoke control and fire resisting door set assemblies based on a test in accordance with EN 1634-1 or EN 1634-2 where the multipoint lock contributes to the integrity;
- Grade N: for use on smoke control and fire resisting door set assemblies based on tests where the multipoint lock does not contribute to keeping the door in a closed position during the fire resisting and/or smoke control test;

5 Safety

- Grade 0: no safety requirement

6 Corrosion resistance and temperature

- Grade 0: No defined corrosion resistance, no temperature requirement
- Grade A: Low corrosion resistance (24 h), no temperature requirement
- Grade C: High corrosion resistance (96 h), no temperature requirement
- Grade D: Very high corrosion resistance (240 h), no temperature requirement
- Grade F: High corrosion resistance (96 h), Temperature requirement: -10°C to +60°C
- Grade G: Very high corrosion resistance (240 h), Temperature requirement: -10°C to +60°C

7 Security for locking points

Grade	Side force on deadbolt	Disengaging force	Deadbolt projection	In case of hook, resistance for pulling of anti-separation bolt	In case of hook, resistance to forcing of anti-lifting device in sliding door lock	Drill resistance
0	-	-	-	-	-	-
1	1 kN	1 kN	10 mm	1 kN	1 kN	no
2	3 kN	2 kN	12 mm	3 kN	3 kN	no
3	5 kN	4 kN	14 mm	5 kN	3 kN	no
4	7 kN	5 kN	20 mm	7 kN	5 kN	no
5	7 kN	5 kN	20 mm	7 kN	5 kN	yes
6	10 kN	6 kN	20 mm	10 kN	6 kN	no
7	10 kN	6 kN	20 mm	10 kN	6 kN	yes

note: 1kN = 100 kg

8 Key identification of lever locks

- Grade 0: Not applicable;
- Grade A: Minimum three detaining elements;
- Grade B: Minimum five detaining elements;
- Grade C: Minimum five detaining elements, extended number of effective differs;
- Grade D: Minimum six detaining elements;
- Grade E: Minimum six detaining elements, extended number of effective differs;
- Grade F: Minimum seven detaining elements;
- Grade G: Minimum seven detaining elements, extended number of effective differs;
- Grade H: Minimum eight detaining elements, extended number of effective differs

9 Security for anti-separation points

Grade	Side force on deadbolt	Disengaging force	Anti-separation point bolt projection	In case of hook, resistance for pulling of anti-separation bolt	In case of hook, resistance to forcing of anti-lifting device in sliding door lock	Drill resistance
0	-	-	-	-	-	-
1	1 kN	1 kN	5 mm	1 kN	1 kN	no
2	3 kN	2 kN	5 mm	1 kN	1 kN	no
3	3 kN	2 kN	5 mm	3 kN	3 kN	no
4	5 kN	4 kN	5 mm	5 kN	4 kN	no
5	7 kN	5 kN	5 mm	7 kN	5 kN	yes
6	10 kN	6 kN	5 mm	10 kN	6 kN	no
7	10 kN	6 kN	5 mm	10 kN	6 kN	yes

note: 1kN = 100 kg


10 Clenching points

- Grade 0: No clenching force requirements
- Grade 1: Clenching force = 10 N
- Grade 2: Clenching force = 25 N
- Grade 3: Clenching force = 50 N
- Grade 4: Clenching force = 120 N

ELECTRICAL LOCKS

Example for a Multitop PRO lock, series 19225

1 2 3 4 5 6 7 8 9
| 3 | X | 9 | 0 | 0 | M | 6-7 | 0 | 2 |

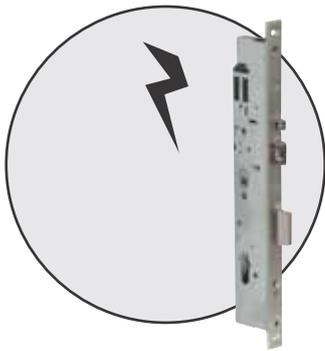

1 Category of use

- Grade 1: For use by people with a high incentive to exercise care and with a small chance of misuse, e.g. residential doors
- Grade 2: For use by people with some incentive to exercise care but where there is some chance of misuse, e.g. office doors.
- Grade 3: For use by the public where there is little incentive to exercise care and where there is a high chance of misuse, e.g. doors in public buildings.

2 Durability

Grade A:	50 000 test cycles	No load on latchbolt
Grade B:	100 000 test cycles	No load on latchbolt
Grade C:	200 000 test cycles	No load on latchbolt
Grade F:	50 000 test cycles	10 N load on latchbolt
Grade G:	100 000 test cycles	10 N load on latchbolt
Grade H:	200 000 test cycles	10 N load on latchbolt
Grade L:	100 000 test cycles	25 N load on latchbolt
Grade M:	200 000 test cycles	25 N load on latchbolt
Grade R:	100 000 test cycles	50 N load on latchbolt
Grade S:	200 000 test cycles	50 N load on latchbolt
Grade W:	100 000 test cycles	120 N load on latchbolt
Grade X:	200 000 test cycles	120 N load on latchbolt
Grade Y:	200 000 test cycles	250 N load on latchbolt

3 Door mass and closing force

Grade 1:	Up to 100 kg door mass	50 N maximum closing force
Grade 2:	Up to 200 kg door mass	50 N maximum closing force
Grade 3:	Above 200 kg door mass or as specified by the manufacturer	50 N maximum closing force
Grade 4:	Up to 100 kg door mass	25 N maximum closing force
Grade 5:	Up to 200 kg door mass	25 N maximum closing force
Grade 6:	Above 200 kg door mass or as specified by the manufacturer	25 N maximum closing force
Grade 7:	Up to 100 kg door mass	15 N maximum closing force
Grade 8:	Up to 200 kg door mass	15 N maximum closing force
Grade 9:	Above 200 kg door mass or as specified by the manufacturer	15 N maximum closing force

4 Suitability for use on fire/smoke doors

- Grade 0: Not intended for use on smoke/fire door assemblies
- Grade A: Suitable for use on smoke door assemblies - based solely on the requirements of the relevant product standard
- Grade B: Suitable for use on smoke/fire door assemblies: with a classification time of: 15 min
- Grade C: Suitable for use on smoke/fire door assemblies: with a minimum classification time of: 30 min
- Grade D: Suitable for use on smoke/fire door assemblies: with a minimum classification time of: 60 min
- Grade E: Suitable for use on smoke/fire door assemblies: with a minimum classification time of: 90 min
- Grade F: Suitable for use on smoke/fire door assemblies: with a classification time of: 120 min grater

5 Safety

Grade 0: No safety requirement

6 Environmental suitability

Grade 0:	No defined resistance	No defined resistance	No defined resistance
Grade A:	No defined resistance	No defined resistance	+40 °C with initial relative humidity of 95 %
Grade B:	No defined resistance	No defined resistance	+55 °C with initial relative humidity of 95 %
Grade C:	Low resistance (24 h)	+5 °C to +55 °C	+40 °C with initial relative humidity of 95 %
Grade D:	Moderate resistance (48 h)	+5 °C to +55 °C	+40 °C with initial relative humidity of 95 %
Grade E:	High resistance (96 h)	+5 °C to +55 °C	+40 °C with initial relative humidity of 95 %
Grade F:	Very high resistance (240 h)	+5 °C to +55 °C	+40 °C with initial relative humidity of 95 %
Grade G:	Moderate resistance (48 h)	-10 °C to +55 °C	+40 °C with initial relative humidity of 95 %
Grade H:	High resistance (96 h)	-10 °C to +55 °C	+40 °C with initial relative humidity of 95 %
Grade J:	Very high resistance (240 h)	-10 °C to +55 °C	+40 °C with initial relative humidity of 95 %
Grade K:	Moderate resistance (48 h)	-25 °C to +70 °C	+55 °C with initial relative humidity of 95 %
Grade L:	High resistance (96 h)	-25 °C to +70 °C	+55 °C with initial relative humidity of 95 %
Grade M:	Very high resistance (240 h)	-25 °C to +70 °C	+55 °C with initial relative humidity of 95 %
Grade N:	No defined resistance	-25 °C to +70 °C	+40 °C with initial relative humidity of 95 %
Grade P:	No defined resistance	-25 °C to +70 °C	+55 °C with initial relative humidity of 95 %

7 Security and drill resistance

Grade	Side force on deadbolt	Disengaging force	Deadbolt projection	In case of hook, resistance to pulling of antiseperation bolt	In case of hook, resistance to forcing of amplifying device in sliding door lock	Drill resistance
0	-	-	-	-	-	-
1	1 kN	1 kN	10 mm	1 kN	1 kN	no
2	3 kN	2 kN	12 mm	3 kN	3 kN	no
3	5 kN	4 kN	14 mm	5 kN	3 kN	no
4	7 kN	5 kN	20 mm	7 kN	5 kN	no
5	7 kN	5 kN	20 mm	7 kN	5 kN	yes
6	10 kN	6 kN	20 mm	10 kN	6 kN	no
7	10 kN	6 kN	20 mm	10 kN	6 kN	yes


note: 1kN = 100 kg

8 Security - electrical function

- Grade 0: no requirement
- Grade 1: status indication

9 Security - electrical manipulation

Grade	Voltage drop protection	Protection against the effect of cutting cables	Protection against the effects of wire manipulation	Resistance to electromagnetic manipulation	Resistance to electrostatic discharge	Resistance to electrostatic manipulation
0						
1					Level 2 (EN 61000-4-2)	
2	yes	yes		yes	Level 4 (EN 61000-4-2)	Level 4 (EN 61000-4-2)
3	yes	yes	yes	yes	Level 4 (EN 61000-4-2)	Level 4 (EN 61000-4-2)

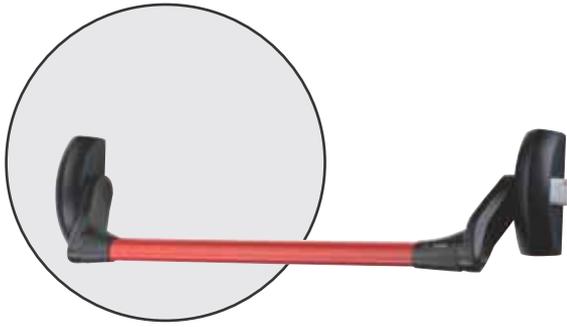

PANIC EXIT DEVICES

Example for Panic exit devices series 59001/11//16

1	2	3	4	5	6	7	8	9	10
3	7	7	A	1	4	2	2	A	A

1 Category of use

Grade 3: High frequency of use where there is little incentive to exercise care, i.e. where there is a chance of an accident occurring and of misuse

2 Durability

Grade 6: 100.000 Test cycles
Grade 7: 200.000 Test cycles

3 Door mass

Grade 5: Up to 100 kg
Grade 6: Up to 200 kg
Grade 7: Above 200 kg

4 Suitability for use on fire/smoke doors

Grade 0: Not approved for use on fire/smoke door assemblies
Grade A: Suitable for use on fire/smoke door assemblies based on the requirements of B.1
Grade B: Suitable for use on fire/smoke door assemblies based on the requirements of EN 1634-1

5 Safety

Grade 1: All panic and emergency devices have a critical safety function therefore only the top grade 1 is identified

6 Corrosion resistance

Two grades of corrosion resistance given in EN 1670:2007, 5.6:
Grade 3: 96 h (high resistance)
Grade 4: 240 h (very high resistance)

7 Security

Grade 2: Panic devices are primarily for the operation of a door from inside and security is secondary to that of safety

8 Projection of horizontal bar

Grade 1: Projection up to 150 mm (large projection)
Grade 2: Projection up to 100 mm (standard projection)

9 Type of horizontal bar operation

Type A: Panic exit device with "push-bar" operation
Type B: Panic exit device with "touch-bar" operation

10 Field of door application

Grade A: Single door, double door: active or inactive leaf
Grade B: Single door only
Grade C: Double door, inactive leaf only



PUSH PAD PANIC EXIT DEVICES

Example for the Push Pad series 59051/61/66

1	2	3	4	5	6	7	8	9	10
3	7	7	A	1	4	5	2	B	A

1 Category of use

Grade 3: High frequency of use where there is little incentive to exercise care, i.e. where there is a chance of an accident occurring and of misuse

2 Durability

Grade 6: 100.000 Test cycles
Grade 7: 200.000 Test cycles

3 Door mass

Grade 5: Up to 100 kg
Grade 6: Up to 200 kg
Grade 7: Above 200 kg

4 Suitability for use on fire/smoke doors

Grade 0: Not approved for use on fire/smoke door assemblies
Grade A: Suitable for use on fire/smoke door assemblies based on the requirements of B.1
Grade B: Suitable for use on fire/smoke door assemblies based on the requirements of EN 1634-1

5 Safety

Grade 1: All panic and emergency devices have a critical safety function therefore only the top grade 1 is identified

6 Corrosion resistance

Two grades of corrosion resistance given in EN 1670:2007, 5.6:
Grade 3: 96 h (high resistance)
Grade 4: 240 h (very high resistance)

7 Security

Grade 2: 1.000 N
Grade 3: 2.000 N
Grade 4: 3.000 N
Grade 5: 5.000 N

8 Projection of operating element


Grade 1: Projection up to 150 mm (large projection)
Grade 2: Projection up to 100 mm (standard projection)

9 Type of operation

Type A: Emergency exit device with "lever handle" operation
Type B: Emergency exit device with "push pad" operation

10 Field of door application

Grade A: Outward opening single exit door, double exit door: active or inactive leaf
Grade B: Outward opening single exit door only
Grade C: Outward opening double exit door: inactive leaf only
Grade D: Inward opening single exit door only

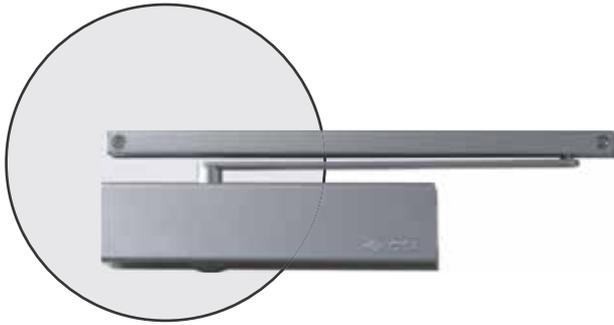

DOOR CLOSERS

Example for door closers
series D5200

1 2 3 4 5 6
| 4 | 8 | 1-4 | 1 | 1 | 3 |

1 Category of use

Grade 3: For closing doors from at least 105° open
Grade 4: For closing doors from 180° open

2 Durability

Only one test duration is identified for door closers manufactured to this standard:
Grade 8: 500.000 Test cycles

3 Door closer power size

Grade 1-7: See table below: Where a door closer provides a range of power sizes both the minimum and the maximum sizes shall be identified

Door closer power size	Recommended door leaf width	Test door mass	Closing moment				Opening moment	Door close efficiency
			between 0° and 4°		between 88° and 92°	any other angle		
			Nm (min)	Nm (max)	Nm (min)	Nm (max)		
1	750	20	9	13	3	2	26	50
2	850	40	13	18	4	3	36	50
3	950	60	18	26	6	4	47	55
4	1.100	80	26	37	9	6	62	60
5	1.250	100	37	54	12	8	83	65
6	1.400	120	54	87	18	11	134	65
7	1.600	160	87	140	29	18	215	65

4 Suitability for use on fire/smoke doors

Grade 0: Not suitable for use on fire/smoke door assemblies
Grade 1: Suitable for use on fire/smoke door assemblies

5 Safety

Grade 1: All door closers are required to satisfy the essential requirement of safety in use; Therefore only grade 1 is identified

6 Corrosion resistance


Grade 0: No defined corrosion resistance
Grade 1: Mild resistance
Grade 2: Moderate resistance
Grade 3: High resistance
Grade 4: Very high resistance



BS OHSAS
18001:2007



ISO 9001:2008

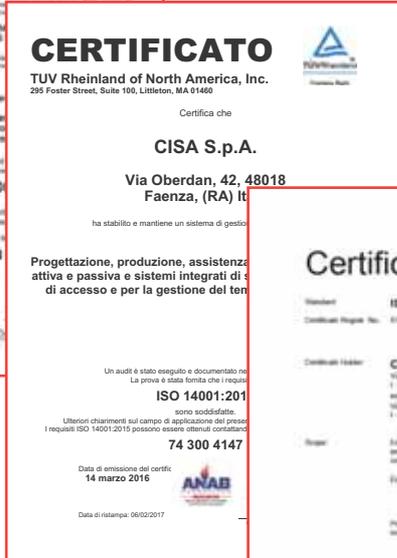

ISO 14001:2004



ISO 50001:2011



AEO F14 0871

Bodies and associations





CISA™

Analytic index



ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 02544 15 0	113	121	5	1 06072 00 0	267			1 06141 71 0	257			1 06221 00 0	427		
1 02550 25 0	113	121	6	1 06075 00 0	177			1 06141 74 0	257			1 06221 01 0	427		
1 02649 10 0	114	121	8	1 06077 16 0	254			1 06141 75 0	258			1 06221 10 0	427		
1 02649 11 0	114	121	8	1 06077 20 0	254			1 06141 76 0	258			1 06221 11 0	427		
1 02715 10 1	413	433	1	1 06078 16 0	254			1 06141 77 0	258			1 06221 15 0	427		
1 02715 11 1	413	433	1	1 06078 20 0	254			1 06141 78 0	258			1 06221 16 0	427		
1 02716 00 1	414	433	1	1 06079 16 0	254			1 06141 79 0	258			1 06221 17 0	427		
1 02716 01 1	414	433	1	1 06079 20 0	255			1 06141 80 0	523			1 06221 18 0	427		
1 02716 10 1	414	433	1	1 06079 77 0	255			1 06141 82 0	259			1 06221 20 0	427		
1 02716 11 1	414	433	1	1 06080 16 0	255			1 06141 84 0	259			1 06221 50 0	428		
1 02716 50 1	414	433	1	1 06080 20 0	255			1 06141 85 0	259			1 06221 51 0	428		
1 02716 51 1	414	433	1	1 06081 00 0	357			1 06141 86 0	259			1 06221 52 0	428		
1 02716 60 1	414	433	1	1 06081 01 0	424			1 06141 87 0	259			1 06221 60 0	428		
1 02716 61 1	414	433	1	1 06082 00 0	357			1 06141 88 0	523			1 06221 62 0	428		
1 05001 00 0 06	299			1 06083 00 0	357			1 06141 89 0	259			1 06223 00 0	348		
1 05001 00 0 07	299			1 06084 00 0	350			1 06141 95 0	259			1 06224 00 0	260		
1 05001 00 0 12	299			1 06086 00 0	177			1 06141 96 0	260			1 06224 50 0	428		
1 05001 00 0 38	299			1 06086 01 0	255			1 06142 00 0	351			1 06224 60 0	428		
1 05002 00 1 06	299			1 06086 02 0	255			1 06142 01 0	424			1 06226 00 0	348		
1 05002 00 1 07	299			1 06091 10 0	346			1 06142 02 0	424			1 06228 08 0	428		
1 05002 00 1 20	299			1 06092 00 0	178			1 06142 51 0	424			1 06228 28 0	428		
1 05002 00 1 38	299			1 06093 00 0	342			1 06142 85 0	523			1 06231 00 0	351		
1 05002 00 2 06	299			1 06093 01 0	342			1 06143 00 0	357			1 06232 00 0	179		
1 05002 00 2 07	299			1 06093 02 0	342			1 06144 10 1	425			1 06232 01 0	179		
1 05002 00 2 20	299			1 06093 04 0	342			1 06144 15 0	425			1 06232 05 0	260		
1 05002 00 2 38	299			1 06093 10 0	342			1 06144 50 1	425			1 06232 06 0	260		
1 05003 00 1 06	300			1 06093 11 0	342			1 06145 10 0	425			1 06232 20 0	179		
1 05003 00 1 07	300			1 06098 00 0	347			1 06145 11 0	425			1 06232 21 0	179		
1 05003 00 2 06	300			1 06100 10 0	347			1 06145 15 0	426			1 06232 22 0	179		
1 05003 00 2 07	300			1 06100 15 0	347			1 06145 50 0	426			1 06233 00 0	261		
1 05004 00 1 06	300			1 06101 10 0	347			1 06146 00 0	354			1 06233 01 0	261		
1 05004 00 1 07	300			1 06102 10 0	347			1 06147 00 0	260			1 06233 02 0	261		
1 05004 00 2 06	300			1 06102 13 0	347			1 06147 01 0	260			1 06233 03 0	261		
1 05004 00 2 07	300			1 06107 00 0	347			1 06149 00 0	347			1 06235 00 0	351		
1 05005 00 0 06	246			1 06110 00 0	343			1 06150 00 0	347			1 06236 00 0	355		
1 05005 00 0 07	246			1 06110 15 0	256			1 06152 00 0	347			1 06237 01 0	355		
1 05005 00 0 12	246			1 06119 00 0	357			1 06157 00 0	260			1 06243 00 0	348		
1 05005 00 0 20	246			1 06123 00 1	256			1 06162 00 0	348			1 06271 00 0	351		
1 05005 00 0 38	246			1 06123 03 0	256			1 06163 00 0	348			1 06272 00 0	351		
1 05020 00 0	246			1 06123 04 0	424			1 06167 00 0	260			1 06275 00 0	351		
1 05021 00 1	246			1 06124 00 0	178			1 06168 00 0	223			1 06277 01 0	268		
1 05021 00 2	246			1 06124 02 0	178			1 06195 05 0	487			1 06277 02 0	268		
1 05030 00 0	423			1 06140 00 0	355			1 06195 06 0	487			1 06277 03 0	268		
1 05031 00 0	423			1 06140 01 0	355			1 06195 07 0	487			1 06277 10 0	269		
1 06000 00 0	199			1 06140 02 0	355			1 06195 08 0	207			1 06277 11 0	269		
1 06002 00 0	254			1 06141 35 0	267			1 06195 09 0	487			1 06277 14 0	269		
1 06003 00 0	176			1 06141 36 0	267			1 06195 10 0	487			1 06277 28 0	269		
1 06003 01 0	176			1 06141 37 0	267			1 06196 43 0	467	529	11	1 06277 32 0	269		
1 06004 00 0	176			1 06141 38 0	267			1 06196 60 0	486			1 06277 41 0	269		
1 06004 01 0	177			1 06141 40 0	268			1 06198 70 0	481			1 06277 44 0	270		
1 06005 00 0	177			1 06141 42 0	268			1 06198 75 0	492			1 06277 76 0	270		
1 06010 00 0	117			1 06141 44 0	268			1 06206 00 0	348			1 06277 77 0	270		
1 06011 00 0	117			1 06141 52 0	256			1 06213 05 0	358			1 06277 78 0	270		
1 06012 00 0	117			1 06141 53 0	256			1 06216 00 0	348			1 06277 80 0	270		
1 06012 01 0	254			1 06141 55 0	256			1 06218 00 0	343			1 06277 88 0	270		
1 06018 25 0	117			1 06141 56 0	256			1 06220 00 0	426			1 06277 89 0	271		
1 06027 00 0	117			1 06141 57 0	256			1 06220 02 0	426			1 06277 92 0	271		
1 06027 01 0	254			1 06141 63 0	256			1 06220 03 0	426			1 06277 95 0	271		
1 06035 00 0	343			1 06141 65 0	256			1 06220 05 0	426			1 06277 98 0	271		
1 06043 00 0	118			1 06141 66 0	257			1 06220 20 0	426			1 06277 99 0	271		
1 06047 51 0	415			1 06141 67 0	257			1 06220 26 0	426			1 06278 00 0	351		
1 06048 02 0	357			1 06141 68 0	257			1 06220 27 0	426			1 06278 01 0	272		
1 06048 03 0	357			1 06141 69 0	257			1 06220 28 0	427			1 06278 02 0	272		
1 06062 00 0	267			1 06141 70 0	257			1 06220 29 0	427			1 06278 04 0	272		

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 06278 05 0	272			1 06291 05 0	353			1 06418 01 0	429			1 06459 02 0	262		
1 06278 06 0	272			1 06291 06 0	262			1 06418 03 0	429			1 06460 00 0	262		
1 06278 07 0	272			1 06291 07 0	180			1 06421 10 1	429			1 06460 05 0	262		
1 06278 11 0	352			1 06291 20 0	353			1 06421 10 2	429			1 06460 15 0	360		
1 06278 16 0	273			1 06291 50 0	429			1 06422 00 0	356			1 06460 40 0	417		
1 06278 17 0	273			1 06292 00 0	358			1 06424 00 0	356			1 06460 50 0	417		
1 06278 19 0	273			1 06292 01 0	359			1 06425 02 0	429			1 06460 51 0	417		
1 06278 20 0	273			1 06293 00 0	359			1 06425 03 0	429			1 06460 60 0	417		
1 06278 21 0	273			1 06293 01 0	359			1 06425 04 0	430			1 06461 01 0	263		
1 06278 22 0	273			1 06300 14 0	143			1 06425 05 0	430			1 06461 02 0	263		
1 06278 26 0	274			1 06300 18 0	143			1 06425 06 0	430			1 06461 03 1	210		
1 06278 27 0	274			1 06301 50 0	143			1 06425 07 0	356			1 06461 03 2	210		
1 06278 28 0	274			1 06301 60 0	143			1 06426 07 0	356			1 06461 04 1	210		
1 06278 64 0	274			1 06302 25 0	143			1 06429 00 0	415			1 06461 04 2	210		
1 06278 65 0	274			1 06302 60 0	144			1 06429 05 0	415			1 06461 07 0	263		
1 06278 66 0	274			1 06303 00 0	144			1 06429 06 0	415			1 06461 11 0	263		
1 06278 80 0	275			1 06316 04 0	481			1 06429 10 0	415			1 06461 12 0	263		
1 06279 00 0	352			1 06322 00 0	359			1 06429 15 0	415			1 06461 17 0	263		
1 06279 10 0	358			1 06323 00 0	359			1 06429 16 0	416			1 06461 20 0	263		
1 06279 10 0 82	358			1 06323 00 0 82	359			1 06429 20 0	416			1 06461 21 0	263		
1 06279 11 0	358			1 06323 01 0	359			1 06429 50 0	416			1 06461 22 0	263		
1 06279 12 0	352			1 06325 00 0	359			1 06429 51 0	416			1 06461 23 0	210		
1 06281 00 0	352			1 06328 00 0	359			1 06429 60 1	416			1 06461 25 0	264		
1 06282 00 0	352			1 06328 00 0 82	359			1 06433 00 0	431			1 06461 26 0	264		
1 06283 01 0	352			1 06328 00 0 B7	359			1 06433 01 0	431			1 06461 27 1	210		
1 06283 02 0 B7	352			1 06329 00 0	359			1 06433 10 0	431			1 06461 27 2	210		
1 06284 00 0	352			1 06329 00 0 82	359			1 06433 11 0	431			1 06461 30 0	264		
1 06284 01 0	352			1 06329 00 0 B7	359			1 06434 00 0	431			1 06461 34 0	264		
1 06285 25 0	275			1 06331 00 0	360			1 06434 01 0	431			1 06461 35 0	264		
1 06285 27 0	275			1 06353 00 0 44	118			1 06436 10 0	207			1 06461 39 0	264		
1 06285 30 0	275			1 06353 00 0 60	118			1 06436 11 0	207			1 06461 40 0	264		
1 06285 32 0	275			1 06353 00 0 62	118			1 06437 00 0	431			1 06461 45 0	264		
1 06285 34 0	275			1 06353 00 0 64	118			1 06437 01 0	431			1 06461 50 0	417		
1 06285 35 0	276			1 06354 00 0 23	118			1 06441 00 0	229			1 06461 51 0	417		
1 06285 36 0	276			1 06354 00 0 68	118			1 06441 10 0	229			1 06461 60 0	417		
1 06285 37 0	276			1 06355 00 0 12	118			1 06441 15 0	180			1 06461 61 0	417		
1 06285 38 0	276			1 06355 00 0 66	118			1 06441 20 0	229			1 06462 01 0	265		
1 06285 42 0	276			1 06356 00 0 12	118			1 06442 00 0	230			1 06462 20 0	265		
1 06285 43 0	277			1 06356 00 0 66	118			1 06443 00 0	230			1 06463 05 0	247		
1 06285 44 0	277			1 06357 00 0 12	118			1 06443 05 0	230			1 06463 06 0	247		
1 06287 02 0	277			1 06357 00 0 66	118			1 06443 21 0	231			1 06463 07 0	247		
1 06287 11 0	277			1 06411 01 0	118			1 06443 26 0	231			1 06463 09 0	247		
1 06287 14 0	278			1 06411 02 0	118			1 06443 31 0	200			1 06463 16 0	248		
1 06287 17 0	278			1 06411 03 0	118			1 06443 36 0	200			1 06463 17 0	248		
1 06287 21 0	278			1 06411 04 0	118			1 06443 41 0	207			1 06463 21 0	248		
1 06287 26 0	278			1 06412 01 0	119			1 06443 46 0	207			1 06463 22 0	248		
1 06287 27 0	279			1 06412 02 0	119			1 06444 46 0	201			1 06463 23 0	248		
1 06287 29 0	279			1 06412 03 0	119			1 06444 47 0	201			1 06463 24 0	249		
1 06287 50 0	279			1 06412 04 0	119			1 06444 56 0	201			1 06463 25 0	249		
1 06287 64 0	279			1 06412 51 0	119			1 06444 66 0	201			1 06463 31 0	249		
1 06287 65 0	279			1 06413 01 0	119			1 06444 67 0	201			1 06463 32 0	249		
1 06287 77 0	280			1 06413 02 0	119			1 06444 76 0	201			1 06463 33 0	249		
1 06287 88 0	280			1 06413 03 0	119			1 06449 00 0	231			1 06463 34 0	249		
1 06287 89 0	280			1 06413 04 0	119			1 06449 05 0	201			1 06463 35 0	249		
1 06287 92 0	280			1 06414 01 0	119			1 06449 10 0	202			1 06465 02 0	250		
1 06287 94 0	280			1 06414 02 0	119			1 06449 11 0	202			1 06465 03 0	250		
1 06287 95 0	281			1 06414 03 0	119			1 06451 00 0	232			1 06465 05 0	250		
1 06287 97 0	281			1 06414 04 0	119			1 06451 10 0	232			1 06465 06 0	251		
1 06290 00 0	261			1 06414 20 0	119			1 06452 05 0	232			1 06465 07 0	251		
1 06290 05 0	179			1 06414 25 0	119			1 06453 05 0	232			1 06465 08 0	251		
1 06290 06 0	179			1 06414 30 0	119			1 06458 10 0	417			1 06465 10 0	251		
1 06290 10 0	179			1 06415 00 0	353			1 06458 11 0	356			1 06465 21 0	252		
1 06291 00 0	352			1 06416 00 0	353			1 06458 20 0	417			1 06465 22 0	252		
1 06291 01 0	261			1 06418 00 0	355			1 06459 01 0	262			1 06465 23 0	252		

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 07084 21 0	491			1 07153 15 0 97	535			1 07551 01 0	575			1 07555 02 0	577		
1 07085 75 0	457			1 07155 01 0	547			1 07551 02 0	575			1 07555 03 0	577		
1 07085 76 0	457			1 07155 02 0	547			1 07551 03 0	575			1 07555 04 0	577		
1 07085 77 0	525			1 07155 03 0	547			1 07551 04 0	575			1 07555 05 0	577		
1 07086 00 0	266			1 07155 04 0	547			1 07551 05 0	575			1 07555 11 0	577		
1 07086 01 0	266			1 07155 05 0	547			1 07551 06 0	575			1 07555 12 0	577		
1 07088 00 0	233			1 07155 06 0	548			1 07551 11 0	575			1 07555 13 0	577		
1 07088 03 0	182			1 07155 10 0 12	543			1 07551 12 0	575			1 07555 14 0	577		
1 07088 03 0 00DZ	183			1 07155 11 0 97	543			1 07551 13 0	575			1 07555 21 0	577		
1 07088 04 0	183			1 07155 12 0 97	543			1 07551 14 0	575			1 07555 22 0	577		
1 07088 04 0 00CG	183			1 07155 13 0 97	543			1 07551 15 0	575			1 07555 23 0	577		
1 07088 05 0	183			1 07155 14 0 97	543			1 07551 16 0	575			1 07555 24 0	577		
1 07089 50 0	457			1 07155 15 0 97	543			1 07551 17 0	575			1 07555 25 0	577		
1 07089 52 0	526			1 07155 20 0 97	543			1 07551 41 0	575			1 07555 26 0	577		
1 07090 01 0	484			1 07155 21 0 97	544			1 07551 42 0	575			1 07555 31 0	577		
1 07090 01 0 C2	484			1 07156 03 0	548			1 07551 43 0	575			1 07555 32 0	577		
1 07090 05 0	484			1 07165 00 0	120			1 07551 44 0	575			1 07555 33 0	577		
1 07090 05 0 C2	484			1 07165 01 0	120			1 07551 45 0	575			1 07555 34 0	577		
1 07090 10 0	484			1 07165 02 0	120			1 07551 51 0	575			1 07555 35 0	577		
1 07090 10 0 C2	484			1 07165 03 0	120			1 07551 52 0	575			1 07555 36 0	577		
1 07090 50 0	443			1 07165 04 0	120			1 07551 53 0	575			1 07555 37 0	577		
1 07091 01 0	485			1 07165 21 0	491			1 07551 54 0	575			1 07555 38 0	577		
1 07091 01 0 C2	485			1 07165 50 0	491			1 07551 55 0	575			1 07555 39 0	577		
1 07091 02 0	485			1 07165 51 0	492			1 07551 56 0	575			1 07555 40 0	577		
1 07091 02 0 C2	485			1 07165 51 0 C2	492			1 07551 71 0	575			1 07555 51 0	577		
1 07091 03 0	485			1 07173 00 0	360			1 07551 72 0	575			1 07555 52 0	577		
1 07091 50 0	443	461	14	1 07174 00 0	360			1 07551 73 0	575			1 07555 53 0	577		
1 07095 00 0	564			1 07174 00 0 82	360			1 07551 74 0	575			1 07555 54 0	577		
1 07108 00 0	564			1 07174 00 0 B7	360			1 07551 75 0	575			1 07555 55 0	577		
1 07109 00 0	564			1 07175 00 0	361			1 07551 76 0	575			1 07555 61 0	577		
1 07109 01 0	564			1 07175 00 0 82	361			1 07551 79 0	575			1 07555 62 0	577		
1 07109 03 0	564			1 07175 00 0 B7	361			1 07552 01 0	575			1 07555 63 0	577		
1 07114 00 0	564			1 07176 00 0	361			1 07552 02 0	575			1 07555 64 0	577		
1 07114 05 0	564			1 07176 10 0	361			1 07552 03 0	575			1 07556 03 0	578		
1 07114 06 0	564			1 07176 61 0	526			1 07552 04 0	576			1 07557 01 0	578		
1 07114 11 0	565			1 07176 61 0 C2	526			1 07552 51 0	576			1 07557 02 0	578		
1 07114 12 0	564			1 07176 62 0	526			1 07552 71 0	576			1 07557 03 0	578		
1 07114 15 0	564			1 07176 62 0 C2	526			1 07552 72 0	576			1 07557 11 0	578		
1 07114 16 0	565			1 07176 63 0	526			1 07552 73 0	576			1 07557 52 0	578		
1 07114 17 0	565			1 07176 63 0 C2	526			1 07552 74 0	576			1 07558 01 0	578		
1 07118 00 1	344			1 07176 66 0	526			1 07552 75 0	576			1 07558 02 0	578		
1 07118 00 2	344			1 07176 66 0 C2	526			1 07552 76 0	576			1 07558 05 0	578		
1 07118 01 1	344			1 07177 00 0	361			1 07552 81 0	576			1 07559 01 0	587		
1 07118 01 2	344			1 07177 10 0	361			1 07552 82 0	576			1 07559 02 0	587		
1 07120 00 1	345			1 07178 00 0	362			1 07552 83 0	576			1 07559 03 0	588		
1 07120 00 2	345			1 07178 10 0	362			1 07552 84 0	576			1 07559 04 0	588		
1 07120 01 1	345			1 07206 00 0	526			1 07552 85 0	576			1 07559 05 0	588		
1 07120 01 2	345			1 07206 01 0	354			1 07552 86 0	576			1 07559 06 0	588		
1 07125 00 0	565			1 07209 00 0	538538			1 07553 01 0	576			1 07559 07 0	588		
1 07125 01 0	565			1 07209 01 0	538			1 07553 02 0	576			1 07559 09 0	588		
1 07126 01 0	458			1 07209 02 0	536			1 07553 03 0	576			1 07559 11 0	588		
1 07126 51 0	458			1 07209 20 0 97	538			1 07553 04 0	576			1 07559 12 0	588		
1 07128 00 0	266			1 07209 21 0	538			1 07553 51 0	576			1 07559 13 0	588		
1 07132 00 0 97	546			1 07209 25 0	538			1 07554 01 0	576			1 07559 19 0	588		
1 07133 00 0 97	546			1 07210 00 0	537			1 07554 02 0	576			1 07559 22 0	588		
1 07134 00 0 97	546			1 07210 01 0	544			1 07554 03 0	576			1 07559 24 0	589		
1 07135 00 0 97	546			1 07430 31 0	565			1 07554 05 0	576			1 07559 25 0	589		
1 07141 01 0 97	542			1 07430 32 0	566			1 07554 51 0	576			1 07559 26 0	589		
1 07142 01 0 97	542			1 07550 01 0	587			1 07554 71 0	577			1 07559 28 0	589		
1 07153 02 0 97	542			1 07550 02 0	587			1 07554 72 0	577			1 07559 42 0	588		
1 07153 03 0 97	542			1 07550 04 0	587			1 07554 73 0	577			1 07559 48 0	588		
1 07153 04 0 97	542			1 07550 12 0	64			1 07554 91 0	577			1 07559 62 0	587		
1 07153 05 0 97	542			1 07550 13 0	587			1 07554 92 0	577			1 07559 63 0	588		
1 07153 06 0 97	542			1 07550 14 0	75			1 07555 01 0	577			1 07559 80 0	589		

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 07559 81 0	589			1 07580 05 0	72			1 07582 48 0	74			1 07591 12 0	585		
1 07559 83 0	589			1 07580 10 0	73			1 07582 49 0	74			1 07591 15 0	585		
1 07559 84 0	589			1 07580 11 A	73			1 07582 50 0	74			1 07591 21 0	585		
1 07559 85 0	589			1 07580 11 B	73			1 07582 51 0	74			1 07591 29 0	586		
1 07571 01 0	579			1 07580 12 A	73			1 07582 52 0	74			1 07591 39 0	586		
1 07571 02 0	579			1 07580 12 B	73			1 07582 53 0	74			1 08210 01 0	116	121	9
1 07571 03 0	579			1 07580 13 A	73			1 07582 54 0	74			1 08210 02 0	116	121	9
1 07571 04 0	579			1 07580 13 B	73			1 07582 55 0	74			1 08210 05 0	116	121	9
1 07571 05 0	579			1 07580 14 A	73			1 07582 56 0	74			1 08210 06 0	116	121	9
1 07571 06 0	579			1 07580 14 B	73			1 07582 57 0	74			1 08210 12 0	116	121	9
1 07571 11 0	579			1 07580 15 A	73			1 07582 58 0	74			1 08210 13 0	116	121	9
1 07571 12 0	579			1 07580 15 B	73			1 07582 59 0	74			1 08210 14 0	116	121	9
1 07571 13 0	579			1 07580 16 A	73			1 07582 60 0	74			1 08210 16 0	116	121	9
1 07571 14 0	579			1 07580 16 B	73			1 07582 61 0	74			1 08210 18 0	116	121	9
1 07571 15 0	579			1 07580 17 A	73			1 07582 62 0	74			1 08220 02 0	116	122	10
1 07571 16 0	579			1 07580 20 0	73			1 07582 63 0	74			1 08230 02 0	116	122	11
1 07571 17 0	579			1 07580 21 0	62			1 07582 64 0	74			1 08230 06 0	116	122	11
1 07571 18 0	579			1 07580 22 0	62			1 07582 66 0	74			1 1A610 00 0	293	364	10
1 07571 41 0	579			1 07580 23 0	62			1 07582 67 0	74			1 1A610 00 0 00PC	293	364	10
1 07571 42 0	579			1 07580 24 0	62			1 07582 68 0	74			1 1A611 00 0	293	364	10
1 07571 43 0	579			1 07580 30 A	73			1 07582 69 0	74			1 1A611 00 0 00DF	150	185	8
1 07571 44 0	579			1 07580 30 0	73			1 07582 71 0	74			1 1A611 00 0 00PC	293	364	10
1 07571 45 0	579			1 07580 31 0	73			1 07582 72 0	74			1 1A630 00 0	293	364	10
1 07571 70 0	579			1 07580 32 A	73			1 07582 76 0	74			1 1A631 00 0	293	364	10
1 07571 71 0	579			1 07580 33 A	73			1 07582 77 0	74			1 1A721 00 0	149	185	8
1 07571 72 0	579			1 07580 34 0	73			1 07582 78 0	74			1 1A721 00 0 00PA	149	185	8
1 07571 73 0	579			1 07580 47 0 12	73			1 07582 79 0	74			1 1A721 00 0 00PB	149	185	8
1 07571 74 0	579			1 07580 48 0 12	73			1 07582 80 0	74			1 1A721 00 0 00PC	149	185	8
1 07571 75 0	579			1 07580 50 0	62			1 07582 82 0	74			1 1A721 00 0 079	149	185	8
1 07571 76 0	579			1 07580 51 0	62			1 07582 86 0	74			1 1A731 00 0	149	185	8
1 07571 77 0	581			1 07580 52 0	62			1 07582 87 0	74			1 1A731 00 0 00PA	149	185	8
1 07571 78 0	581			1 07580 53 0	62			1 07582 88 0	74			1 1A731 00 0 00PB	149	185	8
1 07571 80 0	579			1 07580 55 0	62			1 07582 95 0	74			1 1A731 00 0 00PC	149	185	8
1 07571 93 0	581			1 07580 60 A	73			1 07586 04 0	142			1 1A731 00 0 079	149	185	8
1 07571 94 0	581			1 07580 61 0	62			1 07586 05 0	142			1 11610 50 1	294	364	1
1 07572 01 0	579			1 07580 62 0	62			1 07586 06 1	142			1 11610 50 2	294	364	1
1 07572 02 0	579			1 07580 70 0	62			1 07586 08 0	142			1 11610 50 3	295	364	2
1 07572 03 0	579			1 07582 10 0	75			1 07586 09 0	142			1 11610 50 4	295	364	2
1 07572 71 0	579			1 07582 11 0	75			1 07586 10 0	142			1 11610 60 1	294	364	1
1 07572 72 0	579			1 07582 12 0	75			1 07589 02 0	142			1 11610 60 2	294	364	1
1 07572 73 0	579			1 07582 13 0	75			1 07589 03 1	142			1 11610 60 3	295	364	2
1 07572 74 0	579			1 07582 14 0	75			1 07589 04 0	142			1 11610 60 4	295	364	2
1 07572 75 0	579			1 07582 15 0	75			1 07589 05 0	142			1 11610 70 1	294	364	1
1 07572 76 0	579			1 07582 16 0	75			1 07590 01 0	582			1 11610 70 2	294	364	1
1 07572 77 0	581			1 07582 17 0	75			1 07590 05 0	582			1 11610 70 3	295	364	2
1 07572 78 0	581			1 07582 18 0	75			1 07590 12 0	582			1 11610 70 4	295	364	2
1 07572 81 0	579			1 07582 20 0	75			1 07590 15 0	582			1 11610 80 1	294	364	1
1 07572 82 0	579			1 07582 23 0	75			1 07590 18 0	582			1 11610 80 2	294	364	1
1 07572 83 0	579			1 07582 30 0	74			1 07590 21 0	582			1 11610 80 3	295	364	2
1 07572 84 0	579			1 07582 31 0	74			1 07590 23 0	583			1 11610 80 4	295	364	2
1 07572 85 0	580			1 07582 32 0	74			1 07590 24 0	583			1 11611 50 1	294	364	1
1 07572 87 0	580			1 07582 33 0	74			1 07590 25 0	583			1 11611 50 2	294	364	1
1 07572 88 0	580			1 07582 34 0	74			1 07590 26 0	583			1 11611 60 1	294	364	1
1 07572 89 0	580			1 07582 35 0	74			1 07590 27 0	583			1 11611 60 2	294	364	1
1 07572 90 0	580			1 07582 36 0	74			1 07590 28 0	583			1 11611 70 1	294	364	1
1 07572 91 0	580			1 07582 37 0	74			1 07590 29 0	584			1 11611 70 2	294	364	1
1 07572 92 0	580			1 07582 38 0	74			1 07590 30 0	584			1 11611 80 1	294	364	1
1 07572 93 0	581			1 07582 39 0	74			1 07590 35 0	584			1 11611 80 2	294	364	1
1 07572 94 0	581			1 07582 40 0	74			1 07590 36 0	584			1 11630 50 1	294	364	1
1 07572 95 0	581			1 07582 41 0	74			1 07590 37 0	584			1 11630 50 2	294	364	1
1 07572 96 0	581			1 07582 42 0	74			1 07590 38 0	584			1 11630 50 3	295		
1 07580 01 0	72			1 07582 44 0	74			1 07590 45 0	585			1 11630 50 4	295		
1 07580 02 0	72			1 07582 46 0	74			1 07591 01 0	585			1 11630 60 1	294	364	1
1 07580 03 0	72			1 07582 47 0	74			1 07591 05 0	585			1 11630 60 2	294	364	1

ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING		ITEM	PAGE	DRAWING	
		Page	Table			Page	Table			Page	Table			Page	Table
1 59366 10 0	474	529	12	1 82010 32 0	554	571	1	1 82410 82 0	555	571	1				
1 59371 10 0	451	529	12	1 82010 40 0	554	571	1	1 82410 90 0	555	571	1				
1 59607 10 0	521	530	14	1 82010 41 0	554	571	1	1 82410 91 0	555	571	1				
1 59607 10 0 C2	521	530	14	1 82010 42 0	554	571	1	1 82410 92 0	555	571	1				
1 59616 00 0	447	530	13	1 82010 50 0	554	571	1	1 82450 34 0	561	572	2				
1 59616 10 0	447	530	13	1 82010 51 0	554	571	1	1 82450 43 0	561	572	2				
1 59617 00 0	473			1 82010 52 0	554	571	1	1 82450 53 0	561	572	2				
1 59617 12 0	521			1 82010 70 0	554	571	1	1 82450 74 0	561	572	2				
1 59647 00 0	447	530	15	1 82010 71 0	554	571	1	1 82450 85 0	561	572	2				
1 59711 00 0	520	530	16	1 82010 72 0	554	571	1	1 82450 95 0	561	572	2				
1 59711 00 0 005B	520	530	16	1 82010 80 0	554	571	1	1 82710 30 0	553	571	1				
1 59711 00 0 C2	520	530	16	1 82010 81 0	554	571	1	1 82710 31 0	553	571	1				
1 59711 01 0	520	530	16	1 82010 82 0	554	571	1	1 82710 32 0	553	571	1				
1 59711 10 0	520	530	16	1 82010 90 0	554	571	1	1 82710 40 0	553	571	1				
1 59711 10 0 005B	520	530	16	1 82010 91 0	554	571	1	1 82710 41 0	553	571	1				
1 59711 10 0 C2	520	530	16	1 82010 92 0	554	571	1	1 82710 42 0	553	571	1				
1 59711 11 0	520	530	16	1 82050 34 0	560	572	2	1 82710 50 0	553	571	1				
1 59801 10 0	466	529	11	1 82050 43 0	560	572	2	1 82710 51 0	553	571	1				
1 59801 11 0	466	529	11	1 82050 53 0	560	572	2	1 82710 52 0	553	571	1				
1 59811 09 0	466	529	11	1 82050 74 0	560	572	2	1 82710 70 0	553	571	1				
1 59811 10 0	466	529	11	1 82050 85 0	560	572	2	1 82710 71 0	553	571	1				
1 59811 10 0 005B	467	529	11	1 82050 95 0	560	572	2	1 82710 72 0	553	571	1				
1 59811 10 0 C2	466	529	11	1 82210 20 0	555	571	1	1 82710 80 0	553	571	1				
1 59811 11 0	466	529	11	1 82210 21 0	555	571	1	1 82710 81 0	553	571	1				
1 59811 11 0 C2	466	529	11	1 82210 30 0	555	571	1	1 82710 82 0	553	571	1				
1 59816 10 0	467	529	11	1 82210 31 0	555	571	1	1 82710 90 0	553	571	1				
1 59816 11 0	467	529	11	1 82210 32 0	555	571	1	1 82710 91 0	553	571	1				
1 59851 09 0	465			1 82210 40 0	555	571	1	1 82710 92 0	553	571	1				
1 59851 10 0	465			1 82210 41 0	555	571	1	1 82750 34 0	558	572	2				
1 59851 11 0	465			1 82210 42 0	555	571	1	1 82750 43 0	558	572	2				
1 60130 01 0 98	545	549	1	1 82210 50 0	555	571	1	1 82750 53 0	558	572	2				
1 60131 01 0 98	545	549	1	1 82210 51 0	555	571	1	1 82750 74 0	558	572	2				
1 60140 02 0 98	545	549	1	1 82210 52 0	555	571	1	1 82750 85 0	558	572	2				
1 60141 02 0 98	545	549	1	1 82210 70 0	555	571	1	1 82750 95 0	558	572	2				
1 60150 03 0 98	545	549	1	1 82210 71 0	555	571	1	1 82751 35 0	559	572	2				
1 60151 03 0 98	545	549	1	1 82210 72 0	555	571	1	1 82751 75 0	559	572	2				
1 60160 04 0 98	545	549	1	1 82210 80 0	555	571	1	1 83000 40 0	556	572	3				
1 60161 04 0 98	545	549	1	1 82210 81 0	555	571	1	1 83000 41 0	556	572	3				
1 72210 16 0	115	122	18	1 82210 82 0	555	571	1	1 83010 40 0	556	572	3				
1 72210 20 0	115	122	18	1 82210 90 0	555	571	1	1 83710 40 0	556	572	3				
1 72210 25 0	115	122	18	1 82210 91 0	555	571	1								
1 72210 30 0	115	122	18	1 82210 92 0	555	571	1								
1 72215 16 0	115	122	18	1 82250 34 0	561	572	2								
1 72215 20 0	115	122	18	1 82250 43 0	561	572	2								
1 72215 25 0	115	122	18	1 82250 53 0	561	572	2								
1 72215 30 0	115	122	18	1 82250 74 0	561	572	2								
1 72250 26 0	115	123	19	1 82250 85 0	561	572	2								
1 72251 01 0	115	123	20	1 82250 95 0	561	572	2								
1 72251 03 0	115	123	20	1 82410 20 0	555	571	1								
1 8A010 20 0	557	571	1	1 82410 21 0	555	571	1								
1 8A010 21 0	557	571	1	1 82410 30 0	555	571	1								
1 8A010 30 0	557	571	1	1 82410 31 0	555	571	1								
1 8A010 31 0	557	571	1	1 82410 32 0	555	571	1								
1 8A010 40 0	557	571	1	1 82410 40 0	555	571	1								
1 8A010 41 0	557	571	1	1 82410 41 0	555	571	1								
1 8A050 23 0	562	572	2	1 82410 42 0	555	571	1								
1 8A050 34 0	562	572	2	1 82410 50 0	555	571	1								
1 8A050 43 0	562	572	2	1 82410 51 0	555	571	1								
1 82010 10 0	554	571	1	1 82410 52 0	555	571	1								
1 82010 11 0	554	571	1	1 82410 70 0	555	571	1								
1 82010 20 0	554	571	1	1 82410 71 0	555	571	1								
1 82010 21 0	554	571	1	1 82410 72 0	555	571	1								
1 82010 30 0	554	571	1	1 82410 80 0	555	571	1								
1 82010 31 0	554	571	1	1 82410 81 0	555	571	1								



CISA

Special executions



SURCHARGES FOR SPECIAL FINISHES	Nickel-plated 12	Bronze-plated visible parts 47	Polished visible parts 66	Polished chrome plated 21
<p>CYLINDERS</p> <ul style="list-style-type: none"> • Single rim cylinders - Cam locks and furniture cylinders • Rim cylinder sets - Double cylinders (standard, with tumb turn shaft) • Single mortice cylinders (standard, with tumb turn shaft) • Double cylinders with round knob, Hotel Function <p>ROSES:</p> <ul style="list-style-type: none"> • 06010 - 06011 - 06012 - 06018 - 06027 • 06043 - 06081 - 06082 - 06083 - 06143 <p>LOCKS (visible parts):</p> <ul style="list-style-type: none"> • 12010 - 12011 - 12015 - 12016 - 5C010 - 5C011 - 5C021 - 5C031 - 52210 - 52300 - 52310 - 52520 - 52521 - 52526 • 44010 - 44011 • 45100 • 5C110 - 5C120 - 5C130 - 5C140 - 5C150 - 5C170 • 5C611 - 5C631 <p>STRIKERS</p>	<ul style="list-style-type: none"> • • • - • 	<ul style="list-style-type: none"> - - - - - • - 	<ul style="list-style-type: none"> - • • - 	<ul style="list-style-type: none"> - - - • -
BUTTON ITEM 1.06110.00.0	•	-	-	-

SPECIAL FINISHES

**PAINTED
RAL
COLORS**

41	42	43	44	45	97	B9
red RAL 3000	yellow RAL 1004	green RAL 6001	black RAL 9005	white RAL 9010	grey RAL 9006	steel grey

FAST PANIC EXIT DEVICES

• **eFAST Touch 59851 series**

- White casing White bar Fin. 45 ●
- Grey casing Grey bar Fin. 97 -
- St. steel grey casing ... St. steel grey bar Fin. B9 -

• **FAST Touch item 59811.10.0, 59711.00.0, 59711.10.0**

- Red casing Black bar Fin. 41 ●
- Yellow casing Black bar Fin. 42 ●
- Green casing Black bar Fin. 43 ●
- Black casing Black bar Fin. 44 ●
- White casing White bar Fin. 45 ●
- Grey casing Grey bar Fin. 97 -
- St. steel grey casing ... St. steel grey bar Fin. B9 -

• **FAST Touch item 59811.10.0.00.00.SB, 59711.00/10.0.00.00.SB (casing fin.) bar not supplied as stand.**

- Red casing Fin. 41 ●
- Yellow casing Fin. 42 ●
- Green casing Fin. 43 ●
- Black casing Fin. 44 -
- White casing Fin. 45 ●
- Grey casing Fin. 97 -




• **FAST Push series 59011, 59066 and Prestige series 59311, 59607, 59617.XX**

- Red casing Fin. 41 ●
- Yellow casing Fin. 42 ●
- Green casing Fin. 43 ●
- White casing Fin. 45 ●
- Grey casing Fin. 97 (*) Surcharge for Prestige series only ●
- St. steel grey casing ... Fin. B9(**) Not available for 59617 series -


• **Additional locking points and components for FAST and Prestige series (fin. 44 for horizontal bar only)**

- Set of latchbolt item 1. 07063-20/30/35/40/51/61/66/71.0 ●
- Inside plate item 07176.60/61/62/63/70/71.0 ●
- Set for top rod extensions item 1.07081.06.0 ●
- Kit of vertical rod item 1.07064.51/61.0 ●
- Hold open devices item 1.07165.50/51.0 ●
- Strikers series 07072 ●
- Horizontal bar item 07007.13/14/15.0 ●
- Outside operation devices item 07077, 07078 ●
- Electric strikers item 07083.15-77.0 ●




NOTE: Finishing C2 (satin stainless steel PVD) not on the price list contact customer service CISA

<p>SPECIAL KEYING ARRANGEMENTS</p>	CROSS KEY	STANDARD C2000	Asix
			
<p>KEYED ALIKE SYSTEMS</p> <p>A) KEY-CHANGES AT OUR CHOICE</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob, cross key cylinders..... KA - Rim locks with double cylinder, double cylinders, rim cylinder sets..... <p>KA WITH A DIFFERENT NUMBER OF KEYS THAN THE STANDARD (specify number in order)</p> <ul style="list-style-type: none"> - Less than standard number WHERE AVAILABLE - More than standard number <p>KA CODED (specify code in order)</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, Single mortice cylinder single rim cylinders, cylinder with knob, cross key cylinder KC - Rim locks with double cylinder, double cylinders, , rim cylinder sets..... <p>(*) Cylinder supplied with one key.</p>	<p>• (*)</p> <p>-</p> <p>-</p> <p>• (*)</p> <p>-</p>	<p>•</p> <p>•</p> <p>-</p> <p>•</p> <p>•</p>	<p>•</p> <p>•</p> <p>-</p> <p>•</p> <p>•</p>
<p>MASTER KEY SYSTEMS MK - GMK - GGMK <small>Key code numbering, as standard. Cylinder code numbering, as standard only for Astral Tekno, Astral Tekno PRO, AP4 S and RS3 S serie)</small></p> <p>A) KEY-CHANGES AT OUR CHOICE</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob..... MK - Rim locks with double cylinder, double cylinders, rim cylinder sets..... <p>MK WITH A DIFFERENT NUMBER OF KEYS THAN THE STANDARD (specify number in order)</p> <ul style="list-style-type: none"> - Less than standard number - More than standard number <p>MK CODED FOR EXTENSIONS (specify system code in order)</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob - Rim locks with double cylinder, double cylinders, rim cylinder sets. <p>B) MASTER KEY.....</p>	<p>-</p> <p>-</p> <p>-</p> <p>-</p> <p>-</p>	<p>•</p> <p>•</p> <p>•</p> <p>•</p> <p>•</p>	<p>•</p> <p>•</p> <p>•</p> <p>•</p> <p>•</p>

Astral		C3000	C3000S	Astral-Astral S		Astral Tekno PRO	AP4 S	RS3 S
Short key	Long key			Short key	Long key			
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•


<p>SPECIAL KEYING ARRANGEMENTS</p>	<p>STANDARD C2000</p>	<p>Asix</p>
		
<p>1-2 SYSTEM PLUS CONSTRUCTION KEY (available with RS3 S only) <i>Standard supply 1+3+1: one ALI construction key (white-black wings), three ALI keys LEVEL 1 (red wings), one ALI key LEVEL 2 (red-white wings)</i></p> <p style="text-align: right;">3C</p> <p>1-2 SYSTEM PLUS CONSTRUCTION KEY (available with AP4 S) <i>Standard supply 1+3+1: one construction key (black wings), three keys LEVEL 1 (red wings), one key LEVEL 2 (green wings)</i></p> <p><i>Each level is supplied with its specific Security Card</i> <i>Different number of keys can be supplied upon request.</i></p> <ul style="list-style-type: none"> - Single cylinders, cylinder with knob..... - Double cylinders..... 	<p style="text-align: center;">-</p> <p style="text-align: center;">-</p>	<p style="text-align: center;">-</p> <p style="text-align: center;">-</p>
<p>1-2-3 SYSTEM PLUS CONSTRUCTION KEY (available with RS3 S only) <i>Standard supply 3+1+1: three ALI keys LEVEL 1 (red wings), one ALI key LEVEL 2 (red-white wings), one ALI key LEVEL 3 (white wings)</i></p> <p style="text-align: right;">3L</p> <p><i>Each level is supplied with its specific Security Card</i></p> <p>1-2-3 SYSTEM PLUS CONSTRUCTION KEY (available with AP4 S) <i>Standard supply 3+1+1: three keys LEVEL 1 (red wings), one key LEVEL 2 (green wings), one key LEVEL 3 (orange wings)</i></p> <p><i>Each level is supplied with its specific Security Card</i> <i>Different number of keys can be supplied upon request.</i></p> <ul style="list-style-type: none"> - Single cylinders, cylinder with knob..... - Double cylinders..... 	<p style="text-align: center;">-</p> <p style="text-align: center;">-</p>	<p style="text-align: center;">-</p> <p style="text-align: center;">-</p>
<p>Key code numbering, as standard. Cylinder code numbering, as standard only for Astral Tekno, Astral Tekno PRO, AP4 S and RS3 S series.</p> <p>OWNER / SERVICE SYSTEM (DADA SYSTEM on RS3 S, AP4 S)</p> <p style="text-align: right;">CE</p> <p>A) KEY-CHANGES AT OUR CHOICE</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob, cross key cylinders.. - Rim locks with double cylinder, double cylinders, rim cylinder set..... <p>B) CODED (specify system code or key biting in order)</p> <ul style="list-style-type: none"> - Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob - Rim locks with double cylinder, double cylinders, rim cylinder set..... <p>N.B. If requested: add surcharge for cylinder body numbering or special numberings.</p>	<p style="text-align: center;">•</p> <p style="text-align: center;">•</p> <p style="text-align: center;">•</p> <p style="text-align: center;">•</p>	<p style="text-align: center;">•</p> <p style="text-align: center;">•</p> <p style="text-align: center;">•</p> <p style="text-align: center;">•</p>
<p>CONSTRUCTION KEY SYSTEMS:</p> <p style="text-align: right;">CA</p> <ul style="list-style-type: none"> • Master key systems <i>The construction master key opens all the cylinder until the individual or master one is used, which cancels it definitively</i> <ul style="list-style-type: none"> - Single cylinder, cylinder with knob..... - Double cylinder - Master construction key <p>If Master Keys are not required, CISA recommends the "Single Cylinder"</p> • Single Cylinder (Surcharge must be added to the cylinder price as appropriate). <i>Each cylinder has construction key (marked C) and 3 ownwr's key.</i> <i>The construction key opens the cylinder until the owner's one is used.</i> <ul style="list-style-type: none"> - Single cylinder, cylinder with knob,(construction key included)..... - Double cylinder (construction key included) 	<p style="text-align: center;">•</p> <p style="text-align: center;">•</p> <p style="text-align: center;">•</p> <p style="text-align: center;">-</p> <p style="text-align: center;">-</p>	<p style="text-align: center;">-</p>

Astral		C3000	C3000S	Astral S		Astral Tekno PRO	AP4 S	RS3 S
 Short key	 Long key			 Short key	 Long key			
-	-	-	-	-	-	-	•	•
-	-	-	-	-	-	-	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•

<p>KEYS OPTIONS</p>	<p>STANDARD C2000</p>	<p>Asix</p>																				
																						
<p>BITTED KEYS IN ADDITION TO STANDARD SUPPLY.</p> <p>A) 3 keys supply C3 (standard supply 2 keys) (*only padlocks)</p> <p>5 keys supply C5 (standard supply 2 keys / 3 keys)</p> <p>different key supply CH (specify the total number of keys)</p> <p>NOTE CYLINDERS ordered with 5 KEYS (standard supply: 3 keys)</p>	<p>•*</p> <p>-</p>	<p>-</p> <p>•</p>																				
<p>CYLINDERS SUPPLIED WITH 3 LONG KEYS CL</p>	<p>-</p>	<p>-</p>																				
<p>KEY DUPLICATION AND SECURITY CARD.</p> <p>KEYS C2000, SP, ASIX, ASTRAL, ASTRAL-S ORDERED SEPARATELY BY QUOTING THE KEY BITTING CODE OR CODE CARD / ORDERED AS PER SAMPLE</p> <p>C3000 - C3000 S KEYS ORDERED SEPARATELY WITH SECURITY CARD (code 1.00430.00.1.00.00.KC)</p> <p>SECURITY CARD C3000 - C3000 S ORDERED ACCORDING TO EXISTING PROCEDURE 1.00430.80.0.00.00.KC</p> <p>TSP KEYS ORDERED SEPARATELY WITH SECURITY CARD (TSP short key code 1.00500.01.1.00.00 KC), (TSP long key code 1.00500.90.1.00.00 KC)</p> <p>SECURITY CARD TSP ORDERED ACCORDING TO EXISTING PROCEDURE 1.00500.80.0.00.00.KC</p> <p>ASTRAL TEKNO PRO KEYS ORDERED SEPARATELY WITH SECURITY CARD (1.00690.00.0.00 CL.KC)</p> <p>SECURITY CARD ASTRAL TEKNO PRO ORDERED ACCORDING TO EXISTING PROCEDURE 1.00690.80.0.00.00.KC</p> <p>AP3 S, AP4 S KEYS ORDERED SEPARATELY WITH SECURITY CARD (AP3 S code 1.00770.00.0.00.00 KC), (AP4 S code 1.00810.00.0.00.00 KC)</p> <p>SECURITY CARD AP3 S 1.00770.80.0.00.00.KC, AP4 S 1.00810.80.0.00.00.KC ORDERED ACCORDING TO EXISTING PROCEDURE</p> <p>RS3 S KEYS ORDERED SEPARATELY WITH SECURITY CARD (RS3 S CODE 1.00800.00.0.00 CL.KC)</p> <p>SECURITY CARD RS3 S ORDERED ACCORDING TO EXISTING PROCEDURE 1.00800.80.0.00.00.KC</p> <p>NOTE</p> <ul style="list-style-type: none"> Copies of keys or of Security Cards TSP, AP3 S, AP4 S and RS3 S must be requested by submitting specific orders. Shipment by express courier. Any additional forwarding charges shall be at the customer's expense. Key delivery time: 5 working days from order date for orders up to 10pcs (shipment time excluded), for larger orders, delivery shall be agreed upon. <p>If a Security card is lost or stolen, we advise replacing the cylinder(s) to ensure the same level of security.</p>	<p>•</p> <p>-</p>	<p>•</p> <p>-</p>																				
<ul style="list-style-type: none"> CYLINDERS WITH PERSONALIZED KEYWAY (specify on order form) PP <ul style="list-style-type: none"> Cylinders (for cylinder locks, order cylinder separately) Key <p>STANDARD, C3000, C3000S, ASTRAL, ASTRAL-S, ASTRAL TEKNO, ASTRAL TEKNO PRO Cylinders (min 300 pcs first order), 50 PCS SECOND ORDER</p> KEY COINING (CS) OR INSERT (CP) FOR PERSONALIZED KEYBOW (ONE SIDE ONLY). <p>Minimum quantity:</p> <table border="0"> <tr> <td>- STANDARD, ASIX keys</td> <td>3.000 pcs.</td> <td>- STANDARD, ASIX cylinder</td> <td>1.000 pcs.</td> <td>CS</td> </tr> <tr> <td>- ASTRAL, C3000, C3000S keys</td> <td>2.000 pcs.</td> <td>- ASTRAL, C3000, C3000S cylinder</td> <td>1.000 pcs.</td> <td></td> </tr> <tr> <td>- AP4 S keys</td> <td>See Solution Partner program</td> <td>- AP4 S, RS3 S cylinder</td> <td>300 pcs.</td> <td></td> </tr> <tr> <td>- ASTRAL TEKNO PRO keys</td> <td>500 pcs.</td> <td>- ASTRAL TEKNO PRO cylinder</td> <td>300 pcs.</td> <td>CP</td> </tr> </table>	- STANDARD, ASIX keys	3.000 pcs.	- STANDARD, ASIX cylinder	1.000 pcs.	CS	- ASTRAL, C3000, C3000S keys	2.000 pcs.	- ASTRAL, C3000, C3000S cylinder	1.000 pcs.		- AP4 S keys	See Solution Partner program	- AP4 S, RS3 S cylinder	300 pcs.		- ASTRAL TEKNO PRO keys	500 pcs.	- ASTRAL TEKNO PRO cylinder	300 pcs.	CP	<p>•</p> <p>•</p>	<p>-</p> <p>-</p>
- STANDARD, ASIX keys	3.000 pcs.	- STANDARD, ASIX cylinder	1.000 pcs.	CS																		
- ASTRAL, C3000, C3000S keys	2.000 pcs.	- ASTRAL, C3000, C3000S cylinder	1.000 pcs.																			
- AP4 S keys	See Solution Partner program	- AP4 S, RS3 S cylinder	300 pcs.																			
- ASTRAL TEKNO PRO keys	500 pcs.	- ASTRAL TEKNO PRO cylinder	300 pcs.	CP																		

SPECIAL KEYING ARRANGEMENTS		
	DOUBLE-BIT KEY MORTICE LOCKS	
	SINGLE LOCKS	TWIN LOCKS
<p>KEYED ALIKE SYSTEMS</p> <p>A) KEY-CHANGES AT OUR CHOICE KA</p> <p>KA WITH A DIFFERENT NUMBER OF KEYS THAN THE STANDARD (specify number in order)</p> <ul style="list-style-type: none"> - Less than standard number - More than standard number <p>B) CODED (specify system code or key bitting in order) KC</p>	<p>•</p> <p>•</p> <p>•</p>	<p>•</p> <p>•</p> <p>•</p>


ADDITIONAL BITTED KEYS		
	Key item	
<p>BITTED KEYS IN ADDITION TO STANDARD SUPPLY specify the total number of keys</p> <p style="text-align: right;">CH</p> <p>For REKEYABLE LOCKS " "</p> <p>For DOUBLE BIT CYLINDERS " "</p> <p>For DOUBLE BIT CYLINDERS for REKEYABLE locks " " "</p>	<p>00100</p> <p>00101</p> <p>00102</p> <p>00104</p> <p>00110</p> <p>00112</p> <p>00120</p> <p>00121</p> <p>00122</p> <p>00123</p> <p>00125</p> <p>00162</p> <p>00163</p> <p>00162</p> <p>00163</p> <p>00162</p> <p>00163</p>	<p>•</p>



DOUBLE-BIT KEY MORTICE LOCKS	DOUBLE-BIT KEY RIM LOCKS and 6-LEVER ARMoured DOOR LOCKS		DOUBLE BIT CYLINDER for 6-LEVER DOUBLE-BIT KEY LOCKS	DOUBLE BIT CYLINDER for 6-LEVER DOUBLE-BIT KEY LOCKS, REKEYABLE
	with KEY 00120-00123	with KEY 00125		
• • • •	• • • V	• • • •	• • • •	• • • •

**KEY DUPLICATION
00162, 00163**

() Keys duplicated by CISA only*



	For REKEYABLE locks	For DOUBLE BIT CYLINDERS on 6-LEVER ARMoured DOOR LOCKS <i>(*)</i>		For DOUBLE BIT CYLINDERS on REKEYABLE LOCKS <i>(*)</i>
		KEYING ON SHAFT	KEYING ON SHAFT AND KEY BITS	KEYING ON SHAFT AND KEY BITS
		A) Ordered separately by code	•	•
B) Ordered as per sample	•	-	•	•

NUMBERING	CN NUMBERING DEFINED BY CISA (with reference to the key bitting)	NPN NUMBERING DEFINED BY CUSTOMER
<ul style="list-style-type: none"> • PADLOCK..... • CYLINDER..... • 1 KEY..... 	<ul style="list-style-type: none"> • • • 	<ul style="list-style-type: none"> • • •

PRODUCTS WITH ARRANGEMENTS DIFFERENT THAN THE STANDARD ONE	
<p>PANIC EXIT DEVICES SERIES 59001, 59011, 59061, 59301, 59311, 59361, 59801, 59811, 59851</p> <ul style="list-style-type: none"> - Version with steel latches, for fire doors (Spec FR) - Additional locking points item 1.07063.20/30/35/51/61/66.0 with steel latch bolt for fire resistant doors (Spec. FR) - Version with hold open device (not for 59851 series) (Spec FG) - Version with microswitch (not for 59851 series) (Spec LA)..... 	<ul style="list-style-type: none"> • • • •
<p>FLOOR HINGES</p> <ul style="list-style-type: none"> - Customer's brand on the plate free of charge for orders over 100 pcs - Contribution towards creating key coining for personalised brand on plates - Floor hinges without housing - Cam shaft with special pivot head 	<ul style="list-style-type: none"> • • •

LOCKS SUPPLIED WITH CYLINDERS OTHER THAN THE STANDARD ONE

RIM LOCKS WITH CYLINDER OR RIM CYLINDER SET IN FOLLOWING VERSIONS:

Asix

AX

- For all electric locks series 1A610, 1A611, 1A630, 1A631, 1A721, 1A731, 11610, 11611, 11721, 11921
- For locks series 50110, 50111, 50130, 50131, 50180, 50181, 50330, 54310, 54311, 54315, 54316, 54340, 54941, 54510, 54550, 54570

Astral S

AT

- For all electric locks series 1A600, 1A700, 11000 series 11823, 11670 excluded
- For all locks series 50000, series 50210, 50211, 50220, 50221 excluded
- For all rim latches series 54000

Astral Tekno PRO

AK

- For all electric locks series 1A600, 1A700, 11000 series 11823, 11670 excluded
- For all locks series 50000, series 50210, 50211, 50220, 50221 excluded
- For all rim latches series 54000

C3000 C3000S

AC

- For all electric locks series 1A610, 1A611, 1A631, 1A721, 1A731, 11610, 11611, 11721, 11921
- For all locks series 50000, series 50120, 50125, 50160, 50170, 50210, 50211, 50220, 50221 50221 excluded
- For all rim latches series 54000

AP4 S

AP

- For all electric locks series 1A600, 1A700, 11000 series 11823 excluded
- For all locks series 50000 series 50210, 50211, 50220, 50221 excluded
- For all rim latches series 54000

RS3 S

AS

- For all electric locks series 1A600, 1A700, 11000 item. 1A630, 11630, 11635, 11670, 11731, 11823, 11931 excluded
- For all locks series 50000 items 50121, 50141, 50171, 50211, 50221, 50421, 50461, 50471, 50521, 50571 excluded.
- For all rim latches series 54000

LOCKS WITH FIXED EXTERNAL CYLINDER LONGER THAN STANDARD SIZE

N.B.: Order extension kit series 07165 (see cylinder accessories section of catalogue)

ELECTRIC LOCKS 24 V a.c. POWERED ELECTRIC LOCKS

N.B.: Use coil accessory (if available) or "booster" accessory item 1.07022.00

CYLINDERS AND PADLOCKS SUPPLIED IN SEMI-ASSEMBLED OR UNASSEMBLED VERSIONS

Cylinders and padlocks are available in **SEMI-ASSEMBLED** or **UNASSEMBLED** versions :

- "SEMI - ASSEMBLED"(ready for keying)
- "UNASSEMBLED" (completely unassembled)

In both cases, keys, pins, drivers, springs, pin hole plugs, circlips, are to be ordered separately

CYLINDERS	SEMI-ASSEMBLED 90				UNASSEMBLED 91					
	STD	C2000	SP		STD	C2000	C3000 C3000S	SP	Astral	Astral Tekno Pro
• Euro profile double cylinders	TO BE DISCONTINUED	TO BE DISCONTINUED	TO BE DISCONTINUED		TO BE DISCONTINUED	•	•	TO BE DISCONTINUED	•	•
• Euro profile single cylinders.....	TO BE DISCONTINUED	TO BE DISCONTINUED	TO BE DISCONTINUED		TO BE DISCONTINUED	•	•	TO BE DISCONTINUED	•	•
• Euro profile thumb turn cylinders	TO BE DISCONTINUED	TO BE DISCONTINUED	TO BE DISCONTINUED		TO BE DISCONTINUED	•	•	TO BE DISCONTINUED	•	•
• Rim cylinders, cam locks, furniture cylinders	TO BE DISCONTINUED	TO BE DISCONTINUED	TO BE DISCONTINUED		TO BE DISCONTINUED	•	•	TO BE DISCONTINUED	•	•
• Rim cylinder set	TO BE DISCONTINUED	TO BE DISCONTINUED	TO BE DISCONTINUED		TO BE DISCONTINUED	•	•	TO BE DISCONTINUED	•	•
• Hardened steel padlock cylinders	TO BE DISCONTINUED	TO BE DISCONTINUED	TO BE DISCONTINUED		TO BE DISCONTINUED	•	•	TO BE DISCONTINUED	•	•
BRASS PADLOCKS	STANDARD				LIM					
• 22010-30/40	•									
• 22010-50/60	•				See PP					

HARDENED STEEL PADLOCKS

Hardened steel padlocks in **UNASSEMBLED** version are supplied without cylinder and without the cylinder and padlock drill resistant plate
When ordering the padlock cylinder you must specify separately the relevant padlock drill resistant plate (the cylinder drill resistant plate is supplied as standard)

- 28050-55/56/57, 28350-62, 28050-70/71/72, 28350-73, 28550-66/67/75/84/85

•

PADLOCKS WITH KEY ALIKE - AS PER SAMPLE (KS)

- Padlocks series 22000 and 28000

•









Keys compatibility 48
 Key blanks - 1:1 scale 49

Double-bit key blanks 55










KEY BLANKS	CYLINDERS AND PADLOCKS
01060-10	41510 - 41525 - 41526
00770-00	0H112 - 0H149 - 0H155 - 0H210 - 0H310 - 0H311 - 0H312 - 0H314 - 0H317 - 0H350 - 0H351 - 0H352 - 0H357 - 0H410 - 0H510 - 0H610
00810-00	0P112 - 0P149 - 0P155 - 0P210 - 0P3S1 - 0P3S2 - 0P314 - 0P3S7 - 0P410 - 0P510 - 0P610
00210-00/11	02400
00401-00	26020-50/60 - serie 28050 - 28350 - 28550 - 02650
00450-01/90	02163 - 02164 - 02172 - 02176 - 02179 - 02182 - 02502 - 02572 - 02652 - 08815 - 08835 08855 - 08857 - 08875 - 08887 - 72275 - 72276 - 28052 - 28352 - 28552
00500-01/90	02152 - 02162 - 02166 - 02169 - 02173 - 02174 - 02501 - 02562 - 02651 - 08810 - 08830 - 08850 - 08851 - 08870 - 08881 - 72270 72271 28051 - 28351 - 28551
00620-01/90	0A112 - 0A114 - 0A116 - 0A120 - 0A149 - 0A155 - 0A210 - 0A310 - 0A311 - 0A312 - 0A314 - 0A317 - 0A3S1 - 0A3S2 - 0A3S7 - 0A410 - 0A415 - 0A510 - 0A610 - 28053 - 28353 - 28553
01210-00	02520
01310-00/10/20/30/40	02102 - 02104 - 02106 - 02110 - 02139 - 02142 - 02145 - 02146 - 02500 - 02513 - 02550 - 02552 - 02592 - 02649 08710-07/08/10/12÷15/17÷30/35÷37/46 - 08730 22010-50/60 - 22011-50/52 - 22012-50 - 22013-50/60 - 72250
01070-10	0G300-07-08-10-12÷15-17÷70 - 0G301-07-12-13-26 - 0G304-02÷13-20-21 - 0G302 - 0G303 - 0G305 - 0G307 0G115 - 0G150 - 0G200 - 0G500 - 0G501
01320-00/10/20/30/40	02544-15 08710-04÷06/09/11/16 - 44010 - 44011
01070-05	0G300-04÷06-09/11/16 - 0G301-05-06-09-11 - 0G304-18
01330-00	02544-10/14 - 02126 - 02156
01070-01	0G300-02/03
01410-00	08210-02/05/06/12÷14/18 - 08220-02 - 08230-02/06 22010-40 - 22011-40/41 - 22012-40 - 22013-40 - 22070-40 - 26020-40 - 26021-40
01420-00	02040 - 02042 - 72010 - 72210 - 72215
01425-00	08210-01
01430-00	22010-30 - 22011-30/31 - 22012-30 - 22013-30 - 22070-30 - 26020-30
01440-00	22010-20/25 - 22011-20 - 22013-20/25 23010
01510-00	22010-115
00670-01	0E300 - 0E304 - 0E302 - 0E303 - 0E305 - 0E115 - 0E150 - 0E200 - 0E500 - 0E600 - 0E307
00670-0005D	0E300-(SD) - 0E307-(SD) - 0E304-(NV)
00690-00-0-00-CL	0M112 - 0M156 - 0M311 - 0M312 - 0M314 - 0M317 - 0M510 - 0M410 - 0M610 - 0M3T1 - 0M3T2 - 0M3T7
00430-00-1	0N116 - 0N210 - 0N149 - 0N310 - 0N312 - 0N314 - 0N317 - 0N510 - 0N610 - 0N410 - 0N3S1 - 0N3S2 - 0N3S7


Type	Description	L	Pins	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	3	0,004	50	1 01040 01 1					
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,004	50	1 01040 02 1					
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,010	50	1 01040 03 1					
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,010	50	1 01040 04 1					
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,010	50	1 01040 05 1					
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,012	50	1 01060 10 0					
	<ul style="list-style-type: none"> Nickel-plated steel Cross key section 	75,0	6	0,018	25	1 00210 00 0				
	<ul style="list-style-type: none"> Nickel-plated steel Cross key section 	90,0	6	0,023	25	1 00211 00 0				
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	6	0,015	25	1 01210 00 2					

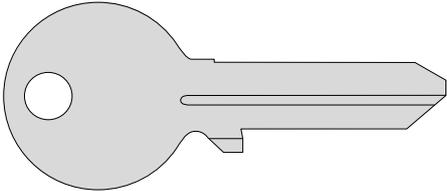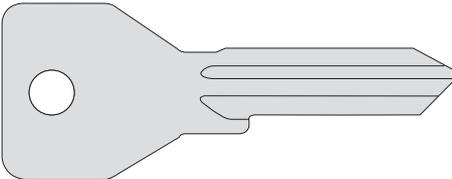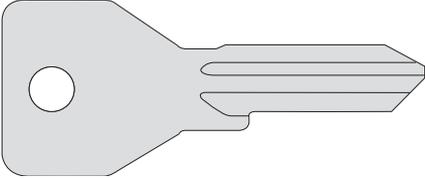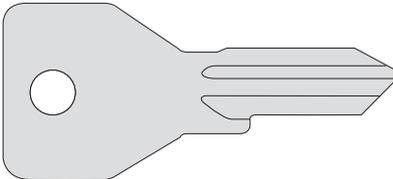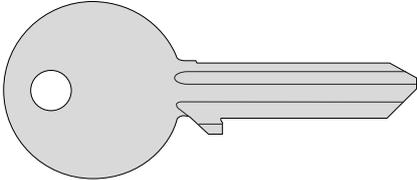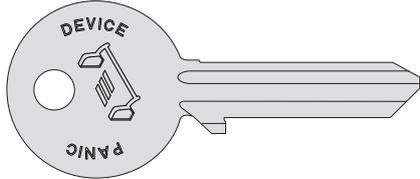Type	Description	L	Pins	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,014	25	1	01220	00	2		
C2000 	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,012	50	1	01070	10	1		
		5	0,013	50	1	01070	10	2		
C2000 	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,012	50	1	01070	05	1		
		4	0,011	50	1	01070	05	2		
C2000 	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	3	0,011	50	1	01070	01	1		
		3	0,011	50	1	01070	01	2		
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,010	50	1	01310	00	1		
		5	0,010	50	1	01310	00	2		
	<ul style="list-style-type: none"> Outside access device blank key Duplication also possible with: 1.01336. 00.1 	5	0,010	50	1	01310	05	1		

Type	Description	L	Pins	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 									1 01320 00 1
										1 01320 00 2
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 									1 01310 10 1
										1 01310 10 2
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 									1 01320 10 1
										1 01320 10 2
	<ul style="list-style-type: none"> Blank key for master key duplication (MK) Nickel-plated brass Paracentral keyway 									1 01310 20 1
										1 01310 20 2
	<ul style="list-style-type: none"> Blank key for grand master key duplication (GMK) Nickel-plated brass Paracentral keyway 									1 01310 30 1
										1 01310 30 2
	<ul style="list-style-type: none"> Blank key for great grand master key duplication (GGMK) Nickel-plated brass Paracentral keyway 									1 01310 40 1
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 									1 01330 00 1
										1 01330 00 2

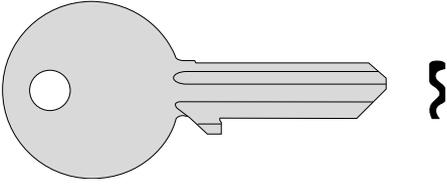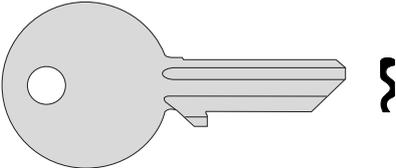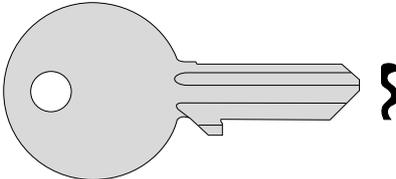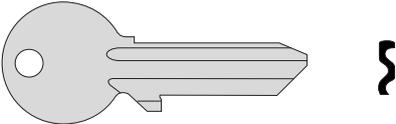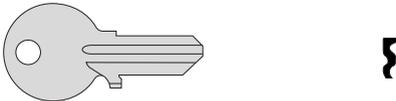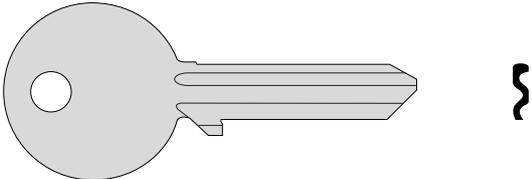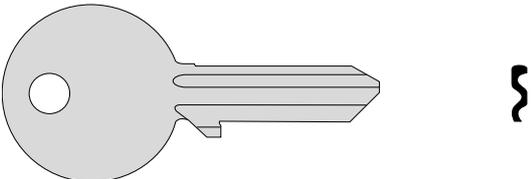Type	Description	L	Pins	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	5	0,007	50	1	01410 00 1				
		5	0,007	50	1	01410 00 2				
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,008	50	1	01420 00 1				
		4	0,008	50	1	01420 00 2				
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	3	0,007	50	1	01425 00 1				
		3	0,008	50	1	01425 00 2				
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	4	0,005	50	1	01430 00 1				
	<ul style="list-style-type: none"> Nickel-plated brass Paracentral keyway 	3	0,003	50	1	01510 00 1				
		3	0,002	50	1	01510 00 2				
	<ul style="list-style-type: none"> Nickel-plated brass Multiprofile Paracentral keyway 	5	0,010	50	1	01336 00 1				
		5	0,010	50	1	01336 00 2				
	<ul style="list-style-type: none"> Nickel-plated brass Multiprofile Paracentral keyway 	4	0,009	50	1	01337 00 1				
		4	0,009	50	1	01337 00 2				


Type	Description	L	Pins	Unit weight	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

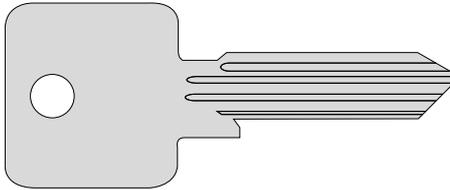

- Nickel-plated brass
- Paracentral keyway

5	0,015	50	1 00401 00 1
5	0,015	50	1 00401 00 2


Asix

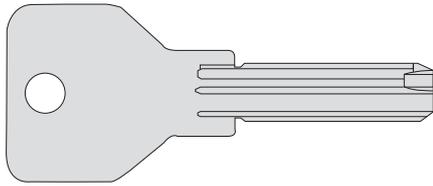

- Nickel-plated brass
- Thickness 2.9 mm.
- Flat profile

6	0,017	50	1 00670 01 0
---	-------	----	--------------


AsixPRO

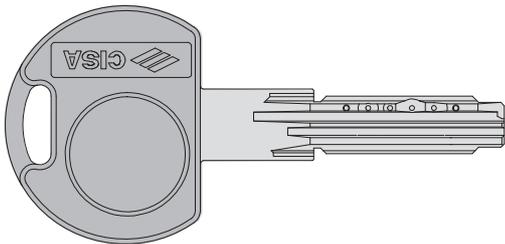

- Nickel-plated brass
- Thickness 2.2 mm.
- Flat profile

10	0,015	50	1 00670 01 0 00 SD
----	-------	----	--------------------


Astral

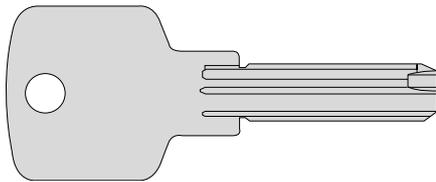

- Nickel-plated brass
- Thickness 2.2 mm.
- Flat profile

10	0,015	50	1 00600 01 0
----	-------	----	--------------

Astral

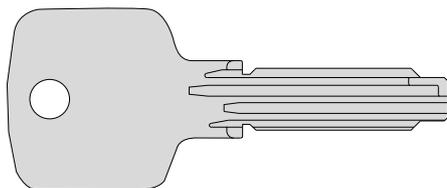


- Nickel-plated brass
- Thickness 2.9 mm.
- Flat profile

10	0,017	50	1 00620 01 0
----	-------	----	--------------

Type	Description	L	Pins	Unit weight 	Pieces 	ITEM				
						Type	Dim.	Hand	Fin.	Pers.

Astral

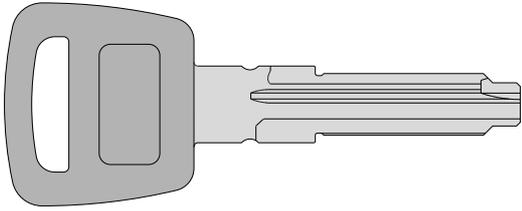


- Nickel-plated brass
- Nylon bow
- Long key
- Thickness 2.9 mm.
- Flat profile



10 0,015 20 1 00620 90 0

Astral Tekno PRO

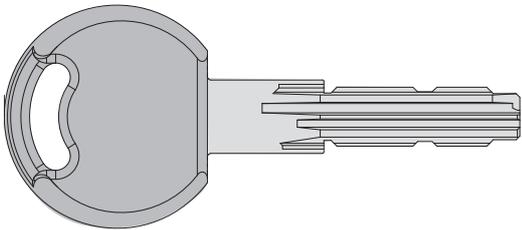


- Nickel-plated brass
- Nylon bow
- Long key 16 mm
- Flat profile, thickness 2.9 mm
- KEY BLANK DISTRIBUTION IS REGULATED BY CONTRACT



10 0,024 20 1 00690 00 0 00 CL

C3000 - C3000S

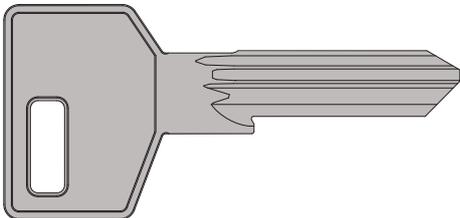


- Nickel silver alloy
- 3D Trade Mark
- Paracentral keyway
- KEYBLANK DISTRIBUTION IS REGULATED BY CONTRACT










6 0,015 50 1 00430 00 1


AP4 S


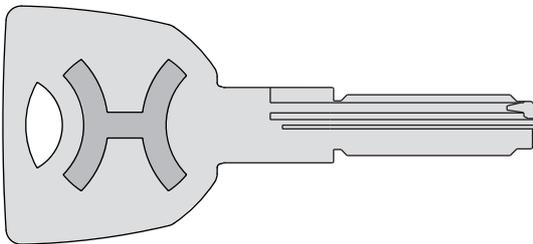


- SEE CISA SOLUTION PARTNER PROGRAM

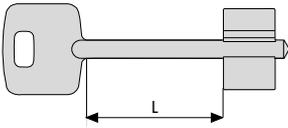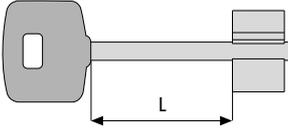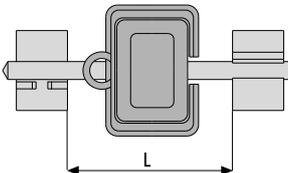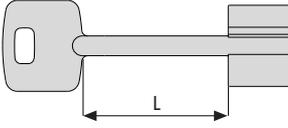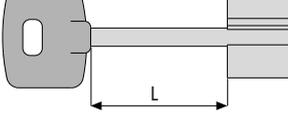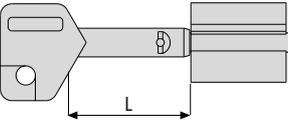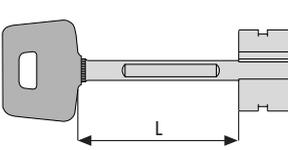

Type	Description	For locks series	L	Levers	Unit weight 	 Pieces	ITEM			
							Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Nickel-plated brass 	17300, 57000, 57200, 57300, 57400, 57800	35,5	6	0,018	25	1	00100	00	1
			60,0	6	0,022	25	1	00102	00	1
	<ul style="list-style-type: none"> Nickel-plated brass Nylon bow 	57000, 57200, 57800	35,5	6	0,020	25	1	00101	00	1
			35,5	6	0,020	25	1	00101	00	2
			46,0		0,022	25	1	00104	00	1
	<ul style="list-style-type: none"> Nickel-plated brass Nylon bow 	57050, 57055, 57060	42,0	6	0,028	10	1	00110	00	1
	<ul style="list-style-type: none"> Nickel-plated brass 	17500, 57100, 57500	62,0	6	0,029	25	1	00120	00	1
			62,0	6	0,029	25	1	00120	00	2
			37,0	6	0,025	25	1	00121	00	1
	<ul style="list-style-type: none"> Nickel-plated brass Nylon bow 	17500, 56700, 57500, 57700	37,0	6	0,029	10	1	00122	00	1
			58,0	6	0,033	25	1	00123	00	1
			47,0	6	0,030	10	1	00124	00	1
	<ul style="list-style-type: none"> Nickel-plated brass 	57100, 57500	60,0	6	0,040	10	1	00125	00	1
			60,0	6	0,040	10	1	00125	00	2
	<ul style="list-style-type: none"> Nickel-plated brass Nylon bow 	17600, 57600, 57900	44,0	6	0,032	10	1	00162	00	1
			64,0	6	0,036	10	1	00163	00	1

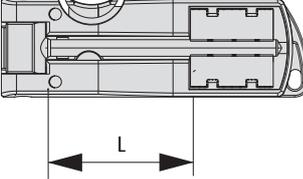Type	Description	For locks series	L	Levers	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
 	<ul style="list-style-type: none"> Nickel-plated brass Nylon snap grip 	17600, 57600, 57900	44,0	6	0,042	10	1	00170	00	1	
			64,0	6	0,042	10	1	00171	00	1	



RS3 S european profile cylinders.....	59
RS3 S Modulo european profile cylinders	61
RS3 S rim cylinders	65
RS3 S various cylinders	67
AP4 S european profile cylinders	68
AP4S - ASTRAL S - C300 S Modulo cylinders.....	71
AP4 S Rim cylinders.....	76
AP4 Various cylinders	78
ASTRAL Tekno Pro european profile cylinders.....	80
ASTRAL TEKNO rim cylinders	83
ASTRAL TEKNO various cylinders.....	85
Snap resistant Astral Cylinders	87
ASTRAL European profile cylinders.....	89
ASTRAL rim cylinders.....	91
ASTRAL various cylinders.....	93

ASIX PRO European profile cylinders	94
ASIX European profile cylinders	96
ASIX rim cylinders	99
C3000 S European profile cylinders	101
C3000 European profile cylinders	104
C3000 rim cylinders	106
C3000 various cylinders	107
C2000 European profile cylinders	108
C2000 rim cylinders	112
Standard rim cylinders	113
Standard various cylinders	114
Oval shaped cylinders	116
Accessories for cylinders	117
Dimensional drawings	121




MODULO SYSTEM

MODULAR PLATFORM FOR CYLINDERS

THAT HAS LIMITED IMPACT ON YOUR STOCK

CISA's Modulo System platform uses parts belonging to the AP4 S, Astral S and C3000 S ranges, so your cylinder can be assembled and installed directly on-site, guaranteeing you the best solution for your needs without any extra stock requirements.

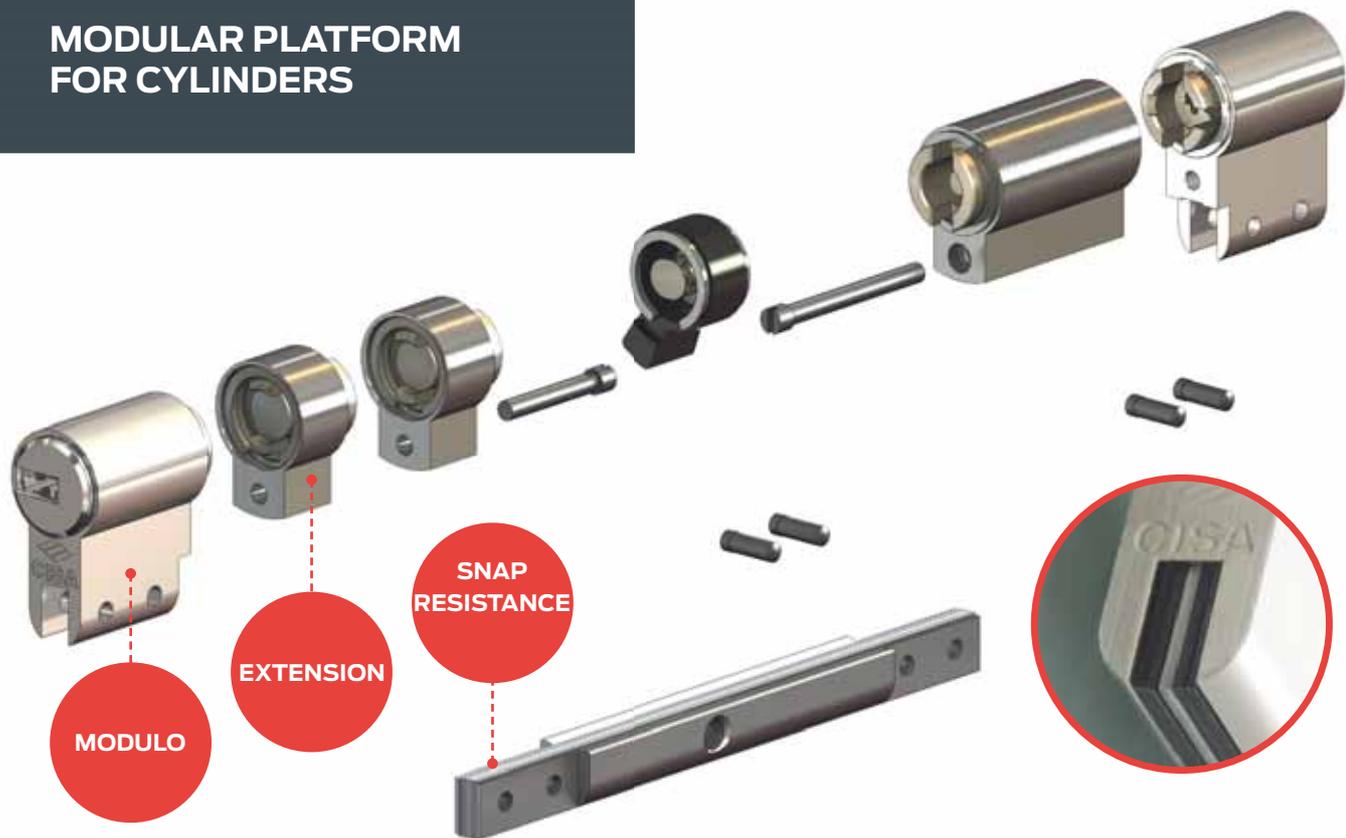

THE MODULO PLATFORM IS COMPATIBLE WITH: SYSTEM



AP4 S Patented system

Reversible key with mobile part, patented and protected by 3D Trademark, can only be duplicated by CISA Solution Partners or CISA. Up to 40 billion possible combinations (different keys)



ASTRAL S

Reversible key, free duplication.

Over 1,600,000 possible combinations (different keys)



C3000 S Protected system

Key protected by 3D Trademark, can only be duplicated by CISA or at CISA authorised centres. Over 240,000 possible combinations (different keys)





Technical features:

- CYLINDER:**
- Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying
 - Security Card: authorised duplication by Cisa only
 - Hardened steel pins and drivers.
 - Stainless steel springs
 - Brass casing with snap resistant two-material core
 - Brass plug.
 - Cam: DIN, self-lubricating sintered steel
 - Clutch-type cam for emergency operation.
- KEY:**
- Non-handed, easier to use
 - Patented controlled duplication

- With built-in mobile element.
- Material: nickel silver alloy.
- Numbered key head.
- Key neck length: 16 mm (compatible with protective roses).

Supplied as standard:

- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.
- Fixing screw.

Finishes:

- Standard: nickel-plated sanded brass (fin. 12).
- On request: polished brass (fin. 66).

Standards:

- Compliant with the European Standard EN 1303: 2015.

- Attack resistance : D
- Key Related Security : 6
- Durability : 6
- For armored door classes 4 to 6 according to the draft Standard EN 1627

Certifications:


- ICIM certified: EN 1303:15 16010C6D - Europe.
- Gost certified - Russia.
- SKG**

Patents:

- Key: EP1728944
- Snap Resistant - Europe EP1583878 - Russia RU2361989
- ALL is protected by a Shape trademark B02004C000802

RS3 S


Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

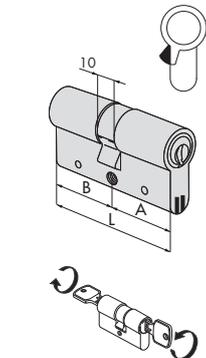

- Clutch-type SNAP RESISTANT double cylinder


30 / 30	60,0	30,0	30,0	15	1 00800 00 0 00CL	0,260	1	1	0L3S1	07	0	12	CL
30 / 35	65,0	30,0	35,0	15	1 00800 00 0 00CL	0,270	1	1	0L3S1	26	0	12	CL
35 / 35	70,0	35,0	35,0	15	1 00800 00 0 00CL	0,279	1	1	0L3S1	13	0	12	CL
40 / 30	70,0	40,0	30,0	15	1 00800 00 0 00CL	0,279	1	1	0L3S1	12	0	12	CL
35 / 40	75,0	35,0	40,0	15	1 00800 00 0 00CL	0,300	1	1	0L3S1	28	0	12	CL
30 / 45	75,0	30,0	45,0	15	1 00800 00 0 00CL	0,300	1	1	0L3S1	27	0	12	CL
35 / 45	80,0	35,0	45,0	15	1 00800 00 0 00CL	0,315	1	1	0L3S1	19	0	12	CL
40 / 40	80,0	40,0	40,0	15	1 00800 00 0 00CL	0,315	1	1	0L3S1	18	0	12	CL
30 / 50	80,0	30,0	50,0	15	1 00800 00 0 00CL	0,315	1	1	0L3S1	17	0	12	CL
35 / 50	85,0	35,0	50,0	15	1 00800 00 0 00CL	0,330	1	1	0L3S1	31	0	12	CL
40 / 45	85,0	40,0	45,0	15	1 00800 00 0 00CL	0,330	1	1	0L3S1	30	0	12	CL
30 / 55	85,0	30,0	55,0	15	1 00800 00 0 00CL	0,330	1	1	0L3S1	33	0	12	CL
35 / 55	90,0	35,0	55,0	15	1 00800 00 0 00CL	0,330	1	1	0L3S1	32	0	12	CL
40 / 50	90,0	40,0	50,0	15	1 00800 00 0 00CL	0,330	1	1	0L3S1	21	0	12	CL
45 / 45	90,0	45,0	45,0	15	1 00800 00 0 00CL	0,330	1	1	0L3S1	29	0	12	CL
30 / 60	90,0	30,0	60,0	15	1 00800 00 0 00CL	0,330	1	1	0L3S1	20	0	12	CL
40 / 55	95,0	40,0	55,0	15	1 00800 00 0 00CL	0,350	1	1	0L3S1	42	0	12	CL
35 / 60	95,0	35,0	60,0	15	1 00800 00 0 00CL	0,350	1	1	0L3S1	38	0	12	CL
45 / 50	95,0	45,0	50,0	15	1 00800 00 0 00CL	0,350	1	1	0L3S1	39	0	12	CL
35 / 65	100,0	35,0	65,0	15	1 00800 00 0 00CL	0,370	1	1	0L3S1	22	0	12	CL
40 / 60	100,0	40,0	60,0	15	1 00800 00 0 00CL	0,370	1	1	0L3S1	25	0	12	CL
45 / 55	100,0	45,0	55,0	15	1 00800 00 0 00CL	0,370	1	1	0L3S1	43	0	12	CL
50 / 50	100,0	50,0	50,0	15	1 00800 00 0 00CL	0,370	1	1	0L3S1	23	0	12	CL
30 / 70	100,0	30,0	70,0	15	1 00800 00 0 00CL	0,370	1	1	0L3S1	24	0	12	CL
40 / 70	110,0	40,0	70,0	15	1 00800 00 0 00CL	0,400	1	1	0L3S1	35	0	12	CL
50 / 60	110,0	50,0	60,0	15	1 00800 00 0 00CL	0,400	1	1	0L3S1	36	0	12	CL
55 / 55	110,0	55,0	55,0	15	1 00800 00 0 00CL	0,400	1	1	0L3S1	70	0	12	CL
30 / 80	110,0	30,0	80,0	15	1 00800 00 0 00CL	0,400	1	1	0L3S1	37	0	12	CL
40 / 80	120,0	40,0	80,0	15	1 00800 00 0 00CL	0,420	1	1	0L3S1	60	0	12	CL
50 / 80	130,0	50,0	80,0	15	1 00800 00 0 00CL	0,440	1	1	0L3S1	55	0	12	CL

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	Plns				Type	Dim.	Hand	Fin.	Pers.

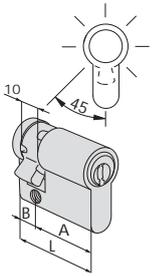


- Single cylinder with cam adjustable to 8 positions

30 / 10	40,0	30,0	10,0	15	1 00800 00 0 00CL	0,200	1	1	OL314	02	0	12	CL
35 / 10	45,0	35,0	10,0	15	1 00800 00 0 00CL	0,210	1	1	OL314	07	0	12	CL
40 / 10	50,0	40,0	10,0	15	1 00800 00 0 00CL	0,220	1	1	OL314	03	0	12	CL
45 / 10	55,0	45,0	10,0	15	1 00800 00 0 00CL	0,230	1	1	OL314	08	0	12	CL
50 / 10	60,0	50,0	10,0	15	1 00800 00 0 00CL	0,240	1	1	OL314	04	0	12	CL
60 / 10	70,0	60,0	10,0	15	1 00800 00 0 00CL	0,260	1	1	OL314	05	0	12	CL
65 / 10	75,0	65,0	10,0	15	1 00800 00 0 00CL	0,270	1	1	OL314	21	0	12	CL
70 / 10	80,0	70,0	10,0	15	1 00800 00 0 00CL	0,280	1	1	OL314	06	0	12	CL
80 / 10	90,0	80,0	10,0	15	1 00800 00 0 00CL	0,300	1	1	OL314	20	0	12	CL
95 / 10	105,0	95,0	10,0	15	1 00800 00 0 00CL	0,330	1	1	OL314	13	0	12	CL

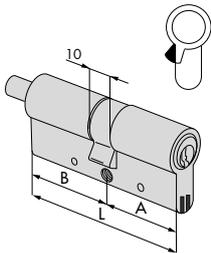

- Double SNAP RESISTANT cylinder pre-set for thumb turn installation
- ON REQUEST: Thumb turns series 06353, 06355, 06356, 06357

30 / 30	60,0	30,0	30,0	15	1 00800 00 0 00CL	0,270	1	1	OL352	07	0	12	CL
30 / 35	65,0	30,0	35,0	15	1 00800 00 0 00CL	0,280	1	1	OL352	26	0	12	CL
35 / 30	65,0	35,0	30,0	15	1 00800 00 0 00CL	0,280	1	1	OL352	81	0	12	CL
40 / 30	70,0	40,0	30,0	15	1 00800 00 0 00CL	0,292	1	1	OL352	12	0	12	CL
35 / 35	70,0	35,0	35,0	15	1 00800 00 0 00CL	0,292	1	1	OL352	13	0	12	CL
40 / 35	75,0	40,0	35,0	15	1 00800 00 0 00CL	0,302	1	1	OL352	83	0	12	CL
30 / 45	75,0	30,0	45,0	15	1 00800 00 0 00CL	0,302	1	1	OL352	27	0	12	CL
35 / 40	75,0	35,0	40,0	15	1 00800 00 0 00CL	0,302	1	1	OL352	28	0	12	CL
30 / 50	80,0	30,0	50,0	15	1 00800 00 0 00CL	0,312	1	1	OL352	17	0	12	CL
35 / 45	80,0	35,0	45,0	15	1 00800 00 0 00CL	0,312	1	1	OL352	19	0	12	CL
40 / 40	80,0	40,0	40,0	15	1 00800 00 0 00CL	0,312	1	1	OL352	18	0	12	CL
45 / 35	80,0	45,0	35,0	15	1 00800 00 0 00CL	0,312	1	1	OL352	85	0	12	CL
40 / 45	85,0	40,0	45,0	15	1 00800 00 0 00CL	0,322	1	1	OL352	30	0	12	CL
50 / 35	85,0	50,0	35,0	15	1 00800 00 0 00CL	0,322	1	1	OL352	94	0	12	CL
45 / 40	85,0	45,0	40,0	15	1 00800 00 0 00CL	0,322	1	1	OL352	84	0	12	CL
30 / 60	90,0	30,0	60,0	15	1 00800 00 0 00CL	0,332	1	1	OL352	20	0	12	CL
40 / 50	90,0	40,0	50,0	15	1 00800 00 0 00CL	0,332	1	1	OL352	21	0	12	CL
45 / 45	90,0	45,0	45,0	15	1 00800 00 0 00CL	0,332	1	1	OL352	29	0	12	CL
40 / 55	95,0	40,0	55,0	15	1 00800 00 0 00CL	0,342	1	1	OL352	42	0	12	CL
55 / 40	95,0	55,0	40,0	15	1 00800 00 0 00CL	0,342	1	1	OL352	98	0	12	CL
50 / 50	100,0	50,0	50,0	15	1 00800 00 0 00CL	0,352	1	1	OL352	23	0	12	CL
45 / 55	100,0	45,0	55,0	15	1 00800 00 0 00CL	0,352	1	1	OL352	43	0	12	CL
55 / 45	100,0	55,0	45,0	15	1 00800 00 0 00CL	0,352	1	1	OL352	99	0	12	CL
55 / 50	105,0	55,0	50,0	15	1 00800 00 0 00CL	0,362	1	1	OL352	64	0	12	CL
60 / 50	110,0	60,0	50,0	15	1 00800 00 0 00CL	0,372	1	1	OL352	89	0	12	CL
55 / 60	115,0	55,0	60,0	15	1 00800 00 0 00CL	0,382	1	1	OL352	71	0	12	CL
60 / 60	120,0	60,0	60,0	15	1 00800 00 0 00CL	0,392	1	1	OL352	40	0	12	CL
65 / 55	120,0	65,0	55,0	15	1 00800 00 0 00CL	0,392	1	1	OL352	86	0	12	CL

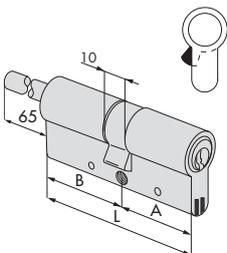

- Double SNAP RESISTANT cylinder pre-set for thumb turn installation
- Adjustable shaft
- can be used with inside escutcheon item 1.06458.20.0
- ON REQUEST: Thumb turns series 06353, 06355, 06356, 06357

30 / 30	60,0	30,0	30,0	15	1 00800 00 0 00CL	0,306	1	1	OL357	07	0	12	CL
35 / 30	65,0	35,0	30,0	15	1 00800 00 0 00CL	0,320	1	1	OL357	81	0	12	CL
40 / 30	70,0	40,0	30,0	15	1 00800 00 0 00CL	0,340	1	1	OL357	12	0	12	CL
45 / 30	75,0	45,0	30,0	15	1 00800 00 0 00CL	0,305	1	1	OL357	91	0	12	CL
50 / 30	80,0	50,0	30,0	15	1 00800 00 0 00CL	0,370	1	1	OL357	90	0	12	CL
60 / 30	90,0	60,0	30,0	15	1 00800 00 0 00CL	0,400	1	1	OL357	87	0	12	CL
70 / 30	100,0	70,0	30,0	15	1 00800 00 0 00CL	0,420	1	1	OL357	88	0	12	CL



EN 1303:15	KEY RELATED SECURITY	1	2	3	4	5	6
	ATTACK RESISTANCE	0	A	B	C	D	6
	DURABILITY	1	2	3	4	5	6

Technical features:

- CYLINDER:**
- Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying
 - Hardened steel pins and drivers.
 - Stainless steel springs
 - Brass casing with snap resistant two-material core
 - Brass plug.
 - Cam: DIN, self-lubricating sintered steel
 - Clutch-type cam for emergency operation.
- KEY:**
- Non-handed, easier to use
 - Patented controlled duplication
 - **With built-in mobile element.**
 - Material: nickel silver alloy.

- Numbered key head.
- Key neck length: 16 mm (compatible with protective roses).

Supplied as standard:

- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.
- Fixing screw.

Finishes:

- Standard: nickel-plated sanded brass (fin. 12).
- On request: polished brass (fin. 66).

Standards:

- Compliant with the European Standard EN 1303: 2015.
- Attack resistance : D

- Key Related Security : 6
- Durability : 6
- For armored door classes 4 to 6 according to the draft Standard EN 1627

Patents:


- Key:
 - Europe EP1728944
 - Russia RU2008150925
 - Ukraine UA200814736
- Snap system:
 - Europe EP1583878
 - Russia RU2361989
- Extension bolts units: patented pending

Certifications:

- SKG***


RS3 S Modulo

Type	Description	Comm. dim. A / B	L	Pins	Key item	Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- Pair of modules for double cylinders with clutch mechanism

30 / 30 15 1 00800 00 0 00CL 0,272 1 1 **0L3M1 07 0 12 CL**




- Pair of modules for thumb turn cylinders

30 / 30 15 1 00800 00 0 00CL 0,272 1 1 **0L3M2 07 0 12 CL**

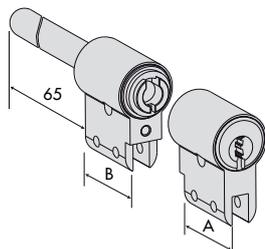





- Pair of modules for thumb turn cylinders with adjustable shaft


30 / 30 15 1 00800 00 0 00CL 0,272 1 1 **0L3M7 07 0 12 CL**



- Single cylinder module

30 15 1 00800 00 0 00CL 0,272 1 1 **0L3M4 02 0 12 CL**

Type	Description	Comm. dim. A / B	L	Pins	Key item	Unit weight Kg	Pieces	ITEM						
								Type	Dim.	Hand	Fin.	Pers.	Spec.	
	• Module for nickel-plated thumb turn cylinder (fin 12)	30				0,305	*5	1	07580	55	0			
	• Extension bolt unit on key side for double cylinders or thumb turn cylinders		5,0			0,305	*20	1	07580	21	0			
			10,0			0,305	*20	1	07580	22	0			
			20,0			0,305	*10	1	07580	23	0			
			30,0			0,305	*10	1	07580	24	0			
	• Follower					0,305	*50	1	07580	50	0			
	• Extension bolt unit fixing screw		5,0			0,305	*50	1	07580	10	0			
				10,0			0,305	*50	1	07580	11	A		
				15,0			0,305	*50	1	07580	11	B		
				20,0			0,305	*50	1	07580	12	A		
				25,0			0,305	*50	1	07580	12	B		
				30,0			0,305	*50	1	07580	13	A		
				35,0			0,305	*50	1	07580	13	B		
				40,0			0,305	*25	1	07580	14	A		
				45,0			0,305	*25	1	07580	14	B		
				50,0			0,305	*25	1	07580	15	A		
				55,0			0,305	*25	1	07580	15	B		
				60,0			0,305	*10	1	07580	16	A		
			65,0			0,305	*10	1	07580	16	B			
			70,0			0,305	*10	1	07580	17	A			
	• SNAP RESISTANT unit fixing pin					0,305	*500	1	07580	20	0			
	• Follower kit for single cylinder					0,305	*5	1	07580	70	0			
	• Coupling unit for double cylinders with clutch mechanism	30 / 30				0,305	*25	1	07580	51	0			
		30 / 35				0,305	*25	1	07580	52	0			
		35 / 35				0,305	*25	1	07580	53	0			
	• Coupling unit for cylinder with thumb turn shaft	30 / 30					0,305	*50	1	07580	61	0		
		35 / 30					0,305	*25	1	07580	62	0		

Type	Description	Comm. dim. A / B	L	Plus	Key item	Kg	Pcs	ITEM								
								Type	Dim.	Hand	Fin.	Pers.	Spec.			
	<ul style="list-style-type: none"> • Pre-assembled SNAP RESISTANT system compatible with AP4 S, Astral S and C3000S 	30 / 30				0,305	5	1	07582	30	0					
		30 / 35				0,305	5	1	07582	31	0					
		30 / 40				0,305	5	1	07582	32	0					
		30 / 45				0,305	5	1	07582	33	0					
		30 / 50				0,305	5	1	07582	34	0					
		30 / 55				0,305	5	1	07582	35	0					
		30 / 60				0,305	2	1	07582	36	0					
		30 / 65				0,305	2	1	07582	37	0					
		30 / 70				0,305	2	1	07582	38	0					
		30 / 75				0,305	1	1	07582	39	0					
		30 / 80				0,305	1	1	07582	40	0					
		30 / 85				0,305	1	1	07582	41	0					
		30 / 90				0,305	1	1	07582	42	0					
		30 / 100				0,305	1	1	07582	44	0					
		35 / 35					0,305	5	1	07582	46	0				
		35 / 40					0,305	5	1	07582	47	0				
		35 / 45					0,305	5	1	07582	48	0				
		35 / 50					0,305	5	1	07582	49	0				
		35 / 55					0,305	2	1	07582	50	0				
		35 / 60					0,305	2	1	07582	51	0				
		35 / 65					0,305	2	1	07582	52	0				
		35 / 70					0,305	1	1	07582	53	0				
		35 / 75					0,305	1	1	07582	54	0				
		35 / 80					0,305	1	1	07582	55	0				
		40 / 40					0,305	5	1	07582	56	0				
		40 / 45					0,305	5	1	07582	57	0				
		40 / 50					0,305	2	1	07582	58	0				
		40 / 55					0,305	2	1	07582	59	0				
		40 / 60					0,305	2	1	07582	60	0				
		40 / 65					0,305	1	1	07582	61	0				
		40 / 70					0,305	1	1	07582	62	0				
		40 / 75					0,305	1	1	07582	63	0				
		40 / 80					0,305	1	1	07582	64	0				
		45 / 45					0,305	2	1	07582	66	0				
		45 / 50					0,305	2	1	07582	67	0				
		45 / 55					0,305	2	1	07582	68	0				
45 / 60					0,305	1	1	07582	69	0						
45 / 70					0,305	1	1	07582	71	0						
45 / 75					0,305	1	1	07582	72	0						
50 / 50					0,305	2	1	07582	76	0						
50 / 55					0,305	1	1	07582	77	0						
50 / 60					0,305	1	1	07582	78	0						
50 / 65					0,305	1	1	07582	79	0						
50 / 70					0,305	1	1	07582	80	0						
50 / 80					0,305	1	1	07582	82	0						
55 / 55					0,305	1	1	07582	86	0						
55 / 60					0,305	1	1	07582	87	0						
55 / 65					0,305	1	1	07582	88	0						
60 / 60					0,305	1	1	07582	95	0						

Type	Description	Comm. dim. A / B	L	Plms	Key item	Unit weight Pieces	ITEM				
							Type	Dim.	Hand	Pers. Spec.	
	<ul style="list-style-type: none"> • Single cylinder connector 	30 / 10				0,305	5	1	07582	10	0
		35 / 10				0,305	5	1	07582	11	0
		40 / 10				0,305	5	1	07582	12	0
		45 / 10				0,305	5	1	07582	13	0
		50 / 10				0,305	5	1	07582	14	0
		55 / 10				0,305	2	1	07582	15	0
		60 / 10				0,305	2	1	07582	16	0
		65 / 10				0,305	2	1	07582	17	0
		70 / 10				0,305	2	1	07582	18	0
		80 / 10				0,305	2	1	07582	20	0
		95 / 10				0,305	2	1	07582	23	0
	<ul style="list-style-type: none"> • Assembly kit for RS3 S Modulo cylinders 					5,700	1	1	07550	12	0



Technical features:

CYLINDER:

- Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying.
- Security Card: authorised duplication by Cisa only
- Hardened steel pins.
- Hardened steel drivers.
- Stainless steel springs.
- Brass plug.
- Brass casing.

KEY:

- Non-handed, easier to use.
- **With built-in mobile element.**
- Material: nickel silver alloy.
- Numbered key head.
- Key neck length: 16 mm (compatible with protective roses).
- Patented controlled duplication

Supplied as standard:

- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.






Finishes:

- Standard: nickel-plated sanded brass (fin. 12).
- On request: polished brass (fin. 66).

Patents:

- Key:**
- Europe EP1728944
 - Russia RU2008150925
 - Ukraine UA200814736

RS3 S

Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM									
			L	Pins			Type	Dim.	Hand	Fin.	Pers.	Spec.				
	• Cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570	15	1 00800 00 0 00CL	0,240	1	1	0L510	00	0	12	CL				
	• Cylinder with anti-pulling, anti-drill nickel-plated escutcheon		15	1 00800 00 0 00CL	0,325	1	1	0L510	10	0	12	CL				
	• Tubular cylinder	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	15	1 00800 00 0 00CL	0,215	1	1	0L210	50	0	12	CL				
	• Pair of cylinders	50120, 50125, 50160, 50170, 50210, 50220	15	1 00800 00 0 00CL	0,267	1	1	0L112	00	0	12	CL				
		11630	15	1 00800 00 0 00CL	0,267	1	1	0L114	00	0	12	CL				
		11670	15	1 00800 00 0 00CL	0,267	1	1	0L156	00	0	12	CL				
	• Pair of cylinders, tubular outside	11721, 11921	15	1 00800 00 0 00CL	0,295	1	1	0L149	00	0	12	CL				
		11671, 11761, 11771	15	1 00800 00 0 00CL	0,253	1	1	0L155	00	0	12	CL				

Type	Description	For locks series	L	Pins	Key item	Unit weight	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
	• Pair of cylinders, tubular outside	1A631, 1A721, 1A731	15	100800 00 0 00CL	0,295	1	1	0L150	00 0	12	CL	
		50121, 50126, 50141, 50161, 50171, 50421, 50461, 50471, 50521, 50561, 50571	50	15 100800 00 0 00CL	0,295	1	1	0L116	00 0	12	CL	
	• Pair of cylinders, tubular outside	11631, 11731, 11931	15	100800 00 0 00CL	0,295	1	1	0L120	00 0	12	CL	



Technical features:
CYLINDER

- Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying.
- Security Card: authorised duplication by Cisa only
- Hardened steel pins.
- Hardened steel drivers.
- Stainless steel springs.
- Brass casing with snap resistant two-material core
- Brass plug.

KEY:

- Non-handed, easier to use.
- **With built-in mobile element.**
- Material: nickel silver alloy.
- Numbered key head.
- Key neck length: 16 mm (compatible with protective roses).
- Patented controlled duplication

Supplied as standard:

- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.

Finishes:




- Standard: nickel-plated sanded brass (fin. 12).

Patents:

Key:

- Europe EP1728944
- Russia RU2008150925
- Ukraine UA200814736

RS3 S

Type	Description	For locks series	Door thickness		Key item	Unit weight Kg	Pieces	ITEM					
			Pins					Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Vertical key extraction • Deadbolt to choose from items 1.06414.25.0 and 1.06414.35.0 (specify in order) 		17	15	1 00800 00 000CL	0,150	1	1	0L410	00	0	12	CL
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with welding terminals • Automatic return to key extraction position (0) 		17	15	1 00800 00 000CL	0,150	1	1	0L415	01	0	12	CL
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with welding terminals • Automatic return to key extraction position (0) 		17	15	1 00800 00 000CL	0,150	1	1	0L415	03	0	12	CL
	<ul style="list-style-type: none"> • Plug for steel padlocks series 28000 • 2 keys • Pickled brass body • Complete with plate 		15	1	1 00800 00 000CL	0,240	1	1	0L610	00	0	00	CL
	<ul style="list-style-type: none"> • Cylinder for panic exit device external control item 1.07078.28.0 		15	1	1 00800 00 000CL	0,240	1	1	0L610	10	0	00	CL



Technical features:

- **CYLINDER:**
- BKP resistance to pumping, patented system
- Security Card: protected key duplication
- Brass body with dual-material SNAP RESISTANT core
- Brass plugs
- Carbonitrided steel pins
- Cylindrical and mushroom-like steel drivers with special anti-picking shape
- Phosphor bronze and steel springs
- Clutch-type DIN cam in self-lubricating sintered steel
- **KEY:**
- flat reversible
- in nickel silver alloy with mobile element
- long neck, compatible with protective roses
- numerical code on key bow

Supplied as standard:

- 3 keys
- Security Card
- Fixing screws
- Operating and maintenance instructions

Finishes:

- **SUPPLIED AS STANDARD:**
- nickel-plated sanded brass (fin. 12)
- **ON REQUEST:**
- polished brass (fin. 66)

Standards:

- In compliance with EN 1303:15
- Attack Resistance: grade D
- Key Related Security: grade 6
- Durability: grade 6

Certificates:


- ICIM EN 1303:15
- 16010C6D - Europe
- SKG**
- Gost - Russia

Patents:

- **Key:**
- PCT/IT2013/000297-APA (Patent)
- No. 1276648 (Trade Mark)
- **Snap Resistant system:**
- EPI583878
- **BKP:**
- PCT/WO2007/074163A1
- **Picking:**
- PCT/IT2016/000093

AP4 S


Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

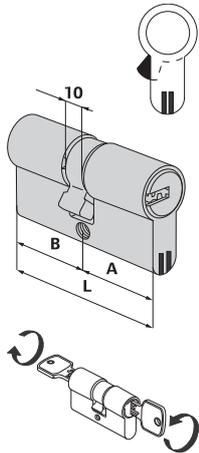

• Double cylinder with clutch system


30 / 30	59,0 29,5 29,5 12	1 00810 00 0	0,272	1	1	OP3S1	07	0	12
28 / 34	61,2 27,7 33,5 12	1 00810 00 0	0,272	1	1	OP3S1	06	0	12
30 / 35	64,0 29,5 34,5 12	1 00810 00 0	0,305	1	1	OP3S1	26	0	12
33 / 33	65,0 32,5 32,5 12	1 00810 00 0	0,272	1	1	OP3S1	10	0	12
35 / 35	69,0 34,5 34,5 12	1 00810 00 0	0,272	1	1	OP3S1	13	0	12
40 / 30	69,0 39,5 29,5 12	1 00810 00 0	0,272	1	1	OP3S1	12	0	12
30 / 45	74,0 29,5 44,5 12	1 00810 00 0	0,305	1	1	OP3S1	27	0	12
35 / 40	74,0 34,5 39,5 12	1 00810 00 0	0,305	1	1	OP3S1	28	0	12
30 / 50	79,0 29,5 49,5 12	1 00810 00 0	0,305	1	1	OP3S1	17	0	12
35 / 45	79,0 34,5 44,5 12	1 00810 00 0	0,305	1	1	OP3S1	19	0	12
40 / 40	79,0 39,5 39,5 12	1 00810 00 0	0,305	1	1	OP3S1	18	0	12
30 / 55	84,0 29,5 54,5 12	1 00810 00 0	0,305	1	1	OP3S1	33	0	12
35 / 50	84,0 34,5 49,5 12	1 00810 00 0	0,305	1	1	OP3S1	31	0	12
40 / 45	84,0 39,5 44,5 12	1 00810 00 0	0,305	1	1	OP3S1	30	0	12
30 / 60	89,0 29,5 59,5 12	1 00810 00 0	0,305	1	1	OP3S1	20	0	12
35 / 55	89,0 34,5 54,5 12	1 00810 00 0	0,305	1	1	OP3S1	32	0	12
40 / 50	89,0 39,5 49,5 12	1 00810 00 0	0,305	1	1	OP3S1	21	0	12
45 / 45	89,0 44,5 44,5 12	1 00810 00 0	0,305	1	1	OP3S1	29	0	12
30 / 65	94,0 29,5 64,5 12	1 00810 00 0	0,305	1	1	OP3S1	41	0	12
35 / 60	94,0 34,5 59,5 12	1 00810 00 0	0,305	1	1	OP3S1	38	0	12
40 / 55	94,0 39,5 54,5 12	1 00810 00 0	0,305	1	1	OP3S1	42	0	12
45 / 50	94,0 44,5 49,5 12	1 00810 00 0	0,305	1	1	OP3S1	39	0	12
30 / 70	99,0 29,5 69,5 12	1 00810 00 0	0,305	1	1	OP3S1	24	0	12
35 / 65	99,0 34,5 64,5 12	1 00810 00 0	0,305	1	1	OP3S1	22	0	12
40 / 60	99,0 39,5 59,5 12	1 00810 00 0	0,305	1	1	OP3S1	25	0	12
45 / 55	99,0 44,5 54,5 12	1 00810 00 0	0,305	1	1	OP3S1	43	0	12
50 / 50	99,0 49,5 49,5 12	1 00810 00 0	0,305	1	1	OP3S1	23	0	12
30 / 75	104,0 29,5 74,5 12	1 00810 00 0	0,305	1	1	OP3S1	56	0	12
30 / 30	104,0 34,5 69,5 12	1 00810 00 0	0,305	1	1	OP3S1	49	0	12
45 / 60	104,0 44,5 59,5 12	1 00810 00 0	0,305	1	1	OP3S1	54	0	12
55 / 50	104,0 54,5 49,5 12	1 00810 00 0	0,305	1	1	OP3S1	64	0	12
30 / 80	109,0 29,5 79,5 12	1 00810 00 0	0,305	1	1	OP3S1	37	0	12
35 / 75	109,0 34,5 74,5 12	1 00810 00 0	0,305	1	1	OP3S1	57	0	12
40 / 70	109,0 39,5 69,5 12	1 00810 00 0	0,305	1	1	OP3S1	35	0	12
50 / 60	109,0 49,5 59,5 12	1 00810 00 0	0,390	1	1	OP3S1	36	0	12
55 / 55	109,0 54,5 54,5 12	1 00810 00 0	0,305	1	1	OP3S1	70	0	12
30 / 85	114,0 29,5 84,5 12	1 00810 00 0	0,305	1	1	OP3S1	77	0	12
40 / 75	114,0 39,5 74,5 12	1 00810 00 0	0,305	1	1	OP3S1	59	0	12
45 / 75	114,0 44,5 69,5 12	1 00810 00 0	0,305	1	1	OP3S1	61	0	12
50 / 65	114,0 49,5 64,5 12	1 00810 00 0	0,305	1	1	OP3S1	65	0	12
55 / 60	114,0 54,5 59,5 12	1 00810 00 0	0,305	1	1	OP3S1	71	0	12
30 / 90	119,0 29,5 89,5 12	1 00810 00 0	0,305	1	1	OP3S1	52	0	12
40 / 80	119,0 39,5 79,5 12	1 00810 00 0	0,305	1	1	OP3S1	60	0	12
50 / 70	119,0 49,5 69,5 12	1 00810 00 0	0,305	1	1	OP3S1	66	0	12
60 / 60	119,0 59,5 59,5 12	1 00810 00 0	0,305	1	1	OP3S1	40	0	12
30 / 100	129,0 29,5 99,5 12	1 00810 00 0	0,305	1	1	OP3S1	53	0	12

Type	Description	Comm. dim.				Key item	Kg	Pcs	ITEM			
		L	A	B	Pins				Type	Dim.	Hand	Fin.

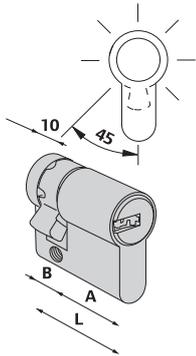

- Single cylinder with 8-position adjustable cam


30 / 10	39,5	29,5	10,0	12	1	00810 00 0	0,272	1	1	OP314	02	0	12
35 / 10	44,5	34,5	10,0	12	1	00810 00 0	0,272	1	1	OP314	07	0	12
40 / 10	49,5	39,5	10,0	12	1	00810 00 0	0,272	1	1	OP314	03	0	12
45 / 10	54,5	44,5	10,0	12	1	00810 00 0	0,272	1	1	OP314	08	0	12
50 / 10	59,5	49,5	10,0	12	1	00810 00 0	0,272	1	1	OP314	04	0	12
60 / 10	69,5	59,5	10,0	12	1	00810 00 0	0,272	1	1	OP314	05	0	12
65 / 10	74,5	64,5	10,0	12	1	00810 00 0	0,272	1	1	OP314	21	0	12
70 / 10	79,5	69,5	10,0	12	1	00810 00 0	0,272	1	1	OP314	06	0	12
80 / 10	89,5	79,5	10,0	12	1	00810 00 0	0,272	1	1	OP314	20	0	12
95 / 10	104,5	94,5	10,0	12	1	00810 00 0	0,272	1	1	OP314	13	0	12

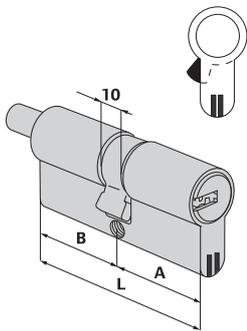

- Double cylinder pre-set for thumb turn installation
- ON REQUEST:
Thumb turns item 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	12	1	00810 00 0	0,305	1	1	OP3S2	07	0	12
30 / 35	64,0	29,5	34,5	12	1	00810 00 0	0,305	1	1	OP3S2	26	0	12
35 / 30	64,0	34,5	29,5	12	1	00810 00 0	0,305	1	1	OP3S2	81	0	12
33 / 33	65,0	32,5	32,5	12	1	00810 00 0	0,305	1	1	OP3S2	10	0	12
30 / 40	69,0	29,5	39,5	12	1	00810 00 0	0,305	1	1	OP3S2	82	0	12
35 / 35	69,0	34,5	34,5	12	1	00810 00 0	0,305	1	1	OP3S2	13	0	12
40 / 30	69,0	39,5	29,5	12	1	00810 00 0	0,305	1	1	OP3S2	12	0	12
35 / 40	74,0	34,5	39,5	12	1	00810 00 0	0,305	1	1	OP3S2	28	0	12
30 / 45	74,0	29,5	44,5	12	1	00810 00 0	0,305	1	1	OP3S2	27	0	12
40 / 35	74,0	39,5	34,5	12	1	00810 00 0	0,305	1	1	OP3S2	83	0	12
45 / 30	74,0	44,5	29,5	12	1	00810 00 0	0,305	1	1	OP3S2	91	0	12
30 / 50	79,0	29,5	49,5	12	1	00810 00 0	0,305	1	1	OP3S2	17	0	12
35 / 45	79,0	34,5	44,5	12	1	00810 00 0	0,305	1	1	OP3S2	19	0	12
40 / 40	79,0	39,5	39,5	12	1	00810 00 0	0,305	1	1	OP3S2	18	0	12
45 / 35	79,0	44,5	34,5	12	1	00810 00 0	0,305	1	1	OP3S2	85	0	12
40 / 45	84,0	39,5	44,5	12	1	00810 00 0	0,305	1	1	OP3S2	30	0	12
45 / 40	84,0	44,5	39,5	12	1	00810 00 0	0,305	1	1	OP3S2	84	0	12
30 / 60	89,0	29,5	59,5	12	1	00810 00 0	0,305	1	1	OP3S2	20	0	12
40 / 50	89,0	39,5	49,5	12	1	00810 00 0	0,305	1	1	OP3S2	21	0	12
45 / 45	89,0	44,5	44,5	12	1	00810 00 0	0,305	1	1	OP3S2	29	0	12
40 / 55	94,0	39,5	54,5	12	1	00810 00 0	0,305	1	1	OP3S2	42	0	12
55 / 40	94,0	54,5	39,5	12	1	00810 00 0	0,305	1	1	OP3S2	98	0	12
45 / 50	94,0	44,5	49,5	12	1	00810 00 0	0,305	1	1	OP3S2	39	0	12
40 / 60	99,0	39,5	59,5	12	1	00810 00 0	0,305	1	1	OP3S2	25	0	12
45 / 55	99,0	44,5	54,5	12	1	00810 00 0	0,305	1	1	OP3S2	43	0	12
50 / 50	99,0	49,5	49,5	12	1	00810 00 0	0,305	1	1	OP3S2	23	0	12
40 / 65	104,0	39,5	64,5	12	1	00810 00 0	0,305	1	1	OP3S2	44	0	12
45 / 60	104,0	44,5	59,5	12	1	00810 00 0	0,305	1	1	OP3S2	54	0	12
55 / 50	104,0	54,5	49,5	12	1	00810 00 0	0,305	1	1	OP3S2	64	0	12
30 / 80	109,0	29,5	79,5	12	1	00810 00 0	0,305	1	1	OP3S2	37	0	12
35 / 75	109,0	34,5	74,5	12	1	00810 00 0	0,305	1	1	OP3S2	57	0	12
40 / 70	109,0	39,5	69,5	12	1	00810 00 0	0,305	1	1	OP3S2	35	0	12
50 / 60	109,0	49,5	59,5	12	1	00810 00 0	0,305	1	1	OP3S2	36	0	12
45 / 70	114,0	44,5	69,5	12	1	00810 00 0	0,305	1	1	OP3S2	61	0	12
50 / 65	114,0	49,5	64,5	12	1	00810 00 0	0,305	1	1	OP3S2	65	0	12

Type	Description	Comm. dim.				Key item	Kg	Pcs	ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers.

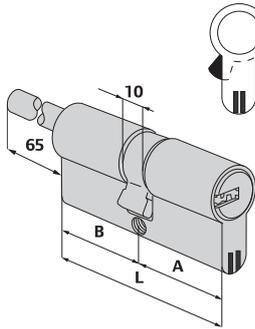

- Double cylinder with adjustable shaft, pre-set for thumb turn
- To use with inside escutcheon item 1.06458.20
- On request: Thumb turns item 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	12	1 00810 00 0	0,272	1	1	0P357 07 0 12
35 / 30	64,0	34,5	29,5	12	1 00810 00 0	0,272	1	1	0P357 81 0 12
40 / 30	69,0	39,5	29,5	12	1 00810 00 0	0,272	1	1	0P357 12 0 12
45 / 30	74,0	44,5	29,5	12	1 00810 00 0	0,272	1	1	0P357 91 0 12
50 / 30	79,0	49,5	29,5	12	1 00810 00 0	0,272	1	1	0P357 90 0 12
55 / 30	84,0	54,5	29,5	12	1 00810 00 0	0,272	1	1	0P357 92 0 12
60 / 30	89,0	59,5	29,5	12	1 00810 00 0	0,272	1	1	0P357 87 0 12
65 / 30	94,0	64,5	29,5	12	1 00810 00 0	0,272	1	1	0P357 A3 0 12
70 / 30	99,0	69,5	29,5	12	1 00810 00 0	0,272	1	1	0P357 88 0 12
80 / 30	110,0	79,5	29,5	12	1 00810 00 0	0,272	1	1	0P357 93 0 12
90 / 30	120,0	89,5	29,5	12	1 00810 00 0	0,282	1	1	0P357 C6 0 12
100 / 30	130,0	99,5	29,5	12	1 00810 00 0	0,292	1	1	0P357 C7 0 12



Technical features:

- CISA patented system (AP4S - C300S)
- Security Card: authorised key duplication by CISA or CISA Solution Partners (AP4S - C300S)
- BKP resistance to pumping, patented system
- Brass body with dual-material SNAP RESISTANT core

Supplied as standard:







- 3 keys
- Fixing screws
- Operating and maintenance instructions

Finishes:


- SUPPLIED AS STANDARD:
Nickel-plated sanded brass (fin. 12)
- ON REQUEST:
Polished brass (fin. 66)


MODULO SYSTEM

Type	Description	Comm. dim. A / B	L	Pins	Key item	Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of modules for cylinder with clutch system AP4S	30 / 30	12	1	00810 00 0	0,272	1	1	OP3M1	07	0	12	
	• Pair of modules for cylinder with thumb turn shaft AP4S	30 / 30	12	1	00810 00 0	0,272	1	1	OP3M2	07	0	12	
	• Pair of modules for cylinder with adjustable thumb turn shaft AP4S	30 / 30	12	1	00810 00 0	0,272	1	1	OP3M7	07	0	12	
	• Module for single cylinder ASTRAL S	30	12	1	00810 00 0	0,272	1	1	OP3M4	02	0	12	
	• Pair of modules for cylinder with clutch system ASTRAL S	30 / 30	10	1	00620 90 0	0,272	1	1	OA3M1	07	0	12	CL

Type	Description	Comm. dim.		Key item	Kg	Pieces	ITEM							
		A / B	L				Plms	Unit weight	Type	Dim.	Hand	Fin.	Pers. Spec.	
	• Pair of modules for cylinder with thumb turn shaft ASTRAL S	30 / 30	10	1	00620 90 0	0,272	1	1	0A3M2	07 0 12	CL			
	• Pair of modules for cylinder with adjustable thumb turn shaft ASTRAL S	30 / 30	10	1	00620 90 0	0,272	1	1	0A3M7	07 0 12	CL			
	• Module for single cylinder ASTRAL S	30	10	1	00620 90 0	0,272	1	1	0A3M4	02 0 12	CL			
	• Pair of modules for cylinder with clutch system C300S	30 / 30	6	1	00430 00 1	0,272	1	1	0N3M1	07 0 12				
	• Pair of modules for cylinder with thumb turn shaft C300S	30 / 30	6	1	00430 00 1	0,272	1	1	0N3M2	07 0 12				
	• Pair of modules for cylinder with adjustable thumb turn shaft C300S	30 / 30	6	1	00430 00 1	0,272	1	1	0N3M7	07 0 12				
	• Module for single cylinder C300S	30	6	1	00430 00 1	0,272	1	1	0N3M4	02 0 12				
	• Extension bolt unit on key side for double cylinders and cylinders with thumb turn shaft (CISA patent)		5,0			0,305	30	1	07580	05 0				
			10,0			0,305	20	1	07580	01 0				
			20,0			0,305	20	1	07580	02 0				
			30,0			0,305	10	1	07580	03 0				

Type	Description	Comm. dim. A / B	L	Pins	Key item	Kg	Unit weight	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Fixing screws for extension bolt unit 		5,0			0,305	50	1	07580	10	0		
			10,0			0,305	50	1	07580	11	A		
			15,0			0,305	50	1	07580	11	B		
			20,0			0,305	50	1	07580	12	A		
			25,0			0,305	50	1	07580	12	B		
			30,0			0,305	50	1	07580	13	A		
			35,0			0,305	50	1	07580	13	B		
			40,0			0,305	25	1	07580	14	A		
			45,0			0,305	25	1	07580	14	B		
			50,0			0,305	25	1	07580	15	A		
			55,0			0,305	25	1	07580	15	B		
			60,0			0,305	10	1	07580	16	A		
			65,0			0,305	10	1	07580	16	B		
			70,0			0,305	10	1	07580	17	A		
	<ul style="list-style-type: none"> • Follower for clutch-type cylinder (for C3000S) • Follower for clutch-type cylinder (for AP4S and ASTRAL S) 					0,305	100	1	07580	30	A		
						0,305	100	1	07580	30	0		
	<ul style="list-style-type: none"> • Coupling unit for cylinder with clutch system (for C3000S) • Coupling unit for cylinder with clutch system (for AP4S and ASTRAL S) 	30 / 30				0,305	50	1	07580	34	0		
		30 / 30			0,305	50	1	07580	31	0			
		30 / 35			0,305	50	1	07580	32	A			
		35 / 35			0,305	50	1	07580	33	A			
	<ul style="list-style-type: none"> • Follower kit for single cylinder 					0,305	5	1	07580	60	A		
	<ul style="list-style-type: none"> • Insert for fixing the "SNAP RESISTANT" system 					0,305	500	1	07580	20	0		
	<ul style="list-style-type: none"> • Nickel-plated module for thumb turn cylinder (fin. 12) • On request: polished brass finish (fin. 66) 	30				0,305	5	1	07580	47	0	12	
	<ul style="list-style-type: none"> • Nickel-plated module for thumb turn cylinder with adjustable shaft (fin. 12) • On request: polished brass finish (fin. 66) 	30				0,305	5	1	07580	48	0	12	

Type	Description	Comm. dim. A / B	L	Pins	Key item	Kg	Pieces	ITEM								
								Type	Dim.	Hand	Fin.	Pers.	Spec.			
	<ul style="list-style-type: none"> Pre-assembled SNAP RESISTANT system compatible with AP4 S, Astral S and C300S 	30 / 30				0,305	5	1	07582	30	0					
		30 / 35					0,305	5	1	07582	31	0				
		30 / 40					0,305	5	1	07582	32	0				
		30 / 45					0,305	5	1	07582	33	0				
		30 / 50					0,305	5	1	07582	34	0				
		30 / 55					0,305	5	1	07582	35	0				
		30 / 60					0,305	2	1	07582	36	0				
		30 / 65					0,305	2	1	07582	37	0				
		30 / 70					0,305	2	1	07582	38	0				
		30 / 75					0,305	1	1	07582	39	0				
		30 / 80					0,305	1	1	07582	40	0				
		30 / 85					0,305	1	1	07582	41	0				
		30 / 90					0,305	1	1	07582	42	0				
		30 / 100					0,305	1	1	07582	44	0				
		35 / 35					0,305	5	1	07582	46	0				
		35 / 40					0,305	5	1	07582	47	0				
		35 / 45					0,305	5	1	07582	48	0				
		35 / 50					0,305	5	1	07582	49	0				
		35 / 55					0,305	2	1	07582	50	0				
		35 / 60					0,305	2	1	07582	51	0				
		35 / 65					0,305	2	1	07582	52	0				
		35 / 70					0,305	1	1	07582	53	0				
		35 / 75					0,305	1	1	07582	54	0				
		35 / 80					0,305	1	1	07582	55	0				
		40 / 40					0,305	5	1	07582	56	0				
		40 / 45					0,305	5	1	07582	57	0				
		40 / 50					0,305	2	1	07582	58	0				
		40 / 55					0,305	2	1	07582	59	0				
		40 / 60					0,305	2	1	07582	60	0				
		40 / 65					0,305	1	1	07582	61	0				
		40 / 70					0,305	1	1	07582	62	0				
		40 / 75					0,305	1	1	07582	63	0				
		40 / 80					0,305	1	1	07582	64	0				
		45 / 45					0,305	2	1	07582	66	0				
		45 / 50					0,305	2	1	07582	67	0				
		45 / 55					0,305	2	1	07582	68	0				
45 / 60					0,305	1	1	07582	69	0						
45 / 70					0,305	1	1	07582	71	0						
45 / 75					0,305	1	1	07582	72	0						
50 / 50					0,305	2	1	07582	76	0						
50 / 55					0,305	1	1	07582	77	0						
50 / 60					0,305	1	1	07582	78	0						
50 / 65					0,305	1	1	07582	79	0						
50 / 70					0,305	1	1	07582	80	0						
50 / 80					0,305	1	1	07582	82	0						
55 / 55					0,305	1	1	07582	86	0						
55 / 60					0,305	1	1	07582	87	0						
55 / 65					0,305	1	1	07582	88	0						
60 / 60					0,305	1	1	07582	95	0						

Type	Description	Comm. dim. A / B	L	Pins	Key item	Kg	Unit weight	Pieces	ITEM					
									Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Connector for single cylinder 	30 / 10					0,305	5	1	07582	10	0		
		35 / 10					0,305	5	1	07582	11	0		
		40 / 10					0,305	5	1	07582	12	0		
		45 / 10					0,305	5	1	07582	13	0		
		50 / 10					0,305	5	1	07582	14	0		
		55 / 10					0,305	2	1	07582	15	0		
		60 / 10					0,305	2	1	07582	16	0		
		65 / 10					0,305	2	1	07582	17	0		
		70 / 10					0,305	2	1	07582	18	0		
		80 / 10					0,305	2	1	07582	20	0		
		95 / 10					0,305	2	1	07582	23	0		
	<ul style="list-style-type: none"> • Assembly kit for Modulo System cylinders 						3,000	1	1	07550	14	0		



Technical features:

- CISA patented system: **key with mobile element**
- Security Card: protected key duplication

CYLINDER:

- Brass body
- Brass plugs
- Carbonitrided steel pins
- Carbonitrided steel drivers
- Phosphor bronze springs

KEYS :

- flat reversible
- in nickel silver alloy with mobile element
- long neck, compatible with protective roses
- numerical code on key bow

Supplied as standard:

- 3 keys
- Security Card
- Fixing roses
- Fixing screws
- Operating and maintenance instructions





Finishes:



- SUPPLIED AS STANDARD::
- nickel-plated sanded brass (fin. 12)
- ON REQUEST:
- polished brass (fin. 66)


Patents:

- Key:
PCT/IT2013/000297-APA (Patent)
No. 1.276648 (Trade Mark)

AP4 S

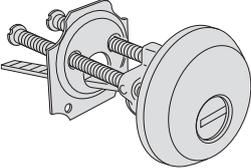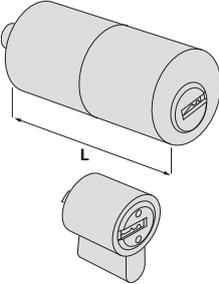Type	Description	For locks series	L	Pins	Key item	Kg	Pieces	ITEM								
								Type	Dim.	Hand	Fin.	Pers.	Spec.			
	• Cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570	12	1	00810 00 0	0,204	1	1	OP510	00	0	12				
	• Cylinder with nickel-plated anti-pulling and drill resistant protective rose		12	1	00810 00 0	0,325	1	1	OP510	10	0	12				
	• Tubular cylinder	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	50,0	12	1 00810 00 0	0,215	1	1	OP210	55	0	12				
	• Pair of cylinders with external tubular cylinder	1A631, 1A721, 1A731	50,0	12	1 00810 00 0	0,295	1	1	OP150	00	0	12				

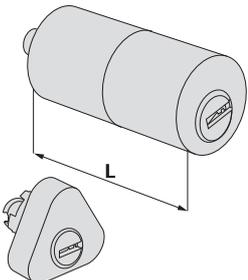Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM										
			L	Pin			Kg	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.				
	<ul style="list-style-type: none"> • Pair of cylinders with external tubular cylinder 	50121, 50126, 50141, 50161, 50171, 50421, 50461, 50471, 50521, 50561, 50571	50,0	12	1 00810 00 0	0,295	1	1	OP116	00	0	12					
		11631, 11731, 11931	50,0	12	1 00810 00 0	0,295	1	1	OP120	00	0	12					
	<ul style="list-style-type: none"> • Pair of cylinders 	11670			12	1 00810 00 0	0,295	1	1	OP156	00	0	12				

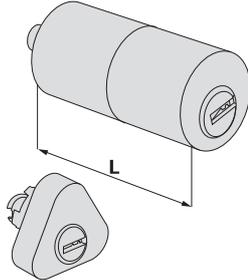	<ul style="list-style-type: none"> • Pair of cylinders with external tubular cylinder 	11721, 11921	50,0	12	1 00810 00 0	0,295	1	1	OP149	00	0	12				
--	--	--------------	------	----	--------------	-------	---	---	-------	----	---	----	--	--	--	--



Technical features:

- CISA patented system: **key with mobile element**
- Security Card: protected key duplication
- Brass body
- Brass plugs
- Carbonitrided steel pins
- Carbonitrided steel drivers
- Phosphor bronze springs
- Keys:
 - flat reversible
 - in nickel silver alloy with mobile element
 - long neck, compatible with protective roses
 - numerical code on key bow

Supplied as standard:

- 3 keys
- Security Card
- Fixing roses
- Fixing screws
- Operating and maintenance instructions







Finishes:

- Nickel-plated sanded brass (fin. 12)


Patents.

- Key: PCT/IT2013/000297-APA (Patent) N° 1276648 (Trade Mark)

AP4 S


Type	Description	Door thickness Pins	Key item	Unit weight Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> • Steel padlock plug • 2 keys • Pickled brass body • Complete with plate item 1.07573.08.0 	12	1 00810 00 0	0,117	1	1	OP610	00 0	
	<ul style="list-style-type: none"> • Cylinder for outside access device 1.07078.28.0 	12	1 00810 00 0	0,117	1	1	OP610	10 0 12	
	<ul style="list-style-type: none"> • Cylinder for outside access device 1.07078.29.0 	12	1 00810 00 0	0,117	1	1	OP610	11 0 12	
	<ul style="list-style-type: none"> • Cylinder for Meroni Premi/Apri mechanism 	12	1 00810 00 0	0,117	1	1	OP610	12 0 12	
 	<ul style="list-style-type: none"> • Key extraction to position (0) • Ring item 1.06021.10.0 • Deadbolt item 1.06414.20.0 or 1.06414.30.0 (to be ordered separately) 	17	12 1 00810 00 0	0,117	1	1	OP410	00 0 12	

Type	Description	Door thickness Pins	Key item	Unit weight Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

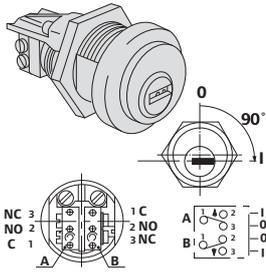

- Microswitch (7 A, 250 V) with welding terminals
- Automatic return to key extraction position (0)
- Ring item 1.06021.10.0

17 12 1 00810 00 0 0,117 1 1 OP415 01 0 12

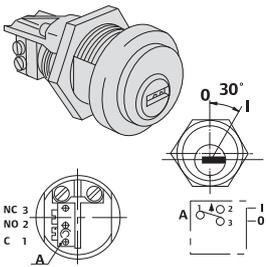

- Microswitch (7 A, 250 V) with welding terminals
- Automatic return to key extraction position (0)
- Ring item 1.06021.10.0

17 12 1 00810 00 0 0,117 1 1 OP415 03 0 12



EN 1303:15
 KEY RELATED SECURITY 1 2 3 4 5 6
 ATTACK RESISTANCE 0 A B C D
 DURABILITY 1 2 3 4 5 6

Technical features:

- CISA patented system
- BKP Resistance to bumping
- 10-pin key biting system
- Security Card: protected key duplication
- **Brass body with cut for controlled snapping**
- Brass plugs
- Clutch-type DIN cam in self-lubricating sintered steel
- Hardened steel pins
- Hardened steel drivers
- Double side control steel pin
- Phosphor bronze and steel springs
- Patented key:
 - flat reversible
 - in nickel-plated brass

- plastic key bow
- long neck, compatible with protective roses

Supplied as standard:

- 3 keys
- Security Card
- Fixing screw
- Operating and maintenance Instructions

Finishes:

- SUPPLIED AS STANDARD:
 - nickel-plated brass (fin. 12)
- ON REQUEST:
 - polished brass (fin. 66)

Standards:

- In compliance with EN 1303:15
- Attack Resistance: grade C
- Key Related Security: grade 6
- Durability: grade 6

Certificates:


- Gost - Russia
- SKG**

Patents:

- Key: EP 1 867 810 B1
- BKP: PCT/WO 2007/074163 A1

Astral Tekno PRO


Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

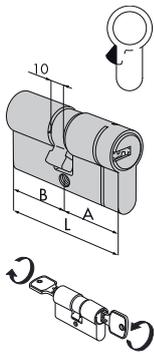

- Clutching system double cylinder


30 / 30	59,0 29,5 29,5	10	1 00690 00 0 00CL	0,235	1	1	OM3T1	07	0	12
28 / 34	61,2 27,7 33,5	10	1 00690 00 0 00CL	0,235	1	1	OM3T1	06	0	12
28 / 36	63,2 27,7 35,5	10	1 00690 00 0 00CL	0,243	1	1	OM3T1	09	0	12
30 / 35	64,0 29,5 34,5	10	1 00690 00 0 00CL	0,238	1	1	OM3T1	26	0	12
33 / 33	65,0 32,5 32,5	10	1 00690 00 0 00CL	0,258	1	1	OM3T1	10	0	12
35 / 35	69,0 34,5 34,5	10	1 00690 00 0 00CL	0,272	1	1	OM3T1	13	0	12
40 / 30	69,0 39,5 29,5	10	1 00690 00 0 00CL	0,272	1	1	OM3T1	12	0	12
28 / 43	70,2 27,7 42,5	10	1 00690 00 0 00CL	0,272	1	1	OM3T1	11	0	12
30 / 45	74,0 29,5 44,5	10	1 00690 00 0 00CL	0,274	1	1	OM3T1	27	0	12
35 / 40	74,0 34,5 39,5	10	1 00690 00 0 00CL	0,274	1	1	OM3T1	28	0	12
30 / 50	79,0 29,5 49,5	10	1 00690 00 0 00CL	0,290	1	1	OM3T1	17	0	12
35 / 45	79,0 34,5 44,5	10	1 00690 00 0 00CL	0,290	1	1	OM3T1	19	0	12
40 / 40	79,0 39,5 39,5	10	1 00690 00 0 00CL	0,290	1	1	OM3T1	18	0	12
30 / 55	84,0 29,5 54,5	10	1 00690 00 0 00CL	0,304	1	1	OM3T1	33	0	12
35 / 50	84,0 34,5 49,5	10	1 00690 00 0 00CL	0,304	1	1	OM3T1	31	0	12
40 / 45	84,0 39,5 44,5	10	1 00690 00 0 00CL	0,304	1	1	OM3T1	30	0	12
30 / 60	89,0 29,5 59,5	10	1 00690 00 0 00CL	0,320	1	1	OM3T1	20	0	12
35 / 55	89,0 34,5 54,5	10	1 00690 00 0 00CL	0,320	1	1	OM3T1	32	0	12
40 / 50	89,0 39,5 49,5	10	1 00690 00 0 00CL	0,320	1	1	OM3T1	21	0	12
45 / 45	89,0 44,5 44,5	10	1 00690 00 0 00CL	0,320	1	1	OM3T1	29	0	12
30 / 65	94,0 29,5 64,5	10	1 00690 00 0 00CL	0,330	1	1	OM3T1	41	0	12
35 / 60	94,0 34,5 59,5	10	1 00690 00 0 00CL	0,330	1	1	OM3T1	38	0	12
40 / 55	94,0 39,5 54,5	10	1 00690 00 0 00CL	0,330	1	1	OM3T1	42	0	12
45 / 50	94,0 44,5 49,5	10	1 00690 00 0 00CL	0,330	1	1	OM3T1	39	0	12
30 / 70	99,0 29,5 69,5	10	1 00690 00 0 00CL	0,340	1	1	OM3T1	24	0	12
35 / 65	99,0 34,5 64,5	10	1 00690 00 0 00CL	0,350	1	1	OM3T1	22	0	12
40 / 60	99,0 39,5 59,5	10	1 00690 00 0 00CL	0,350	1	1	OM3T1	25	0	12
45 / 55	99,0 44,5 54,5	10	1 00690 00 0 00CL	0,340	1	1	OM3T1	43	0	12
50 / 50	99,0 49,5 49,5	10	1 00690 00 0 00CL	0,340	1	1	OM3T1	23	0	12
40 / 65	104,0 39,5 64,5	10	1 00690 00 0 00CL	0,365	1	1	OM3T1	44	0	12
45 / 60	104,0 44,5 59,5	10	1 00690 00 0 00CL	0,365	1	1	OM3T1	54	0	12

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM			
		L	A	B	Pins				Type	Dim.	Hand	Fin.

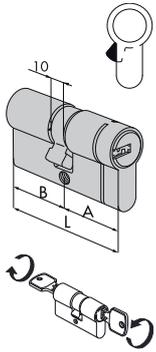


• Clutching system double cylinder

30 / 75	104,0	29,5	74,5	10	1 00690 00 0 00CL	0,365	1	1	OM3T1	56	0	12
35 / 70	104,0	34,5	69,5	10	1 00690 00 0 00CL	0,365	1	1	OM3T1	49	0	12
55 / 50	104,0	54,5	49,5	10	1 00690 00 0 00CL	0,365	1	1	OM3T1	64	0	12
35 / 75	109,0	34,5	74,5	10	1 00690 00 0 00CL	0,360	1	1	OM3T1	57	0	12
30 / 80	109,0	29,5	79,5	10	1 00690 00 0 00CL	0,360	1	1	OM3T1	37	0	12
45 / 65	109,0	44,5	64,5	10	1 00690 00 0 00CL	0,360	1	1	OM3T1	45	0	12
40 / 70	109,0	39,5	69,5	10	1 00690 00 0 00CL	0,360	1	1	OM3T1	35	0	12
50 / 60	109,0	49,5	59,5	10	1 00690 00 0 00CL	0,360	1	1	OM3T1	36	0	12
55 / 55	109,0	54,5	54,5	10	1 00690 00 0 00CL	0,360	1	1	OM3T1	70	0	12
30 / 85	114,0	29,5	84,5	10	1 00690 00 0 00CL	0,400	1	1	OM3T1	77	0	12
50 / 65	114,0	49,5	64,5	10	1 00690 00 0 00CL	0,400	1	1	OM3T1	65	0	12
55 / 60	114,0	54,5	59,5	10	1 00690 00 0 00CL	0,400	1	1	OM3T1	71	0	12
40 / 75	114,0	39,5	74,5	10	1 00690 00 0 00CL	0,400	1	1	OM3T1	59	0	12
45 / 70	114,0	44,5	69,5	10	1 00690 00 0 00CL	0,400	1	1	OM3T1	61	0	12
30 / 90	119,0	29,5	89,5	10	1 00690 00 0 00CL	0,420	1	1	OM3T1	52	0	12
40 / 80	119,0	39,5	79,5	10	1 00690 00 0 00CL	0,420	1	1	OM3T1	60	0	12
60 / 60	119,0	59,5	59,5	10	1 00690 00 0 00CL	0,420	1	1	OM3T1	40	0	12
50 / 70	119,0	49,5	69,5	10	1 00690 00 0 00CL	0,420	1	1	OM3T1	66	0	12
30 / 100	129,0	29,5	99,5	10	1 00690 00 0 00CL	0,460	1	1	OM3T1	53	0	12



• Single cylinder with adjustable cam in 8 position

30 / 10	39,5	29,5	10,0	10	1 00690 00 0 00CL	0,185	1	1	OM324	02	0	12
35 / 10	44,5	34,5	10,0	10	1 00690 00 0 00CL	0,195	1	1	OM324	07	0	12
40 / 10	49,5	39,5	10,0	10	1 00690 00 0 00CL	0,205	1	1	OM324	03	0	12
45 / 10	54,5	44,5	10,0	10	1 00690 00 0 00CL	0,215	1	1	OM324	08	0	12
50 / 10	49,5	39,5	10,0	10	1 00690 00 0 00CL	0,225	1	1	OM324	04	0	12
60 / 10	69,5	59,5	10,0	10	1 00690 00 0 00CL	0,245	1	1	OM324	05	0	12
65 / 10	74,5	64,5	10,0	10	1 00690 00 0 00CL	0,255	1	1	OM324	21	0	12
70 / 10	79,5	69,5	10,0	10	1 00690 00 0 00CL	0,265	1	1	OM324	06	0	12
80 / 10	89,5	79,5	10,0	10	1 00690 00 0 00CL	0,285	1	1	OM324	20	0	12
95 / 10	104,5	94,5	10,0	10	1 00690 00 0 00CL	0,315	1	1	OM324	13	0	12

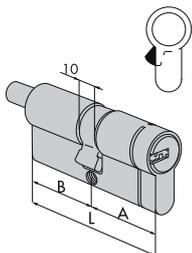

• Double cylinder with thumb turn shaft
• ON REQUEST:
Knobs series
06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	10	1 00690 00 0 00CL	0,240	1	1	OM3T2	07	0	12
30 / 35	64,0	29,5	34,5	10	1 00690 00 0 00CL	0,250	1	1	OM3T2	26	0	12
35 / 30	64,0	34,5	29,5	10	1 00690 00 0 00CL	0,250	1	1	OM3T2	81	0	12
30 / 40	69,0	29,5	39,5	10	1 00690 00 0 00CL	0,260	1	1	OM3T2	82	0	12
35 / 35	69,0	34,5	34,5	10	1 00690 00 0 00CL	0,260	1	1	OM3T2	13	0	12
40 / 30	69,0	39,5	29,5	10	1 00690 00 0 00CL	0,260	1	1	OM3T2	12	0	12
35 / 40	74,0	34,5	39,5	10	1 00690 00 0 00CL	0,270	1	1	OM3T2	28	0	12
30 / 45	74,0	29,5	44,5	10	1 00690 00 0 00CL	0,270	1	1	OM3T2	27	0	12
40 / 35	74,0	39,5	34,5	10	1 00690 00 0 00CL	0,270	1	1	OM3T2	83	0	12
45 / 30	74,0	44,5	29,5	10	1 00690 00 0 00CL	0,270	1	1	OM3T2	91	0	12
30 / 50	79,0	29,5	49,5	10	1 00690 00 0 00CL	0,280	1	1	OM3T2	17	0	12
35 / 45	79,0	34,5	44,5	10	1 00690 00 0 00CL	0,280	1	1	OM3T2	19	0	12
40 / 40	79,0	39,5	39,5	10	1 00690 00 0 00CL	0,280	1	1	OM3T2	18	0	12
40 / 45	84,0	39,5	44,5	10	1 00690 00 0 00CL	0,290	1	1	OM3T2	30	0	12
30 / 60	89,0	29,5	59,5	10	1 00690 00 0 00CL	0,300	1	1	OM3T2	20	0	12
40 / 50	89,0	39,5	49,5	10	1 00690 00 0 00CL	0,300	1	1	OM3T2	21	0	12
45 / 45	89,0	44,5	44,5	10	1 00690 00 0 00CL	0,300	1	1	OM3T2	29	0	12
45 / 50	94,0	44,5	49,5	10	1 00690 00 0 00CL	0,300	1	1	OM3T2	39	0	12
40 / 60	99,0	39,5	59,5	10	1 00690 00 0 00CL	0,320	1	1	OM3T2	25	0	12
50 / 50	99,0	49,5	49,5	10	1 00690 00 0 00CL	0,320	1	1	OM3T2	23	0	12

Type	Description	Comm. dim.				Key item	Kg	Pcs	ITEM								
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers.	Spec.			
<ul style="list-style-type: none"> • Double cylinder with adjustable thumb turn shaft • To be combined with inside rose item 1.06458.20 • ON REQUEST: Knobs series 06353, 06355, 06356, 06357 	30 / 30	59,0	29,5	29,5	10	1 00690 00 0 00CL	0,284	1	1	OM3T7	07	0	12				
	35 / 30	64,0	34,5	29,5	10	1 00690 00 0 00CL	0,294	1	1	OM3T7	81	0	12				
	40 / 30	69,0	39,5	29,5	10	1 00690 00 0 00CL	0,304	1	1	OM3T7	12	0	12				
	45 / 30	74,0	44,5	29,5	10	1 00690 00 0 00CL	0,314	1	1	OM3T7	91	0	12				
	50 / 30	79,0	49,5	29,5	10	1 00690 00 0 00CL	0,324	1	1	OM3T7	90	0	12				
	55 / 30	84,0	54,5	29,5	10	1 00690 00 0 00CL	0,334	1	1	OM3T7	92	0	12				
	60 / 30	89,0	59,5	29,5	10	1 00690 00 0 00CL	0,344	1	1	OM3T7	87	0	12				
	65 / 30	94,0	64,5	29,5	10	1 00690 00 0 00CL	0,354	1	1	OM3T7	A3	0	12				
	70 / 30	99,0	69,5	29,5	10	1 00690 00 0 00CL	0,364	1	1	OM3T7	88	0	12				
	80 / 30	109,0	79,5	29,5	10	1 00690 00 0 00CL	0,384	1	1	OM3T7	93	0	12				
	90 / 30	119,0	89,5	29,5	10	1 00690 00 0 00CL	0,404	1	1	OM3T7	C6	0	12				
100 / 30	129,0	99,5	29,5	10	1 00690 00 0 00CL	0,424	1	1	OM3T7	C7	0	12					



Technical features:

- Cisa patented system
- 10 pin (6 active, 4 passive) key biting system
- Security Card: protected key duplication
- Brass body
- Brass plugs
- Self-lubricating DIN sintered steel clutch-type cam
- Casehardened steel pins
- Hardened steel pin drivers
- Double side control steel pin
- Phosphorous bronze and steel springs
- Patented key:
 - reversible flat key
 - nickel-plated brass key
 - plastic material head
 - long neck, compatible with protective roses

Supplied as standard:

- 3 keys
- Security Card
- Fixing screw
- Fixing roses
- Operating and maintenance Instructions

Finishes:

- STANDARD:
 - nickel-plated brass (fin. 12)
- ON REQUEST:
 - polished brass (fin. 66)






Certifications:




- Gost - Russia

Patents:

- Key: EP 1 867 810 B1

Astral Tekno PRO

Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM									
			L	Pins			Kg		Type	Dim.	Hand	Fin.	Pers. Spec.			
	• Rim cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570	10	1 00690 00 0 00CL	0,204	1	1	0M510	00	0	12	CL				
	• Rim cylinder with plated tear and drill resistant rose		10	1 00690 00 0 00CL	0,325	1	1	0M510	10	0	12	CL				
	• Round cylinder • For further lenght see item 07165	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	50,0	10 1 00690 00 0 00CL	0,160	1	1	0M210	50	0	12	CL				
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	10 1 00690 00 0 00CL	0,267	1	1	0M150	00	0	12	CL				
	• Cylinder set	50120, 50125, 50160, 50170, 50210, 50220	10	1 00690 00 0 00CL	0,267	1	1	0M112	00	0	12	CL				
		11630	10	1 00690 00 0 00CL	0,267	1	1	0M114	00	0	12	CL				

Type	Description	For locks series	Key item				ITEM				
			L	Plms	Unit weight	Pieces	Type	Dim. Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> Cylinder set, with round external cylinder 	50121, 50126, 50141, 50161, 50171, 50211, 50221, 50421, 50461, 50471, 50521, 50561, 50571	10	1 00690 00 0 00CL	0,267	1	1	0M116 00 0 12 CL			
		11631, 11731, 11931	10	1 00690 00 0 00CL	0,267	1	1	0M120 00 0 12 CL			
	<ul style="list-style-type: none"> Cylinder set, with round external cylinder 	11670	10	1 00690 00 0 00CL	0,267	1	1	0M156 00 0 12 CL			
	<ul style="list-style-type: none"> Cylinder set, with round external cylinder 	11721, 11921	50,0	10	1 00690 00 0 00CL	0,267	1	1	0M149 00 0 12 CL		
		11671, 11761, 11771	50,0	10	1 00690 00 0 00CL	0,267	1	1	0M155 00 0 12 CL		



Technical features:

- BKP Cisa patented system
- 10 pin (6 active, 4 passive) key biting system
- Security Card: protected key duplication
- Brass casing
- Brass plugs
- Self-lubricating DIN sintered steel clutch-type cam
- Casehardened steel pins
- Hardened steel pin drivers
- Double side control steel pin
- Phosphorous bronze and steel springs
- Patented key:
 - reversible flat key
 - nickel-plated brass key
 - plastic material head
 - long neck, compatible with protective roses

Supplied as standard:

- 3 keys
- Security Card
- Fixing screw
- Operating and maintenance Instructions

Finishes:

- STANDARD:
 - nickel-plated brass (fin. 12)

Certifications:


Gost - Russia

Patents:

Key: EP 1 867 810 B1

Astral Tekno PRO

Type	Description	Door thickness	Pins	Key item	Unit weight	Pieces	ITEM					
							Type	Dim.	Hand	Fin.	Pars.	Spec.
	<ul style="list-style-type: none"> • Steel plug for padlocks • 2 keys • Pickled brass body • Complete with plate item 1.07573.08.0 	10	10	100690 00 000CL	0,106	1	1	0M610	00	0	00	CL
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.28.0 	10	10	100690 00 000CL	0,117	1	1	0M610	10	0	12	CL
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.29.0 	10	10	100690 00 000CL	0,117	1	1	0M610	11	0	12	CL
	<ul style="list-style-type: none"> • Cylinder for Meroni "Premiagri" (push-to-open) knobsets 	10	10	100690 00 000CL	0,117	1	1	0M610	12	0	12	CL
	<ul style="list-style-type: none"> • Key extraction position (0) • Deadbolt item 1.06414.20.0 or 1.06414.30.0 (to order separately) 	17	10	100690 00 000CL	0,150	1	1	0M410	00	0	12	CL
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0) 	17	10	100690 00 000CL	0,150	1	1	0M415	01	0	12	CL

Type	Description	Door thickness		Key item	Unit weight	Pieces	ITEM					
		mm	in				Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0) 	17	10	1 00690 00 0 00CL	0,150	1	1	OM415	03	0	12	CL



Technical features:

- BKP (bumping resistant) registered patented
- 10 pins (6 active, 4 passive) key biting system
- Brass body with dual-material SNAP RESISTANT core
- brass body with segment pack extended through the entire length of the cylinder brass plugs
- self-lubricating sintered steel projecting DIN CAM
- pins and drivers in hardened steel
- phosphor bronze springs
- Flat reversible key
 - in a special brass alloy nickel-plated
 - numbered on key head

Supplied as standard:

- 3 keys
- Code Card
- Fixing screw
- Operating and Maintenance Instructions.

On request:

- Key with long neck (pers. CL), with personalised plastic piece and profile (pers. CP)

Finishes:

- Standard: sanded brass (fin. 00)
- On request:
 - nickel-plated brass (fin. 12)
 - polished brass (fin. 66)

Standards:

- Compliant with EN 1303:05
- Attack Resistance: grade C
- Key Related Security: grade 6
- Durability: grade 6

Certifications:


- ICIM EN 1303:15 16010C6C
- Gost - Russia
- SKG**

Patents:

- Snap system Europe EPI 583878
- BKP: PCT/WO2007/074163A1

Astral S


Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

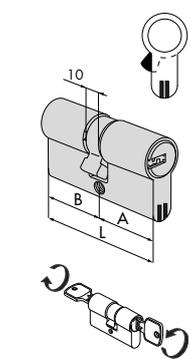

• Clutching systems double cylinders


30 / 30	59,0	29,5	29,5	10	1	00620 01 0	0,234	12	1	0A3S1 07 0
28 / 34	61,2	27,7	33,5	10	1	00620 01 0	0,234	12	1	0A3S1 06 0
28 / 36	63,2	27,7	35,5	10	1	00620 01 0	0,234	12	1	0A3S1 09 0
30 / 35	64,0	29,5	34,5	10	1	00620 01 0	0,243	12	1	0A3S1 26 0
33 / 33	65,0	32,5	32,5	10	1	00620 01 0	0,234	12	1	0A3S1 10 0
35 / 35	69,0	34,5	34,5	10	1	00620 01 0	0,234	12	1	0A3S1 13 0
40 / 30	69,0	39,5	29,5	10	1	00620 01 0	0,234	12	1	0A3S1 12 0
28 / 43	70,2	27,7	42,5	10	1	00620 01 0	0,234	12	1	0A3S1 11 0
30 / 45	74,0	29,5	44,5	10	1	00620 01 0	0,243	12	1	0A3S1 27 0
35 / 40	74,0	34,5	39,5	10	1	00620 01 0	0,243	12	1	0A3S1 28 0
30 / 50	79,0	29,5	49,5	10	1	00620 01 0	0,234	12	1	0A3S1 17 0
35 / 45	79,0	34,5	44,5	10	1	00620 01 0	0,234	12	1	0A3S1 19 0
40 / 40	79,0	39,5	39,5	10	1	00620 01 0	0,234	12	1	0A3S1 18 0
30 / 55	84,0	29,5	54,5	10	1	00620 01 0	0,304	12	1	0A3S1 33 0
35 / 50	84,0	34,5	49,5	10	1	00620 01 0	0,319	12	1	0A3S1 31 0
40 / 45	84,0	39,5	44,5	10	1	00620 01 0	0,319	12	1	0A3S1 30 0
43 / 43	85,0	42,5	42,5	10	1	00620 01 0	0,304	12	1	0A3S1 46 0
30 / 60	89,0	29,5	59,5	10	1	00620 01 0	0,304	12	1	0A3S1 20 0
35 / 55	89,0	34,5	54,5	10	1	00620 01 0	0,304	12	1	0A3S1 32 0
40 / 50	89,0	39,5	49,5	10	1	00620 01 0	0,319	12	1	0A3S1 21 0
45 / 45	89,0	44,5	44,5	10	1	00620 01 0	0,319	12	1	0A3S1 29 0
30 / 65	94,0	29,5	64,5	10	1	00620 01 0	0,319	6	1	0A3S1 41 0
35 / 60	94,0	34,5	59,5	10	1	00620 01 0	0,304	6	1	0A3S1 38 0
45 / 50	94,0	44,5	49,5	10	1	00620 01 0	0,304	6	1	0A3S1 39 0
30 / 70	99,0	29,5	69,5	10	1	00620 01 0	0,349	6	1	0A3S1 24 0
35 / 65	99,0	34,5	64,5	10	1	00620 01 0	0,319	6	1	0A3S1 22 0
40 / 60	99,0	39,5	59,5	10	1	00620 01 0	0,349	6	1	0A3S1 25 0
45 / 55	99,0	44,5	54,5	10	1	00620 01 0	0,349	6	1	0A3S1 43 0
50 / 50	99,0	49,5	49,5	10	1	00620 01 0	0,319	6	1	0A3S1 23 0
30 / 75	104,0	29,5	74,5	10	1	00620 01 0	0,234	6	1	0A3S1 56 0
35 / 70	104,0	34,5	69,5	10	1	00620 01 0	0,234	6	1	0A3S1 49 0
50 / 55	104,0	49,5	54,5	10	1	00620 01 0	0,234	6	1	0A3S1 64 0
30 / 80	109,0	29,5	79,5	10	1	00620 01 0	0,349	6	1	0A3S1 37 0
40 / 70	109,0	39,5	69,5	10	1	00620 01 0	0,349	6	1	0A3S1 35 0
50 / 60	109,0	49,5	59,5	10	1	00620 01 0	0,319	6	1	0A3S1 36 0
55 / 55	109,0	54,5	54,5	10	1	00620 01 0	0,319	6	1	0A3S1 70 0
30 / 85	114,0	29,5	84,5	10	1	00620 01 0	0,234	6	1	0A3S1 77 0
50 / 65	114,0	49,5	64,5	10	1	00620 01 0	0,234	6	1	0A3S1 65 0
40 / 75	114,0	39,5	74,5	10	1	00620 01 0	0,234	6	1	0A3S1 59 0

Type	Description	Comm. dim.				Key item	Kg	Pcs	ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers.

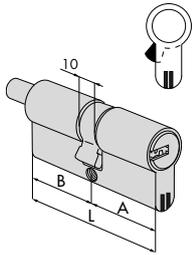

- Double cylinders with thumb turn shaft
- ON REQUEST:
- Knobs series 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	10	1 00620 01 0	0,275	12	1	OA3S2	07	0				
30 / 35	64,0	29,5	34,5	10	1 00620 01 0	0,264	12	1	OA3S2	26	0				
35 / 30	64,0	34,5	29,5	10	1 00620 01 0	0,264	12	1	OA3S2	81	0				
33 / 33	65,0	32,5	32,5	10	1 00620 01 0	0,264	12	1	OA3S2	10	0				
30 / 40	69,0	29,5	39,5	10	1 00620 01 0	0,264	12	1	OA3S2	82	0				
35 / 35	69,0	34,5	34,5	10	1 00620 01 0	0,264	12	1	OA3S2	13	0				
35 / 40	74,0	34,5	39,5	10	1 00620 01 0	0,294	12	1	OA3S2	28	0				
40 / 35	74,0	39,5	34,5	10	1 00620 01 0	0,294	12	1	OA3S2	83	0				
30 / 50	79,0	29,5	49,5	10	1 00620 01 0	0,318	6	1	OA3S2	17	0				
35 / 45	79,0	34,5	44,5	10	1 00620 01 0	0,318	6	1	OA3S2	19	0				
40 / 40	79,0	39,5	39,5	10	1 00620 01 0	0,318	6	1	OA3S2	18	0				
40 / 45	84,0	39,5	44,5	10	1 00620 01 0	0,324	6	1	OA3S2	30	0				
45 / 40	84,0	44,5	39,5	10	1 00620 01 0	0,324	6	1	OA3S2	84	0				
50 / 35	84,0	49,5	34,5	10	1 00620 01 0	0,324	6	1	OA3S2	94	0				
43 / 43	85,0	42,5	42,5	10	1 00620 01 0	0,324	6	1	OA3S2	46	0				
30 / 60	89,0	29,5	59,5	10	1 00620 01 0	0,324	6	1	OA3S2	20	0				
40 / 50	89,0	39,5	49,5	10	1 00620 01 0	0,324	6	1	OA3S2	21	0				
45 / 45	89,0	44,5	44,5	10	1 00620 01 0	0,324	6	1	OA3S2	29	0				
40 / 55	94,0	39,5	54,5	10	1 00620 01 0	0,367	6	1	OA3S2	42	0				
55 / 40	94,0	54,5	39,5	10	1 00620 01 0	0,367	6	1	OA3S2	98	0				
45 / 50	94,0	44,5	49,5	10	1 00620 01 0	0,367	6	1	OA3S2	39	0				
40 / 60	99,0	39,5	59,5	10	1 00620 01 0	0,370	6	1	OA3S2	25	0				
45 / 55	99,0	44,5	54,5	10	1 00620 01 0	0,370	6	1	OA3S2	43	0				
50 / 50	99,0	49,5	49,5	10	1 00620 01 0	0,370	6	1	OA3S2	23	0				
45 / 60	104,0	44,5	59,5	10	1 00620 01 0	0,398	6	1	OA3S2	54	0				
30 / 80	109,0	29,5	79,5	10	1 00620 01 0	0,400	6	1	OA3S2	37	0				
40 / 70	109,0	39,5	69,5	10	1 00620 01 0	0,400	6	1	OA3S2	35	0				
55 / 55	109,0	54,5	54,5	10	1 00620 01 0	0,400	6	1	OA3S2	70	0				
60 / 50	109,0	59,5	49,5	10	1 00620 01 0	0,400	6	1	OA3S2	89	0				
55 / 60	114,0	54,5	59,5	10	1 00620 01 0	0,415	6	1	OA3S2	71	0				
55 / 65	119,0	54,5	64,5	10	1 00620 01 0	0,430	6	1	OA3S2	72	0				
60 / 60	119,0	59,5	59,5	10	1 00620 01 0	0,430	6	1	OA3S2	40	0				
65 / 55	119,0	64,5	54,5	10	1 00620 01 0	0,430	6	1	OA3S2	86	0				

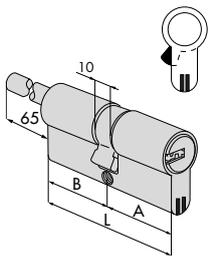

- Double cylinders with adjustable thumb turn shaft
- to be combined with inside rose item 1.06458.20
- ON REQUEST:
- Knobs series 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	10	1 00620 01 0	0,275	6	1	OA3S7	07	0				
35 / 30	64,0	34,5	29,5	10	1 00620 01 0	0,275	6	1	OA3S7	81	0				
40 / 30	69,0	39,5	29,5	10	1 00620 01 0	0,264	6	1	OA3S7	12	0				
45 / 30	74,0	44,5	29,5	10	1 00620 01 0	0,264	6	1	OA3S7	91	0				
50 / 30	79,0	49,5	29,5	10	1 00620 01 0	0,329	6	1	OA3S7	90	0				
55 / 30	84,0	54,5	29,5	10	1 00620 01 0	0,359	6	1	OA3S7	92	0				
60 / 30	89,0	59,5	29,5	10	1 00620 01 0	0,359	6	1	OA3S7	87	0				
70 / 30	99,0	69,5	29,5	10	1 00620 01 0	0,370	6	1	OA3S7	88	0				



Technical features:

- 10 pins key biting system
- brass body
- brass plugs
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs
- self-lubricating sintered steel projecting DIN cam
- KEY:
 - flat reversible keys
 - in nickel-plated brass
 - numbered on key bow

Supplied as standard:

- 3 keys
- Code Card
- Fixing screws

On request:

- Cylinders with long key (plastic bow), compatible with protective roses (pers. CL)

Finishes:

- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12)
 - polished brass (fin. 66)

Standards:


- Compliant with EN 1303:2015
- Attack Resistance: grade A
- Key Related Security: grade 6
- Durability: grade 6

Certifications:

- Gost - Russia
- SKG **

Astral

Type	Description	Comm. dim.	L	A	B	Pins	Key item	Kg	Pieces	ITEM			
										Type	Dim.	Hand	Fin.

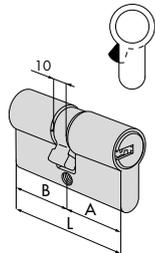


- Double cylinder

TO BE DISCONTINUED


28 / 28	55,4	27,7	27,7	10	1	00620 01 0	0,232	12	1	0A310 05 0				
30 / 30	59,0	29,5	29,5	10	1	00620 01 0	0,235	12	1	0A310 07 0				
28 / 32	59,2	27,7	31,5	10	1	00620 01 0	0,230	12	1	0A310 08 0				
28 / 34	61,2	27,7	33,5	10	1	00620 01 0	0,234	12	1	0A310 06 0				
30 / 35	64,0	29,5	34,5	10	1	00620 01 0	0,243	12	1	0A310 26 0				
33 / 33	65,0	32,5	32,5	10	1	00620 01 0	0,258	12	1	0A310 10 0				
35 / 35	69,0	34,5	34,5	10	1	00620 01 0	0,272	12	1	0A310 13 0				
40 / 30	69,0	39,5	29,5	10	1	00620 01 0	0,272	12	1	0A310 12 0				
28 / 43	70,2	27,7	42,5	10	1	00620 01 0	0,262	12	1	0A310 11 0				
30 / 45	74,0	29,5	44,5	10	1	00620 01 0	0,274	12	1	0A310 27 0				
35 / 40	74,0	34,5	39,5	10	1	00620 01 0	0,274	12	1	0A310 28 0				
30 / 50	79,0	29,5	49,5	10	1	00620 01 0	0,301	12	1	0A310 17 0				
35 / 45	79,0	34,5	44,5	10	1	00620 01 0	0,289	12	1	0A310 19 0				
40 / 40	79,0	39,5	39,5	10	1	00620 01 0	0,289	12	1	0A310 18 0				
30 / 55	84,0	29,5	54,5	10	1	00620 01 0	0,304	12	1	0A310 33 0				
35 / 50	84,0	34,5	49,5	10	1	00620 01 0	0,360	12	1	0A310 31 0				
40 / 45	84,0	39,5	44,5	10	1	00620 01 0	0,304	12	1	0A310 30 0				
30 / 60	89,0	29,5	59,5	10	1	00620 01 0	0,320	12	1	0A310 20 0				
35 / 55	89,0	34,5	54,5	10	1	00620 01 0	0,332	12	1	0A310 32 0				
40 / 50	89,0	39,5	49,5	10	1	00620 01 0	0,320	12	1	0A310 21 0				
45 / 45	89,0	44,5	44,5	10	1	00620 01 0	0,333	12	1	0A310 29 0				
30 / 65	94,0	29,5	64,5	10	1	00620 01 0	0,334	6	1	0A310 41 0				
35 / 60	94,0	34,5	59,5	10	1	00620 01 0	0,390	6	1	0A310 38 0				
40 / 55	94,0	39,5	54,5	10	1	00620 01 0	0,355	6	1	0A310 42 0				
45 / 50	94,0	44,5	49,5	10	1	00620 01 0	0,334	6	1	0A310 39 0				
30 / 70	99,0	29,5	69,5	10	1	00620 01 0	0,349	6	1	0A310 24 0				
35 / 65	99,0	34,5	64,5	10	1	00620 01 0	0,349	6	1	0A310 22 0				
40 / 60	99,0	39,5	59,5	10	1	00620 01 0	0,349	6	1	0A310 25 0				
45 / 55	99,0	44,5	54,5	10	1	00620 01 0	0,349	6	1	0A310 43 0				
50 / 50	99,0	49,5	49,5	10	1	00620 01 0	0,349	6	1	0A310 23 0				
30 / 80	109,0	29,5	79,5	10	1	00620 01 0	0,378	6	1	0A310 37 0				
40 / 70	109,0	39,5	69,5	10	1	00620 01 0	0,400	6	1	0A310 35 0				
50 / 60	109,0	49,5	59,5	10	1	00620 01 0	0,402	6	1	0A310 36 0				
55 / 55	109,0	54,5	54,5	10	1	00620 01 0	0,378	6	1	0A310 70 0				
55 / 60	114,0	54,5	59,5	10	1	00620 01 0	0,420	6	1	0A310 71 0				

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers.

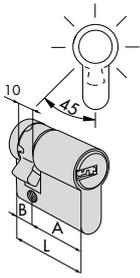

- Single cylinder with adjustable cam in 8 position


30 / 10	39,5	29,5	10,0	10	1 00620 01 0	0,186	12	1	OA314	02 0
35 / 10	44,5	34,5	10,0	10	1 00620 01 0	0,201	12	1	OA314	07 0
40 / 10	49,5	39,5	10,0	10	1 00620 01 0	0,199	12	1	OA314	03 0
50 / 10	59,5	49,5	10,0	10	1 00620 01 0	0,227	12	1	OA314	04 0
60 / 10	69,5	59,5	10,0	10	1 00620 01 0	0,257	12	1	OA314	05 0

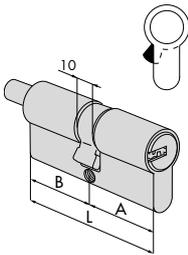

- Double cylinder with thumb turn shaft
- ON REQUEST:
Knobs series 06353, 06355, 06356, 06357

TO BE DISCONTINUED

30 / 30	59,0	29,5	29,5	10	1 00620 01 0	0,244	12	1	OA312	07 0
35 / 30	64,0	34,5	29,5	10	1 00620 01 0	0,259	12	1	OA312	81 0
33 / 33	65,0	32,5	32,5	10	1 00620 01 0	0,267	12	1	OA312	10 0
30 / 40	69,0	29,5	39,5	10	1 00620 01 0	0,279	12	1	OA312	82 0
35 / 35	69,0	34,5	34,5	10	1 00620 01 0	0,279	12	1	OA312	13 0
40 / 30	69,0	39,5	29,5	10	1 00620 01 0	0,279	12	1	OA312	12 0
30 / 45	74,0	29,5	44,5	10	1 00620 01 0	0,350	12	1	OA312	27 0
30 / 50	79,0	29,5	49,5	10	1 00620 01 0	0,318	6	1	OA312	17 0
40 / 40	79,0	39,5	39,5	10	1 00620 01 0	0,309	6	1	OA312	18 0
45 / 35	79,0	44,5	34,5	10	1 00620 01 0	0,309	6	1	OA312	85 0
45 / 40	84,0	44,5	39,5	10	1 00620 01 0	0,324	6	1	OA312	84 0
40 / 50	89,0	39,5	49,5	10	1 00620 01 0	0,350	6	1	OA312	21 0
45 / 45	89,0	44,5	44,5	10	1 00620 01 0	0,347	6	1	OA312	29 0
40 / 55	94,0	39,5	54,5	10	1 00620 01 0	0,355	6	1	OA312	42 0
45 / 55	99,0	44,5	54,5	10	1 00620 01 0	0,370	6	1	OA312	43 0
50 / 50	99,0	49,5	49,5	10	1 00620 01 0	0,370	6	1	OA312	23 0
45 / 60	104,0	44,5	59,5	10	1 00620 01 0	0,398	6	1	OA312	54 0
55 / 50	104,0	54,5	49,5	10	1 00620 01 0	0,384	6	1	OA312	64 0
60 / 50	109,0	59,5	49,5	10	1 00620 01 0	0,410	6	1	OA312	89 0

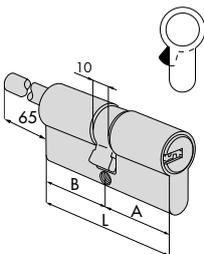

- Double cylinder with adjustable thumb turn shaft
- To be combined with inside rose item 1.06458.20
- ON REQUEST:
Knobs series 06353, 06355, 06356, 06357

TO BE DISCONTINUED

30 / 30	59,0	29,5	29,5	10	1 00620 01 0	0,284	6	1	OA317	07 0
35 / 30	64,0	34,5	29,5	10	1 00620 01 0	0,312	6	1	OA317	81 0
40 / 30	69,0	39,5	29,5	10	1 00620 01 0	0,312	6	1	OA317	12 0
50 / 30	79,0	49,5	29,5	10	1 00620 01 0	0,329	6	1	OA317	90 0
60 / 30	89,0	59,5	29,5	10	1 00620 01 0	0,359	6	1	OA317	87 0
70 / 30	99,0	69,5	29,5	10	1 00620 01 0	0,370	6	1	OA317	88 0



Technical features:

- 10 (6 active + 4 passive) pins key biting system
- brass body
- brass plug
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs

KEY:

- flat reversible keys
- in nickel-plated brass
- numbered on key bow






Supplied as standard:

- 3 keys
- Code Card
- Fixing screws
- Fixing plates


Finishes:

- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12)
 - polished brass (fin. 66)

Astral

Type	Description	For locks series	Key item		Unit weight Kg	Pieces	ITEM							
			L	Pins			Type	Dim.	Hand	Fin.	Pers.	Spec.		
	• Rim cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54552, 54570	10	1 00620 01 0	0,204	6	1	0A510	00	0				
	• Rim cylinder with nickel-plated tear and drill resistant rose		10	1 00620 01 0	0,270	6	1	0A510	11	0				
	• Round cylinder • For further lenght see item 07165	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	50,0	10 1 00620 01 0	0,160	6	1	0A210	50	0				
	• Cylinder set	50120, 50125, 50160, 50170, 50210, 50220	10	1 00620 01 0	0,267	6	1	0A112	00	0				
		11630	10	1 00620 01 0	0,267	6	1	0A114	00	0				
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	10 1 00620 01 0	0,233	6	1	0A150	00	0				

Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM				
			L	Pins			Type	Dim.	Hand	Fin.	Pers.



- Cylinder set, with round external cylinder

50121, 50126, 50141,
50161, 50171, 50211,
50221, 50421, 50461,
50471, 50521, 50561,
50571

50,0 10 1 00620 01 0 0,233 6

1 0A116 00 0

11631, 11731, 11931

50,0 10 1 00620 01 0 0,253 6

1 0A120 00 0

11721, 11921


50,0 10 1 00620 01 0 0,253 6

1 0A149 00 0

11671, 11761, 11771

50,0 10 1 00620 01 0 0,253 6

1 0A155 00 0

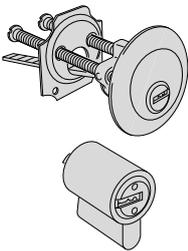

- Cylinder set

1A630

10 1 00620 01 0 0,267 6

1 0A115 00 0



Technical features:

- 10 pins key biting system
- brass body
- brass plug
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs

KEY:

- flat reversible keys
- in nickel-plated brass
- numbered on key bow

Supplied as standard:

- 3 keys
- Code Card
- Fixing screws
- Fixing plates

Finishes:

- Nickel-plated brass (fin. 12)

Astral

Type	Description	Door thickness	Pins	Key item	Unit weight	Pieces	ITEM					
							Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Small cylinder for padlocks: series 28053 - 28353 - 28553 • 2 keys • Pickled brass body • Complete with plate 	10	1	00620 01 0	0,106	6	1	0A610	00	0		
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.28.0 	10	1	00620 01 0	0,106	6	1	0A610	10	0		
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.29.0 	10	1	00620 01 0	0,106	6	1	0A610	11	0		
	<ul style="list-style-type: none"> • Vertical key extraction • Deadbolt item 1.06414.20.0 or item 1.06414.30.0 (to order separately) 	17	10	1 00620 01 0	0,195	6	1	0A410	00	0		
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0) 	17	10	1 00620 01 0	0,140	6	1	0A415	01	0		
	<ul style="list-style-type: none"> • Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0) 	17	10	1 00620 01 0	0,188	6	1	0A415	03	0		



EN 1303:15 KEY RELATED SECURITY 1 2 3 4 5 6
 ATTACK RESISTANCE 0 A B C D
 DURABILITY 1 2 3 4 5 6

Asix PRO

Technical features:

- Brass body
- Brass plugs
- DIN projecting cam in self-lubricating sintered steel
- Pins:
 - in wear resistant bronze
 - in hardened steel in the first position.
- Drivers:
 - in cylindrical mushroom-type brass
 - in carbonitrided steel in the first position.
- Phosphor bronze springs
- Keys:
 - flat reversible
 - long neck compatible with protective rose
 - in nickel-plated brass
- Numerical code on key bow

Supplied as standard:

- Fixing screws
- 3 keys


Finishes:

- SUPPLIED AS STANDARD:
 - nickel-plated sanded brass (fin. 12)

Standards:


- In compliance with EN 1303:2015
- Attack Resistance: grade 0
- Key Related Security: grade 5
- Durability: grade 6

Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.

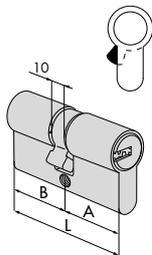

- Double cylinder
- Configuration construction key 1+5

30 / 30	59,0	29,5	29,5	6	1	00670 01 0 00SD	0,223	6	1	OE300	07	0	12	SD
28 / 32	59,2	27,7	31,5	6	1	00670 01 0 00SD	0,225	6	1	OE300	08	0	12	SD
40 / 30	69,0	39,5	29,5	6	1	00670 01 0 00SD	0,325	6	1	OE300	12	0	12	SD
35 / 35	69,0	34,5	34,5	6	1	00670 01 0 00SD	0,240	6	1	OE300	13	0	12	SD
30 / 50	79,0	29,5	49,5	6	1	00670 01 0 00SD	0,350	6	1	OE300	17	0	12	SD
40 / 40	79,0	39,5	39,5	6	1	00670 01 0 00SD	0,260	6	1	OE300	18	0	12	SD
35 / 45	79,0	34,5	44,5	6	1	00670 01 0 00SD	0,260	6	1	OE300	19	0	12	SD
30 / 60	89,0	29,5	59,5	6	1	00670 01 0 00SD	0,339	6	1	OE300	20	0	12	SD
40 / 50	89,0	39,5	49,5	6	1	00670 01 0 00SD	0,280	6	1	OE300	21	0	12	SD
50 / 50	99,0	49,5	49,5	6	1	00670 01 0 00SD	0,300	6	1	OE300	23	0	12	SD
30 / 70	99,0	29,5	69,5	6	1	00670 01 0 00SD	0,300	6	1	OE300	24	0	12	SD
40 / 60	99,0	39,5	59,5	6	1	00670 01 0 00SD	0,300	6	1	OE300	25	0	12	SD
30 / 35	64,0	29,5	34,5	6	1	00670 01 0 00SD	0,230	6	1	OE300	26	0	12	SD
30 / 45	74,0	29,5	44,5	6	1	00670 01 0 00SD	0,250	6	1	OE300	27	0	12	SD
35 / 40	74,0	34,5	39,5	6	1	00670 01 0 00SD	0,250	6	1	OE300	28	0	12	SD
45 / 45	89,0	44,5	44,5	6	1	00670 01 0 00SD	0,280	6	1	OE300	29	0	12	SD
40 / 45	84,0	39,5	44,5	6	1	00670 01 0 00SD	0,270	6	1	OE300	30	0	12	SD
35 / 50	84,0	34,5	49,5	6	1	00670 01 0 00SD	0,270	6	1	OE300	31	0	12	SD
30 / 55	84,0	29,5	54,5	6	1	00670 01 0 00SD	0,270	6	1	OE300	33	0	12	SD
40 / 70	109,0	39,5	69,5	6	1	00670 01 0 00SD	0,320	6	1	OE300	35	0	12	SD
50 / 60	109,0	49,5	59,5	6	1	00670 01 0 00SD	0,320	6	1	OE300	36	0	12	SD

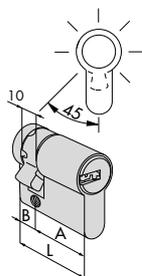

- Single cylinder with 8-position adjustable cam Item 1 OE304 18 0 fixed cam
- Supplied in KA version
- Configuration construction key 1+2

25 / 10	34,5	24,5	10,0	6	1	00670 01 0 00SD	0,150	6	1	OE304	18	0	12	NV
40 / 40	79,0	39,5	39,5	6	1	00670 01 0 00SD	0,150	6	1	OE304	18	0	12	NV KA
30 / 10	39,5	29,5	10,0	6	1	00670 01 0 00SD	0,164	6	1	OE304	02	0	12	NV
30 / 10	39,5	29,5	10,0	6	1	00670 01 0 00SD	0,160	6	1	OE304	02	0	12	NV KA
40 / 10	49,5	39,5	10,0	6	1	00670 01 0 00SD	0,160	6	1	OE304	03	0	12	NV KA
35 / 10	44,5	34,5	10,0	6	1	00670 01 0 00SD	0,170	6	1	OE304	07	0	12	NV KA

Type	Description	Comm. dim.				Key item	Kg	Unit weight	Pieces	ITEM					
		L	A	B	pins					Type	Dim.	Hand	Fin.	Pers.	Spec.
<ul style="list-style-type: none"> • Double cylinder with adjustable shaft, pre-set for thumb turn • Configuration construction key 1+5 • For use with inside escutcheon item 1.06458.20 • ON REQUEST: Thumb turns item 06353, 06355, 06356, 06357 	30 / 30	59,0	29,5	29,5	6	1 00670 01 0 00SD	0,260	6	1	OE307	07 0 12 SD				
	35 / 30	64,0	34,5	29,5	6	1 00670 01 0 00SD	0,270	6	1	OE307	81 0 12 SD				
	40 / 30	69,0	39,5	29,5	6	1 00670 01 0 00SD	0,280	6	1	OE307	12 0 12 SD				
	45 / 30	74,0	44,5	29,5	6	1 00670 01 0 00SD	0,290	6	1	OE307	91 0 12 SD				
	50 / 30	79,0	49,5	29,5	6	1 00670 01 0 00SD	0,370	6	1	OE307	90 0 12 SD				
	60 / 30	89,0	59,5	29,5	6	1 00670 01 0 00SD	0,340	6	1	OE307	87 0 12 SD				
	70 / 30	99,0	69,5	29,5	6	1 00670 01 0 00SD	0,360	6	1	OE307	88 0 12 SD				



EN 1303:15	KEY RELATED SECURITY	1	2	3	4	5	6
	ATTACK RESISTANCE	0	A	B	C	D	
	DURABILITY	1	2	3	4	5	6

Asix

Technical features:

- brass body
- brass plugs
- self-lubricating sintered steel projecting DIN cam
- pins:
 - in wear resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs
- self-lubricating sintered steel projecting cam, DIN-compatible
- KEY:
 - flat reversible keys
 - in nickel-plated brass
 - long key for protective roses compatibility
 - numerical coding on the head

Supplied as standard:

- 3 keys
- Fixing screw


Finishes:

- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12)

Standards:

- Compliant with EN 1303:2015
- Attack Resistance: grade 0
- Key Related Security: grade 5
- Durability: grade 6


Type	Description	Comm. dim.	Key item				Kg	Pieces	ITEM			
			L	A	B	Pins			Type	Dim.	Hand	Fin.

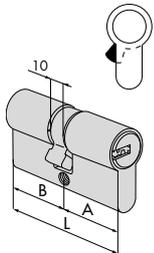

• Double cylinder


28 / 28	55,4	27,7	27,7	6	1 00670 01 0	0,216	6	1	OE300	05 0
30 / 30	59,0	29,5	29,5	6	1 00670 01 0	0,223	6	1	OE300	07 0
28 / 32	59,2	27,7	31,5	6	1 00670 01 0	0,225	6	1	OE300	08 0
28 / 34	61,2	27,7	33,5	6	1 00670 01 0	0,230	6	1	OE300	06 0
28 / 36	63,2	27,7	35,5	6	1 00670 01 0	0,242	6	1	OE300	09 0
30 / 35	64,0	29,5	34,5	6	1 00670 01 0	0,233	6	1	OE300	26 0
33 / 33	65,0	32,5	32,5	6	1 00670 01 0	0,242	6	1	OE300	10 0
35 / 35	69,0	34,5	34,5	6	1 00670 01 0	0,267	6	1	OE300	13 0
40 / 30	69,0	39,5	29,5	6	1 00670 01 0	0,258	6	1	OE300	12 0
28 / 43	70,2	27,7	42,5	6	1 00670 01 0	0,275	6	1	OE300	11 0
30 / 45	74,0	29,5	44,5	6	1 00670 01 0	0,264	6	1	OE300	27 0
35 / 40	74,0	34,5	39,5	6	1 00670 01 0	0,264	6	1	OE300	28 0
30 / 50	79,0	29,5	49,5	6	1 00670 01 0	0,279	6	1	OE300	17 0
35 / 45	79,0	34,5	44,5	6	1 00670 01 0	0,279	6	1	OE300	19 0
40 / 40	79,0	39,5	39,5	6	1 00670 01 0	0,279	6	1	OE300	18 0
30 / 55	84,0	29,5	54,5	6	1 00670 01 0	0,294	6	1	OE300	33 0
35 / 50	84,0	34,5	49,5	6	1 00670 01 0	0,294	6	1	OE300	31 0
40 / 45	84,0	39,5	44,5	6	1 00670 01 0	0,294	6	1	OE300	30 0
30 / 60	89,0	29,5	59,5	6	1 00670 01 0	0,323	6	1	OE300	20 0
35 / 55	89,0	34,5	54,5	6	1 00670 01 0	0,310	6	1	OE300	32 0
40 / 50	89,0	39,5	49,5	6	1 00670 01 0	0,310	6	1	OE300	21 0
45 / 45	89,0	44,5	44,5	6	1 00670 01 0	0,310	6	1	OE300	29 0
30 / 65	94,0	29,5	64,5	6	1 00670 01 0	0,324	6	1	OE300	41 0
35 / 60	94,0	34,5	59,5	6	1 00670 01 0	0,324	6	1	OE300	38 0
40 / 55	94,0	39,5	54,5	6	1 00670 01 0	0,341	6	1	OE300	42 0
45 / 50	94,0	44,5	49,5	6	1 00670 01 0	0,324	6	1	OE300	39 0
30 / 70	99,0	29,5	69,5	6	1 00670 01 0	0,339	6	1	OE300	24 0
35 / 65	99,0	34,5	64,5	6	1 00670 01 0	0,339	6	1	OE300	22 0
40 / 60	99,0	39,5	59,5	6	1 00670 01 0	0,339	6	1	OE300	25 0
45 / 55	99,0	44,5	54,5	6	1 00670 01 0	0,339	6	1	OE300	43 0
50 / 50	99,0	49,5	49,5	6	1 00670 01 0	0,339	6	1	OE300	23 0
50 / 55	104,0	49,5	54,5	6	1 00670 01 0	0,368	6	1	OE300	64 0
30 / 75	104,0	29,5	74,5	6	1 00670 01 0	0,339	6	1	OE300	56 0
35 / 70	104,0	34,5	69,5	6	1 00670 01 0	0,353	6	1	OE300	49 0
40 / 65	104,0	39,5	64,5	6	1 00670 01 0	0,353	6	1	OE300	44 0
45 / 60	104,0	44,5	59,5	6	1 00670 01 0	0,353	6	1	OE300	54 0
45 / 65	109,0	44,5	64,5	6	1 00670 01 0	0,291	6	1	OE300	45 0
30 / 80	109,0	29,5	79,5	6	1 00670 01 0	0,368	6	1	OE300	37 0
40 / 70	109,0	39,5	69,5	6	1 00670 01 0	0,368	6	1	OE300	35 0
50 / 60	109,0	49,5	59,5	6	1 00670 01 0	0,368	6	1	OE300	36 0
55 / 55	109,0	54,5	54,5	6	1 00670 01 0	0,368	6	1	OE300	70 0
45 / 70	114,0	44,5	69,5	6	1 00670 01 0	0,390	6	1	OE300	61 0
45 / 75	119,0	44,5	74,5	6	1 00670 01 0	0,353	6	1	OE300	62 0
60 / 60	119,0	59,5	59,5	6	1 00670 01 0	0,368	6	1	OE300	40 0

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	pins				Type	Dim.	Hand	Fin.	Pers. Spec.

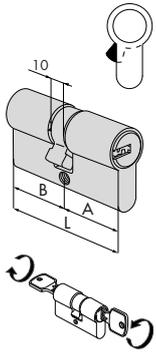





• Clutch-type double cylinder

30 / 30	59,0	29,5	29,5	6	1	00670 01 0	0,225	6	1	OE301 07 0				
28 / 34	61,2	27,7	33,5	6	1	00670 01 0	0,225	6	1	OE301 06 0				
28 / 36	63,2	27,7	35,5	6	1	00670 01 0	0,225	6	1	OE301 09 0				
30 / 35	64,0	29,5	34,5	6	1	00670 01 0	0,225	6	1	OE301 26 0				
33 / 33	65,0	32,5	32,5	6	1	00670 01 0	0,225	6	1	OE301 10 0				
35 / 35	69,0	34,5	34,5	6	1	00670 01 0	0,225	6	1	OE301 13 0				
40 / 30	69,0	39,5	29,5	6	1	00670 01 0	0,225	6	1	OE301 12 0				
28 / 43	70,2	27,7	42,5	6	1	00670 01 0	0,225	6	1	OE301 11 0				
30 / 45	74,0	29,5	44,5	6	1	00670 01 0	0,225	6	1	OE301 27 0				
35 / 40	74,0	34,5	39,5	6	1	00670 01 0	0,225	6	1	OE301 28 0				
30 / 50	79,0	29,5	49,5	6	1	00670 01 0	0,225	6	1	OE301 17 0				
40 / 40	79,0	39,5	39,5	6	1	00670 01 0	0,225	6	1	OE301 18 0				
30 / 55	84,0	29,5	54,5	6	1	00670 01 0	0,225	6	1	OE301 33 0				
35 / 50	84,0	34,5	49,5	6	1	00670 01 0	0,225	6	1	OE301 31 0				
40 / 45	84,0	39,5	44,5	6	1	00670 01 0	0,225	6	1	OE301 30 0				
30 / 60	89,0	29,5	59,5	6	1	00670 01 0	0,225	6	1	OE301 20 0				
35 / 55	89,0	34,5	54,5	6	1	00670 01 0	0,225	6	1	OE301 32 0				
40 / 50	89,0	39,5	49,5	6	1	00670 01 0	0,225	6	1	OE301 21 0				
45 / 45	89,0	44,5	44,5	6	1	00670 01 0	0,225	6	1	OE301 29 0				
30 / 65	94,0	29,5	64,5	6	1	00670 01 0	0,225	6	1	OE301 41 0				
35 / 60	94,0	34,5	59,5	6	1	00670 01 0	0,225	6	1	OE301 38 0				
40 / 55	94,0	39,5	54,5	6	1	00670 01 0	0,225	6	1	OE301 42 0				
45 / 50	94,0	44,5	49,5	6	1	00670 01 0	0,225	6	1	OE301 39 0				
30 / 70	99,0	29,5	69,5	6	1	00670 01 0	0,225	6	1	OE301 24 0				
35 / 65	99,0	34,5	64,5	6	1	00670 01 0	0,225	6	1	OE301 22 0				
40 / 60	99,0	39,5	59,5	6	1	00670 01 0	0,225	6	1	OE301 25 0				
45 / 55	99,0	44,5	54,5	6	1	00670 01 0	0,225	6	1	OE301 43 0				
50 / 50	99,0	49,5	49,5	6	1	00670 01 0	0,225	6	1	OE301 23 0				
30 / 80	109,0	29,5	79,5	6	1	00670 01 0	0,225	6	1	OE301 37 0				
40 / 70	109,0	39,5	69,5	6	1	00670 01 0	0,225	6	1	OE301 35 0				
50 / 60	109,0	49,5	59,5	6	1	00670 01 0	0,225	6	1	OE301 36 0				
55 / 55	109,0	54,5	54,5	6	1	00670 01 0	0,225	6	1	OE301 70 0				
55 / 60	114,0	54,5	59,5	6	1	00670 01 0	0,225	6	1	OE301 71 0				

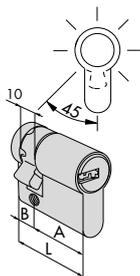

- Single cylinder with 8 position adjustable cam
- Item 1.OE304.18.0 fixed 27° protruding cam

25 / 10	34,5	24,5	10,0	5	1	00670 01 0	0,164	6	1	OE304 18 0				
30 / 10	39,5	29,5	10,0	6	1	00670 01 0	0,164	6	1	OE304 02 0				
35 / 10	44,5	34,5	10,0	6	1	00670 01 0	0,179	6	1	OE304 07 0				
37 / 10	46,5	36,5	10,0	6	1	00670 01 0	0,185	6	1	OE304 10 0				
40 / 10	49,5	39,5	10,0	6	1	00670 01 0	0,195	6	1	OE304 03 0				
45 / 10	54,5	44,5	10,0	6	1	00670 01 0	0,207	6	1	OE304 08 0				
50 / 10	59,5	49,5	10,0	6	1	00670 01 0	0,222	6	1	OE304 04 0				
60 / 10	69,5	59,5	10,0	6	1	00670 01 0	0,252	6	1	OE304 05 0				
65 / 10	74,5	64,5	10,0	6	1	00670 01 0	0,267	6	1	OE304 21 0				
70 / 10	79,5	69,5	10,0	6	1	00670 01 0	0,282	6	1	OE304 06 0				
80 / 10	89,5	79,5	10,0	6	1	00670 01 0	0,312	6	1	OE304 20 0				
90 / 10	103,5	93,5	10,0	6	1	00620 01 0	0,357	6	1	OE304 13 0				

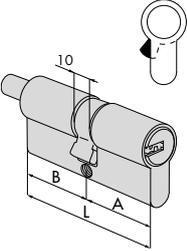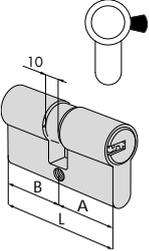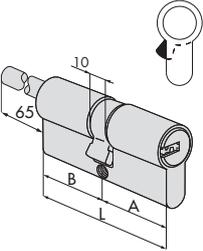Type	Description	Comm. dim.				Key item	Unit weight Kg	Pieces	ITEM						
		L	A	B	Plns				Type	Dim.	Hand	Fin.	Pers.	Spec.	
 <ul style="list-style-type: none"> • Double cylinder with thumb turn shaft • ON REQUEST: Knobs series 06353, 06354, 06355, 06356, 06357 	30 / 30	59,0	29,5	29,5	6	1 00670 01 0	0,239	6	1	OE302	07	0			
	30 / 35	64,0	29,5	34,5	6	1 00670 01 0	0,254	6	1	OE302	26	0			
	35 / 30	64,0	34,5	29,5	6	1 00670 01 0	0,254	6	1	OE302	81	0			
	30 / 40	69,0	29,5	39,5	6	1 00670 01 0	0,274	6	1	OE302	82	0			
	35 / 35	69,0	34,5	34,5	6	1 00670 01 0	0,265	6	1	OE302	13	0			
	40 / 30	69,0	39,5	29,5	6	1 00670 01 0	0,274	6	1	OE302	12	0			
	35 / 40	74,0	34,5	39,5	6	1 00670 01 0	0,289	6	1	OE302	28	0			
	30 / 50	79,0	29,5	49,5	6	1 00670 01 0	0,304	6	1	OE302	17	0			
	35 / 45	79,0	34,5	44,5	6	1 00670 01 0	0,304	6	1	OE302	19	0			
	40 / 40	79,0	39,5	39,5	6	1 00670 01 0	0,304	6	1	OE302	18	0			
	40 / 45	84,0	39,5	44,5	6	1 00670 01 0	0,319	6	1	OE302	30	0			
	45 / 40	84,0	44,5	39,5	6	1 00670 01 0	0,319	6	1	OE302	84	0			
	43 / 43	85,0	42,5	42,5	6	1 00670 01 0	0,321	6	1	OE302	46	0			
	30 / 60	89,0	29,5	59,5	6	1 00670 01 0	0,334	6	1	OE302	20	0			
	45 / 45	89,0	44,5	44,5	6	1 00620 01 0	0,334	6	1	OE302	29	0			
	40 / 50	89,0	39,5	49,5	6	1 00670 01 0	0,334	6	1	OE302	21	0			
	40 / 55	94,0	39,5	54,5	6	1 00670 01 0	0,355	6	1	OE302	42	0			
	45 / 50	94,0	44,5	49,5	6	1 00670 01 0	0,355	6	1	OE302	39	0			
	45 / 55	99,0	44,5	54,5	6	1 00670 01 0	0,365	6	1	OE302	43	0			
	50 / 50	99,0	49,5	49,5	6	1 00670 01 0	0,365	6	1	OE302	23	0			
45 / 60	104,0	44,5	59,5	6	1 00670 01 0	0,379	6	1	OE302	54	0				
55 / 50	104,0	54,5	49,5	6	1 00670 01 0	0,379	6	1	OE302	64	0				
50 / 60	109,0	49,5	59,5	6	1 00620 01 0	0,395	6	1	OE302	36	0				
60 / 60	119,0	59,5	59,5	6	1 00670 01 0	0,425	6	1	OE302	40	0				
 <ul style="list-style-type: none"> • Nickel-plated double cylinder series with special cam 90° for series 46305 locks • 3 keys • Fixing screw 	30 / 30	59,0	29,5	29,5	6	1 00670 01 0	0,225	6	1	OE303	07	0 12			
 <ul style="list-style-type: none"> • Nickel-plated single cylinder series with special cam 90° for series 46305 locks • 3 keys • Fixing screw 	30 / 10	39,5	29,5	10,0	6	1 00670 01 0	0,164	6	1	OE305	02	0 12			
 <ul style="list-style-type: none"> • Double cylinder with adjustable thumb turn shaft • To be combined with inside rose item 1.06458.20 • ON REQUEST: Knobs series 06353, 06355, 06356, 06357 	30 / 30	59,0	29,5	29,5	6	1 00670 01 0	0,284	6	1	OE307	07	0			
	40 / 30	69,0	39,5	29,5	6	1 00670 01 0	0,312	6	1	OE307	12	0			
	35 / 30	64,0	34,5	29,5	6	1 00670 01 0	0,294	6	1	OE307	81	0			
	45 / 30	74,0	44,5	29,5	6	1 00670 01 0	0,320	6	1	OE307	91	0			
	50 / 30	79,0	49,5	29,5	6	1 00670 01 0	0,329	6	1	OE307	90	0			
	60 / 30	89,0	59,5	29,5	6	1 00670 01 0	0,359	6	1	OE307	87	0			
	70 / 30	99,0	69,5	29,5	6	1 00670 01 0	0,370	6	1	OE307	88	0			



Technical features:

- brass body
- brass plugs
- pins:
 - in wear-resistant bronze
 - in hardened steel in first position
- drivers:
 - in brass, mushroom-type anti-picking and cylindrical
 - in hardened steel in first position
- phosphor bronze springs
- KEY:
 - flat reversible keys
 - in nickel-plated brass
 - numerical coding on the head






Supplied as standard:


- 3 keys
- Fixing screws

Finishes:

- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12)

Asix

Type	Description	For locks series	Key item		Unit weight Kg	Pieces	ITEM							
			L	Pins			Type	Dim.	Hand	Fin.	Pers.	Spec.		
	• Rim cylinder	1A610	6	1	1 00670 01 0	0,182	6	1	0E500	00	0			
	• Round cylinder • For further lenght see item 07165	1A611	50,0	6	1 00670 01 0	0,170	6	1	0E200	50	0			
	• Cylinder set, with round external cylinder	11721, 11921	50,0	6	1 00670 01 0	0,255	6	1	0E149	00	0			
	• Cylinder set	1A630	6	1	1 00670 01 0	0,250	6	1	0E115	00	0			
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	6	1 00670 01 0	0,255	6	1	0E150	00	0			

Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM							
			L	Pins			Type	Dim.	Hand	Fin.	Pers.	Spec.		
	<ul style="list-style-type: none"> • Cylinder for padlocks series 28000 • 2 keys 		6	1 00670 01 0	0,117	6	1	OE600	00	0				
	<ul style="list-style-type: none"> • Cylinder for external control item 1.07078.28.0 • Ground brass 		6	1 00670 01 0	0,117	6	1	OE600	10	0				
	<ul style="list-style-type: none"> • Cylinder for external control item 1.07078.29.0 • Ground brass 		6	1 00670 01 0	0,117	6	1	OE600	11	0				



Technical features:

- CYLINDER:
- BKP resistance to pumping, patented system
- Security Card: protected key duplication
- Brass body with dual-material **SNAP RESISTANT** core
- Brass plugs
- Carbonitrided steel pins
- Variable shape hardened steel drivers
- Phosphor bronze and steel springs
- Clutch-type DIN cam in self-lubricating sintered steel

KEY:

- protected by trademark
- paracentral keyway
- in nickel silver alloy

- long neck, compatible with protective roses
- numerical code on key bow

Supplied as standard:

- 3 keys
- Security Card
- Fixing screws
- Operating and maintenance instructions

Finishes:

- SUPPLIED AS STANDARD:
- nickel-plated sanded brass (fin. 12)
- ON REQUEST:
- polished brass (fin. 66)

Standards:

- In compliance with EN 1303:2015
- Attack Resistance: grade D
- Key Related Security: grade 6
- Durability: grade 6


Certificates:

- SKG***
- Patents:**
- Key: 3D Trade Mark 1 236 248 and Community Design registered at no. 2669630
- BKP: PCT/WO2007/074163 A1
- Snap Resistant system: EPI583878

C3000 S


Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

• Double cylinder with clutch system

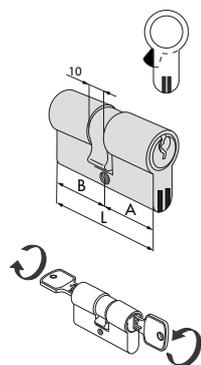


30 / 30	59,0	29,5	29,5	6	1	00430 00 1	0,235	1	1	ON3S1	07	0	12
30 / 35	64,0	29,5	34,5	6	1	00430 00 1	0,235	1	1	ON3S1	26	0	12
35 / 35	69,0	34,5	34,5	6	1	00430 00 1	0,235	1	1	ON3S1	13	0	12
40 / 30	69,0	39,5	29,5	6	1	00430 00 1	0,235	1	1	ON3S1	12	0	12
30 / 45	74,0	29,5	44,5	6	1	00430 00 1	0,235	1	1	ON3S1	27	0	12
35 / 40	74,0	34,5	39,5	6	1	00430 00 1	0,235	1	1	ON3S1	28	0	12
30 / 50	79,0	29,5	49,5	6	1	00430 00 1	0,235	1	1	ON3S1	17	0	12
35 / 45	79,0	34,5	44,5	6	1	00430 00 1	0,235	1	1	ON3S1	19	0	12
40 / 40	79,0	39,5	39,5	6	1	00430 00 1	0,235	1	1	ON3S1	18	0	12
30 / 55	84,0	29,5	54,5	6	1	00430 00 1	0,235	1	1	ON3S1	33	0	12
35 / 50	84,0	34,5	49,5	6	1	00430 00 1	0,235	1	1	ON3S1	31	0	12
40 / 45	84,0	39,5	44,5	6	1	00430 00 1	0,235	1	1	ON3S1	30	0	12
30 / 60	89,0	29,5	59,5	6	1	00430 00 1	0,235	1	1	ON3S1	20	0	12
35 / 55	89,0	34,5	54,5	6	1	00430 00 1	0,235	1	1	ON3S1	32	0	12
40 / 50	89,0	39,5	49,5	6	1	00430 00 1	0,235	1	1	ON3S1	21	0	12
45 / 45	89,0	44,5	44,5	6	1	00430 00 1	0,235	1	1	ON3S1	29	0	12
30 / 65	94,0	29,5	64,5	6	1	00430 00 1	0,235	1	1	ON3S1	41	0	12
35 / 60	94,0	34,5	59,5	6	1	00430 00 1	0,235	1	1	ON3S1	38	0	12
40 / 55	94,0	39,5	54,5	6	1	00430 00 1	0,235	1	1	ON3S1	42	0	12
45 / 50	94,0	44,5	49,5	6	1	00430 00 1	0,235	1	1	ON3S1	39	0	12
30 / 70	99,0	29,5	69,5	6	1	00430 00 1	0,235	1	1	ON3S1	24	0	12
35 / 65	99,0	34,5	64,5	6	1	00430 00 1	0,235	1	1	ON3S1	22	0	12
40 / 60	99,0	39,5	59,5	6	1	00430 00 1	0,235	1	1	ON3S1	25	0	12
45 / 55	99,0	44,5	54,5	6	1	00430 00 1	0,235	1	1	ON3S1	43	0	12
30 / 80	109,0	29,5	79,5	6	1	00430 00 1	0,235	1	1	ON3S1	23	0	12
40 / 65	104,0	39,5	64,5	6	1	00430 00 1	0,235	1	1	ON3S1	44	0	12
45 / 60	104,0	44,5	59,5	6	1	00430 00 1	0,235	1	1	ON3S1	54	0	12
30 / 75	104,0	29,5	74,5	6	1	00430 00 1	0,235	1	1	ON3S1	56	0	12
55 / 50	104,0	54,5	49,5	6	1	00430 00 1	0,235	1	1	ON3S1	64	0	12
35 / 70	104,0	34,5	69,5	6	1	00430 00 1	0,235	1	1	ON3S1	49	0	12
35 / 75	109,0	34,5	74,5	6	1	00430 00 1	0,235	1	1	ON3S1	57	0	12
30 / 80	109,0	29,5	79,5	6	1	00430 00 1	0,235	1	1	ON3S1	37	0	12
40 / 70	109,0	39,5	69,5	6	1	00430 00 1	0,235	1	1	ON3S1	35	0	12
50 / 60	109,0	49,5	59,5	6	1	00430 00 1	0,235	1	1	ON3S1	36	0	12
55 / 55	109,0	54,5	54,5	6	1	00430 00 1	0,235	1	1	ON3S1	70	0	12
30 / 85	114,0	29,5	84,5	6	1	00430 00 1	0,235	1	1	ON3S1	77	0	12
50 / 65	114,0	49,5	64,5	6	1	00430 00 1	0,235	1	1	ON3S1	65	0	12
55 / 60	114,0	54,5	59,5	6	1	00430 00 1	0,235	1	1	ON3S1	71	0	12
40 / 75	114,0	39,5	74,5	6	1	00430 00 1	0,235	1	1	ON3S1	59	0	12
45 / 70	114,0	44,5	69,5	6	1	00430 00 1	0,235	1	1	ON3S1	61	0	12
30 / 90	119,0	29,5	89,5	6	1	00430 00 1	0,235	1	1	ON3S1	52	0	12
40 / 80	119,0	39,5	79,5	6	1	00430 00 1	0,235	1	1	ON3S1	60	0	12
60 / 60	119,0	59,5	59,5	6	1	00430 00 1	0,235	1	1	ON3S1	40	0	12
50 / 70	119,0	49,5	69,5	6	1	00430 00 1	0,235	1	1	ON3S1	66	0	12
30 / 100	129,0	29,5	99,5	6	1	00430 00 1	0,235	1	1	ON3S1	53	0	12

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers.

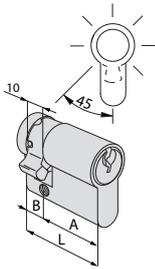

- Single cylinder with 14-position adjustable cam


30 / 10	39,5	29,5	10,0	6	1 00430 00 1	0,186	1	1	ON324 02 0 12
33 / 10	42,5	32,5	10,0	6	1 00430 00 1	0,186	1	1	ON324 09 0 12
35 / 10	44,5	34,5	10,0	6	1 00430 00 1	0,186	1	1	ON324 07 0 12
40 / 10	49,5	39,5	10,0	6	1 00430 00 1	0,186	1	1	ON324 03 0 12
45 / 10	54,5	44,5	10,0	6	1 00430 00 1	0,186	1	1	ON324 08 0 12
50 / 10	59,5	49,5	10,0	6	1 00430 00 1	0,186	1	1	ON324 04 0 12
60 / 10	69,5	59,5	10,0	6	1 00430 00 1	0,186	1	1	ON324 05 0 12
70 / 10	79,5	69,5	10,0	6	1 00430 00 1	0,186	1	1	ON324 06 0 12

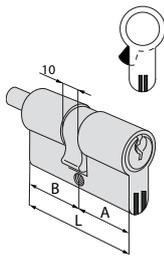

- Double cylinder with adjustable shaft
- ON REQUEST Thumb turns
- 06353, 06355, 06356, 06357 series

30 / 30	59,0	29,5	29,5	6	1 00430 00 1	0,244	1	1	ON352 07 0 12
30 / 35	64,0	29,5	34,5	6	1 00430 00 1	0,244	1	1	ON352 26 0 12
35 / 30	64,0	34,5	29,5	6	1 00430 00 1	0,244	1	1	ON352 81 0 12
33 / 33	65,0	32,5	32,5	6	1 00430 00 1	0,244	1	1	ON352 10 0 12
30 / 40	69,0	29,5	39,5	6	1 00430 00 1	0,244	1	1	ON352 82 0 12
35 / 35	69,0	34,5	34,5	6	1 00430 00 1	0,244	1	1	ON352 13 0 12
40 / 30	69,0	39,5	29,5	6	1 00430 00 1	0,244	1	1	ON352 12 0 12
35 / 40	74,0	34,5	39,5	6	1 00430 00 1	0,244	1	1	ON352 28 0 12
30 / 45	74,0	29,5	44,5	6	1 00430 00 1	0,244	1	1	ON352 27 0 12
40 / 35	74,0	39,5	34,5	6	1 00430 00 1	0,244	1	1	ON352 83 0 12
45 / 30	74,0	44,5	29,5	6	1 00430 00 1	0,244	1	1	ON352 91 0 12
30 / 50	79,0	29,5	49,5	6	1 00430 00 1	0,244	1	1	ON352 17 0 12
35 / 45	79,0	34,5	44,5	6	1 00430 00 1	0,244	1	1	ON352 19 0 12
40 / 40	79,0	39,5	39,5	6	1 00430 00 1	0,244	1	1	ON352 18 0 12
45 / 35	79,0	44,5	34,5	6	1 00430 00 1	0,244	1	1	ON352 85 0 12
40 / 45	84,0	39,5	44,5	6	1 00430 00 1	0,244	1	1	ON352 30 0 12
45 / 40	84,0	44,5	39,5	6	1 00430 00 1	0,244	1	1	ON352 84 0 12
50 / 35	84,0	49,5	34,5	6	1 00430 00 1	0,244	1	1	ON352 94 0 12
30 / 60	89,0	29,5	59,5	6	1 00430 00 1	0,244	1	1	ON352 20 0 12
40 / 50	89,0	39,5	49,5	6	1 00430 00 1	0,244	1	1	ON352 21 0 12
45 / 45	89,0	44,5	44,5	6	1 00430 00 1	0,244	1	1	ON352 29 0 12
40 / 55	94,0	39,5	54,5	6	1 00430 00 1	0,244	1	1	ON352 42 0 12
55 / 40	94,0	54,5	39,5	6	1 00430 00 1	0,244	1	1	ON352 98 0 12
45 / 50	94,0	44,5	49,5	6	1 00430 00 1	0,244	1	1	ON352 39 0 12
40 / 60	99,0	39,5	59,5	6	1 00430 00 1	0,244	1	1	ON352 25 0 12
45 / 55	99,0	44,5	54,5	6	1 00430 00 1	0,244	1	1	ON352 43 0 12
50 / 50	99,0	49,5	49,5	6	1 00430 00 1	0,244	1	1	ON352 23 0 12
55 / 55	104,0	54,5	54,5	6	1 00430 00 1	0,244	1	1	ON352 70 0 12
40 / 65	104,0	39,5	64,5	6	1 00430 00 1	0,244	1	1	ON352 44 0 12
45 / 60	104,0	44,5	59,5	6	1 00430 00 1	0,244	1	1	ON352 54 0 12
55 / 50	104,0	54,5	49,5	6	1 00430 00 1	0,244	1	1	ON352 64 0 12
30 / 80	109,0	29,5	79,5	6	1 00430 00 1	0,244	1	1	ON352 37 0 12
40 / 70	109,0	39,5	69,5	6	1 00430 00 1	0,244	1	1	ON352 35 0 12
50 / 60	109,0	49,5	59,5	6	1 00430 00 1	0,244	1	1	ON352 36 0 12
60 / 50	109,0	59,5	49,5	6	1 00430 00 1	0,244	1	1	ON352 89 0 12
35 / 80	114,0	34,5	79,5	6	1 00430 00 1	0,244	1	1	ON352 58 0 12
55 / 60	114,0	54,5	59,5	6	1 00430 00 1	0,244	1	1	ON352 71 0 12
45 / 70	114,0	44,5	69,5	6	1 00430 00 1	0,244	1	1	ON352 61 0 12
50 / 65	114,0	49,5	64,5	6	1 00430 00 1	0,244	1	1	ON352 65 0 12
55 / 65	119,0	54,5	64,5	6	1 00430 00 1	0,244	1	1	ON352 72 0 12
65 / 55	119,0	64,5	54,5	6	1 00430 00 1	0,244	1	1	ON352 86 0 12
60 / 60	119,0	59,5	59,5	6	1 00430 00 1	0,244	1	1	ON352 40 0 12

Type	Description	Comm. dim.				Key item	Kg	Pcs	ITEM			
		L	A	B	Pins				Type	Dim.	Hand	Fin.

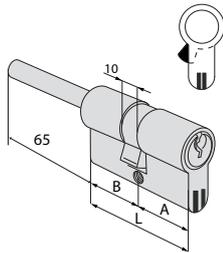

- Double cylinder with adjustable shaft, pre-set for thumb turn
- To use with inside escutcheon item 1.06458.20
- On request:
Thumb turns item
06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 07 0 12
35 / 30	64,0	34,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 81 0 12
40 / 30	69,0	39,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 12 0 12
45 / 30	74,0	44,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 91 0 12
50 / 30	79,0	49,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 90 0 12
55 / 30	84,0	54,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 92 0 12
60 / 30	89,0	59,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 87 0 12
65 / 30	94,0	64,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 A3 0 12
70 / 30	99,0	69,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 88 0 12
80 / 30	110,0	79,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 93 0 12
90 / 30	120,0	89,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 C6 0 12
100 / 30	130,0	99,5	29,5	6	1	00430 00 1	0,275	1	1	ON3S7 C7 0 12



EN 1303:15
 KEY RELATED SECURITY 1 2 3 4 5 6
 ATTACK RESISTANCE 0 A B C D
 DURABILITY 1 2 3 4 5 6

C3000

Technical features:

- CYLINDER :**
- BKP resistance to pumping, patented system
 - Security Card: protected key duplication
 - Brass plugs
 - Carbonitrided steel pins
 - Variable shape hardened steel drivers
 - Phosphor bronze and steel springs
 - DIN cam in self-lubricating sintered steel

KEY:

- protected by trademark
- paracentral keyway
- in nickel silver alloy
- long neck, compatible with protective roses
- numerical code on key bow

Supplied as standard:

- 3 keys
- Security Card
- Fixing screws
- Operating and maintenance instructions

Finishes:

- **SUPPLIED AS STANDARD:**
 - nickel-plated sanded brass (fin. 12)
- **ON REQUEST:**
 - polished brass (fin. 66)

Standards:

- In compliance with EN 1303:2015
- Attack Resistance: grade A
- Key Related Security: grade 6
- Durability: grade 6


Certificates:

SKG**

Patents:

- Key: Marchi 3D n° 1 236 248 e Modello di Design Comunitario depositato n°2669630
- BKP: PCT/WO2007/074163 A1


Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

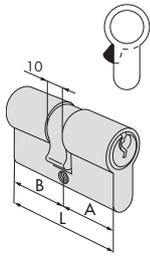

• Double cylinder


30 / 30	59,0	29,5	29,5	6	1 00430 00 1	0,235	12	1	ON310	07	0	12
30 / 35	64,0	29,5	34,5	6	1 00430 00 1	0,238	12	1	ON310	26	0	12
33 / 33	65,0	32,5	32,5	6	1 00430 00 1	0,238	12	1	ON310	10	0	12
35 / 35	69,0	34,5	34,5	6	1 00430 00 1	0,272	12	1	ON310	13	0	12
40 / 30	69,0	39,5	29,5	6	1 00430 00 1	0,272	12	1	ON310	12	0	12
30 / 45	74,0	29,5	44,5	6	1 00430 00 1	0,274	12	1	ON310	27	0	12
35 / 40	74,0	34,5	39,5	6	1 00430 00 1	0,274	12	1	ON310	28	0	12
30 / 50	79,0	29,5	49,5	6	1 00430 00 1	0,289	12	1	ON310	17	0	12
35 / 45	79,0	34,5	44,5	6	1 00430 00 1	0,289	12	1	ON310	19	0	12
40 / 40	79,0	39,5	39,5	6	1 00430 00 1	0,289	12	1	ON310	18	0	12
30 / 55	84,0	29,5	54,5	6	1 00430 00 1	0,304	12	1	ON310	33	0	12
35 / 50	84,0	34,5	49,5	6	1 00430 00 1	0,304	12	1	ON310	31	0	12
40 / 45	84,0	39,5	44,5	6	1 00430 00 1	0,304	12	1	ON310	30	0	12
30 / 60	89,0	29,5	59,5	6	1 00430 00 1	0,320	12	1	ON310	20	0	12
35 / 55	89,0	34,5	54,5	6	1 00430 00 1	0,320	12	1	ON310	32	0	12
40 / 50	89,0	39,5	49,5	6	1 00430 00 1	0,320	12	1	ON310	21	0	12
45 / 45	89,0	44,5	44,5	6	1 00430 00 1	0,320	12	1	ON310	29	0	12
30 / 65	94,0	29,5	64,5	6	1 00430 00 1	0,330	6	1	ON310	41	0	12
35 / 60	94,0	34,5	59,5	6	1 00430 00 1	0,330	6	1	ON310	38	0	12
40 / 55	94,0	39,5	54,5	6	1 00430 00 1	0,330	6	1	ON310	42	0	12
45 / 50	94,0	44,5	49,5	6	1 00430 00 1	0,330	6	1	ON310	39	0	12
30 / 70	99,0	29,5	69,5	6	1 00430 00 1	0,340	6	1	ON310	24	0	12
35 / 65	99,0	34,5	64,5	6	1 00430 00 1	0,340	6	1	ON310	22	0	12
40 / 60	99,0	39,5	59,5	6	1 00430 00 1	0,340	6	1	ON310	25	0	12
45 / 55	99,0	44,5	54,5	6	1 00430 00 1	0,349	6	1	ON310	43	0	12
50 / 50	99,0	49,5	49,5	6	1 00430 00 1	0,340	6	1	ON310	23	0	12
30 / 75	104,0	29,5	74,5	6	1 00430 00 1	0,340	6	1	ON310	56	0	12
35 / 70	104,0	34,5	69,5	6	1 00430 00 1	0,340	6	1	ON310	49	0	12
55 / 50	104,0	54,5	49,5	6	1 00430 00 1	0,340	6	1	ON310	64	0	12
40 / 65	104,0	39,5	64,5	6	1 00430 00 1	0,235	6	1	ON310	44	0	12
45 / 60	104,0	44,5	59,5	6	1 00430 00 1	0,235	6	1	ON310	54	0	12
30 / 80	109,0	29,5	79,5	6	1 00430 00 1	0,360	6	1	ON310	37	0	12
40 / 70	109,0	39,5	69,5	6	1 00430 00 1	0,360	6	1	ON310	35	0	12
50 / 60	109,0	49,5	59,5	6	1 00430 00 1	0,360	6	1	ON310	36	0	12
55 / 55	109,0	54,5	54,5	6	1 00430 00 1	0,360	6	1	ON310	70	0	12
35 / 75	109,0	34,5	74,5	6	1 00430 00 1	0,235	6	1	ON310	57	0	12
45 / 65	109,0	44,5	64,5	6	1 00430 00 1	0,289	6	1	ON310	45	0	12
50 / 65	114,0	49,5	64,5	6	1 00430 00 1	0,370	6	1	ON310	65	0	12
55 / 60	114,0	54,5	59,5	6	1 00430 00 1	0,370	6	1	ON310	71	0	12
40 / 75	114,0	39,5	74,5	6	1 00430 00 1	0,370	6	1	ON310	59	0	12
45 / 75	114,0	44,5	74,5	6	1 00430 00 1	0,289	6	1	ON310	61	0	12
30 / 85	114,0	29,5	84,5	6	1 00430 00 1	0,235	6	1	ON310	77	0	12
30 / 90	119,0	29,5	89,5	6	1 00430 00 1	0,410	6	1	ON310	52	0	12
40 / 80	119,0	39,5	79,5	6	1 00430 00 1	0,380	6	1	ON310	60	0	12
60 / 60	119,0	59,5	59,5	6	1 00430 00 1	0,380	6	1	ON310	40	0	12

Type	Description	Comm. dim.				Key item	Kg	Pcs	ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers.

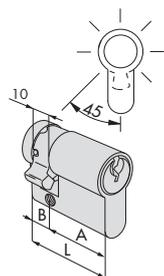


- Single cylinder with 14-position adjustable cam

30 / 10	39,5	29,5	10,0	6	1	00430 00 1	0,186	12	1	ON314 02 0 12
33 / 10	42,5	32,5	10,0	6	1	00430 00 1	0,195	12	1	ON314 09 0 12
35 / 10	44,5	34,5	10,0	6	1	00430 00 1	0,200	12	1	ON314 07 0 12
40 / 10	49,5	39,5	10,0	6	1	00430 00 1	0,210	12	1	ON314 03 0 12
45 / 10	54,5	44,5	10,0	6	1	00430 00 1	0,220	12	1	ON314 08 0 12
50 / 10	59,5	49,5	10,0	6	1	00430 00 1	0,225	12	1	ON314 04 0 12
60 / 10	69,5	59,5	10,0	6	1	00430 00 1	0,235	12	1	ON314 05 0 12
70 / 10	79,5	69,5	10,0	6	1	00430 00 1	0,245	12	1	ON314 06 0 12

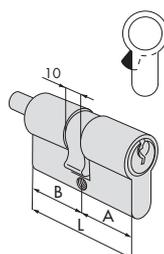

- Double cylinder pre-set for thumb turn installation
- On request: thumb turns series: 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	6	1	00430 00 1	0,244	12	1	ON312 07 0 12
30 / 35	64,0	29,5	34,5	6	1	00430 00 1	0,259	12	1	ON312 26 0 12
35 / 30	64,0	34,5	29,5	6	1	00430 00 1	0,259	12	1	ON312 81 0 12
33 / 33	65,0	32,5	32,5	6	1	00430 00 1	0,259	12	1	ON312 10 0 12
30 / 40	69,0	29,5	39,5	6	1	00430 00 1	0,279	12	1	ON312 82 0 12
35 / 35	69,0	34,5	34,5	6	1	00430 00 1	0,279	12	1	ON312 13 0 12
40 / 30	69,0	39,5	29,5	6	1	00430 00 1	0,279	12	1	ON312 12 0 12
35 / 40	74,0	34,5	39,5	6	1	00430 00 1	0,294	12	1	ON312 28 0 12
30 / 45	74,0	29,5	44,5	6	1	00430 00 1	0,294	12	1	ON312 27 0 12
40 / 35	74,0	39,5	34,5	6	1	00430 00 1	0,294	12	1	ON312 83 0 12
45 / 30	74,0	44,5	29,5	6	1	00430 00 1	0,294	12	1	ON312 91 0 12
30 / 50	79,0	29,5	49,5	6	1	00430 00 1	0,309	6	1	ON312 17 0 12
35 / 45	79,0	34,5	44,5	6	1	00430 00 1	0,309	6	1	ON312 19 0 12
40 / 40	79,0	39,5	39,5	6	1	00430 00 1	0,309	6	1	ON312 18 0 12
45 / 35	79,0	44,5	34,5	6	1	00430 00 1	0,309	6	1	ON312 85 0 12
40 / 45	84,0	39,5	44,5	6	1	00430 00 1	0,324	6	1	ON312 30 0 12
45 / 40	84,0	44,5	39,5	6	1	00430 00 1	0,324	6	1	ON312 84 0 12
30 / 60	89,0	29,5	59,5	6	1	00430 00 1	0,344	6	1	ON312 20 0 12
40 / 50	89,0	39,5	49,5	6	1	00430 00 1	0,344	6	1	ON312 21 0 12
45 / 45	89,0	44,5	44,5	6	1	00430 00 1	0,344	6	1	ON312 29 0 12
40 / 55	94,0	39,5	54,5	6	1	00430 00 1	0,364	6	1	ON312 42 0 12
55 / 40	94,0	54,5	39,5	6	1	00430 00 1	0,364	6	1	ON312 98 0 12
45 / 50	94,0	44,5	49,5	6	1	00430 00 1	0,364	6	1	ON312 39 0 12
40 / 60	99,0	39,5	59,5	6	1	00430 00 1	0,384	6	1	ON312 25 0 12
45 / 55	99,0	44,5	54,5	6	1	00430 00 1	0,384	6	1	ON312 43 0 12
50 / 50	99,0	49,5	49,5	6	1	00430 00 1	0,384	6	1	ON312 23 0 12
45 / 60	104,0	44,5	59,5	6	1	00430 00 1	0,394	6	1	ON312 54 0 12
55 / 50	104,0	54,5	49,5	6	1	00430 00 1	0,394	6	1	ON312 64 0 12
30 / 80	109,0	29,5	79,5	6	1	00430 00 1	0,410	6	1	ON312 37 0 12
40 / 70	109,0	39,5	69,5	6	1	00430 00 1	0,410	6	1	ON312 35 0 12
50 / 60	109,0	49,5	59,5	6	1	00430 00 1	0,410	6	1	ON312 36 0 12

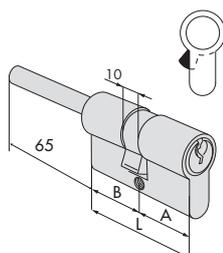

- Double cylinder with adjustable shaft, pre-set for thumb turn
- To use with inside escutcheon item 1.06458.20
- On request: thumb turns series: 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	6	1	00430 00 1	0,275	6	1	ON317 07 0 12
35 / 30	64,0	34,5	29,5	6	1	00430 00 1	0,285	6	1	ON317 81 0 12
40 / 30	69,0	39,5	29,5	6	1	00430 00 1	0,295	6	1	ON317 12 0 12
45 / 30	74,0	44,5	29,5	6	1	00430 00 1	0,305	6	1	ON317 91 0 12
50 / 30	79,0	49,5	29,5	6	1	00430 00 1	0,315	6	1	ON317 90 0 12
55 / 30	84,0	54,5	29,5	6	1	00430 00 1	0,325	6	1	ON317 92 0 12
60 / 30	89,0	59,5	29,5	6	1	00430 00 1	0,335	6	1	ON317 87 0 12
65 / 30	94,0	64,5	29,5	6	1	00430 00 1	0,345	6	1	ON317 A3 0 12
70 / 30	99,0	69,5	29,5	6	1	00430 00 1	0,355	6	1	ON317 88 0 12
80 / 30	110,0	79,5	29,5	6	1	00430 00 1	0,375	1	1	ON317 93 0 12



Technical features:

- CYLINDER:**
- Security Card: protected key duplication
 - Brass plugs
 - Carbonitrided steel pins
 - Variable shape hardened steel drivers
 - Phosphor bronze and steel springs

- KEY:**
- protected by trademark
 - paracentral keyway
 - in nickel silver alloy
 - long neck, compatible with protective roses
 - numerical code on key bow

Supplied as standard:

- 3 keys
- Security Card
- Fixing screws
- Operating and maintenance instructions

Finishes:

- SUPPLIED AS STANDARD:
 - nickel-plated sanded brass (fin. 12)
- ON REQUEST:
 - polished brass (fin. 66)





Certificates:

- SKG^{***}

Patents:

- Key: 3D Trade Mark 1 236 248 and Community Design registered at no. 2669630

C3000

Type	Description	For locks series	L	Pins	Key item	Unit weight	Pieces	ITEM							
								Type	Dim.	Hand	Fin.	Pers.	Spec.		
	• Cylinder	1A610, 11610, 50010, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570	6	1	00430 00 1	0,204	6	1	ON510	00	0	12			
	• Tubular cylinder	1A611, 11611, 50111, 50131, 50181, 50481, 54316, 54341	55,0	6	1 00430 00 1	0,160	6	1	ON210	55	0	12			
	• Pair of cylinders with external tubular cylinder	50121, 50126, 50141, 50161, 50171, 50211, 50211, 50221, 50421, 50451, 50471, 50521, 50571	50,0	6	1 00430 00 1	0,267	6	1	ON116	00	0	12			
		11721, 11921	55,0	6	1 00430 00 1	0,267	6	1	ON149	00	0	12			
	• Pair of cylinders with external tubular cylinder	1A631, 1A721, 1A731	55,0	6	1 00430 00 1	0,267	6	1	ON150	00	0	12			



Technical features:

- CYLINDER**
- CISA patented system
 - Security Card: protected key duplication
 - Brass body
 - Brass plugs
 - Carbonitrided steel pins
 - Variable shape hardened steel drivers
 - Phosphor bronze and steel springs

KEY:

- protected by trademark
- paracentral keyway
- in nickel silver alloy
- long neck, compatible with protective roses
- numerical code on key bow

Supplied as standard:

- 3 keys
- Security Card
- Fixing screws
- Operating and maintenance instructions

Finishes:

- SUPPLIED AS STANDARD:
- nickel-plated sanded brass (fin. 12)

Certificates:



- SKG**

Patents:

- Key: 3D Trade Mark 1 236 248 and Community Design registered at no. 2669630


C3000

Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM				
			L	Pins			Type	Dim.	Hand	Fin.	Pers.



- Key extraction to position (0)
- Deadbolt item 1.06414.20.0 or 1.06414.30.0 (to be ordered separately)

17 6 1 00430 00 1 0,150 6 1 **0N410 00 0 12**



- Steel padlock plug
- 2 keys
- Pickled brass body
- Complete with plate item 1.07573.08.0

6 1 00430 00 1 0,106 6 1 **0N610 00 0**



EN 1303:15	KEY RELATED SECURITY	1	2	3	4	5	6
	ATTACK RESISTANCE	0	A	B	C	D	
	DURABILITY	1	2	3	4	5	6

Technical features:

- brass body
- brass plugs
- self-lubricating sintered steel projecting cam, DIN-compatible
- pins:
 - in brass
 - in hardened steel in first position
- drivers:
 - in brass
 - in hardened steel in first position
- phosphor bronze springs
- KEY:
- nickel-plated brass
- long key for protective roses compatibility
- Numerical code on paracentral key bow

Supplied as standard:

- 3 keys
- Fixing screw

Finishes:


- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12)
 - polished brass (66)

Standards:

- Compliant with EN 1303:2015
- Attack Resistance: grade 0
- Key Related Security: grade 4
- Durability: grade 6

C2000


Type	Description	Comm. dim.	Key item	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

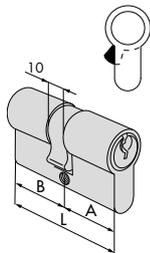

• Double cylinder


22 / 22	43,4	21,7	21,7	3	1 01070 01 1	0,172	12	1	OG300	02 0
22 / 27	48,4	21,7	26,7	3	1 01070 01 1	0,192	12	1	OG300	03 0
25 / 25	49,8	24,9	24,9	4	1 01070 05 1	0,189	12	1	OG300	04 0
27 / 27	53,0	26,5	26,5	4	1 01070 05 1	0,200	12	1	OG300	05 0
27 / 33	59,0	26,5	32,5	4	1 01070 05 1	0,216	12	1	OG300	06 0
30 / 30	59,0	29,5	29,5	5	1 01070 10 1	0,216	12	1	OG300	07 0
30 / 33	62,0	29,5	32,5	5	1 01070 10 1	0,212	12	1	OG300	08 0
27 / 37	63,0	26,5	36,5	4	1 01070 05 1	0,237	12	1	OG300	09 0
30 / 35	64,0	29,5	34,5	5	1 01070 10 1	0,233	12	1	OG300	26 0
33 / 33	65,0	32,5	32,5	5	1 01070 10 1	0,233	12	1	OG300	10 0
27 / 43	69,0	26,5	42,5	4	1 01070 05 1	0,250	12	1	OG300	11 0
30 / 40	69,0	29,5	39,5	5	1 01070 10 1	0,250	12	1	OG300	12 0
35 / 35	69,0	34,5	34,5	5	1 01070 10 1	0,250	12	1	OG300	13 0
30 / 43	72,0	29,5	42,5	5	1 01070 10 1	0,258	6	1	OG300	14 0
37 / 37	73,0	36,5	36,5	5	1 01070 10 1	0,266	6	1	OG300	15 0
30 / 45	74,0	29,5	44,5	5	1 01070 10 1	0,266	6	1	OG300	27 0
35 / 40	74,0	34,5	39,5	5	1 01070 10 1	0,266	6	1	OG300	28 0
27 / 53	79,0	26,5	52,5	4	1 01070 05 1	0,283	6	1	OG300	16 0
30 / 50	79,0	29,5	49,5	5	1 01070 10 1	0,291	6	1	OG300	17 0
35 / 45	79,0	34,5	44,5	5	1 01070 10 1	0,283	6	1	OG300	19 0
40 / 40	79,0	39,5	39,5	5	1 01070 10 1	0,285	6	1	OG300	18 0
30 / 55	84,0	29,5	54,5	5	1 01070 10 1	0,300	6	1	OG300	33 0
35 / 50	84,0	34,5	49,5	5	1 01070 10 1	0,300	6	1	OG300	31 0
40 / 45	84,0	39,5	44,5	5	1 01070 10 1	0,300	6	1	OG300	30 0
43 / 43	85,0	42,5	42,5	5	1 01070 10 1	0,303	6	1	OG300	46 0
30 / 60	89,0	29,5	59,5	5	1 01070 10 1	0,316	6	1	OG300	20 0
35 / 55	89,0	34,5	54,5	5	1 01070 10 1	0,325	6	1	OG300	32 0
40 / 50	89,0	39,5	49,5	5	1 01070 10 1	0,316	6	1	OG300	21 0
45 / 45	89,0	44,5	44,5	5	1 01070 10 1	0,325	6	1	OG300	29 0
35 / 60	94,0	34,5	59,5	5	1 01070 10 1	0,312	6	1	OG300	38 0
45 / 50	94,0	44,5	49,5	5	1 01070 10 1	0,312	6	1	OG300	39 0
40 / 55	94,0	39,5	54,5	5	1 01070 10 1	0,330	6	1	OG300	42 0
30 / 65	94,0	29,5	64,5	5	1 01070 10 1	0,350	6	1	OG300	41 0
30 / 70	99,0	29,5	69,5	5	1 01070 10 1	0,350	6	1	OG300	24 0
35 / 65	99,0	34,5	64,5	5	1 01070 10 1	0,312	6	1	OG300	22 0
40 / 60	99,0	39,5	59,5	5	1 01070 10 1	0,350	6	1	OG300	25 0
45 / 55	99,0	44,5	54,5	5	1 01070 10 1	0,312	6	1	OG300	43 0
50 / 50	99,0	49,5	49,5	5	1 01070 10 1	0,350	6	1	OG300	23 0
45 / 60	104,0	44,5	59,5	5	1 01070 10 1	0,350	6	1	OG300	54 0
35 / 70	104,0	34,5	69,5	5	1 01070 10 1	0,350	6	1	OG300	49 0
40 / 65	104,0	39,5	64,5	5	1 01070 10 1	0,172	6	1	OG300	44 0
30 / 80	109,0	29,5	79,5	5	1 01070 10 1	0,350	6	1	OG300	37 0
40 / 70	109,0	39,5	69,5	5	1 01070 10 1	0,360	6	1	OG300	35 0

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM			
		L	A	B	Pins				Type	Dim.	Hand	Fin.

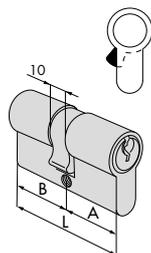


• Double cylinder

50 / 60	109,0	49,5	59,5	5	1	01070 10 1	0,360	6	1	OG300 36 0
45 / 75	119,0	44,5	74,5	6	1	00430 00 1	0,235	6	1	ON310 62 0 12
55 / 55	109,0	54,5	54,5	5	1	01070 10 1	0,360	6	1	OG300 70 0
45 / 65	109,0	44,5	64,5	5	1	01070 10 1	0,212	6	1	OG300 45 0
35 / 75	109,0	34,5	74,5	5	1	01070 10 1	0,360	6	1	OG300 57 0
50 / 55	104,0	49,5	54,5	5	1	01070 10 1	0,172	6	1	OG300 64 0
30 / 75	104,0	29,5	74,5	5	1	01070 10 1	0,172	6	1	OG300 56 0
35 / 80	114,0	34,5	79,5	5	1	01070 10 1	0,172	6	1	OG300 58 0
40 / 75	114,0	39,5	74,5	5	1	01070 10 1	0,172	6	1	OG300 59 0
45 / 70	114,0	44,5	69,5	5	1	01070 10 1	0,212	6	1	OG300 61 0
50 / 65	114,0	49,5	64,5	5	1	01070 10 1	0,172	6	1	OG300 65 0
30 / 85	114,0	29,5	84,5	5	1	01070 10 1	0,216	6	1	OG300 77 0
60 / 60	119,0	59,5	59,5	5	1	01070 10 1	0,390	6	1	OG300 40 0
30 / 90	119,0	29,5	89,5	5	1	01070 10 1	0,390	6	1	OG300 52 0
40 / 80	119,0	39,5	79,5	5	1	01070 10 1	0,390	6	1	OG300 60 0
50 / 70	119,0	49,5	69,5	5	1	01070 10 1	0,212	6	1	OG300 66 0
45 / 75	119,0	44,5	74,5	5	1	01070 10 1	0,390	6	1	OG300 62 0
70 / 70	139,0	69,5	69,5	5	1	01070 10 1	0,440	6	1	OG300 50 0
30 / 100	129,0	29,5	99,5	5	1	01070 10 1	0,430	6	1	OG300 53 0

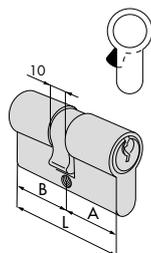

• Clutching system double cylinder


27 / 27	53,0	26,5	26,5	4	1	01070 05 1	0,202	12	1	OG301 05 0
27 / 33	59,0	26,5	32,5	4	1	01070 05 1	0,222	12	1	OG301 06 0
30 / 30	59,0	29,5	29,5	5	1	01070 10 1	0,222	12	1	OG301 07 0
27 / 37	63,0	26,5	36,5	4	1	01070 05 1	0,232	12	1	OG301 09 0
30 / 35	64,0	29,5	34,5	5	1	01070 10 1	0,232	12	1	OG301 26 0
27 / 43	69,0	26,5	42,5	4	1	01070 05 1	0,252	12	1	OG301 11 0
35 / 35	69,0	34,5	34,5	5	1	01070 10 1	0,252	12	1	OG301 13 0
30 / 40	69,0	29,5	39,5	5	1	01070 10 1	0,252	12	1	OG301 12 0
35 / 40	74,0	34,5	39,5	5	1	01070 10 1	0,252	6	1	OG301 28 0
40 / 45	84,0	39,5	44,5	5	1	01070 10 1	0,252	6	1	OG301 30 0

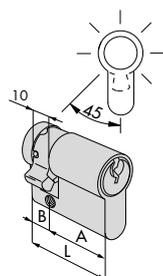

• Single cylinder with adjustable cam in 8 position


25 / 10	34,5	24,5	10,0	4	1	01070 05 1	0,146	12	1	OG304 18 0
30 / 10	39,5	29,5	10,0	5	1	01070 10 1	0,155	12	1	OG304 02 0
33 / 10	42,5	32,5	10,0	5	1	01070 10 1	0,165	12	1	OG304 09 0
35 / 10	44,5	34,5	10,0	5	1	01070 10 1	0,170	12	1	OG304 07 0
37 / 10	46,5	36,5	10,0	5	1	01070 10 1	0,175	12	1	OG304 10 0
40 / 10	49,5	39,5	10,0	5	1	01070 10 1	0,191	12	1	OG304 03 0
43 / 10	52,5	42,5	10,0	5	1	01070 10 1	0,195	12	1	OG304 11 0
50 / 10	59,5	49,5	10,0	5	1	01070 10 1	0,215	12	1	OG304 04 0
55 / 10	64,5	54,5	10,0	5	1	01070 10 1	0,245	12	1	OG304 35 0
60 / 10	69,5	59,5	10,0	5	1	01070 10 1	0,245	12	1	OG304 05 0
64 / 10	73,5	63,5	10,0	5	1	01070 10 1	0,255	6	1	OG304 21 0
70 / 10	79,5	69,5	10,0	5	1	01070 10 1	0,275	6	1	OG304 06 0
80 / 10	89,5	79,5	10,0	5	1	01070 10 1	0,305	6	1	OG304 20 0
94 / 10	103,5	93,5	10,0	5	1	01070 10 1	0,355	6	1	OG304 13 0

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM				
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers.

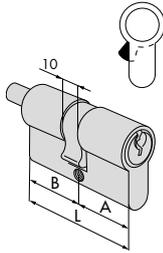


- Double cylinder with thumb turn shaft
- ON REQUEST:
Knobs series 06353, 06355, 06356, 06357

30 / 30	59,0	29,5	29,5	5	1 01070 10 1	0,237	6	1	OG302	07 0
30 / 35	64,0	29,5	34,5	5	1 01070 10 1	0,250	6	1	OG302	26 0
35 / 30	64,0	34,5	29,5	5	1 01070 10 1	0,250	6	1	OG302	81 0
33 / 33	65,0	32,5	32,5	5	1 01070 10 1	0,255	6	1	OG302	10 0
30 / 40	69,0	29,5	39,5	5	1 01070 10 1	0,270	6	1	OG302	82 0
35 / 35	69,0	34,5	34,5	5	1 01070 10 1	0,270	6	1	OG302	13 0
40 / 30	69,0	39,5	29,5	5	1 01070 10 1	0,270	6	1	OG302	12 0
35 / 40	74,0	34,5	39,5	5	1 01070 10 1	0,285	6	1	OG302	28 0
40 / 35	74,0	39,5	34,5	5	1 01070 10 1	0,285	6	1	OG302	83 0
30 / 50	79,0	29,5	49,5	5	1 01070 10 1	0,300	6	1	OG302	17 0
35 / 45	79,0	34,5	44,5	5	1 01070 10 1	0,300	6	1	OG302	19 0
40 / 40	79,0	39,5	39,5	5	1 01070 10 1	0,300	6	1	OG302	18 0
45 / 35	79,0	44,5	34,5	5	1 01070 10 1	0,300	6	1	OG302	85 0
40 / 45	84,0	39,5	44,5	5	1 01070 10 1	0,315	6	1	OG302	30 0
45 / 40	84,0	44,5	39,5	5	1 01070 10 1	0,315	6	1	OG302	84 0
43 / 43	85,0	42,5	42,5	5	1 01070 10 1	0,318	6	1	OG302	46 0
30 / 60	89,0	29,5	59,5	5	1 01070 10 1	0,330	6	1	OG302	20 0
40 / 50	89,0	39,5	49,5	5	1 01070 10 1	0,330	6	1	OG302	21 0
45 / 45	89,0	44,5	44,5	5	1 01070 10 1	0,330	6	1	OG302	29 0
40 / 55	94,0	39,5	54,5	5	1 01070 10 1	0,350	6	1	OG302	42 0
45 / 50	94,0	44,5	49,5	5	1 01070 10 1	0,350	6	1	OG302	39 0
45 / 55	99,0	44,5	54,5	5	1 01070 10 1	0,360	6	1	OG302	43 0
50 / 50	99,0	49,5	49,5	5	1 01070 10 1	0,360	6	1	OG302	23 0
45 / 60	104,0	44,5	59,5	5	1 01070 10 1	0,375	6	1	OG302	54 0
55 / 50	104,0	54,5	49,5	5	1 01070 10 1	0,375	6	1	OG302	64 0
30 / 80	109,0	29,5	79,5	5	1 01070 10 1	0,390	6	1	OG302	37 0
40 / 70	109,0	39,5	69,5	5	1 01070 10 1	0,390	6	1	OG302	35 0
50 / 60	109,0	49,5	59,5	5	1 01070 10 1	0,390	6	1	OG302	36 0
60 / 50	109,0	59,5	49,5	5	1 01070 10 1	0,390	6	1	OG302	89 0
55 / 60	114,0	54,5	59,5	5	1 01070 10 1	0,400	6	1	OG302	71 0
55 / 65	119,0	54,5	64,5	5	1 01070 10 1	0,420	6	1	OG302	72 0
60 / 60	119,0	59,5	59,5	5	1 01070 10 1	0,420	6	1	OG302	40 0
65 / 55	119,0	64,5	54,5	5	1 01070 10 1	0,420	6	1	OG302	86 0

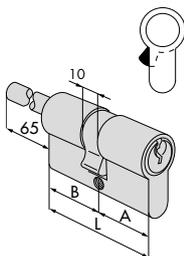

- Double cylinder with adjustable thumb turn shaft
- To be combined with inside rose item 1.06458.20
- ON REQUEST:
Knobs series 06353, 06355, 06356, 06357


30 / 30	59,0	29,5	29,5	5	1 01070 10 1	0,260	6	1	OG307	07 0
35 / 30	64,0	34,5	29,5	5	1 01070 10 1	0,270	6	1	OG307	81 0
40 / 30	69,0	39,5	29,5	5	1 01070 10 1	0,272	6	1	OG307	12 0
45 / 30	74,0	44,5	29,5	5	1 01070 10 1	0,287	6	1	OG307	91 0
50 / 30	79,0	49,5	29,5	5	1 01070 10 1	0,300	6	1	OG307	90 0
60 / 30	89,0	59,5	29,5	5	1 01070 10 1	0,320	6	1	OG307	87 0
70 / 30	99,0	69,5	29,5	5	1 01070 10 1	0,340	6	1	OG307	88 0

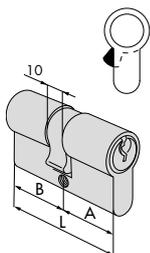

- Nickel-plated single cylinder with special cam 90° for series 46305 locks
- 3 keys
- Fixing screws

30 / 30	59,0	29,5	29,5	5	1 01070 10 1	0,216	12	1	OG303	07 0 12
---------	------	------	------	---	--------------	-------	----	---	-------	---------

Type	Description	Comm. dim.				Key item	Kg	Pics	ITEM					
		L	A	B	Pins				Type	Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • Nickel-plated single cylinder with special cam 90° for series 46305 locks • 3 keys • Fixing screws 	30	10	39,5	29,5	10,0	5	0,155	12	1	0G305	02	0	12

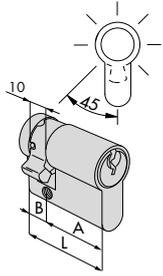



Technical features:

- brass body
- brass plugs
- pins:
 - in brass
- drivers:
 - in brass, mushroom-type anti-picking and cylindrical
- phosphor bronze springs
- KEY
 - nickel-plated brass
 - long key for protective roses compatibility
- Numerical coding on the head.

Supplied as standard:


- 3 keys
- Fixing screw

Finishes:

- STANDARD:
 - sanded brass (fin. 00)
- ON REQUEST:
 - nickel-plated brass (fin. 12)
 - polished brass (fin. 66)

C2000

Type	Description	For locks series	L	Pins	Key item	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Spec.	
	• Rim cylinder	1A610		5	1 01070 10 1	0,182	6	1	0G500	00	0	
	• Round cylinder	1A611	105,0	5	1 01070 10 1	0,193	6	1	0G200	05	0	
			55,0	5	1 01070 10 1	0,168	6	1	0G200	55	0	
			65,0	5	1 01070 10 1	0,165	6	1	0G200	65	0	
			75,0	5	1 01070 10 1	0,174	6	1	0G200	75	0	
			85,0	5	1 01070 10 1	0,185	6	1	0G200	85	0	
95,0	5	1 01070 10 1	0,182	6	1	0G200	95	0				
	• Cylinder set	1A630		5	1 01070 10 1	0,250	6	1	0G115	00	0	
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	5	1 01070 10 1	0,255	6	1	0G150	00	0	

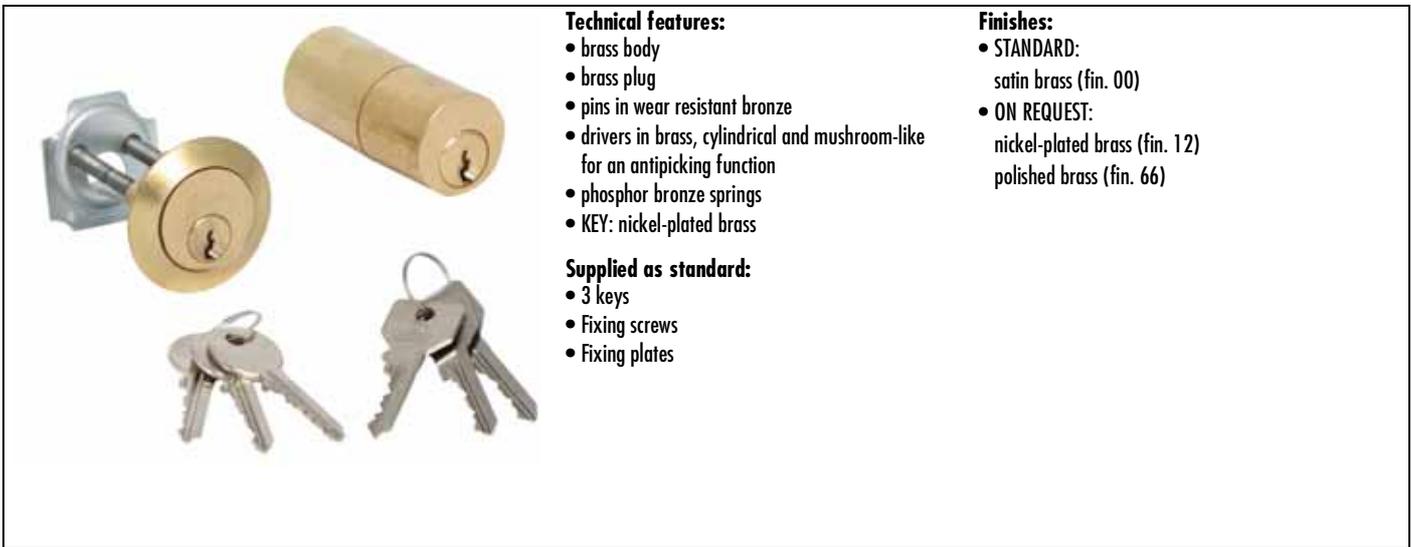

Technical features:







- brass body
- brass plug
- pins in wear resistant bronze
- drivers in brass, cylindrical and mushroom-like for an antipicking function
- phosphor bronze springs
- KEY: nickel-plated brass

Supplied as standard:

- 3 keys
- Fixing screws
- Fixing plates

Finishes:

- STANDARD: satin brass (fin. 00)
- ON REQUEST: nickel-plated brass (fin. 12) polished brass (fin. 66)

Type	Description	For locks series	Key item		Unit weight	Pieces	ITEM								
			L	Pins			Kg	Type	Dim.	Hand	Fin.	Pers.	Spec.		
	• Rim cylinder	13010	6	1	01210 00 2	0,238	6	1	02520	00 0					
	• Rim cylinder	11610, 50110, 50130, 50180, 54570	5	1	01310 00 1	0,180	6	1	02550	25 0					
	• Cylinder set	50120, 50125, 50160, 50170, 50210, 50220	5	1	01310 00 1	0,250	6	1	02102	00 0					
		11630	5	1	01310 00 1	0,255	6	1	02104	00 0					
		11670	5	1	01310 00 1	0,262	6	1	02146	00 0					
	• Cylinder set, with round external cylinder	50121, 50126, 50141, 50161, 50171, 50211, 50221, 50421, 50461, 50471, 50521, 50561, 50571	50,0	5	1 01310 00 1	0,256	6	1	02106	00 0					
		11631, 11731, 11931	50,0	5	1 01310 00 1	0,256	6	1	02110	00 0					
		11721, 11921	50,0	5	1 01310 00 1	0,269	6	1	02139	00 0					
		11823	70,0	5	1 01310 00 1	0,252	6	1	02142	00 0					
		11671, 11761, 11771	50,0	5	1 01310 00 1	0,267	6	1	02145	00 0					
	• Cylinder for roll-up shutter locks	41410, 41420, 41421	10,0	3	1 01320 00 2	0,089	6	1	02544	10 0					
	• Finish: polished brass only (fin. 66)	41010, 41110, 41111	14,0	3	1 01310 00 2	0,104	6	1	02544	14 0					
		41210, 41220, 41221, 41230, 41231, 41310, 41311, 41320	15,0	4	1 01310 00 2	0,120	6	1	02544	15 0					
	• Cylinder for gate locks	42010, 42020, 42030, 42110, 42120, 42210, 42310, 42410, 42420, 42510	4	1	01330 00 1	0,180	6	1	02156	00 0					
	• Finish: polished brass only (fin. 66)														



Technical features:

- brass body
- pins in wear resistant bronze
- drivers in brass, cylindrical and mushroom-like for an antipicking function
- phosphor bronze springs
- KEY: nickel-plated brass

Supplied as standard:



- 2 or 3 keys
- Fixing screws
- Fixing plates

Finishes:

- Various finishes according to the cylinder type



Type	Description	Door thickness Pins	Key item	Unit weight Kg	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Cross-key cylinder complete with 19 mm adaptor • For locks series 16000, 46000 • Short key version 	6	1 00210 00 0	0,119	12	1	02400	10	0	
	<ul style="list-style-type: none"> • Cross-key cylinder complete with 19 mm adaptor • For locks series 16000, 46000 • Long key version 	6	1 00211 00 0	0,132	12	1	02400	11	0	
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07077.28.0 • Sanded brass 	5	1 01310 00 1	0,120	6	1	02649	10	0	
	<ul style="list-style-type: none"> • Cylinder for outside operation devices item 1.07078.29.0 • Sanded brass 	5	1 01310 00 1	0,118	6	1	02649	11	0	
	<ul style="list-style-type: none"> • 3 keys • Belt sanded brass <p>TO BE DISCONTINUED</p>	4	1 01320 00 1	0,280	6	1	44010	02	0	
	<ul style="list-style-type: none"> • 3 keys • Belt sanded brass <p>TO BE DISCONTINUED</p>	4	1 01320 00 1	0,280	6	1	44011	02	0	
	<ul style="list-style-type: none"> • 2 keys • polished brass <p>TO BE DISCONTINUED</p>	4	1 01420 00 1	0,110	6	1	72010	00	0	

Type	Description	Door thickness Pins	Key item	Kg Unit weight	Pieces	ITEM			
						Type	Dim.	Hand	Fin.





- 2 keys
- Belt sanded brass
- Key removed in vertical position
- Cam item 06411 or 06412, to be ordered separately

11	3	1	01420 00 1	0,078	12	1	72210	16	0
15	4	1	01420 00 1	0,087	12	1	72210	20	0
20	4	1	01420 00 1	0,097	12	1	72210	25	0
25	4	1	01420 00 1	0,108	12	1	72210	30	0




- MARINE TYPE
- 2 keys
- Chrome-plated brass
- Key removed in vertical position
- Cam item 1.06412.51.0, specify with order

11	3	1	01420 00 1	0,077	12	1	72215	16	0
15	4	1	01420 00 1	0,085	12	1	72215	20	0
20	4	1	01420 00 1	0,094	12	1	72215	25	0
25	4	1	01420 00 1	0,105	12	1	72215	30	0




- 3 keys
- Nickel-plated brass
- Vertical key extraction
- Deadbolt to choose from items 1.06414.20.0 and 1.06414.30.0 (specify in order)

17	5	1	01310 00 1	0,135	6	1	72250	26	0
----	---	---	------------	-------	---	---	-------	----	---



- 3 keys
- Nickel-plated brass
- Microswitch (7 A, 250 V) with terminals to be welded
- Automatic return to key extraction position (0)

17	5	1	01310 00 1	0,145	6	1	72251	01	0
----	---	---	------------	-------	---	---	-------	----	---



- 3 keys
- Nickel-plated brass
- Microswitch (7 A, 250 V) with terminals to be welded
- Automatic return to key extraction position (0)

17	5	1	01310 00 1	0,144	6	1	72251	03	0
----	---	---	------------	-------	---	---	-------	----	---



Technical features:

- brass body
- brass plugs
- pins in wear resistant bronze
- drivers in brass, cylindrical and mushroom-like for an antipicking function
- phosphor bronze springs
- self-lubricating sintered steel cam
- KEY: nickel-plated brass


Supplied as standard:

- 3 keys
- Fixing screw

Finishes:


- STANDARD: sanded brass (fin. 00)
- ON REQUEST: nickel-plated brass (fin. 12)

Type	Description	Comm. dim.				Key item	Kg	Pieces	ITEM			
		L	A	B	Pins				Type	Dim.	Hand	Fin.




- Double cylinder

20 / 20	41,4	20,7	20,7	3	1 01425 00 1	0,120	12	1	08210	01	0
28 / 28	55,4	27,7	27,7	5	1 01410 00 1	0,168	12	1	08210	02	0
30 / 30	60,0	30,0	30,0	5	1 01410 00 1	0,180	12	1	08210	05	0
28 / 35	62,7	27,7	35,0	5	1 01410 00 1	0,187	12	1	08210	06	0
30 / 40	70,0	30,0	40,0	5	1 01410 00 1	0,204	12	1	08210	12	0
35 / 35	70,0	35,0	35,0	5	1 01410 00 1	0,205	12	1	08210	13	0
28 / 45	72,7	27,7	45,0	5	1 01410 00 1	0,210	6	1	08210	14	0
28 / 53	80,7	27,7	53,0	5	1 01410 00 1	0,233	6	1	08210	16	0
40 / 40	80,0	40,0	40,0	5	1 01410 00 1	0,231	6	1	08210	18	0



- Single cylinder


28 / 10	38,0	27,7	10,3	5	1 01410 00 1	0,124	12	1	08220	02	0
---------	------	------	------	---	--------------	-------	----	---	-------	----	---



- Thumb turn double cylinder
- Black nylon knob


28 / 28	55,4	27,7	27,7	5	1 01410 00 1	0,183	6	1	08230	02	0
35 / 28	62,7	35,0	27,7	5	1 01410 00 1	0,190	6	1	08230	06	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.




• Belt sanded brass rose to be used with European profile cylinders

0,009 100 1 06010 00 0




• Belt sanded brass rose to be used with European profile cylinders

0,008 100 1 06011 00 0

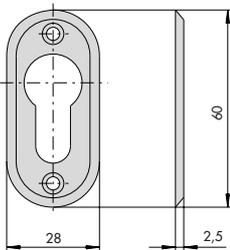


• Belt sanded brass rose to be used with European profile cylinders

0,009 100 1 06012 00 0

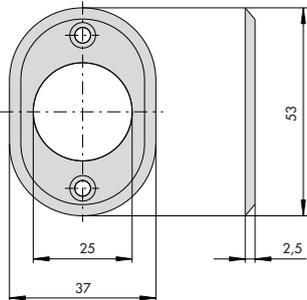

• Belt sanded brass rose to be used with rim cylinders (diameter 25 mm.)

0,010 100 1 06018 25 0




• Belt sanded brass rose to be used with oval cylinders

82000 0,007 100 1 06027 00 0


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Polished brass rose to be used with European profile cylinders 		0,024	100	1	06043	00	0	
	<ul style="list-style-type: none"> Aluminium knob, black lacquered 		0,038	6	1	06353	00	0 44	
	<ul style="list-style-type: none"> Aluminium knob, gold bronze anodised 		0,040	6	1	06353	00	0 60	
	<ul style="list-style-type: none"> Aluminium knob, aluminium anodised 		0,037	6	1	06353	00	0 62	
	<ul style="list-style-type: none"> Aluminium knob, dark brown bronze anodised 		0,040	6	1	06353	00	0 64	
	<ul style="list-style-type: none"> Chrome-plated sanded brass knob for pre-set cylinders 		0,060	6	1	06354	00	0 23	
	<ul style="list-style-type: none"> Chrome-plated painted brass knob for pre-set cylinders 		0,060	6	1	06354	00	0 68	
	<ul style="list-style-type: none"> Nickel-plated brass knob 		0,051	6	1	06355	00	0 12	
	<ul style="list-style-type: none"> Laquered polished brass knob 		0,060	6	1	06355	00	0 66	
	<ul style="list-style-type: none"> Nickel-plated brass knobs 		0,180	6	1	06356	00	0 12	
	<ul style="list-style-type: none"> Laquered polished brass knob 		0,183	6	1	06356	00	0 66	
	<ul style="list-style-type: none"> Nickel-plated brass knobs 		0,062	6	1	06357	00	0 12	
	<ul style="list-style-type: none"> Laquered polished brass knob 		0,165	6	1	06357	00	0 66	
	<ul style="list-style-type: none"> Zinc-plated steel cam 	72210	0,012	12	1	06411	01	0	
			0,012	12	1	06411	02	0	
			0,014	12	1	06411	03	0	
			0,016	12	1	06411	04	0	

Type	Description	For series/item	Unit weight Pieces	ITEM		
				Type	Dim. Hand	Fin. Pers. Spec.
	• Zinc-plated steel cam	72210	0,014 12	1	06412	01 0
				1	06412	02 0
				1	06412	03 0
				1	06412	04 0
				1	06412	04 0
	• Zinc-plated steel cam	72215	0,013 12	1	06412	51 0
	• Zinc-plated steel cam	72350	0,007 12	1	06413	01 0
				1	06413	02 0
				1	06413	03 0
				1	06413	04 0
				1	06413	04 0
	• Zinc-plated steel cam	72350	0,008 12	1	06414	01 0
				1	06414	02 0
				1	06414	03 0
				1	06414	04 0
				1	06414	04 0
	• Zinc plated steel cam	0A410, 0M410, 0N410, 0P410, 72250	0,019 12	1	06414	20 0
	• Zinc plated steel cam	0L410	0,018 12	1	06414	25 0
	• Zinc plated steel cam	0A410, 0M410, 0N410, 0P410, 72250	0,010 12	1	06414	30 0


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM					
					Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Cylinder spacer kit • L = 36 mm. • Total cylinder length 60 mm 	OG200, 0A210, OL210, ON210, OM210, OP210	0,030	12	1	07165	00	0		
	<ul style="list-style-type: none"> • Cylinder spacer kit • L = 46 mm. • Total cylinder length 70 mm 	OG200, 0A210, OL210, ON210, OM210, OP210	0,038	12	1	07165	01	0		
	<ul style="list-style-type: none"> • Cylinder spacer kit • L = 56 mm. • Total cylinder length 80 mm 	OG200, 0A210, OL210, ON210, OM210, OP210	0,045	12	1	07165	02	0		
	<ul style="list-style-type: none"> • Cylinder spacer kit • L = 66 mm. • Total cylinder length 90 mm 	OG200, 0A210, OL210, ON210, OM210, OP210	0,050	12	1	07165	03	0		
	<ul style="list-style-type: none"> • Cylinder spacer kit • L = 76 mm. • Total cylinder length 100 mm 	OG200, 0A210, OL210, ON210, OM210, OP210	0,052	12	1	07165	04	0		

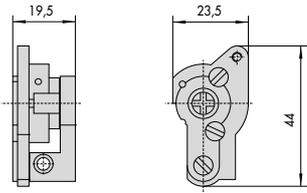

02400

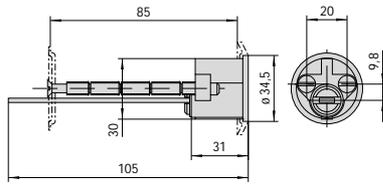


1.02520.00

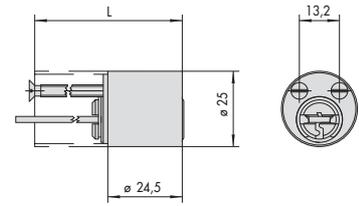


**0A210, 0L210, 0E200, 0G200,
0M210, 0N210, 0P210**

1

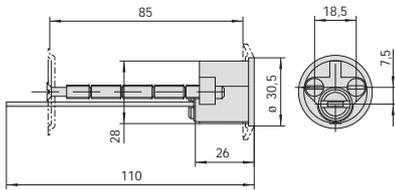


**1.0A510.00, 1.0L510.00, 1.0E500.00, 1.0G500.00,
1.0M510.00, 1.0N510.00, 1.0P510.00**

4




	S	A	L
1.02544.10	5,5	13	10
1.02544.14	6,5	16	14
1.02544.15	5,5	18	15

7

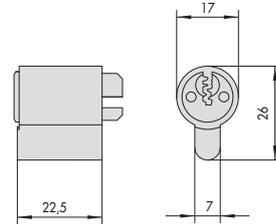


**1.02649.01, 1.02650.01, 1.0A610.00,
1.0L610.00, 1.0E600.00, 1.0M610.00,
1.0N610.00, 1.0P610.00**

2

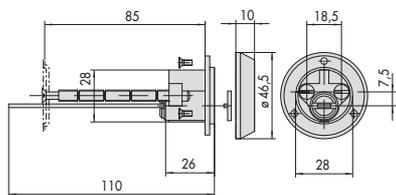


**1.0A510.11, 1.0L510.10,
1.0M510.10, 1.0P510.10**

5

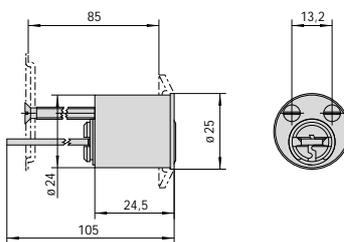

1.02550.25

8

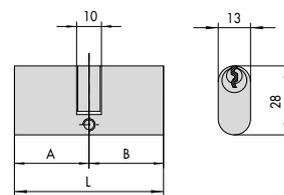


08210


3

6


9

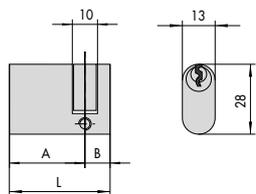

1.08220.02

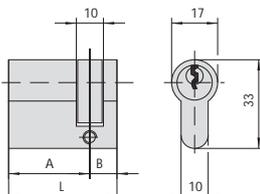


**08730, 0A314, 0E304,
0G304, 0E305, 0G305,
0L314, 0M324, 0N314,
0N324, 0P314**

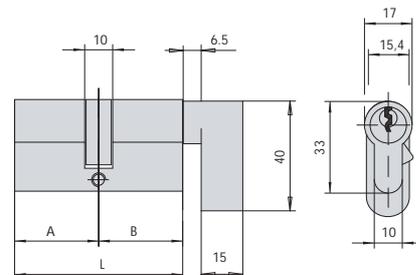


08453

10

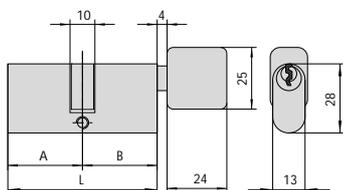


08230

13

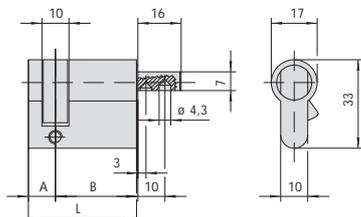


08359

16

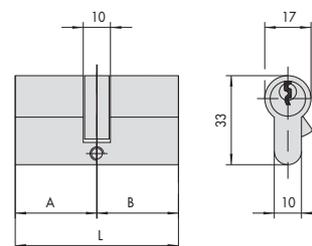


**08710, 0A351, 0A310, 0G300,
0G301, 0G303, 0L351, 0E300,
0E301, 0M3T1, 0N310, 0N351,
0P351**

11

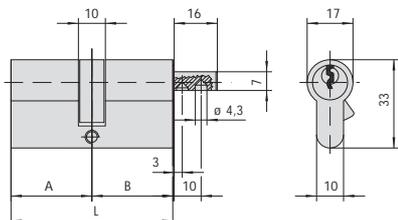


**0A3S2, 0A312, 0E302, 0G302,
0L3S2, 0M3T2, 0N312, 0N3S2**

14

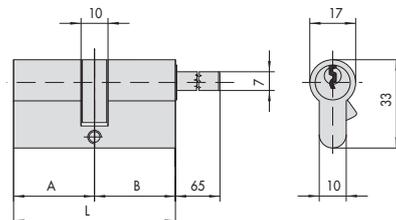

0A3S7, 0A317, 0G307, 0L3S7, 0M3T7, 0N317, 0N3S7, 0P3S7

17

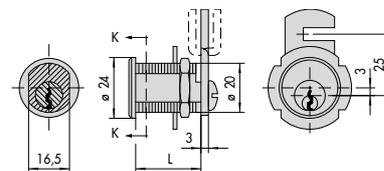


**1.72210.16 - 1.72215.16
1.72210.20 - 1.72215.20
1.72210.25 - 1.72215.25
1.72210.30 - 1.72215.30**

**L
16,5
20
25
30**


12

15

18

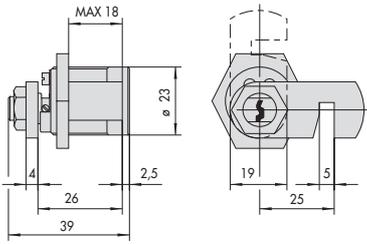

1.72250.26, 1.0A410.00, 1.0L410.00,
1.0M410.00, 1.0N410.00, 1.0P410.00

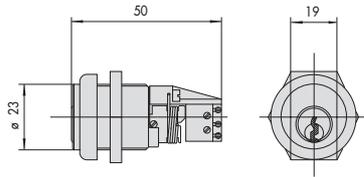

72251, 0A415, 0L415,
0M415, 0P415

19

20



RS3 steel padlocks.....	127
AP4 steel padlocks	128
Astral Tekno steel padlocks	129
C3000 steel padlocks.....	130
Astral steel padlocks.....	131
LIM steel padlocks.....	132
Padlocks for european profile cylinder.....	133
Marine Type padlocks.....	134
Brass padlocks	135

CISA Locking Line padlocks with steel sleeve.....	136
Rectangular brass padlocks CISA Locking Line.....	137
Marine Type padlocks CISA Locking Line.....	138
CISA Locking Line brass padlocks	139
CISA Locking Line padlocks with combination lock ..	141
Spare parts for padlocks.....	142
Accessories for padlocks	143
Spare parts for padlocks.....	145





Steel padlocks

**WITH AP4, ASTRAL TEKNO,
AND C3000 CYLINDERS.**



Attack and weather resistant



Protected key duplication





Technical features:


- Security Card: protected duplication
- Carbonitrided solid steel body, with chemical nickel-plating corrosion treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced
- KEY
 - flat reversible keys, with incorporated mobile element
 - in nickel silver alloy
 - numbered on key bow

Supplied as standard:

- 2 keys
- SECURITY CARD


RS3

Type	Description	Key item					Unit weight	Pieces	ITEM			
		A	C	D	L	S			Type	Dim.	Hand	Fin.

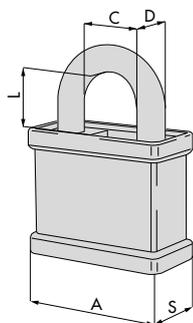

• Key removable in locked position only

55	25,0	11,0	25,0	25,0	15	1 00800 00 0	0,553	6	1 28059 55 0 00	CL
55	25,0	11,0	45,0	25,0	15	1 00800 00 0	0,586	6	1 28059 56 0 00	CL
70	31,0	14,0	25,0	26,0	15	1 00800 00 0	0,854	6	1 28059 70 0 00	CL
70	31,0	14,0	65,0	26,0	15	1 00800 00 0	0,954	6	1 28059 72 0 00	CL



66	20,0	10,0	11,0	25,0	15	1 00800 00 0	0,677	6	1 28559 66 0 00	CL
75	27,0	12,0	13,5	28,0	15	1 00800 00 0	0,843	6	1 28559 75 0 00	CL
84	36,0	12,0	17,5	28,0	15	1 00800 00 0	0,995	6	1 28559 84 0 00	CL
84	36,0	14,0	17,5	28,0	15	1 00800 00 0	0,974	6	1 28559 85 0 00	CL



Technical features:


- Security Card: protected duplication
- Solid body in carbonitrided steel with corrosion resistant chemical nickel plating
- Hardened steel shackle with chemical nickel plating
- Cylinder protection plate in carbonitrided steel with chemical nickel plating
- Replaceable cylinder
- Keys:
 - flat reversible
 - **in nickel silver alloy, with mobile element**
 - numerical code on key bow

Supplied as standard:

- Code Card
- 2 keys


AP4

Type	Description	Key item						Kg	Box	Unit weight	Pieces	ITEM			
		A	C	D	L	S	Pins					Type	Dim.	Hand	Fin.

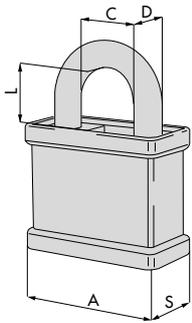

• Key removable in locked position only

55	25,0	11,0	25,0	25,0	11	1	00810 00 0	0,565	6	1	2805P 55 0				
55	25,0	11,0	45,0	25,0	11	1	00810 00 0	0,601	6	1	2805P 56 0				
55	26,0	11,0	65,0	25,0	11	1	00810 00 0	0,610	6	1	2805P 57 0				
70	31,0	14,0	25,0	26,0	11	1	00810 00 0	0,880	6	1	2805P 70 0				
70	31,0	14,0	45,0	26,0	11	1	00810 00 0	0,927	6	1	2805P 71 0				
70	31,0	14,0	65,0	26,0	11	1	00810 00 0	0,954	6	1	2805P 72 0				



66	20,0	10,0	11,0	25,0	11	1	00810 00 0	0,685	6	1	2855P 66 0				
66	18,0	14,0	17,5	28,0	11	1	00810 00 0	0,837	6	1	2855P 67 0				
75	27,0	12,0	13,5	28,0	11	1	00810 00 0	0,852	6	1	2855P 75 0				
84	36,0	12,0	17,5	28,0	11	1	00810 00 0	0,970	6	1	2855P 84 0				
84	36,0	14,0	17,5	28,0	11	1	00810 00 0	0,983	6	1	2855P 85 0				



Technical features:

- Security Card: protected duplication
- Solid body in carbonitrided steel with corrosion resistant chemical nickel plating
- Hardened steel shackle with chemical nickel plating
- Cylinder protection plate in carbonitrided steel with chemical nickel plating
- Replaceable cylinder

Keys:


- flat reversible
- numerical code on key bow

Supplied as standard:

- Security Card
- 2 keys


Astral Tekno

Type	Description	Key item					Unit weight	Pieces	ITEM			
		A	C	D	L	S			Type	Dim.	Hand	Fin.

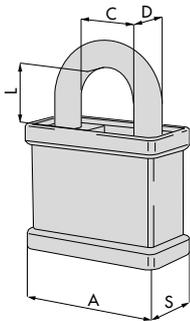

• Key removable in locked position only

55	25,0	11,0	25,0	25,0	10	1 00690 00 0 00	0,565	6	1	2805M	55	0		
55	25,0	11,0	45,0	25,0	10	1 00690 00 0 00	0,601	6	1	2805M	56	0		
55	26,0	11,0	65,0	25,0	10	1 00690 00 0 00	0,610	6	1	2805M	57	0		
70	31,0	14,0	25,0	26,0	10	1 00690 00 0 00	0,880	6	1	2805M	70	0		
70	31,0	14,0	45,0	26,0	10	1 00690 00 0 00	0,927	6	1	2805M	71	0		
70	31,0	14,0	65,0	26,0	10	1 00690 00 0 00	0,954	6	1	2805M	72	0		



66	20,0	10,0	11,0	25,0	10	1 00690 00 0 00	0,685	6	1	2855M	66	0		
66	18,0	14,0	17,5	28,0	10	1 00690 00 0 00	0,852	6	1	2855M	67	0		
75	27,0	12,0	13,5	28,0	10	1 00690 00 0 00	0,852	6	1	2855M	75	0		
84	36,0	12,0	17,5	28,0	10	1 00690 00 0 00	0,970	6	1	2855M	84	0		
84	36,0	14,0	17,5	28,0	10	1 00690 00 0 00	0,983	6	1	2855M	85	0		



Technical features:


- Security Card: protected duplication
 - Solid body in carbonitrided steel with corrosion resistant chemical nickel plating
 - Hardened steel shackle with chemical nickel plating
 - Cylinder protection plate in carbonitrided steel with chemical nickel plating
 - Replaceable cylinder
- Keys:
- numerical code on key bow

Supplied as standard:

- Security Card
- 2 keys


C3000

Type	Description	Key item						Kg	Pieces	ITEM				
		A	C	D	L	S	Pins			Type	Dim.	Hand	Fin.	Pers.

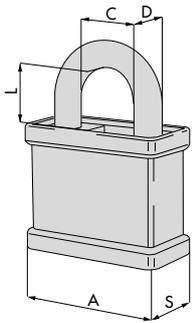

• Key removable in locked position only

55	25,0	11,0	25,0	25,0	6	1 00430 00 1	0,565	6	1	2805N	55	0
55	25,0	11,0	45,0	25,0	6	1 00430 00 1	0,601	6	1	2805N	56	0
55	26,0	11,0	65,0	25,0	6	1 00430 00 1	0,610	6	1	2805N	57	0
70	31,0	14,0	25,0	26,0	6	1 00430 00 1	0,880	6	1	2805N	70	0
70	31,0	14,0	45,0	26,0	6	1 00430 00 1	0,927	6	1	2805N	71	0
70	31,0	14,0	65,0	26,0	6	1 00430 00 1	0,954	6	1	2805N	72	0



66	20,0	10,0	11,0	25,0	6	1 00430 00 1	0,685	6	1	2855N	66	0
66	18,0	14,0	17,5	28,0	6	1 00430 00 1	0,837	6	1	2855N	67	0
75	27,0	12,0	13,5	28,0	6	1 00430 00 1	0,852	6	1	2855N	75	0
84	36,0	12,0	17,5	28,0	6	1 00430 00 1	0,970	6	1	2855N	84	0
84	36,0	14,0	17,5	28,0	6	1 00430 00 1	0,983	6	1	2855N	85	0



Technical features:


- Carbonitrided solid steel body, with chemical anti-corrosion nickel-plating treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced
- KEY:
- flat reversible keys
- numbered on key bow

Supplied as standard:

- 2 keys
- Code Card


Astral

Type	Description	Key item						Unit weight	Pieces	ITEM			
		A	C	D	L	S	Pins			Type	Dim.	Hand	Fin.

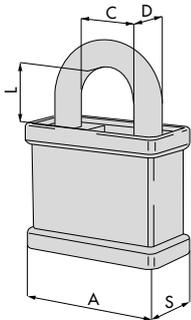

• Key removable in locked position only

55	25,0	11,0	45,0	25,0	10	1 00620 01 0	0,586	6	1 28053 56 0
70	31,0	14,0	25,0	26,0	10	1 00620 01 0	0,854	6	1 28053 70 0
70	31,0	14,0	45,0	26,0	10	1 00620 01 0	0,903	6	1 28053 71 0
70	31,0	14,0	65,0	26,0	10	1 00620 01 0	0,954	6	1 28053 72 0



66	20,0	10,0	11,0	25,0	10	1 00620 01 0	0,677	6	1 28553 66 0
66	18,0	14,0	17,5	28,0	10	1 00620 01 0	0,837	6	1 28553 67 0
75	27,0	12,0	13,5	28,0	10	1 00620 01 0	0,843	6	1 28553 75 0
84	36,0	12,0	17,5	28,0	10	1 00620 01 0	0,955	6	1 28553 84 0
84	36,0	14,0	17,5	28,0	10	1 00620 01 0	0,983	6	1 28553 85 0




Technical features:

- Carbonitrided solid steel body, with chemical anti-corrosion nickel-plating treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- **The removable cylinder can be either rekeyed or replaced**
- Carbonitrided steel plug protection plate
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- Desmopan impact resistant protection device (for the 28050 series)
- LIM patented key profile

Supplied as standard:

- 2 keys

Type	Description	Key item					Unit weight	Pieces	ITEM			
		A	C	D	L	S			Pins	Type	Dim.	Hand

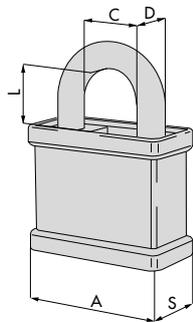


• Key removable in locked position only

55	25,0	11,0	25,0	25,0	5	1 00401 00 1	0,565	6	1	28050	55	0
55	25,0	11,0	45,0	25,0	5	1 00401 00 1	0,601	6	1	28050	56	0
55	26,0	11,0	65,0	25,0	5	1 00401 00 1	0,610	6	1	28050	57	0
70	31,0	14,0	25,0	26,0	5	1 00401 00 1	0,880	6	1	28050	70	0
70	31,0	14,0	45,0	26,0	5	1 00401 00 1	0,927	6	1	28050	71	0
70	31,0	14,0	65,0	26,0	5	1 00401 00 1	0,954	6	1	28050	72	0



• Clam packing

55	25,0	11,0	25,0	25,0	5	1 00401 00 1	0,578	6	1	28055	55	0
55	25,0	11,0	45,0	25,0	5	1 00401 00 1	0,608	6	1	28055	56	0
55	26,0	11,0	65,0	25,0	5	1 00401 00 1	0,636	6	1	28055	57	0
70	31,0	14,0	25,0	26,0	5	1 00401 00 1	0,870	6	1	28055	70	0
70	31,0	14,0	45,0	26,0	5	1 00401 00 1	0,929	6	1	28055	71	0
70	31,0	14,0	65,0	26,0	5	1 00401 00 1	0,971	6	1	28055	72	0



66	20,0	10,0	11,0	25,0	5	1 00401 00 1	0,685	6	1	28550	66	0
66	18,0	14,0	17,5	28,0	5	1 00401 00 1	0,837	6	1	28550	67	0
75	27,0	12,0	13,5	28,0	5	1 00401 00 1	0,852	6	1	28550	75	0
84	36,0	12,0	17,5	28,0	5	1 00401 00 1	0,970	6	1	28550	84	0
84	36,0	14,0	17,5	28,0	5	1 00401 00 1	0,983	6	1	28550	85	0



• Clam packing


66	20,0	10,0	11,0	25,0	5	1 00401 00 1	0,745	6	1	28555	66	0
66	18,0	14,0	17,5	28,0	5	1 00401 00 1	0,855	6	1	28555	67	0
75	27,0	12,0	13,5	28,0	5	1 00401 00 1	0,905	6	1	28555	75	0
84	36,0	12,0	17,5	28,0	5	1 00401 00 1	1,018	6	1	28555	84	0
84	36,0	14,0	17,5	28,0	5	1 00401 00 1	1,009	6	1	28555	85	0



Technical features:

- Brass monoblock body
- Special steel shackle
- Compatibility with European profile single cylinder (30/10 mm) to be purchased separately

Type	Description	Key item					Unit weight	Pieces	ITEM				
		A	C	D	L	S			Pin	Type	Dim.	Hand	Fin.

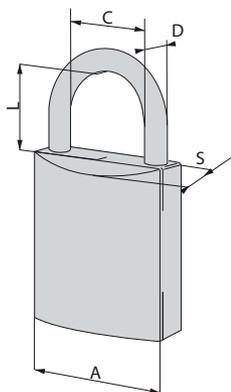

- Designed to match the following cylinders:
 - Asix item 1.0E304.02.0
 - RS3 S item 1.0L314.02.0.66CL
 - C2000 item 1.0G304.02.0
 - Astral Tekno item 1.0M314.02.0.66CL
 - item 1.0N324.02.0.66
- AP4S item 1.0P314.02.0.33
- C3000 I item 1.0N314.02.0

55 27,0 9,5 39,0 27,5 0,550 6 1 26810 55 0




Technical features:

- Chrome-plated solid brass body
- Stainless steel shackle
- Shackle double-locking system
- CISA patented anti-tampering protection device for the bolts
- Picking resistant chrome-plated brass plate
- Item 1.26020.50/60 with LIM patented key profile

Supplied as standard:


- 2 keys

Type	Description	Key item					Kg	Pieces	ITEM			
		A	C	D	L	S			Type	Dim.	Hand	Fin.

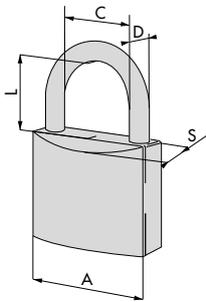

• Standard shackle

30	17,0	5,0	17,0	14,5	4	1 01430 00 1	0,098	12	1 26020 30 0
40	24,0	6,0	23,0	16,5	5	1 01410 00 1	0,175	12	1 26020 40 0
50	29,5	8,0	27,5	17,5	5	1 01310 10 1	0,295	6	1 26022 50 0
60	35,0	10,0	37,5	20,0	5	1 01310 10 1	0,462	6	1 26022 60 0

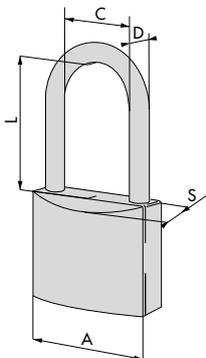

• Long shackle

40	24,0	6,0	40,0	16,5	5	1 01410 00 1	0,182	12	1 26021 40 0
----	------	-----	------	------	---	--------------	-------	----	--------------




Technical features:

- Belt sanded solid brass body
- Nickel-plated, carbonitrided steel shackle
- Version with brass shackle also available
- Shackle double-locking system (item 1.22010.15/20 excluded)
- Picking resistant brass plate

Supplied as standard:


- 2 keys

Type	Description	Key item					Unit weight	Pieces	ITEM			
		A	C	D	L	S			Type	Dim.	Hand	Fin.

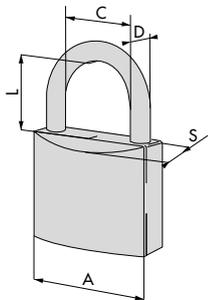

• Standard shackle

15	8,5	3,0	11,0	9,0	3	1 01510 00 1	0,022	12	1 22010 15 0				
20	12,0	3,5	13,0	12,5	4	1 01440 00 1	0,038	12	1 22010 20 0				
25	13,5	4,5	15,0	12,5	4	1 01440 00 1	0,065	12	1 22010 25 0				
30	17,0	5,0	17,0	14,5	4	1 01430 00 1	0,095	12	1 22010 30 0				
40	24,0	6,0	23,0	16,5	5	1 01410 00 1	0,172	12	1 22010 40 0				
50	29,5	8,0	27,5	17,5	5	1 01310 00 1	0,292	6	1 22010 50 0				
60	35,0	10,0	37,5	20,0	5	1 01310 00 1	0,435	6	1 22010 60 0				

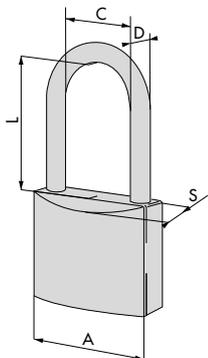

• Long shackle

20	12,0	3,5	22,0	12,5	4	1 01440 00 1	0,053	12	1 22011 20 0				
30	17,0	5,0	24,0	14,5	4	1 01430 00 1	0,098	12	1 22011 30 0				
30	17,0	5,0	65,0	14,5	4	1 01430 00 1	0,111	12	1 22011 31 0				
40	24,0	6,0	40,0	16,5	5	1 01410 00 1	0,183	12	1 22011 40 0				
40	24,0	6,0	63,5	16,5	5	1 01410 00 1	0,191	12	1 22011 41 0				
50	29,5	8,0	80,0	17,5	5	1 01310 00 1	0,345	6	1 22011 50 0				
50	29,5	8,0	127,0	17,5	5	1 01310 00 1	0,381	6	1 22011 52 0				



Technical features:


- Brass solid body with nickel-plated hardened steel sleeve
- Nickel-plated hardened steel shackle
- Carbonitrided steel cylinder protection plate (item 1.21810.80.0)

Supplied as standard:

- 2 keys



Type	Description	Key item					Kg	Box	ITEM			
		A	C	D	L	S			Pins	Type	Dim.	Hand



66	33,0	10,0	14,0	22,7	5	1 01040 04 1	0,598	3	1 21810 65 0				
77	37,0	12,0	17,0	29,2	5	1 01040 05 1	0,843	3	1 21810 80 0				



Technical features:


- Belt sanded solid brass body
- Nickel-plated hardened steel shackle with tear-resistant end

Supplied as standard:

- 2 keys



Type	Description						Key item	Unit weight 	Pieces 	ITEM			
		A	C	D	L	S				Type	Dim.	Hand	Fin.



52	15,0	7,9	13,5	14,7	4	1 01040 03 1	0,197	6	1 21610 50 0				
63	19,0	10,0	14,0	18,5	5	1 01040 04 1	0,330	6	1 21610 63 0				
70	22,0	12,0	13,5	20,0	5	1 01040 04 1	0,439	6	1 21610 70 0				
90	35,0	12,0	18,2	22,5	5	1 01040 05 1	0,728	6	1 21610 90 0				



Technical features:


- Chrome-plated solid brass body
- Stainless steel shackle
- Shackle double-locking system

Supplied as standard:

- 2 keys




Type	Description	Key item					Kg	Pieces	ITEM			
		A	C	D	L	S			Type	Dim.	Hand	Fin.

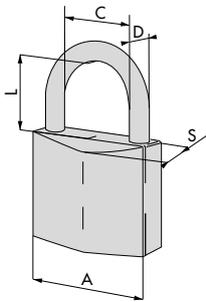

• Standard shackle

29	14,5	4,7	13,8	12,8	4	1 01040 03 1	0,085	12	1 21710 30 0
40	19,5	6,3	22,5	13,5	4	1 01040 03 1	0,153	12	1 21710 40 0
50	28,2	7,1	26,0	14,8	5	1 01040 04 1	0,233	6	1 21710 50 0
60	31,3	7,9	32,2	16,1	5	1 01040 04 1	0,326	6	1 21710 60 0

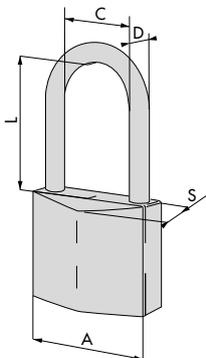

• Long shackle

40	19,5	6,3	40,0	13,5	4	1 01040 03 1	0,162	12	1 21711 40 0
----	------	-----	------	------	---	--------------	-------	----	--------------



Technical features:


- Belt sanded solid brass body
- Nickel-plated, carbonitrided steel shackle
- Shackle double-locking system (item 1.21010.20/25.0 excluded)

Supplied as standard:

- 2 keys




Type	Description	Key item					Unit weight	Pieces	ITEM			
		A	C	D	L	S			Type	Dim.	Hand	Fin.

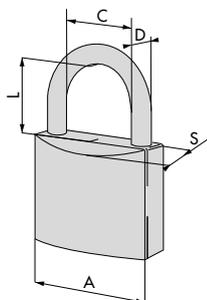


• Standard shackle

20	9,6	3,5	11,3	10,4	3	1 01040 01 1	0,039	12	1 21010 20 0			
25	13,5	3,9	13,1	12,0	4	1 01040 02 1	0,062	12	1 21010 25 0			
30	16,2	4,7	16,9	13,8	4	1 01040 03 1	0,095	12	1 21010 30 0			
40	22,1	6,3	22,4	13,8	5	1 01040 04 1	0,158	12	1 21010 40 0			
50	27,9	7,9	28,7	17,0	5	1 01040 05 1	0,272	6	1 21010 50 0			
60	33,5	9,5	34,7	17,2	5	1 01040 05 1	0,407	6	1 21010 60 0			
70	39,0	11,0	36,0	18,0	5	1 01040 05 1	0,560	6	1 21010 70 0			

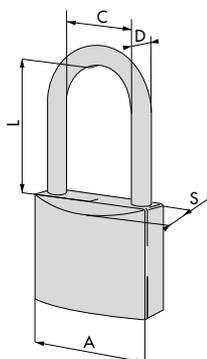

• Long shackle


30	16,2	4,7	24,0	13,8	4	1 01040 03 1	0,097	12	1 21011 30 0			
40	22,1	6,3	40,0	13,8	5	1 01040 04 1	0,165	12	1 21011 40 0			
50	27,9	7,9	80,0	17,0	5	1 01040 05 1	0,317	6	1 21011 50 0			

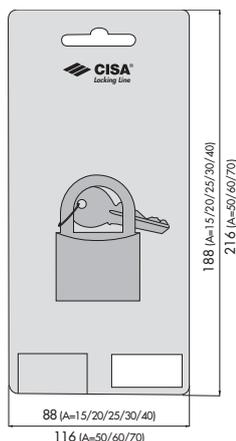

- Standard shackle
- Shrink-wrapped cardboard package

20	9,6	3,5	11,3	10,4	3	1 01040 01 1	0,039	6	1 21090 20 0			
25	13,5	3,9	13,1	12,0	4	1 01040 02 1	0,062	6	1 21090 25 0			
30	16,2	4,7	16,9	13,8	4	1 01040 02 1	0,095	6	1 21090 30 0			
40	22,1	6,3	22,4	13,8	5	1 01040 03 1	0,158	6	1 21090 40 0			
50	27,9	7,9	28,7	17,0	5	1 01040 05 1	0,272	6	1 21090 50 0			
60	33,5	9,5	34,7	17,2	5	1 01040 05 1	0,407	6	1 21090 60 0			

Type	Description	Key item					Unit weight Kg	Pieces	ITEM				
		A	C	D	L	S			Plins	Type	Dim.	Hand	Fin.

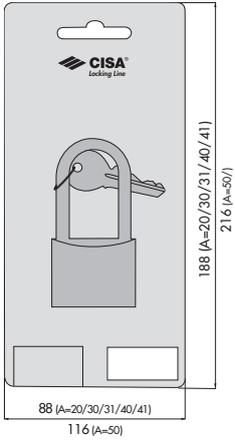

- Long shackle
- Shrink-wrapped cardboard package

30	16,2	4,7	16,9	13,8	4	1 01040 03 1	0,097	6	1 21091 30 0
40	22,1	6,3	40,0	13,8	5	1 01040 04 1	0,165	6	1 21091 40 0
50	27,9	7,9	80,0	17,0	5	1 01040 05 1	0,317	6	1 21091 50 0




Technical features:

- Brass monoblock body
- Nickel-plated carbonitrided steel shackle
- 3 disc system (1,000 combinations) for size 20/30
- 4 disc system (10,000 combinations) for size 40



Type	Description	Key item					Unit weight	Pieces	ITEM			
		A	C	D	L	S			Type	Dim.	Hand	Fin.

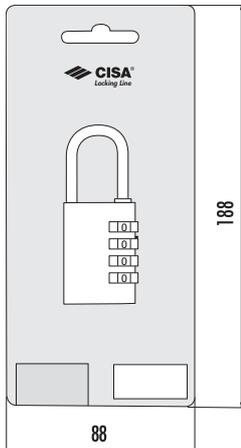


• Shrink-wrapped cardboard package

20	9,0	3,0	21,5	14,0		0,055	6	1 21190 20 0				
30	14,0	5,0	25,0	15,0		0,115	6	1 21190 30 0				
40	22,0	6,0	26,0	18,0		0,235	6	1 21190 40 0				

Type	Description	Unit weight Kg	Pieces	ITEM			
				Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28050 dim. 55, 56, 57 280SN 	0,045	3	1	07586	04	0
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28050 dim. 70, 71, 72 280SN 	0,045	3	1	07586	05	0
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28052 dim. 55, 56, 57 	0,036	3	1	07586	06	1
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28053 dim. 55, 56, 57 280SP, 280SM 	0,045	3	1	07586	08	0
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28053 dim. 70, 71, 72 280SP, 280SM 	0,045	3	1	07586	09	0
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28057 dim. 55, 56, 57 series 28353 dim. 62 	0,045	3	1	07586	10	0
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 2855N 	0,010	3	1	07589	02	0
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28552 	0,045	3	1	07589	03	1
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 285SP, 285SN 	0,003	3	1	07589	04	0
	<ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28559 	0,045	3	1	07589	05	0


Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Zinc plated steel padlock hasp set 		0,526 6	1	06300	14	0
	<ul style="list-style-type: none"> • Zinc plated steel padlock hasp set 		0,515 6	1	06300	18	0
	<ul style="list-style-type: none"> • Zinc plated padlock tie 	1 21610 50 0, 1 21610 63 0, 1 21810 65 0, 1 26509 70 0, 1 28550 66 0, 1 2855M 66 0, 1 2855P 66 0, 1 28553 66 0, 1 28055M66 0, 1 288559 66 0	0,451 4	1	06301	50	0
	<ul style="list-style-type: none"> • Zinc plated padlock tie 	1 21610 50 0, 1 21610 63 0, 1 21810 65 0, 1 28550 66 0, 1 28553 66 0, 1 2855M 66 0, 1 2855N 66 0, 1 2855P 66 0, 1 28559 66 0	0,591 4	1	06301	60	0
	<ul style="list-style-type: none"> • Zinc plated steel hasp for rolling doors, with flat bottom rail and removable dust cover 	1 21610 90 0, 1 21810 80 0, 1 26509 94 0, 1 28550 84 0, 1 28550 85 0, 1 28553 84 0, 1 28553 85 0, 1 2855M 84 0, 1 2855M 85 0, 1 2855N 84 0, 1 2855N 85 0, 1 2855P 84 0, 1 2855P 85 0, 1 28559 84 0, 1 28559 85 0	1,430 1	1	06302	25	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.



• Zinc plated steel hasp for rolling doors, with flat bottom rail and removable dust cover

1 21610 90 0,	1,490	1	1 06302 60 0
1 21810 80 0,			
1 26509 94 0,			
1 28550 84 0,			
1 28550 85 0,			
1 28553 84 0,			
1 28553 85 0,			
1 2855M 84 0,			
1 2855M 85 0,			
1 2855N 84 0,			
1 2855N 85 0,			
1 2855P 84 0,			
1 2855P 85 0,			
1 28559 84 0,			
1 28559 85 0			




• Zinc plated steel hasp for up and over doors, with removable dust cover

1 21810 80 0,	2,520	1	1 06303 00 0
1 28550 85 0,			
1 28553 85 0,			
1 2855M 85 0,			
1 2855N 85 0,			
1 2855P 85 0,			
1 28559 85 0			

HARDENED STEEL PADLOCKS in "UNASSEMBLED" version (suffix 91), supplied without cylinder and drill resistant plates

- Steel padlocks in "UNASSEMBLED" version (suffix 91) are supplied without cylinder and without the cylinder or padlock drill resistant plate. When ordering the padlock cylinder, you have to specify separately the relevant padlock drill resistant plate (the cylinder drill resistant plate is supplied as standard).

PADLOCK SERIES	DRILL RESISTANT PLATE	CYLINDER "LIM" CYLINDER "C3000" item 1 02650 01 0 item 1 0K610 00 0	CYLINDER "SP" item 1 02652 01 0	CYLINDER "ASIX" CYLINDER "ASTRAL" item 1 0E600 00 0 item 1 0A610 00 0	CYLINDER "ASTRAL TEKNO" CYLINDER "AP4" item 1 0M610 00 0 item 1 0P610 00 0	CYLINDER "RS3 S" item 1 0L610 00 0
28000 (Dim. 55/56/67)	For cylinder 	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard
	For padlock 	item 1 07586 04 0	item 1 07586 06 1/2	item 1 07586 08 0	item 1 07586 08 0	item 1 07586 10 0
28300 (Dim. 62)	For cylinder 	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard
	For padlock 	item 1 07586 05 0	item 1 07586 07 1/2	item 1 07586 09 0	item 1 07586 09 0	item 1 07586 11 0
28000 (Dim. 70/71/72/73)	For cylinder 	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard
	For padlock 	item 1 07589 02 0	item 1 07589 03 1/2	item 1 07589 04 0	item 1 07589 04 0	item 1 07589 05 0
28500 (Dim. 66/67/75/84/85)	For cylinder 	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard
	For padlock 	item 1 07589 02 0	item 1 07589 03 1/2	item 1 07589 04 0	item 1 07589 04 0	item 1 07589 05 0

N.B. For plates to be coupled to "SP" cylinders you have to state the hand. In this case, to avoid possible doubts, you also have to state the key code in the description (this can be taken from the 3 first figures on the key head).

Ex: 1 02652 01 0 + 1 07589 03 1 with SP key code. **102:**

("SP" cylinder complete with cylinder drill resistant plate and padlocks drill resistant plate, for right handed (1) keys, for padlocks item 1 28550 66 0 00 91).



Locks for
steel doors



Cylinder electric rim locks - ElettriKa	149
Booster, Coil set Bticino, device	151
Cylinder electric rim locks	152
Cylinder rim locks for shutters	154
Cylinder mortice locks for gates	157
Cylinder mortice locks rolling-shutter and railings	160
Cylinder mortice locks for shutters	161
Cylinder mortice locks	163

Cylinder rim locks	166
Multithrow cylinder rim locks	168
Cylinder mortice locks	169
Cylinder mortice locks, mid-rail type H64 mm	170
Double-bit key mortice locks	171
Double-bit key mortice locks	173
Accessories for metal lock	176
Dimensional drawings	185





CISA[®]

Elettrika

**THE ELECTRIC LOCK
FOR THE SAFE CLOSING OF
YOUR DOORS AND GATES**



CISA ELETTRIKA

The CISA “Elettrika” electric lock is the ideal solution per managing the opening and closing of all kinds of doors and gates, guaranteeing high resistance to forced entry.

Main features and benefits:

Rotary hook deadbolt for increased resistance to forced entry.

Self-adjustable floor striker ensuring perfect closure over time.

Steel casing to protect the lock.

Electric release system for increased resistance to vibrations and impact strength.



Technical features:

- Painted protective steel case
- Metal striker with stainless steel swinging pin
- Rotary hook deadbolt in extruded aluminium
- 12V ac CE power supply
- Current absorption 3 A
- Non-handed and with a variable backset from 50 to 80 mm

Supplied as standard:

- Striker
- Instruction sheet
- Fixing screws
- 2 spacers for the striker
- 3 keys item 1.01070.10.1

On request:

- Booster device item 1.07022.00.0
- Booster plus device item 1.07022.10.0
- Coil set BTicino device item 1.07025.10.0
- Microswitch device item 1.07023.00.0
- Lighted indicator kit item 1.07126.01.0

Hand:
0 = Non-handed

Certification:

- ELETTRIKA is certified according to the European standard prEN 14846:08:


| 3 | X | 2 | 0 | 0 | M | 6 | 0 | 2 |

- Security degree 6
(2,000 Kg lateral push resistance)

Elettrika

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
<ul style="list-style-type: none"> • Back plate for lock and striker to be welded 		 Art. 1 0G150 00 0 Fin.12	50÷80	2,750	1	1	1A721 00 0				
	• Version with BTicino coil item 1.07025.10.0		50÷80	2,710	1	1	1A721 00 0 00 PA				
	• Version with Booster item 1.07022.00.0		50÷80	2,710	1	1	1A721 00 0 00 PB				
	• Version with Booster Plus item 1.07022.10.0		50÷80	2,710	1	1	1A721 00 0 00 PC				
	• Galvanized version • Welding plate and striker spacer	 Art. 1 0G150 00 0 Fin.12	50÷80	2,800	1	1	1A721 00 0 79				
<ul style="list-style-type: none"> • Back plate for lock and striker to be welded • Inner push-button • Hold open device 		 Art. 1 0G150 00 0 Fin.12	50÷80	2,800	1	1	1A731 00 0				
	• Version with BTicino coil item 1.07025.10.0		50÷80	2,800	1	1	1A731 00 0 00 PA				
	• Version with Booster item 1.07022.00.0		50÷80	2,800	1	1	1A731 00 0 00 PB				
	• Version with Booster Plus item 1.07022.10.0		50÷80	2,800	1	1	1A731 00 0 00 PC				
	• Galvanized version • Welding plate and striker spacer • Inside button • Hold-open device • Galvanized protective case	 Art. 1 0G150 00 0 Fin.12	50÷80	2,800	1	1	1A731 00 0 79				

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers.

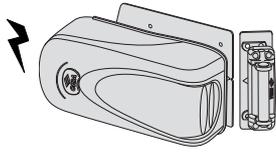

- Inner push-button
- SUPPLIED AS STANDARD:
Striker
Weld plate
Weld striker spacer
Strike spacer set (2pcs)
Fixing screws
Keys item 1.01070.10.1
Instruction sheet



Art.
1 06200 55 0 Fin.12

50÷80 2,780 1 1 1A611 00 0 00 DF

Type	Description	Unit weight 	Pieces 	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Booster device may be combined with ElettriKa rim lock to have the following function: Tension adaptor for tension different from 12 V ac (12 Vdc - 24 Vac - 24Vdc) Electrical input reduction Undersized power supply Electric hold open device (ElettriKa only) Supplied as standard: Fixing screws Instructions sheet Please note: Booster device may be combined also with all electric locks (electric striker escluded) 	0,085	1	1	07022	00	0
	<ul style="list-style-type: none"> Booster Plus device may be combined with ElettriKa rim lock to have the following function: Electronic opening timer with 5 different options (120 sec default) Door condition signal Electric hold open device Tension adaptor for tension different from 12 V ac (12 Vdc - 24 Vac - 24Vdc) Electrical input reduction Undersized power supply Supplied as standard: Pin to deactivate hold open catch Fixing screws Instructions sheet ON REQUEST: Open door indicator item 1.07126.01.0 	0,185	1	1	07022	10	0
	<ul style="list-style-type: none"> Coil for BTicino intercommunication system audio Swing ref. 344702-03-04 Video intercommunication system video Swing ref. 344802-03-04 combined with ElettriKa rim lock give door control signal Supplied as standard: Fixing screws Instructions sheet 	0,092	1	1	07025	10	0
	<ul style="list-style-type: none"> Microswitch Give a signal to operate ration motor may be installed directly on the ElettriKa rim lock Supplied as standard: instruction sheet 	0,007	1	1	07023	00	0
	<ul style="list-style-type: none"> Open door indicator 	0,005	1	1	07126	01	0



Technical features:

- Zinc-plated steel case and striker
- Dead-locking latch
- 12 V ac CE
- Current absorption 2,5 A
- External cylinder length: 55 mm.

Supplied as standard:

- Striker
- Instruction sheet
- Fixing screws (except series 11921-11931)
- 3 keys item 1.01070.10.1 (C2000 key bow)

On request:

- Booster module item 1.07022.00.0

Certifications:

- This electric lock series is certified according to the European standard EN 14846:08:

| 3 | C | 2 | 0 | 0 | L | 3 | 0 | 2 |

Security degree 3

(500 Kg lateral push resistance and 200 Kg front push resistance)

Hand:

- 1 = R.H. inwards
- 2 = L.H. inwards
- 3 = R.H. outwards
- 4 = L.H. outwards

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM			
							Type	Dim.	Hand	Fin. Pers. Spec.
<ul style="list-style-type: none"> • Protective back plate • Spacer 	<p>1 02139 00 0</p>	50	2,140	1	1	11721 50 1				
		50	2,140	1	1	11721 50 2				
		60	2,140	1	1	11721 60 1				
		60	2,140	1	1	11721 60 2				
		70	2,140	1	1	11721 70 1				
		70	2,140	1	1	11721 70 2				
		80	2,140	1	1	11721 80 1				
		80	2,140	1	1	11721 80 2				
<ul style="list-style-type: none"> • Protective back plate • Spacer • Push-button • Hold-open device 	<p>1 02110 00 0</p>	50	2,180	1	1	11731 50 1				
		50	2,180	1	1	11731 50 2				
		60	2,180	1	1	11731 60 1				
		60	2,180	1	1	11731 60 2				
		70	2,180	1	1	11731 70 1				
		70	2,180	1	1	11731 70 2				
		80	2,180	1	1	11731 80 1				
		80	2,180	1	1	11731 80 2				
<ul style="list-style-type: none"> • Manual throw deadbolt • Protective back plate • Spacer 	<p>1 02145 00 0</p>	2 50	2,200	1	1	11761 50 1				
		2 50	2,218	1	1	11761 50 2				
		2 60	2,290	1	1	11761 60 1				
		2 60	2,290	1	1	11761 60 2				
		2 70	2,280	1	1	11761 70 1				
		2 70	2,222	1	1	11761 70 2				
		2 80	2,230	1	1	11761 80 1				
		2 80	2,250	1	1	11761 80 2				
<ul style="list-style-type: none"> • Manual throw deadbolt • Protective back plate • Spacer • Push-button 	<p>1 02145 00 0</p>	2 50	2,205	1	1	11771 50 1				
		2 50	2,205	1	1	11771 50 2				
		2 60	2,280	1	1	11771 60 1				
		2 60	2,280	1	1	11771 60 2				
		2 70	2,210	1	1	11771 70 1				
		2 70	2,210	1	1	11771 70 2				
		2 80	2,231	1	1	11771 80 1				
		2 80	2,251	1	1	11771 80 2				

Type	Description	Cylinder	Throws	Backset	Kg	Unit weight	Pieces	ITEM			
								Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • For automated and up-and-over gates • Protective back plate • External cylinder length: 70 mm. 		80	2,100	1	1	11823	80	1		
			80	2,100	1	1	11823	80	2		
			50	1,450	1	1	11921	50	1		
			50	1,450	1	1	11921	50	2		
			60	1,559	1	1	11921	60	1		
			60	1,472	1	1	11921	60	2		
			70	1,472	1	1	11921	70	1		
			70	1,476	1	1	11921	70	2		
			80	1,470	1	1	11921	80	1		
			80	1,475	1	1	11921	80	2		
	<ul style="list-style-type: none"> • Push-button • Hold-open device 		50	1,475	1	1	11931	50	1		
			50	1,475	1	1	11931	50	2		
			60	1,550	1	1	11931	60	1		
			60	1,472	1	1	11931	60	2		
			70	1,475	1	1	11931	70	1		
			70	1,478	1	1	11931	70	2		
			80	1,470	1	1	11931	80	1		
			80	1,472	1	1	11931	80	2		
	<ul style="list-style-type: none"> • FOR OUTWARD OPENING GATES 		50	1,539	1	1	11921	50	3		
			50	1,538	1	1	11921	50	4		
			60	1,614	1	1	11921	60	3		
			60	1,534	1	1	11921	60	4		
			70	1,533	1	1	11921	70	3		
			70	1,538	1	1	11921	70	4		
			80	1,539	1	1	11921	80	3		
			80	1,534	1	1	11921	80	4		
	<ul style="list-style-type: none"> • FOR OUTWARD OPENING GATES • Push-button • Hold-open device 		50	1,536	1	1	11931	50	3		
			50	1,530	1	1	11931	50	4		
			60	1,532	1	1	11931	60	3		
			60	1,532	1	1	11931	60	4		
			70	1,530	1	1	11931	70	3		
			70	1,534	1	1	11931	70	4		
			80	1,532	1	1	11931	80	3		
			80	1,532	1	1	11931	80	4		



Technical features:

- Zinc-plated steel case
- Steel deadbolts with 25 mm travel (for the series 41600,41620 and 41650, 24 mm travel)
- Brass cylinder

Supplied as standard:

- 3 keys
- ITEMS 41010 - 41110 - 41111: inside: 1 key item 1.01310.00.2 outside: 2 keys item 1.01330.00.1
- ITEMS 41210 - 41220 - 41221 - 41230 - 41231 - 41310 - 41311 - 41320: inside: 1 key item 1.01310.00.2 outside: 2 keys item 1.01320.00.1
- ITEMS 41410 - 41420 - 41421: inside: 1 key item 1.01320.00.2 outside: 2 keys item 1.01330.00.1
- ITEMS 41510 - 41525 - 41526: 2 keys item 1.01060.10.0
- ITEMS 41600 - 41650: 2 keys item 1.01070.10.1
- Cylinder fixing screw (series 41620)

Hand:
0 = Non-handed
1 = R.H.
2 = L.H

Type	Description	Cylinder	L	A	B	S	Throws	Backset	Unit weight Kg	Pieces	ITEM							
											Type	Dim.	Hand	Fin.	Pers.	Spec.		
<ul style="list-style-type: none"> • Central application 		1 02544 14 0	160	55	11,5	13,0	2	80	0,508	2	1	41010	80	0				
		1 02544 15 0	155	55	6,5	20,0	2	78	0,551	2	1	41210	78	0				
		1 02544 15 0	155	55	9,5	17,0	2	78	0,540	2	1	41320	78	0				
		1 02544 10 0	155	55	6,0	15,0	2	78	0,518	2	1	41410	78	0				
<ul style="list-style-type: none"> • Lateral application • Series 41230 with cranked deadbolt 		1 02544 14 0	120	55	11,5	15,0	2	78	0,420	2	1	41110	60	1				
		1 02544 14 0	120	55	11,5	13,0	2	60	0,424	2	1	41110	60	2				
		1 02544 15 0	155	55	6,5	20,0	2	78	0,530	2	1	41220	78	1				
		1 02544 15 0	155	55	6,5	20,0	2	78	0,530	2	1	41220	78	2				
		1 02544 15 0	155	55	6,5	20,0	2	78	0,527	2	1	41230	78	1				
		1 02544 15 0	155	55	6,5	20,0	2	78	0,527	2	1	41230	78	2				
		1 02544 15 0	155	55	9,5	17,0	2	78	0,512	2	1	41310	78	1				
		1 02544 15 0	155	55	9,5	17,0	2	78	0,512	2	1	41310	78	2				
		1 02544 10 0	155	55	6,0	15,0	2	78	0,490	2	1	41420	78	1				
		1 02544 10 0	155	55	6,0	15,0	2	78	0,498	2	1	41420	78	2				
<ul style="list-style-type: none"> • Set of side locks (1pc RH lock, 1pc LH lock) • Series 41230 with cranked deadbolt 		1 02544 14 0	120	55	11,5	13,0	2	60	0,848	1	1	41110	60	0				
		1 02544 15 0	155	55	6,5	20,0	2	78	1,060	1	1	41220	78	0				
		1 02544 15 0	155	55	6,5	20,0	2	78	1,054	1	1	41230	78	0				
		1 02544 15 0	155	55	9,5	17,0	2	78	1,024	1	1	41310	78	0				
		1 02544 10 0	155	55	6,0	15,0	2	78	0,996	1	1	41420	78	0				
	<ul style="list-style-type: none"> • Set of side locks (1pc RH lock, 1pc LH lock) • KA execution (KA) • 3 keys per each set • Series 41231 with cranked deadbolt 		1 02544 14 0	120	55	11,5	13,0	2	60	0,800	1	1	41111	60	0			
			1 02544 15 0	155	55	6,5	20,0	2	78	1,060	1	1	41221	78	0			
			1 02544 15 0	155	55	6,5	20,0	2	78	1,054	1	1	41231	78	0			
			1 02544 15 0	155	55	9,5	17,0	2	78	1,024	1	1	41311	78	0			
			1 02544 10 0	155	55	6,0	15,0	2	78	0,940	1	1	41421	78	0			

Type	Description	Cylinder	Cylinder				Throws	Backset	Unit weight 	Pieces 	ITEM					
			L	A	B	S					Type	Dim.	Hand	Fin.	Pers.	Spec.
 	<ul style="list-style-type: none"> • Deadbolt stroke 25 mm • Central lock • Straight deadbolt • 2 pins dia. 9 mm 	155	55	5,5	15,0	2	78	0,525	12	1	41510	78	0			
	<ul style="list-style-type: none"> • Version with fixing plate assembled • Central application • Straight deadbolt • 2 pins dia. 9 mm 	155	55	5,5	15,0	2	78	0,518	12	1	41510	78	0	00	ZQ	
 	<ul style="list-style-type: none"> • Lateral application • Bent deadbolt • 1 pins dia. 9 mm 	155	55	5,5	15,0	2	78	0,445	12	1	41525	78	1			
		155	55	5,5	15,0	2	78	0,490	12	1	41525	78	2			
 	<ul style="list-style-type: none"> • Set of side locks (1pc RH lock, 1pc LH lock) • Bent deadbolt • 2 pins dia. 9 mm 	155	55	5,5	15,0	2	78	0,800	6	1	41525	78	0			
	<ul style="list-style-type: none"> • Set of side locks (1pc RH lock, 1pc LH lock) • Bent deadbolt • Keyed alike (KA) • 3 keys per pair • 2 pins dia. 9 mms 	155	55	5,5	15,0	2	78	0,875	6	1	41526	78	0			

Type	Description	Cylinder	Cylinder				Throws	Backset	Unit weight Kg	Pieces	ITEM						
			L	A	B	S					Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> • FOR SWING DOORS • Top lock • OPERATION: from the inside and the outside: opening via the handle, from the outside: key locking, from the inside: lever unlocking • ON REQUEST: KA (Keyed Alike) system 		155	55	15,0	1		0,462	12	1	41600	00	0				
	<ul style="list-style-type: none"> • FOR SWING DOORS • Top lock • European profile cylinders to order separately • OPERATION: from the inside and the outside: opening via the handle, from the outside: key locking, from the inside: lever unlocking • ON REQUEST: Cylinder fixing screws 		155	55	15,0	1		0,383	12	1	41620	00	0				
	<ul style="list-style-type: none"> • FOR EXTENSIBLE GATES • Top and bottom locks • European profile cylinders to order separately • OPERATION: from the outside: with key only • ON REQUEST: KA (Keyed Alike) system 		102	26	22,0	16,0	2	68	0,300	12	1	41650	00	0			



Technical features:

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Steel deadbolt






Supplied as standard:




- Cylinder fixing screws
(for versions with European profile cylinders)

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin. Pars. Spec.
	<ul style="list-style-type: none"> • Latch with built-in deadbolt • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1 	1	22	50	0,789	2	1 42010 50 0				
	<ul style="list-style-type: none"> • Latch with built-in deadbolt 	1	22	50	0,609	2	1 42012 50 0				
	<ul style="list-style-type: none"> • deadbolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1 	2	22	50	0,735	2	1 42020 50 0				
	<ul style="list-style-type: none"> • deadbolt only 	2	22	50	0,550	2	1 42022 50 0				
	<ul style="list-style-type: none"> • Non-handed • Latch with built-in deadbolt • Inside knob • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1 	1	22	50	0,804	2	1 42030 50 0				
	<ul style="list-style-type: none"> • Non-handed • Latch with built-in deadbolt • Inside knob 	1	22	50	0,607	2	1 42032 50 0				

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Latch-bolt only Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	22	30	0,657	2	1 42110 30 0						
	<ul style="list-style-type: none"> Latch-bolt only 	22	30	0,470	2	1 42112 30 0						
	<ul style="list-style-type: none"> Latch-bolt only Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	1	22	30	0,620	2	1 42120 30 0					
	<ul style="list-style-type: none"> deadbolt only 	1	22	30	0,425	2	1 42122 30 0					
	<ul style="list-style-type: none"> Latch with dead-locking device Through spindle Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	42	22	30	0,713	2	1 42210 30 0					
	<ul style="list-style-type: none"> Latch with dead-locking device Through spindle 	42	22	30	0,520	2	1 42212 30 0					
	<ul style="list-style-type: none"> Latch with dead-locking device Through spindle Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	1	42	22	50	0,832	2	1 42310 50 0				
	<ul style="list-style-type: none"> Latch with dead-locking device Through spindle 	1	42	22	50	0,650	2	1 42312 50 0				

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Latch and deadbolt (the latch is withdrawn by key and handle) Through spindle Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	1	57	22	30	0,853	2	1	42410	30	0
	<ul style="list-style-type: none"> Latch and deadbolt (the latch is withdrawn by key and handle) Through spindle 	1	57	22	30	0,671	2	1	42412	30	0
	<ul style="list-style-type: none"> Latch and deadbolt (the latch is withdrawn by key and handle) Through spindle Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	2	57	22	30	0,724	2	1	42420	30	0
	<ul style="list-style-type: none"> Latch and deadbolt (the latch is withdrawn by key and handle) Through spindle 	2	57	22	30	0,538	2	1	42422	30	0
	<ul style="list-style-type: none"> Latch and deadbolt (the latch is withdrawn by key and handle) Through spindle Pair of cylinders item 1.02156.00.0 3 keys item 1.01330.00.1 	2	57	22	50	1,018	2	1	42510	50	0
	<ul style="list-style-type: none"> Latch and deadbolt (the latch is withdrawn by key and handle) Through spindle 	2	57	22	50	0,825	2	1	42512	50	0



Technical features:

- Steel case
- Steel faceplate
- Lamellar steel deadbolt protected by single throw armour plating
- Deadbolt resistance equivalent to Grade 3 Security of the European Standard EN 12209:03
 - Side load resistance: 1,000 kg (equivalent to highest grade according to the above Standard)
 - Resistance to blows from below: 400 kg
- Suitable for doors certified to EN 1627:2011 up to WK/RC 2 resistance class
- 13 mm driving gears stroke for additional locking points
- Spindle for operating the deadbolt and driving gears

Supplied as standard:

- Cylinder fixing screws

Finishes:

- Zinc-plated case
- Zinc-plated faceplate
- Zinc-plated deadbolt

Hand:

0 = Non-handed

Cylinder to be ordered separately



0G303, 0G305,
0E303, 0E305

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.



- Latch bolt only
- CAN BE USED WITH THE FOLLOWING ACCESSORIES:
European profile cylinders with special cam:
Item 1.0G305.02.0.12 (C2000 single cylinder)
Item 1.0G303.07.0.12 (C2000 double cylinder)
Item 1.0E305.02.0.12 (ASIX single cylinder)
Item 1.0E303.07.0.12 (ASIX double cylinder)
Handle item 1.06003.00.0
Handle with edge cover item 1.06004.00.0
Striker item 1.06232.21.0
Adjustable striker item 1.06232.22.0
Screwed extension bolts item 1.07088.03.0

1	59	25	19,7	0,590	24	1	46305 19 0
1	59	25	25,7	0,672	24	1	46305 25 0
1	59	25	31	0,780	24	1	46305 30 0



- Deadbolt only
- Pin key cylinder complete with 2 pieces item 1.00210.00.0 (KA 1 version, key included)
- CAN BE USED WITH THE FOLLOWING ACCESSORIES:
Handle item 1.06003.01.0
Handle with edge cover item 1.06004.01.0
Striker item 1.06232.21.0
Adjustable striker item 1.06232.22.0
Extension bolts item 1.07088.03.0

1	59	25	19,7	0,709	24	1	46307 19 0
1	59	25	25,7	0,804	24	1	46307 25 0



Technical features:

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Pre-set for additional locking points

Operation:

- The handle operates both the swinging deadbolt and the extension bolt, bringing them in the locking position; the key blocks the handle

Supplied as standard:

- Pair of threaded bushings (M8) item 1.06290.10.0
- Pair of bushings for quick-lock system (series 46303)
- Cylinder fixing screws
- Instruction sheet

Certifications:

- This lock series is certified to EN 12209:16 grade 3 Security (500 Kg side load and 400 Kg upward force)
- Suitable for doors certified to EN 1627:2011 up to resistance class WK/RC 2

Series 46800, 46803
| 3 | C | 9 | 0 | 0 | F | 3 | B |

Series 46875, 46878
| 3 | C | 9 | 0 | 0 | F | - | B |

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	 Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- Nickel-plated deadbolt
- Inside steel rose item 1.06092.00.0
- Pre-set for additional locking points with threaded bushings
- ON REQUEST:
Extension bolts item 1.07088.03.0
Cylinder with pin key item 1.02400.10.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Zinc plated steel striker item 1.06232.21.0

1	85	25	25	0,590	12	1	46800	25	0
1	85	25	30	0,610	12	1	46800	30	0
1	85	25	35	0,630	12	1	46800	35	0

- Nickel-plated deadbolt
- Inside steel rose item 1.06092.00.0
- Pre-set for additional locking points with quick-lock bushings
- ON REQUEST:
Extension bolts item 1.07088.04.0.00.CG (without tips) or item 1.07088.04.0 (with dia. 10 mm pins)
Cylinder with pin key item 1.02400.10.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Zinc plated steel striker item 1.06232.21.0

1	85	25	25	0,590	12	1	46803	25	0
1	85	25	30	0,610	12	1	46803	30	0
1	85	25	35	0,630	12	1	46803	35	0



- Nickel-plated deadbolt
- Cross-key cylinder with 3 keys
- Inside steel rose item 1.06002.00.0
- Pre-set for additional locking points with threaded bushings
- ON REQUEST:
Extension bolts item 1.07088.03.0
Cylinder with pin key item 1.02400.10.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Zinc plated steel striker item 1.06232.21.0

1	85	25	25	0,710	12	1	46802	25	0
1	85	25	30	0,730	12	1	46802	30	0
1	85	25	35	0,750	12	1	46802	35	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
 <ul style="list-style-type: none"> Nickel-plated metal hook, 7.5 mm gap Inside steel rose item 1.06092.00.0 Zinc plated steel striker item 1.06232.21.0 Pre-set for additional locking points with threaded bushings ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 	1	85	25	25	0,650	12	1	46865	25	0		
	1	85	25	30	0,670	12	1	46865	30	0		
	1	85	25	35	0,690	12	1	46865	35	0		
 <ul style="list-style-type: none"> Top/bottom locking point Inside steel rose item 1.06092.00.0 Pre-set for additional locking points with threaded bushings ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 	85	25	25	0,570	12	1	46875	25	0			
	85	25	30	0,590	12	1	46875	30	0			
	85	25	35	0,610	12	1	46875	35	0			
 <ul style="list-style-type: none"> Top/bottom locking point Inside steel escutcheon item 1.06092.00.0 Pre-set for additional locking points with quick-lock bushings ON REQUEST: Quick-lock bolt extension rods item 1.07088.04.0.00.CG (without pins) or item 1.07088.04.0 (with dia 10 mm pins) Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 	85	25	25	0,570	12	1	46878	25	0			
	85	25	30	0,590	12	1	46878	30	0			
	85	25	35	0,610	12	1	46878	35	0			



Technical features:

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Nickel-plated deadbolt
- Reversible latch bolt (where present)
- Current absorption 3, 1 A
- Power supply 12V ac cc

Supplied as standard:

- Cylinder fixing screws
- Instruction sheet

On request:

- Protective rose for cylinder, item 1.06460.00.0

Certification:

- This lock series is certified according to the European standard EN 12209:16

46820, 46823, 46815, 46825 series
| 3 | C | 9 | 0 | 0 | F | 3 | B |

46870, 46873 series
| 3 | C | 9 | 0 | 0 | F | - | B |

- Security degree 3 (500 Kg lateral push resistance and 400 Kg upward push resistance)


- Suitable for doors certified to EN 1627:2011 up to WK/RC 2 resistance class

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.

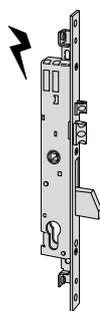

- deadbolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of steel roses item 1.06092.00.0
- Pre-set for additional locking points
- Pair of threaded bushings (M8) item 1.06290.05.0
- Threaded pivots for fixing extension bolts
- ON REQUEST:
Extension bolts item 1.06441.15.0
Extension bolts item 1.07088.03.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Striker item 1.06232.20.0

1	85	25	25	0,931	12	1	16325	25	0
1	85	25	30	0,967	12	1	16325	30	0
1	85	25	35	0,950	12	1	16325	35	0



- Nickel-plated deadbolt and latchbolt, 11 to 17 mm adjustable reversible latchbolt
- Set of steel roses item 1.06092.00.0
- ON REQUEST:
Striker item 1.06232.20.0
Cross-key cylinder item 1.02400.10.0

1	85	25	25	0,630	12	1	46815	25	0
1	85	25	30	0,650	12	1	46815	30	0
1	85	25	35	0,670	12	1	46815	35	0



- Nickel-plated deadbolt
- Set of steel roses item 1.06092.00.0
- Pre-set for additional locking points with threaded bushings
- ON REQUEST:
Extension bolts item 1.07088.03.0
Cylinder with pin key item 1.02400.10.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Striker item 1.06232.21.0

1	25	25	25	0,550	12	1	46820	25	0
1	25	30	30	0,570	12	1	46820	30	0
1	25	35	35	0,590	12	1	46820	35	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
 <ul style="list-style-type: none"> Nickel-plated deadbolt Cross-key cylinder with 3 keys Pre-set for additional locking points with threaded bushings Set of nylon rose item 1.06002.00.0 ON REQUEST: Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.21.0 	1	25	25	0,670	12	1	46822	25	0			
	1	25	30	0,690	12	1	46822	30	0			
	1	25	35	0,710	12	1	46822	35	0			
 <ul style="list-style-type: none"> Nickel-plated deadbolt Inside steel escutcheon item 1.06092.00.0 Pre-set for additional locking points with quick-lock bushings ON REQUEST: Quick-lock bolt extension rods item 1.07088.04.0.00.CG (without pins) or item 1.07088.04.0 (with dia 10 mm pins) Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.21.0 	1	25	25	0,550	12	1	46823	25	0			
	1	25	30	0,570	12	1	46823	30	0			
	1	25	35	0,590	12	1	46823	35	0			
 <ul style="list-style-type: none"> Nickel-plated deadbolt and latchbolt, 11 to 17 mm adjustable reversible latchbolt Set of steel rose item 1.06092.00.0 Pre-set for additional locking points with threaded bushings ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.20.0 	1	85	25	25	0,650	12	1	46825	25	0		
	1	85	25	30	0,670	12	1	46825	30	0		
	1	85	25	35	0,690	12	1	46825	35	0		
 <ul style="list-style-type: none"> Nickel-plated deadbolt and latchbolt, 11 to 17 mm adjustable reversible latchbolt Cross-key cylinder with 3 keys Set of nylon rose item 1.06002.00.0 Pre-set for additional locking points with threaded bushings ON REQUEST: Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.20.0 	1	85	25	25	0,770	12	1	46827	25	0		
	1	85	25	30	0,762	12	1	46827	30	0		
	1	85	25	35	0,810	12	1	46827	35	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.
 <ul style="list-style-type: none"> Nickel-plated laminar steel hook, 7.5 mm gap Inside steel escutcheon item 1.06092.00.0 Pre-set for additional locking points with threaded bushings Striker item 1.06232.21.0 ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 	1	25	25	0,610	12	1 46860 25 0					
	1	25	30	0,630	12	1 46860 30 0					
	1	25	35	0,650	12	1 46860 35 0					
 <ul style="list-style-type: none"> Top/bottom locking point Inside steel escutcheon item 1.06092.00.0 Pre-set for additional locking points with threaded bushings ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 	1	25	25	0,530	12	1 46870 25 0					
	1	25	30	0,550	12	1 46870 30 0					
	1	25	35	0,570	12	1 46870 35 0					
 <ul style="list-style-type: none"> Top/bottom locking point Inside steel escutcheon item 1.06092.00.0 Pre-set for additional locking points with quick-lock bushings ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 	1	25	25	0,530	12	1 46873 25 0					
	1	25	30	0,550	12	1 46873 30 0					
	1	25	35	0,570	12	1 46873 35 0					



Technical features:

- Zinc-plated steel case and striker, painted amaranth red item 1.50171.60.1.00.66 1.50171.60.2.00.66
- Brass latch and deadbolt
- Brass draw-back pull and knob
- External cylinder length 50mm

Hand:

- 1 = R.H. inwards
- 2 = L.H. inwards

Supplied as standard:


- Striker
- Fixing screws
- 3 keys item 1.01070.10.1 (C2000 key bow)

On request:


- Protective back plate and striker spacer item 1.07061.10.0

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM			
							Type	Dim.	Hand	Pers. Spec.
<ul style="list-style-type: none"> • With fixing tongue • Inside draw-back pull 			2	60	1,130	1	1	50421	60	1
			2	60	1,130	1	1	50421	60	2
			2	70	1,200	1	1	50421	70	1
			2	70	1,120	1	1	50421	70	2
<ul style="list-style-type: none"> • With fixing tongue • Inside draw-back pull 			2	50	0,965	1	1	50461	50	1
			2	50	0,975	1	1	50461	50	2
<ul style="list-style-type: none"> • With fixing tongue • Through spindle 			2	60	1,230	1	1	50471	60	1
			2	60	1,250	1	1	50471	60	2
<ul style="list-style-type: none"> • With fixing tongue • Inside knob • Through spindle 			2	60	1,150	1	1	50481	60	1
			2	60	1,160	1	1	50481	60	2
<ul style="list-style-type: none"> • Amaranth red lacquered case and striker • With tongue • Through spindle 			2	60	1,240	1	1	50171	60	1 00 66
			2	60	1,240	1	1	50171	60	2 00 66


Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM			
							Type	Dim.	Hand	Fin.

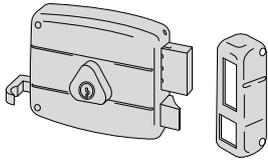


- Without fixing tongue
- Inside draw-back pull



2	60	1,090	1	1 50521 60 1
2	60	1,120	1	1 50521 60 2
2	70	1,160	1	1 50521 70 1
2	70	1,160	1	1 50521 70 2



- Without fixing tongue
- Through spindle



2	60	1,050	1	1 50571 60 1
2	60	1,050	1	1 50571 60 2



Technical features:

- Nickel-plated steel case and plate
- Nickel-plated ground steel deadbolt
- Nickel-plated steel thumb turns
- Nickel-plated cylinder length 50mm

Hand:

1 = R.H.
inwards

Supplied as standard:

- 3 keys item 1.01070.10.1

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
	• Deadbolt only		6	50	1,125	12	1	55254	50	1	
			6	60	1,160	12	1	55254	60	1	
	• Deadbolt with built-in latchbolt		6	50	0,950	12	1	55274	50	1	
			6	60	0,950	12	1	55274	60	1	



Technical features:

- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel deadbolt
- Pre-set for protective roses

Supplied as standard:

- Inside steel escutcheon item 1.06075.00.0
- Cylinder fixing screws
- Instruction sheet

On request:

- Zinc-plated, steel striker item 1.06232.00.0
- Protective rose for cylinder, item 1.06460-50/51/60-0


Hand:

0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.



- Case height 82 mm.

3	25	52	0,600	12	1 56013 50 0
3	25	60	0,657	12	1 56013 60 0
3	25	70	0,697	12	1 56013 70 0



- Case height 82 mm.
- Pre-set for additional locking points
- Pair of threaded bushings (M8) item 1.06290.10.0
- ON REQUEST:
 Extension bolts item 1.06415.00.0
 Extension bolts item 1.07088.03.0
 Floor striker item 1.06086.00.0
 Floor striker with dust cover item 1.06086.02.0

3	25	60	0,720	12	1 56016 60 0
3	25	70	0,792	12	1 56016 70 0



Technical features:

- Galvanized steel case, height 64 mm
- Galvanized steel faceplate
- Adjustable latchbolt, 11 to 17 mm
- 3-throw deadbolt, 11 mm
- Square spindle, 8 mm
- Cylinder fixing via lock internal screw

Supplied as standard:

- Threaded fixing pins for bushings and extension bolts, item 1.06449.05.0
- Pair of steel roses item 1.06075.00.0
- Pair of threaded bushings (M8) item 1.06290.05.0
- Instruction sheet
- Fixing screws


On request:

- Adjustable metal striker plates
- Modular roller assembly item 1.06168.00.0
- Nylon rose item 1.06141.56.0 ensuring interchangeability with series 57300
- Cylinder protective rose item 06460.05.50/51/60.0

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.

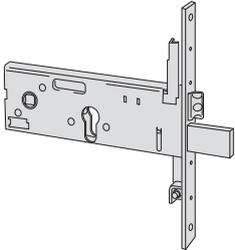


- Galvanized steel faceplate 25x3 mm
- Reversible latch and deadbolt
- ON REQUEST:
"MODULAR" roller assembly item 1.06168.00.0
Floor striker item 1.06086.00/02.0
Zinc-plated steel striker item 1.06232.01.0 or item 1.06232.00.0
Cylinder protective rose item 106460.05/50/51/60
Rose for locks series 57300 item 1.06141.56.0 or item 1.06473.00.0
Extension bolts item 1.06441.15.0
Extension bolts with screws item 1.07088.03/05.0

3	67	25	90	0,930	12	1	56358	90	0			
3	67	25	100	0,930	12	1	56358	10	0			

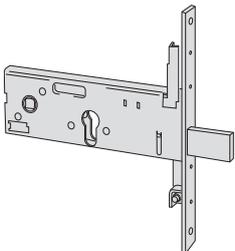

- Galvanized steel faceplate 25x3 mm
- Deadbolt only
- ON REQUEST:
Floor striker item 1.06086.00/02.0
Zinc-plated steel striker item 1.06232.00.0
Cylinder protective rose item 106460.05/50/51/60
Extension bolts item 1.06441.15.0
Extension bolts with screws item 1.07088.03/05.0

3	-	25	110	0,995	12	1	56378	11	0			
---	---	----	-----	-------	----	---	-------	----	---	--	--	--



- MODULAR roller assembly for locks series 56358

						0,040	12	1	06168	00	0	
--	--	--	--	--	--	-------	----	---	-------	----	---	--



Technical features:

- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel deadbolt

Hand:

0 = Non-handed


Supplied as standard:

- Inside steel escutcheon item 1.06124.02.0
- Instruction sheet

On request:

- Zinc-plated steel striker item 1.06232.00.0

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.



- Case height 82 mm.
- 2 keys



1 00100 00 1


4	25	52	0,788	12	1 57013 50 0 00 30
4	25	60	0,833	12	1 57013 60 0 00 30
4	25	70	0,868	12	1 57013 70 0 00 30

- As above, keyed alike (KA)
- 1 key



1 00100 00 1

4	25	52	0,760	12	1 57013 52 0 00 30
4	25	60	0,812	12	1 57013 62 0 00 30
4	25	70	0,833	12	1 57013 72 0 00 30



- Case height 82 mm.
- 2 keys
- Pre-set for additional locking points
- Pair of threaded bushings (M8) item 1.06290.10.0
- ON REQUEST:
Extension bolts item 1.06415.00.0
Extension bolts item 1.07088.03.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0



1 00100 00 1


4	25	60	0,940	12	1 57016 60 0
4	25	70	0,982	12	1 57016 70 0

- As above, keyed alike (KA)
- 1 key



1 00100 00 1

4	25	60	0,925	12	1 57016 62 0
4	25	70	0,963	12	1 57016 72 0



- Case height 82 mm.
- 2 keys
- deadbolt with 3 locking points



1 00100 00 1

4	25	60	0,754	12	1 57030 60 0
4	25	70	0,780	12	1 57030 70 0

- As above, keyed alike (KA)
- 1 key



1 00100 00 1

4	25	60	0,735	12	1 57030 62 0
4	25	70	0,773	12	1 57030 72 0

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM									
								Type	Dim.	Hand	Fin.	Pers. Spec.					
	<ul style="list-style-type: none"> • Case height 82 mm. • 2 keys • deadbolt with 3 locking points • Pre-set for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 	1 00100 00 1	4	25	60	0,848	12	1	57035	60	0						
		1 00100 00 1	4	25	70	0,919	12	1	57035	70	0						
		<ul style="list-style-type: none"> • As above, keyed alike (KA) • 1 key 	1 00100 00 1	4	25	60	0,838	12	1	57035	62	0					
			1 00100 00 1	4	25	70	0,870	12	1	57035	72	0					
				<ul style="list-style-type: none"> • Case height 93 mm. • 2 keys • As above, keyed alike (KA) • 1 key 	1 00100 00 1	2	22	40	0,520	12	1	57223	40	0			
					1 00100 00 1	2	22	45	0,540	12	1	57223	45	0			
1 00100 00 1	2	22			50	0,560	12	1	57223	50	0						
1 00100 00 1	2	22			60	0,592	12	1	57223	60	0						
1 00100 00 1	2	22			40	0,506	12	1	57223	42	0						
1 00100 00 1	2	22			45	0,524	12	1	57223	47	0						
1 00100 00 1	2	22			50	0,545	12	1	57223	52	0						
1 00100 00 1	2	22			60	0,578	12	1	57223	62	0						
	<ul style="list-style-type: none"> • Case height 93 mm. • 2 keys • Pre-set for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 • As above, keyed alike (KA) • 1 key 	1 00100 00 1	2	25	45	0,670	12	1	57226	45	0						
		1 00100 00 1	2	25	50	0,687	12	1	57226	50	0						
		1 00100 00 1	2	25	60	0,730	12	1	57226	60	0						
		<ul style="list-style-type: none"> • As above, keyed alike (KA) • 1 key 	1 00100 00 1	2	25	45	0,657	12	1	57226	47	0					
			1 00100 00 1	2	25	50	0,664	12	1	57226	52	0					
			1 00100 00 1	2	25	60	0,708	12	1	57226	62	0					



Technical features:


- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel deadbolt
- Picking resistant protection plate
- Nickel-plated latch or reversible latch/bolt
- Electrical and mechanical versions are interchangeable
- Power supply 12V ac cc
- Current absorption 1,7 A

Hand:
0 = Non-handed

Supplied as standard:

- Instruction sheet


Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



- Case height 78 mm.
- 2 keys
- deadbolt and latch
- Adjustable latch and piston
- Dead-locking latch
- Hold-open device
- Pair of steel roses item 1.06124.02.0
- ON REQUEST:
Zinc plated steel striker item 1.06232.00.0






4 67 25 90 1,220 12 1 17353 90 0



- Case height 78 mm.
- 2 keys
- deadbolt and latch
- Adjustable latch and piston
- Dead-locking latch
- Hold-open device
- Pair of steel roses item 1.06124.02.0
- Pre-set for additional locking points
- Pair of threaded bushings (M8) item 1.06290.05.0
- Threaded rods for fixing extension bolts
- ON REQUEST:
Extension bolts item 1.06441.15.0
Extension bolts item 1.07088.03.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Zinc plated steel striker item 1.06232.00.0




4 67 25 90 1,312 12 1 17358 90 0

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM						
									Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> • Case height 82 mm. • 2 keys • deadbolt and latch • Inside steel rose item 1.06124.02.0 • ON REQUEST: Zinc plated steel striker item 1.06232.01.0 	 1 00100 00 1	4	67	25	70	1,000	12	1	57313	73	0			
	<ul style="list-style-type: none"> • As above, keyed alike (KA) • 1 key 	 1 00100 00 1	4	67	25	70	1,016	12	1	57313	72	0			
	<ul style="list-style-type: none"> • Case height 82 mm. • 2 keys • deadbolt and latch • Inside steel rose item 1.06124.02.0 • Pre-set for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.01.0 	 1 00100 00 1	4	67	25	70	1,100	12	1	57318	73	0			
	<ul style="list-style-type: none"> • As above, keyed alike (KA) • 1 key 	 1 00100 00 1	4	67	25	70	1,100	12	1	57318	72	0			
	<ul style="list-style-type: none"> • Case height 82 mm. • 2 keys • deadbolt only • Inside steel rose item 1.06124.02.0 • Pre-set for extension bolts • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.00.0 	 1 00100 00 1	4		25	70	0,990	12	1	57336	70	0			
	<ul style="list-style-type: none"> • Case height 78 mm. • 2 keys • deadbolt and latch • Adjustable latch bolt • Inside steel rose item 1.06124.02.0 • ON REQUEST: Zinc plated steel striker item 1.06232.01.0 	 1 00100 00 1	4	67	25	90	1,100	12	1	57353	90	0			

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Case height 78 mm. • 2 keys • deadbolt and latch • Adjustable latch • Inside steel rose item 1.06124.02.0 • Pre-set for extension bolts • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded rods for fixing bushings and extension bolts • ON REQUEST: Extension bolts item 1.06441.15.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.01.0 	 1 00100 00 1	4	67	25	90	1,225	12	1	57358	90	0
	<ul style="list-style-type: none"> • As above, keyed alike (KA) • 1 key 	 1 00100 00 1	4	67	25	90	1,225	12	1	57358	92	0
	<ul style="list-style-type: none"> • Case height 78 mm. • 2 keys • Deadbolt only • Inside steel rose item 1.06124.02.0 • Pre-set for extension bolts • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded rods for fixing bushings and extension bolts • ON REQUEST: Extension bolts item 1.06441.15.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.00.0 	 1 00100 00 1	4		25	90	1,096	12	1	57378	90	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.




• Black nylon rose

02400

0,001

100

1 06002 00 0

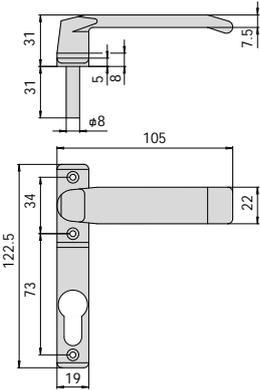


• Black nylon, low handle, charged with 20% glass fibres, specifically for the 46305 series locks
• 3 fastening screws

46305

0,100

12

1 06003 00 0

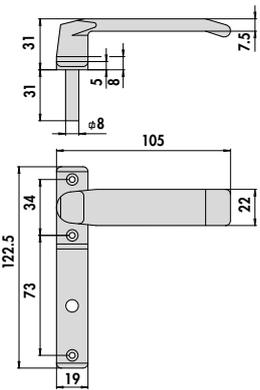


• Handle, in 20 % fiber glass reinforced black nylon, for use with locks series 46307
• 3 fixing screws

46307

0,100

12

1 06003 01 0

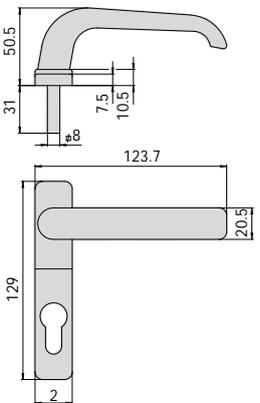

• Black nylon, low handle, charged with 20% glass fibres, specifically for the 46305 series locks
• 3 fastening screws

46305

0,112

12

1 06004 00 0







Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Handle and edge cover in 20% fiber glass reinforced black nylon, for use with locks series 46307 • 3 fixing screws 	46307	0,120	12	1	06004	01	0
	<ul style="list-style-type: none"> • Lock shutter accessory 		0,100	12	1	06005	00	0
	<ul style="list-style-type: none"> • Zinc plated steel rose 	42012, 42022, 42032, 42112, 42122, 42212, 42312, 42412, 42422, 42512, 56013, 56016, 56358, 56378	0,020	100	1	06075	00	0
	<ul style="list-style-type: none"> • Brass floor striker diameter 11 mm. • FOR: extension bolts with rods diameter 10 mm. 	1 06415 00 0, 1 06441 15 0, 1 07088 03 0, 1 07088 04 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57019, 57020, 57024, 57033, 57055, 57215, 57217, 57255, 57259, 57265, 57296, 57831, 57837, 57851, 57857	0,016	12	1	06086	00	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: Internal extension bolts with 8 mm. diameter rods multi-point locks series 46445 Extension bolt for Multitop item 1.06449.11.0 	1 06415 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0, 1 07088 04 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57020, 57033, 57215, 57217, 57255, 57265, 57296, 57831, 57851	0,020	12	1	06086	02	0
	<ul style="list-style-type: none"> • Zinc plated steel rose 	16325, 42012, 42022, 42032, 42112, 42122, 42212, 42412, 42422, 42512, 46800, 46803, 46815, 46820, 46823, 46825, 46860, 46865, 46870, 46873, 46875, 46878	0,014	100	1	06092	00	0
	<ul style="list-style-type: none"> • Zinc plated steel rose 	17353, 17358, 57013, 57016, 57030, 57035, 57223, 57226, 57313, 57318, 57333, 57336, 57353, 57358, 57378	0,043	12	1	06124	00	0
	<ul style="list-style-type: none"> • Zinc plated steel rose 	17353, 17358, 57013, 57016, 57030, 57035, 57223, 57226, 57313, 57318, 57333, 57336, 57353, 57358, 57378	0,020	12	1	06124	02	0
	<ul style="list-style-type: none"> • Nylon rose, to be use for interchangeability with lock series 57300 		0,004	12	1	06141	56	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Noise proof bushes for bolts diameter 8.5 mm. (2 pieces) diameter 10 mm. (1 piece) 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,004	25	1 06147 00 0			
	<ul style="list-style-type: none"> Zinc plated steel striker 	17353, 17358, 56013, 56016, 56358, 56378, 57013, 57016, 57030, 57035, 57223, 57226, 57333, 57336	0,055	25	1 06232 00 0			
	<ul style="list-style-type: none"> Zinc plated steel striker 	56358, 57313, 57318, 57353, 57358, 57378	0,056	25	1 06232 01 0			
	<ul style="list-style-type: none"> Zinc-plated steel faceplate 	46215, 46217, 46225, 46227, 46815, 46825, 46827	0,086	25	1 06232 20 0			
	<ul style="list-style-type: none"> Zinc plated steel striker 	46305, 46307, 46800, 46802, 46803, 46820, 46822, 46823, 46860, 46865	0,056	25	1 06232 21 0			
	<ul style="list-style-type: none"> Adjustable zinc-plated steel striker 2 fastening screws 	46305, 46307	0,038	25	1 06232 22 0			
	<ul style="list-style-type: none"> Coppia boccole filettate (M8) in metallo 	1 06441 20 0, 16325, 17358, 56358, 56378, 57358, 57378	0,050	12	1 06290 05 0			
	<ul style="list-style-type: none"> Set of threaded bushes (M8) in metal 	19225, 49225, 49228, 49250	0,050	12	1 06290 06 0			
	<ul style="list-style-type: none"> Pair of threaded steel bushings (M8), anti-unscrewing 	56016, 57016, 57035, 57226, 57318, 57336	0,025	12	1 06290 10 0			


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Zinc plated steel saw resistant tip, 10 mm. • Side push resistance KN 15 	1 06415 00 0, 1 06416 00 0, 1 06441 15 0, 1 07088 04 0	0,056	12	1	06291	00	0	
	<ul style="list-style-type: none"> • Zinc plated hardened steel tip, dia. 10 mm. • Side push resistance KN 25 	1 06415 00 0, 1 06416 00 0, 1 06441 15 0, 1 07088 03 0 1 07088 04 0	0,054	12	1	06291	05	0	
	<ul style="list-style-type: none"> • Zinc plated steel pin connector 	1 06415 00 0, 1 06416 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 06451 20 0, 1 07088 00 0, 1 07088 03 0 1 07088 04 0	0,016	12	1	06291	20	0	
	<ul style="list-style-type: none"> • Zinc plated hardened steel tip, dia. 14 mm 	1 07088 05 0	0,100	12	1	06291	07	0	
	<ul style="list-style-type: none"> • Zinc plated extension bolts • SUPPLIED AS STANDARD: Pair of bolts dia. 8 mm. Pair of tips dia. 10 mm. item 1.06291.05.0 (2 pieces) 	52526,56016, 56255,57015, 57016,57019, 57033,57035, 57215,57217, 57225,57226, 57255,57256, 57265,57296, 57318,57336	0,533	12	1	06415	00	0	
	<ul style="list-style-type: none"> • Zinc plated extension bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2) 	16325,17358, 56358,56378, 57358,57378	0,530	12	1	06441	15	0	
	<ul style="list-style-type: none"> • Internal rose • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome(fin. 18) Shotgun grey (fin. 46) Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) 	06460,06461, 06480,06485	0,116	12	1	06473	00	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Nylon contact set complete with spacers: 2 mm. (Pcs. 4) 	11000, 12000, 13000	0,035	6	1	06510	00	0	
	<ul style="list-style-type: none"> Zinc plated roller striker 	11721, 11731, 11921, 11931	0,183 0,182	6 6	1	07018	00	1 2	
	<ul style="list-style-type: none"> Zinc plated striker 	11921, 11931	0,172 0,183	6 6	1	07018	00	3 4	
	<ul style="list-style-type: none"> Striker set including: slide anchoring plate screws 	11610, 11630, 11921, 11931	0,100 0,100	1 1	1	07018	10	3 4	
	<ul style="list-style-type: none"> Zinc plated roller striker 	11761, 11771	0,198 0,198	6 6	1	07020	00	1 2	
	<ul style="list-style-type: none"> Striker 	1A721, 1A731	0,200	6	1	07021	00	0	
	<ul style="list-style-type: none"> 1 mm spacer for striker 	1A721, 1A731	0,025	6	1	07021	01	0	

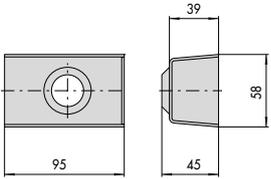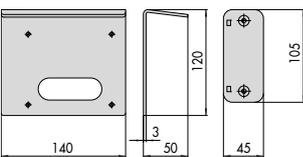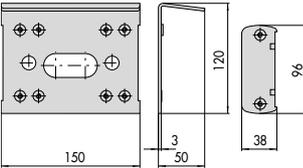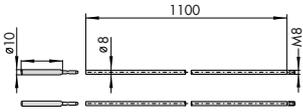Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Backplate for lock and striker to be welded 	1A721, 1A731	0,435	6	1	07021	05	0
	<ul style="list-style-type: none"> • Coil set • 12V ac CE 	1A610, 1A611, 1A630, 1A631, 1A721, 1A731	0,092	6	1	07025	00	0
	<ul style="list-style-type: none"> • Zinc plated steel protective box for outside cylinder 		0,200	10	1	07056	00	0
	<ul style="list-style-type: none"> • Protective back plate, striker spacer and zinc plated steel screws 	11721, 11726, 11731, 11736, 11761, 11771, 11921, 11931	0,645	12	1	07061	00	1
	<ul style="list-style-type: none"> • Protective back plate, striker spacer and zinc plated steel screws 	50411, 50421, 50471, 50481, 50511, 50521, 50571, 50581	0,635	12	1	07061	10	0
	<ul style="list-style-type: none"> • Zinc plated extension bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2) 	16325, 17358, 46305, 46307, 46800, 46802, 46820, 46822, 46825, 46827, 46865, 46875, 46860, 46870, 56016, 56378, 57016, 57035, 57226, 57318, 57336, 57358, 57378	0,567	12	1	07088	03	0

Type	Description	For series/item	Unit weight Pieces	ITEM					
				Type	Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> Zinc-plated internal bolt extension rods with screw SUPPLIED AS STANDARD: - Rod diameter 8 mm. 	16325,17358, 46305,46307, 46800,46802, 46820,46822, 46825,46827, 46865,46875, 46860,46870, 56016,56378, 57016,57035, 57226,57318, 57336,57358, 57378	0,263	50	1	07088	03	0	DZ
	<ul style="list-style-type: none"> Quick-lock internal extension bolts SUPPLIED AS STANDARD: pair of 8 mm diameter bolts Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2) 		0,575	12	1	07088	04	0	
	<ul style="list-style-type: none"> Quick-lock internal extension bolts SUPPLIED AS STANDARD: pair of 8 mm diameter bolts ON REQUEST: tip set (2 pcs) 	46303,46323, 56358	0,430	12	1	07088	04	0	00 CG
	<ul style="list-style-type: none"> Zinc plated extension bolts SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 14 mm. item 1.06291.07.0 (Pcs. 2) 	16325,17358, 46300,46302, 46305,46307, 46320,46322, 46325,46327, 46365,46375, 56016,56358, 57016,57035, 57226,57318, 57336,57358, 57378	0,575	12	1	07088	05	0	
	<ul style="list-style-type: none"> Coil set 12 V ac Black nylon support 	11610,11611, 11630,11631, 11670,11671, 11721,11731, 11761,11771, 11823,11921, 11931	0,087	6	1	07118	00	1	
	<ul style="list-style-type: none"> Coil set 24 V ac Black nylon support 	11610,11611, 11630,11631, 11670,11671, 11721,11731, 11761,11771, 11823,11921, 11931	0,075 0,082	6	1	07118	01	1	


Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Adjustable coil set • 12 V ac • Blue nylon support 	11610,11611,	0,075	6	1	07120	00	1
		11630,11631, 11670,11671, 11721,11731, 11761,11771, 11823,11921, 11931	0,074	6	1	07120	00	2
	<ul style="list-style-type: none"> • Adjustable coil set • 24 V ac • Blue nylon support 	11610,11611,	0,075	6	1	07120	01	1
		11630,11631, 11670,11671, 11721,11731, 11761,11771, 11823,11921, 11931	0,075	6	1	07120	01	2
	<ul style="list-style-type: none"> • Set of coils • 12 V ac CE 	17352,17353, 17357, 17358	0,035	6	1	07128	00	0

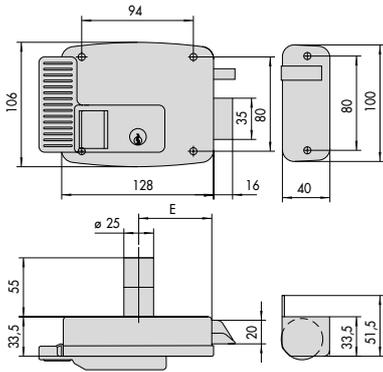

11721, 11731, 11921, 11931

E = 50 - 60 - 70 - 80


1

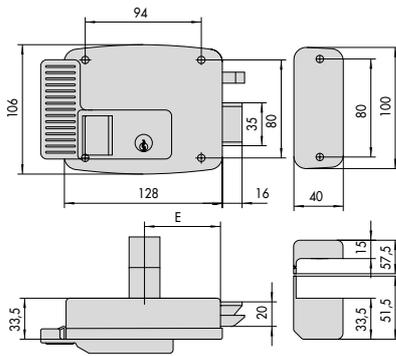

11921, 11926, 11931, 11936


E = 50 - 60 - 70 - 80

4

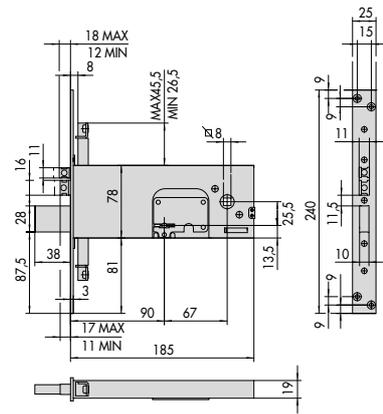

1.17358.90


7

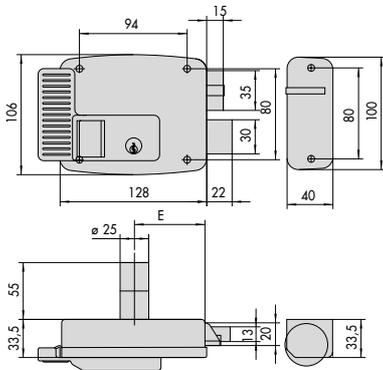


11761, 11771

E = 50 - 60 - 70 - 80

2

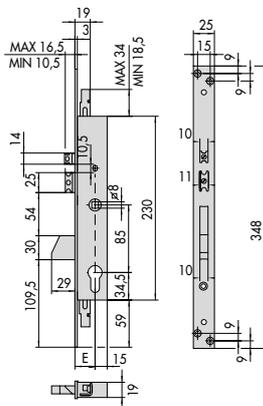


16325
E = 25 - 30 - 35

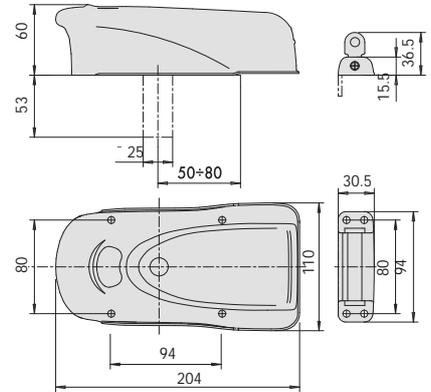


1A610, 1A611, 1A630, 1A631, 1A721, 1A731

5

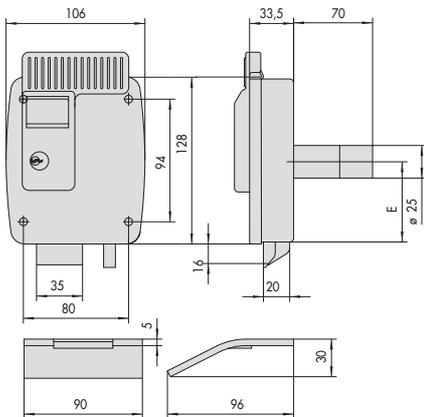


1.11823.80

3

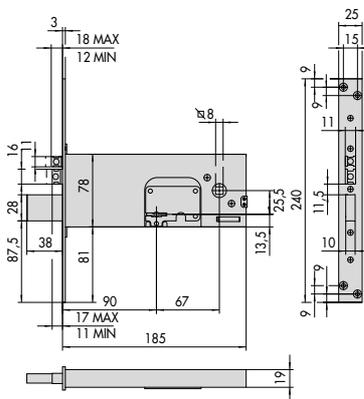


1.17353.90

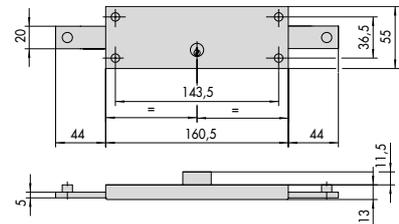


1.41010.80

6


8

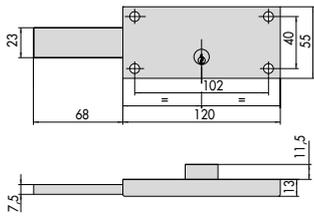

1.41110.60, 1.41111.60

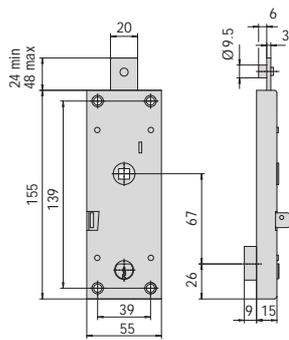


1.41600.00.0

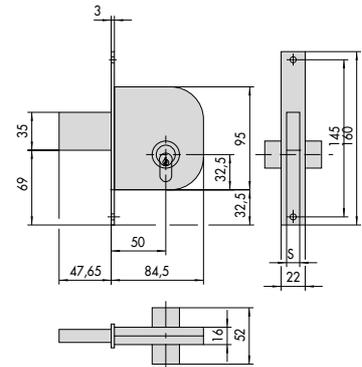

1.42010.50, 1.42012.50
1.42020.50, 1.42022.50


S	5
	12
	9

10

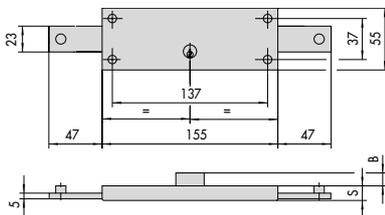


	S	B
1.41210.78	20	6,5
1.41320.78	17	9,5
1.41410.78	15	6
1.41510.78	15	5,5

13

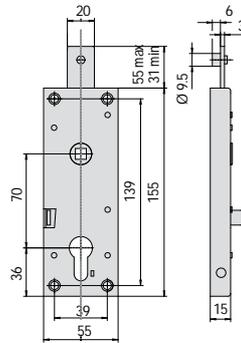


1.41620.00.0

16

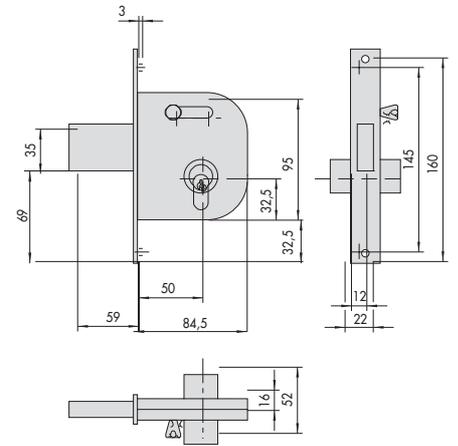


1.42030.50, 1.42032.50

11

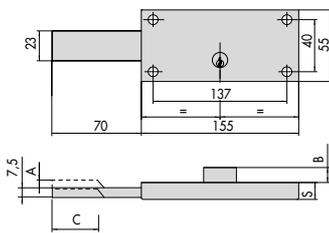


	S	B	A	C
1.41220.78	20	6,5		
1.41221.78	20	6,5		
1.41230.78	20	6,5		
1.41231.78	20	6,5		
1.41310.78	17	9,5		
1.41311.78	17	9,5		
1.41420.78	15	6		
1.41421.78	15	8,5		
1.41525.78	15	5,5	5	31
1.41526.78	15	5,5	5	31

14

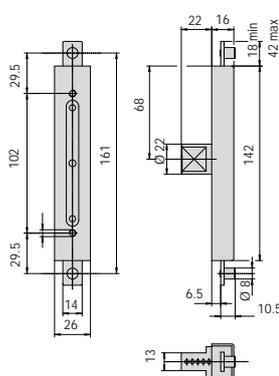

1.41650.00.0

17

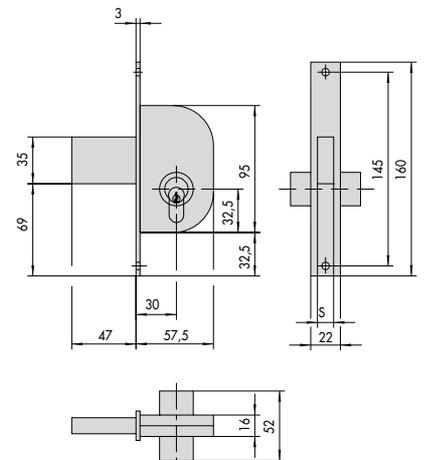


1.42110.30, 1.42112.30
1.42120.30, 1.42122.30

S	5
	12
	9

12


15

18

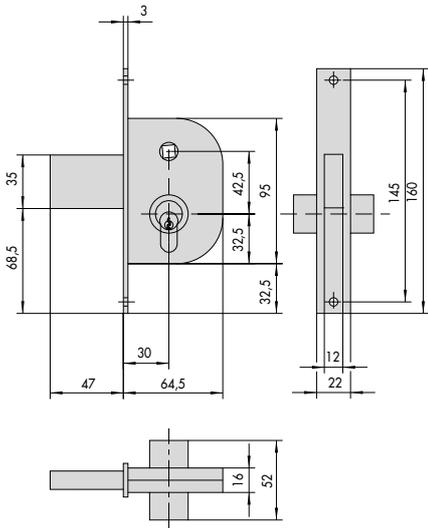


1.42210.30, 1.42212.30

19

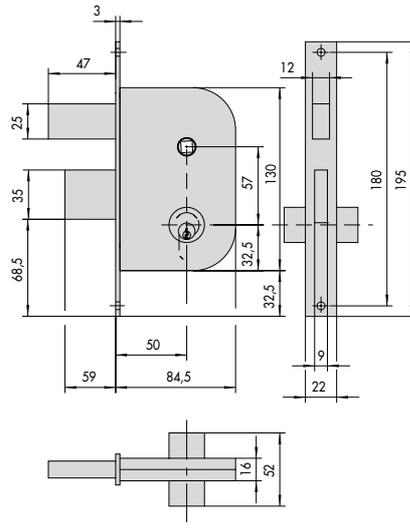


1.42510.50, 1.42512.50

22

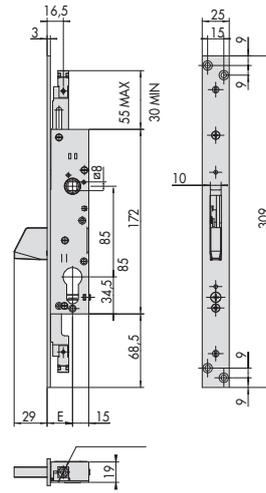


46800, 46802, 46820, 46822 (M8)
46803, 46823 (aggancio rapido)
E = 25 - 30 - 35

25

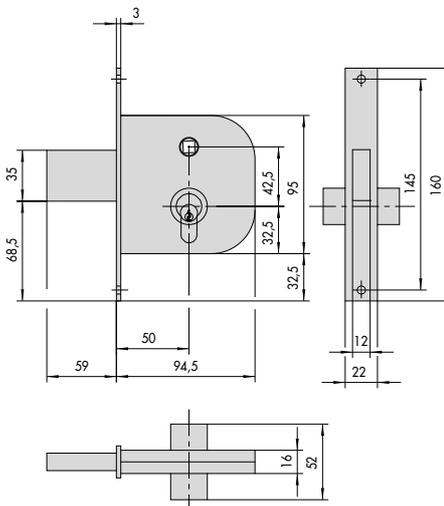


1.42310.50, 1.42312.50

20

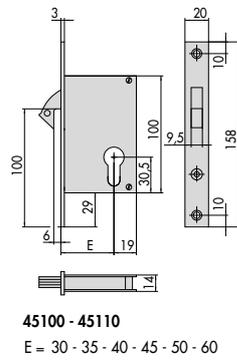


45100 - 45110
E = 30 - 35 - 40 - 45 - 50 - 60

23

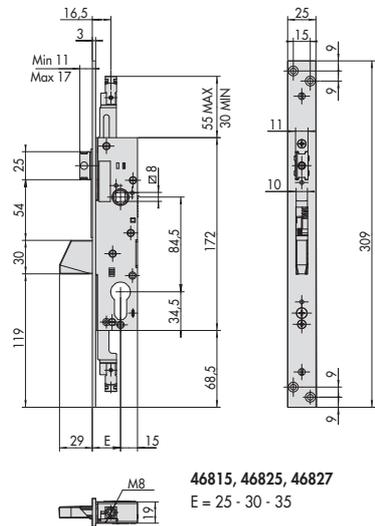


46815, 46825, 46827
E = 25 - 30 - 35

26

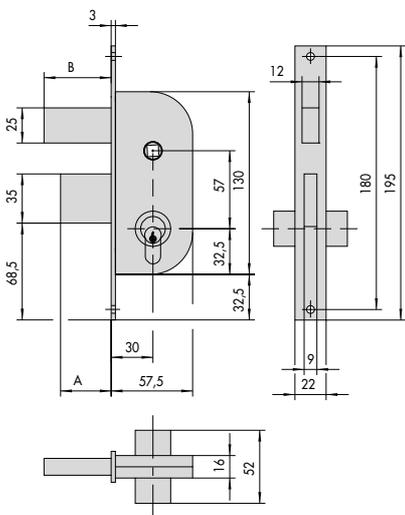


1.42410.30, 1.42412.30	A	B
1.42420.30, 1.42422.30	47	47
	28	24

21

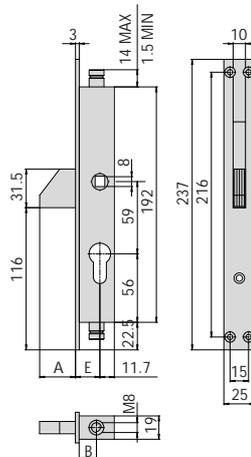


	E	A	B
1.46305.19.0	19,7	29	14
1.46305.25.0	25,7	23	20
1.46305.30.0	31,7	22	26,5
1.46307.19.0	19,7	29	14
1.46307.25.0	25,7	23	20

24

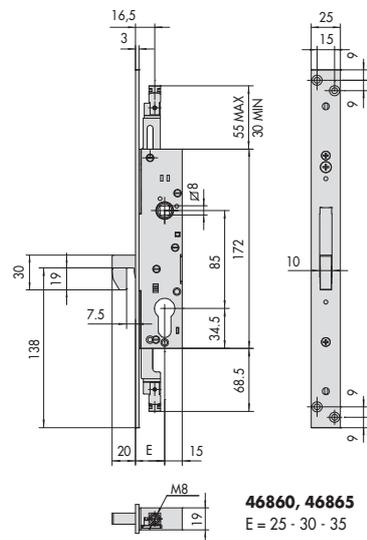


46860, 46865
E = 25 - 30 - 35


27

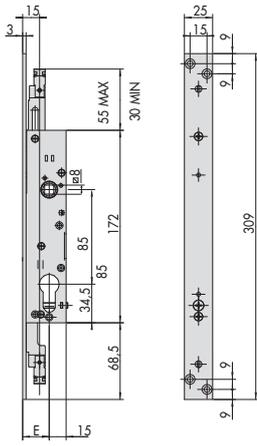

46870, 46875
E = 25 - 30 - 35

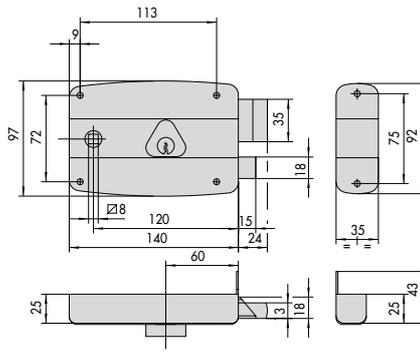


1.50171.60, 1.50471.60, 1.50481.60

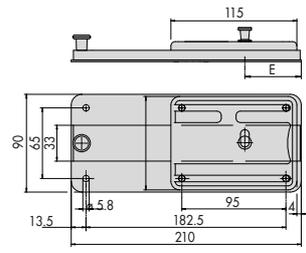


55254, 55274

28

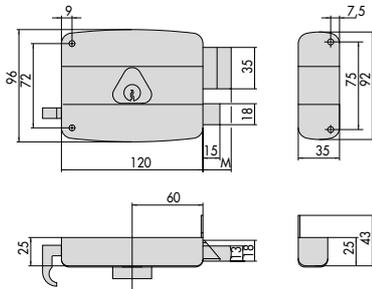


1.50421.60

31

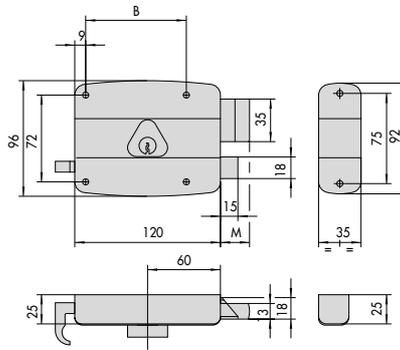


1.50521.60

34

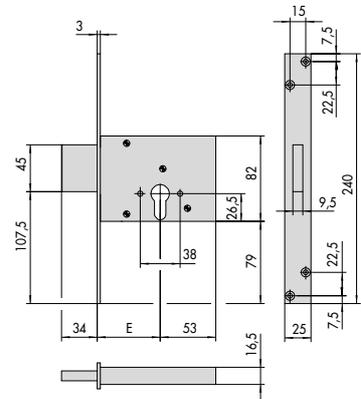


56013
E = 52 - 60 - 70

29

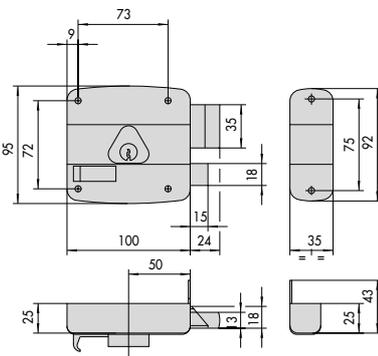


1.50461.50

32

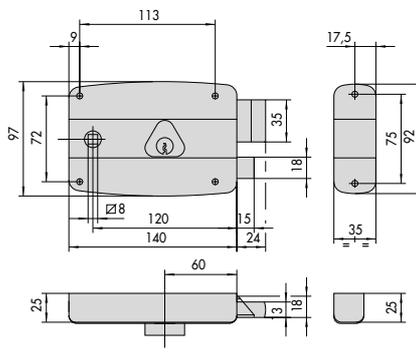

1.50571.60

35



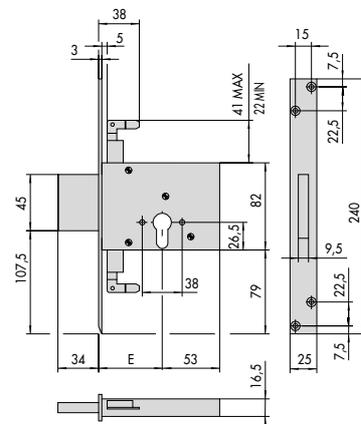


56016
E = 60 - 70

30

33




36

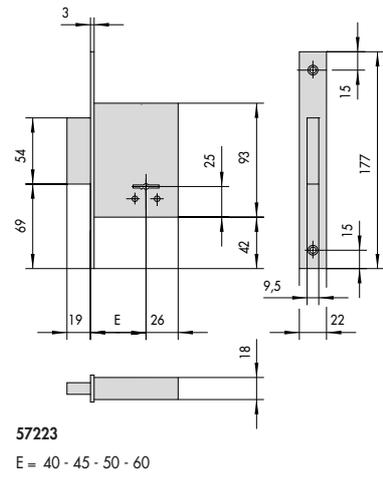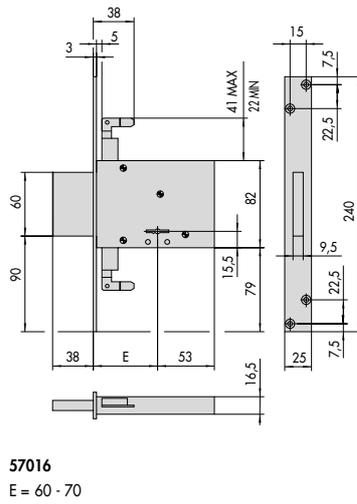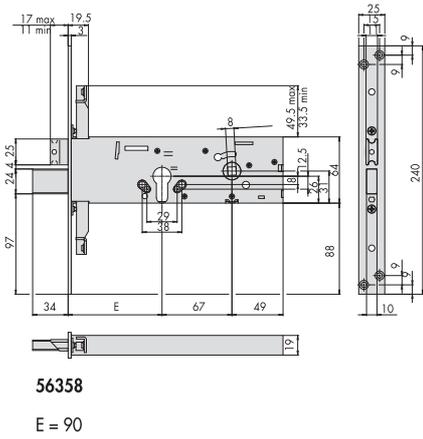

37

40




43

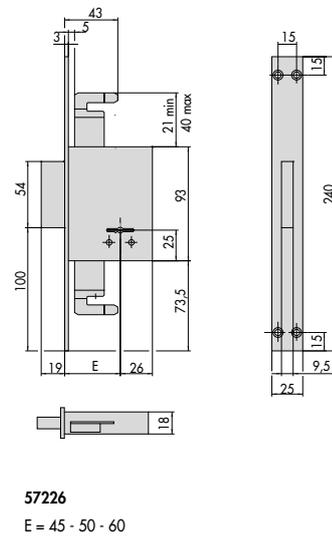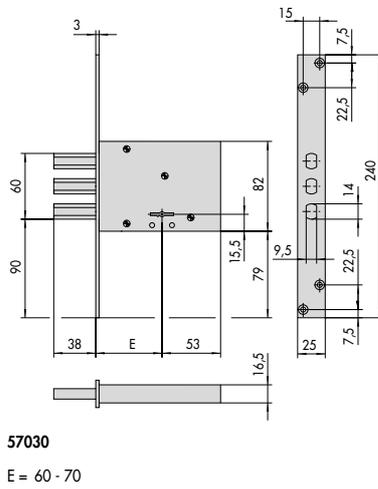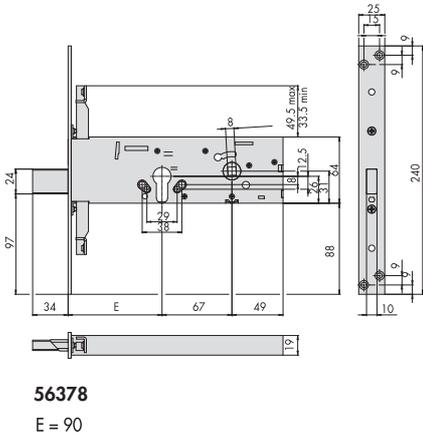

38

41


44

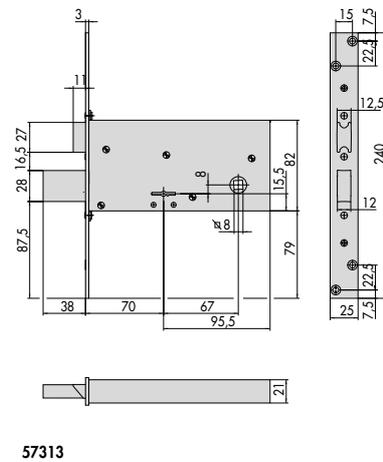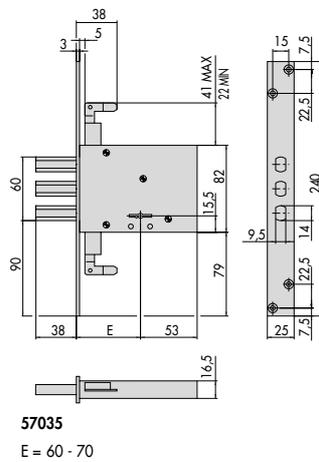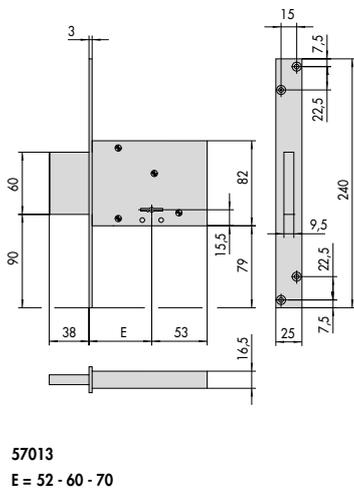


39

42

45

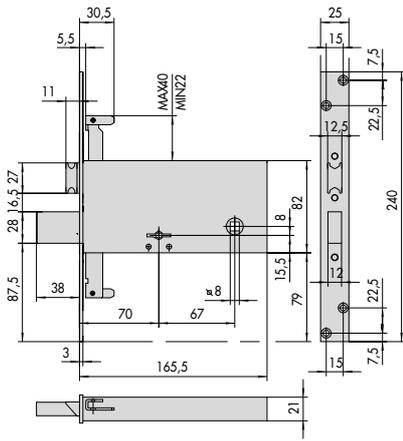


57318

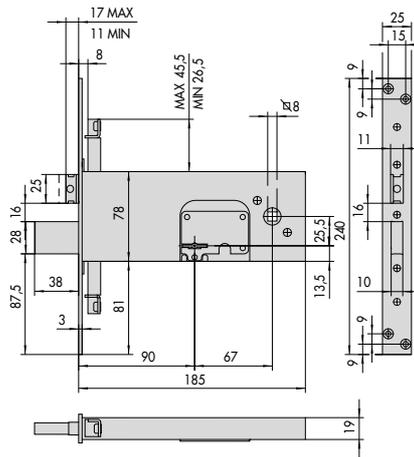


57358, 57378

46

49

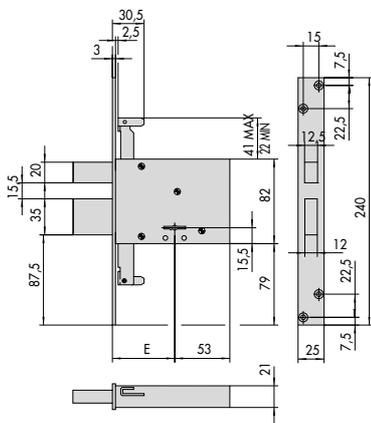


1.57336.70

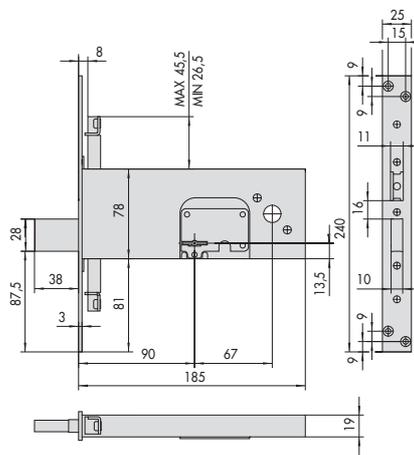

57378

47

50

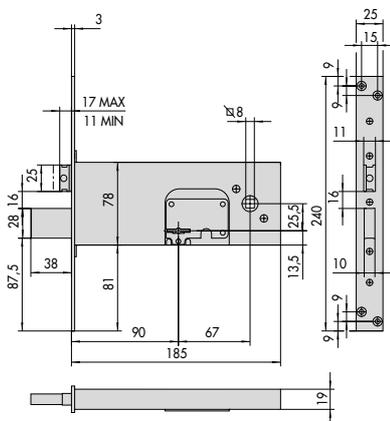

1.57353.90

48



Locks for aluminium doors



Cylinder gear mortice locks.....	193	Kits for additional locking points	229
Cylinder multipoint gear mortice locks Multitop PRO ...	195	Euro profile cylinder mortice locks	234
Multipoint gear mortice lock, with cylinder MultitopMAX.	203	Oval shaped cylinder mortice locks	236
Cylinder multipoint gear mortice locks 3 SCROCCHI.....	208	Cylinder mortice locks, mid-rail type	
Cylinder multipoint mortice locks with swing bolt.....	211	H = 44-64-77 mm	240
Cylinder mortice locks for shutters	216	Cylinder mortice locks, mid-rail type H = 82 mm.....	243
Cylinder mortice locks with swing bolt.....	217	Electric strikers for mortice locks.....	245
Cylinder mortice locks, mid-rail type H=64 mm	223	Adjustable metal striker	247
Double-bit key mortice locks, mid-rail type		Accessories for aluminium locks.....	254
E = 70 mm	224	Nylon striker	267
Double-bit key mortice locks, mid-rail type		Dimensional drawings	282
E = 90-100 mm.....	226		





Multitop MAX

**4 TIMES
MORE SECURE**

Multipoint lock with 4 hook deadbolts for unbeatable security


HIGH SECURITY

Looking system with 4 hooks which are independent of the central lock mechanism and each other. If the central deadbolt or one of the hooks is forced, the other hooks remain securely engaged. CISA patented system.

CORRECTS HEAT

DISTORTION OF THE DOOR

The rack mechanism, which makes it easier to turn the key, and the hooks with their more rounded design, effectively correct distortion of the door due to sudden changes in temperature.

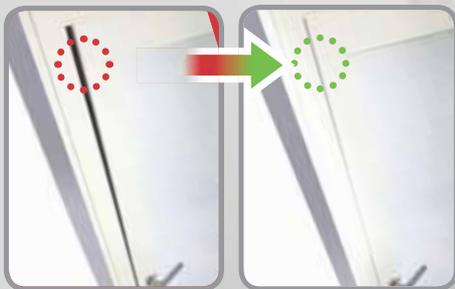

APPLICATIONS

- Entrance doors
- Secondary entrance doors
- Railings and shutters on French windows
- Sliding doors





Technical features:

- Gear-operated system
- Case thickness 15.5 mm
- Off-phase prevention system
- Zinc-plated die-cast alloy case
- Zinc-plated steel case cover
- Latch interchangeable with nickel-plated roller and deadbolt
- Reversible latch or latch/piston
- Pre-set for additional locking points

Supplied as standard:

- Pair of nylon roses item 1.06012.01.0
- Pair of under-faceplate nylon spacers item 1.06141.65.0
- Threaded pins for fixing of extension bolts
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Special striker plates (see Vademecum)
- "Modular" roller assembly item 1.06000.00.0
- Cylinder protective rose item 1.06460.05.0
- Mechanical control button item 1.06110.15.0
- Threaded bushing for extension bolt item 1.06290.06.0

Certification:

- This lock series is certified according to the European standard EN 12209:16 (mechanical) e EN 14846:08 (electric) - Security class 6 (1000 Kg side thrust and 600 Kg front thrust resistance)
- Suitable for doors certified to EN 1627:2011 up to WK/RC 4 resistance class

Hand:
0 = Non-handed

Cylinder to be ordered separately
OE300
(ASIX) series



Multitop PRO

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.



- Stainless steel faceplate 22x3 mm
- Deadbolt and latchbolt
- Adjustable latch and deadbolt from 10.5 to 16.5 mm. "deadlocking"
- CE 12V ac voltage
- Absorbed current 3.1 A

85	22	25	0,980	1	1	19205	25	0		
85	22	30	1,040	1	1	19205	30	0		
85	22	35	1,100	1	1	19205	35	0		
85	22	40	1,160	1	1	19205	40	0		

Certification EN 14846:08

| 3 | X | 9 | 0 | 0 | M | - | 0 | 2 |



- Stainless steel faceplate 22x3 mm
- Deadbolt and latchbolt
- Adjustable latch and deadbolt from 10.5 to 16.5 mm. "deadlocking"
- CE 12V ac voltage
- Absorbed current 3.1 A


2	85	22	25	1,010	1	1	19225	25	0	
2	85	22	30	1,070	1	1	19225	30	0	
2	85	22	35	1,000	1	1	19225	35	0	
2	85	22	40	1,190	1	1	19225	40	0	

Certification EN 14846:08

| 3 | X | 9 | 0 | 0 | M | 6 | 0 | 2 |

- ON REQUEST:
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
Internal extension bolts item 1.06441.20.0
Pair of external bolt connectors item 1.06442.00.0
Extension bolts operated by internal rods item 1.06443.31.0
Extension bolts operated by external rods item 1.06443.36.0
Internal extension rods hook side deadbolts item 1.06443.41.0
External extension rods hook side deadbolts item 1.06443.46.0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- Stainless steel faceplate 22x3 mm
- Deadbolt and latch
- 11 to 17 mm adjustable latch

Certification EN 12209:16
| 3 | X | 9 | 0 | 0 | G | 6 | H |

- ON REQUEST:
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
Internal extension bolts item 1.06441.20.0
Pair of external bolt connectors item 1.06442.00.0
Extension bolts operated by internal rods item 1.06443.31.0
Extension bolts operated by external rods item 1.06443.36.0
Internal extension rods hook side deadbolts item 1.06443.41.0
External extension rods hook side deadbolts item 1.06443.46.0

2	85	22	25	0,720	12	1	49225	25	0
2	85	22	30	0,780	12	1	49225	30	0
2	85	22	35	0,840	12	1	49225	35	0
2	85	22	40	0,900	12	1	49225	40	0
2	92	22	25	0,720	12	1	49228	25	0
2	92	22	30	0,780	12	1	49228	30	0
2	92	22	35	0,840	12	1	49228	35	0
2	92	22	40	0,900	12	1	49228	40	0



- Modular roller for locks 49225 and 49228 series adjustable from 2.5 to 15.5 mm
- Supplied as standard: nylon inserts item 1.06141.70/71/86.0

					0,060	12	1	06000	00	0
--	--	--	--	--	-------	----	---	-------	----	---



- Stainless steel faceplate 22x3 mm
- Deadbolt and roller
- Adjustable roller from 2.5 to 15.5 mm.

Certification EN 12209:16
| 3 | C | 9 | 0 | 0 | G | 6 | H |

- Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
Internal extension bolts item 1.06441.20.0
Pair of external bolt connectors item 1.06442.00.0
extension bolts operated by internal rods item 1.06443.31.0
extension bolts operated by external rods item 1.06443.36.0
Internal extension rods hook side deadbolts item 1.06443.41.0
External extension rods hook side deadbolts item 1.06443.46.0
- Inserts for strike plates for locks 49250 series:
item 1.06141.70.0 for item 1.06463.16/17/34/35.0
item 1.06141.71.0 for item 1.06463.05/31/32/33.0
item 1.06141.86.0 for item 1.06461.30/35.0

- ADJUSTABLE METAL STRIKER
- Central cylinder item: divtor (pc.2) item

1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

2	22	25	0,720	12	1	49250	25	0
2	22	30	0,780	12	1	49250	30	0
2	22	35	0,840	12	1	49250	35	0
2	22	40	0,900	12	1	49250	40	0



Multitop PRO

Technical features:

- Gear-operated system
- Case 15.5 mm thick
- **Off-phase prevention system**
- Zinc-plated die-cast alloy case
- Zinc-plated steel case cover
- Latch interchangeable with nickel-plated roller and deadbolt
- 4th and 5th locking point pre-setting

Supplied as standard:

- Set of nylon roses 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Special striker plates (see Vademecum)
- "MODULAR" roller item 1.06000.00.0
- Cylinder protective rose item 1.06460.05.0

- Mechanical control button item 1.06110.15.0
- Extension bolts for 4th and 5th locking points item 1.06449.10 - 1.06449.11
- Threaded pin for extension bolts with external rods item 1.06449.05.0

Certification:

- This lock series is certified according to the European standard pr EN 15685:14 - (mechanically operated locks) e EN 14846:08 (electrically operated locks) - grade 6 Security (1,000 Kg side load and 600 Kg front thrust)
- Grade 7 Security with a drill-resistant plate series 06436
- Suitable for doors certified to EN 1627:2011 up to resistance class WK/RC 4

Hand:
0 = Non-handed

Cylinder to be ordered separately
OE300 (ASIX) series



Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



• 85 MM CENTRE DISTANCE

- Black painted steel U-shaped adjustable faceplate 24x7 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- Faceplate cover nylon plugs
- CE 12 V ac voltage
- Absorbed current 3.1 A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.47.0

3	2	85	24	25	3,520	1	1	19426 25 0
3	2	85	24	30	3,580	1	1	19426 30 0
3	2	85	24	35	3,640	1	1	19426 35 0
3	2	85	24	40	3,700	1	1	19426 40 0

- Black painted steel U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- CE 12 V ac voltage
- Absorbed current 3.1 A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.46.0

3	2	85	24	25	3,520	1	1	19436 25 0
3	2	85	24	30	3,580	1	1	19436 30 0
3	2	85	24	35	3,640	1	1	19436 35 0
3	2	85	24	40	3,700	1	1	19436 40 0

- Black painted steel U-shaped adjustable faceplate 24x7 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- CE 12 V ac voltage
- Absorbed current 3.1 A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.67.0

3	2	85	24	25	3,520	1	1	19626 25 0
3	2	85	24	30	3,580	1	1	19626 30 0
3	2	85	24	35	3,640	1	1	19626 35 0
3	2	85	24	40	3,700	1	1	19626 40 0

- Black painted steel U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- CE 12 V ac voltage
- Absorbed current 3.1 A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.66.0

3	2	85	24	25	3,520	1	1	19636 25 0
3	2	85	24	30	3,580	1	1	19636 30 0
3	2	85	24	35	3,640	1	1	19636 35 0
3	2	85	24	40	3,700	1	1	19636 40 0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



• **92 MM CENTRE DISTANCE**

- Stainless steel U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- CE 12 V ac voltage
- Absorbed current 3.1 A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.66.0

3	2	92	24	25	3,520	3	1	19638	25	0
3	2	92	24	30	3,580	3	1	19638	30	0
3	2	92	24	35	3,640	3	1	19638	35	0
3	2	92	24	40	3,700	3	1	19638	40	0

• **ADJUSTABLE METAL STRIKER**

- | | |
|---------------------|---------------------|
| • for central lock: | for divertor (pc.2) |
| 1.06463.05.0 | 1.06465.05.0 |
| 1.06463.16.0 | 1.06465.06.0 |
| 1.06463.17.0 | 1.06465.07.0 |
| 1.06463.31.0 | 1.06465.21.0 |
| 1.06463.32.0 | 1.06465.22.0 |
| 1.06463.33.0 | 1.06465.23.0 |
| 1.06463.34.0 | 1.06465.24.0 |
| 1.06463.35.0 | 1.06465.25.0 |
| 1.06461.07.0 | 1.06461.12.0 |
| 1.06461.17.0 | 1.06461.22.0 |
| 1.06461.30.0 | 1.06461.34.0 |
| 1.06461.35.0 | 1.06461.39.0 |

EN 14846:08 Certification

| 3 | X | 9 | 0 | 0 | M | 6/7 | 0 | 2 |

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



85 MM CENTRE DISTANCE

- Black painted U-shaped adjustable faceplate 24x7 mm, 2300 mm.
- top adjustment 350 mm. - bottom adjustment 150 mm.
- Adjustable latch from 11 to 17 mm.
- 3 side deadbolts
- Faceplate nylon covers
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.47.0

3	2	85	24	25	3,310	1	1	49426	25	0
3	2	85	24	30	3,370	1	1	49426	30	0
3	2	85	24	35	3,430	1	1	49426	35	0
3	2	85	24	40	3,490	1	1	49426	40	0

- Black painted U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm. - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.46.0

3	2	85	24	25	3,310	1	1	49436	25	0
3	2	85	24	30	3,370	1	1	49436	30	0
3	2	85	24	35	3,430	1	1	49436	35	0
3	2	85	24	40	3,490	1	1	49436	40	0

- Stainless steel U-shaped adjustable faceplate 24x7 mm, 2300 mm.
- top adjustment 350 mm. - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.67.0

3	2	85	24	25	3,310	1	1	49626	25	0
3	2	85	24	30	3,370	1	1	49626	30	0
3	2	85	24	35	3,430	1	1	49626	35	0
3	2	85	24	40	3,490	1	1	49626	40	0

- Stainless steel U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm. - bottom adjustment 150 mm. .
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.66.0

3	2	85	24	25	3,520	1	1	49636	25	0
3	2	85	24	30	3,580	1	1	49636	30	0
3	2	85	24	35	3,640	1	1	49636	35	0
3	2	85	24	40	3,700	1	1	49636	40	0

92 MM CENTRE DISTANCE

- Stainless steel U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm. - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST: Top extension kit for doors up to 3000 mm high item 1.06444.66.0

3	2	92	24	25	3,310	1	1	49638	25	0
3	2	92	24	30	3,370	1	1	49638	30	0
3	2	92	24	35	3,430	1	1	49638	35	0
3	2	92	24	40	3,490	1	1	49638	40	0

- Modular roller for locks 49000 series adjustable from 2.5 to 15.5 mm
- Supplied as standard: nylon inserts item 1.06141.70/71/86.0

0,060 12 1 06000 00 0



ADJUSTABLE METAL STRIKER

- for central lock: for divertor (pc.2)
- 1.06463.05.0 1.06465.05.0
- 1.06463.16.0 1.06465.06.0
- 1.06463.17.0 1.06465.07.0
- 1.06463.31.0 1.06465.21.0
- 1.06463.32.0 1.06465.22.0
- 1.06463.33.0 1.06465.23.0
- 1.06463.34.0 1.06465.24.0
- 1.06463.35.0 1.06465.25.0
- 1.06461.07.0 1.06461.12.0
- 1.06461.17.0 1.06461.22.0
- 1.06461.30.0 1.06461.34.0
- 1.06461.35.0 1.06461.39.0

prEN 15685:14 Certification

| 3 | X | 9 | A | 0 | G | 6/7 | 0 | 1 | 3 |

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



• 85 MM CENTRE DISTANCE

- Black painted steel U-shaped adjustable faceplate 24x3 mm, 2300 mm.
top adjustment 350 mm.
bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- Faceplate cover nylon plugs
- CE 12V ac voltage
- Absorbed current 3.1A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.56.0

3	2	85	24	25	3,520	1	1	19526 25 0
3	2	85	24	30	3,580	1	1	19526 30 0
3	2	85	24	35	3,640	1	1	19526 35 0
3	2	85	24	40	3,700	1	1	19526 40 0

- Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm.
top adjustment 350 mm.
bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- CE 12V ac voltage
- Absorbed current 3.1A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.76.0

3	2	85	24	25	3,520	1	1	19726 25 0
3	2	85	24	30	3,580	1	1	19726 30 0
3	2	85	24	35	3,640	1	1	19726 35 0
3	2	85	24	40	3,700	1	1	19726 40 0

92 MM CENTRE DISTANCE

- Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm.
top adjustment 350 mm.
bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- CE 12V ac voltage
- Absorbed current 3.1A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.76.0

3	2	92	24	25	3,520	3	1	19728 25 0
3	2	92	24	30	3,580	3	1	19728 30 0
3	2	92	24	35	3,640	3	1	19728 35 0
3	2	92	24	40	3,700	3	1	19728 40 0

• ADJUSTABLE METAL STRIKER

- for central lock: for divertor (pc.2)
- 1.06463.05.0 1.06465.05.0
- 1.06463.16.0 1.06465.06.0
- 1.06463.17.0 1.06465.07.0
- 1.06463.31.0 1.06465.21.0
- 1.06463.32.0 1.06465.22.0
- 1.06463.33.0 1.06465.23.0
- 1.06463.34.0 1.06465.24.0
- 1.06463.35.0 1.06465.25.0
- 1.06461.07.0 1.06461.12.0
- 1.06461.17.0 1.06461.22.0
- 1.06461.30.0 1.06461.34.0
- 1.06461.35.0 1.06461.39.0

EN 14846:08 Certification

| 3 | X | 9 | 0 | 0 | M | 6/7 | 0 | 2 |

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



• 85 MM CENTRE DISTANCE

- Black painted steel U-shaped adjustable faceplate 24x3 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- Faceplate cover nylon plugs
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.56.0

3	2	85	24	25	3,310	1	1	49526 25 0
3	2	85	24	30	3,370	1	1	49526 30 0
3	2	85	24	35	3,430	1	1	49526 35 0
3	2	85	24	40	3,490	1	1	49526 40 0

- Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.76.0

3	2	85	24	25	3,310	1	1	49726 25 0
3	2	85	24	30	3,370	1	1	49726 30 0
3	2	85	24	35	3,430	1	1	49726 35 0
3	2	85	24	40	3,490	1	1	49726 40 0

92 MM CENTRE DISTANCE

- Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 11 to 17 mm adjustable latch.
- 3 lateral deadbolts
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.76.0

3	2	92	24	25	3,310	1	1	49728 25 0
3	2	92	24	30	3,370	1	1	49728 30 0
3	2	92	24	35	3,430	1	1	49728 35 0
3	2	92	24	40	3,490	1	1	49728 40 0



- Modular roller for locks 49000 series adjustable from 2.5 to 15.5 mm
- Supplied as standard: nylon inserts item 1.06141.70/71/86.0

0,060	12	1	06000 00 0
-------	----	---	------------


• ADJUSTABLE METAL STRIKER

- for central lock: for divertor (pc.2)
- 1.06463.05.0 1.06465.05.0
- 1.06463.16.0 1.06465.06.0
- 1.06463.17.0 1.06465.07.0
- 1.06463.31.0 1.06465.21.0
- 1.06463.32.0 1.06465.22.0
- 1.06463.33.0 1.06465.23.0
- 1.06463.34.0 1.06465.24.0
- 1.06463.35.0 1.06465.25.0
- 1.06461.07.0 1.06461.12.0
- 1.06461.17.0 1.06461.22.0
- 1.06461.30.0 1.06461.34.0
- 1.06461.35.0 1.06461.39.0

prEN 15685:14 Certification


| 3 | X | 9 | A | 0 | G | 6/7 | 0 | 1 | 3 |

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers.

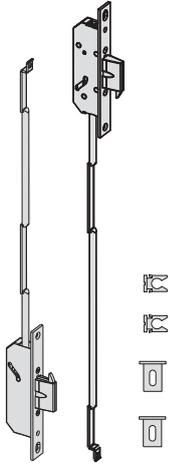

- Pair of lateral extension bolts operated by internal rods
- Horizontally sliding deadbolts with hardened steel inserts and hook bolt
- STAINLESS STEEL faceplate 22x3 mm
- Pre-set for 4th and 5th locking points
- Closed case
- SUPPLIED AS STANDARD:
 - Set of rods dia. 8 mm.
 - Set of faceplate spacers item 1.06141.65.0
 - Rod guide item 1.06224.00.0 (2 pcs)
- ON REQUEST:
 - Special strike plates (see Vademecum)
 - Internal straight extension bolts item 1.06441.10.0 for 4th and 5th locking points
 - Threaded pin item 1.06449.05.0 for fixing 4th and 5th locking point rods

1,000 1 1 06443 31 0




- Pair of lateral extension bolts operated by external rods
- Horizontally sliding deadbolts with hardened steel inserts and hook bolt
- STAINLESS STEEL faceplate 22x3 mm
- Pre-set for 4th and 5th locking points
- Closed case
- SUPPLIED AS STANDARD:
 - Set of external bolt connectors
 - Set of threaded pins
- ON REQUEST:
 - Special strike plates (see Vademecum)
 - Threaded pin item 1.06449.05.0 for fixing 4th and 5th locking point external extension bolts
 - External bolt connectors item 1.06442.00.0

0,766 1 1 06443 36 0


Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • BLACK PAINTED STEEL U-shaped adjustable faceplate 24x5 mm, 700 mm 	19436, 49436	2	24	0,900	1	1 06444 46 0					
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • BLACK PAINTED STEEL U-shaped adjustable faceplate 24x5 mm, 700 mm 	19426, 49426	2	24	0,900	1	1 06444 47 0					
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • STAINLESS STEEL U-shaped adjustable faceplate 24x5 mm, 700 mm 	19636, 19638, 49636, 49638	2	24	0,900	1	1 06444 66 0					
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • STAINLESS STEEL U-shaped adjustable faceplate 24x7 mm, 700 mm 	19626, 49626	2	24	0,900	1	1 06444 67 0					
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • BLACK PAINTED STEEL flat adjustable faceplate 24x3 mm, 700 mm 	19526, 49526	2	24	0,900	1	1 06444 56 0					
	<ul style="list-style-type: none"> • Top extension kit for doors up to 3000 mm high • STAINLESS STEEL flat adjustable faceplate 24x3 mm, 700 mm 	19726, 19728, 49726, 49728	2	24	0,900	1	1 06444 76 0					
	<ul style="list-style-type: none"> • Threaded pin for fixing additional extension bolts for 4th and 5th locking points 					0,002	50	1 06449 05 0				

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.

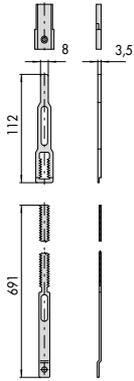

• Additional TOP extension bolt for installation with locks with 24x7 mm U-shaped faceplate for 19000 and 49000 series

0,187 6 1 06449 10 0

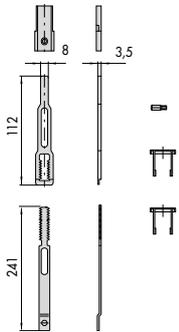

• Additional FLOOR extension bolt for installation with locks with 24x7 mm U-shaped faceplate for 19000 and 49000 series

0,135 6 1 06449 11 0



Technical features:

- Operated by gear mechanism
- Case thickness 15.5 mm
- Closed case
- Latchbolt interchangeable with roller
- Case in pressure die-cast metal
- Steel cover
- Top and bottom adjustable faceplate
- 11 to 17 mm adjustable latchbolt
- 2.5 to 15.5 mm adjustable roller
- 10.5 to 16.5 mm adjustable latchbolt and deadbolt (electric versions)
- Latchbolt with anti-burglary device (electric versions)
- 10 mm thick hooks with 25 mm protrusion
- Protective plate for grade 7 item 1.06436.10/11.0
- Microswitch can be installed on the divertor case
- 8 mm square spindle

- DIN holes to fix handle plate
- CE 12V AC (electric versions)

Supplied as standard:

- Pair of nylon protective roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Modular roller assembly item 1.06000.00.0
- Adjustable metal strikes (see special Vademecum)
- Cylinder protective rose item 1.06460.05.0
- Button item 1.06110.15.0 (electric locks)
- Pair of electric contacts item 1.06511.00.0

Certifications:

- European Standard pr EN 15685:14 (mechanical) and EN 14846:08 (electric)
- Grade 6 Security
- Grade 7 Security using protective plates for the lock and divertors series 06436
- Suitable for EN 1627:2011 certified doors up to resistance class WK/RC4

MultitopMAX

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
									Type	Dim. Hand	Fin.	Pers. Spec.



- CENTRE DISTANCE 85 MM
- 'U'-shaped adjustable faceplate 24 x 5 mm.
In stainless steel, height 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt.
- 4 hooks with hardened STEEL INSERTS.
- CE 12V AC voltage
- Certification EN 14846:08

3	2	85	24	25	3,520	1	1	19656 25 0
3	2	85	24	30	3,580	1	1	19656 30 0
3	2	85	24	35	3,640	1	1	19656 35 0
3	2	85	24	40	3,700	1	1	19656 40 0

| 3 | X | 9 | 0 | 0 | M | 6 / 7 | 0 | 2 |

- ADJUSTABLE METAL STRIKER
 - Central cylinder item: divertor (pc.2) item
- | | |
|--------------|--------------|
| 1.06463.05.0 | 1.06465.05.0 |
| 1.06463.16.0 | 1.06465.06.0 |
| 1.06463.17.0 | 1.06465.07.0 |
| 1.06463.31.0 | 1.06465.21.0 |
| 1.06463.32.0 | 1.06465.22.0 |
| 1.06463.33.0 | 1.06465.23.0 |
| 1.06463.34.0 | 1.06465.24.0 |
| 1.06463.35.0 | 1.06465.25.0 |
| 1.06461.07.0 | 1.06461.12.0 |
| 1.06461.17.0 | 1.06461.22.0 |
| 1.06461.30.0 | 1.06461.34.0 |
| 1.06461.35.0 | 1.06461.39.0 |

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
									Type	Dim.	Hand	Fin.	Pers.



- CENTRE DISTANCE 85 MM
- Stainless steel 'U'-shaped adjustable faceplate 24 x 5 mm, height 2300 mm.
 - top adjustment 350 mm.
 - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened STEEL INSERTS.

3	2	85	24	25	3,310	1	1	49656 25 0
3	2	85	24	30	3,370	1	1	49656 30 0
3	2	85	24	35	3,430	1	1	49656 35 0
3	2	85	24	40	3,490	1	1	49656 40 0

- CENTRE DISTANCE 92 MM
- Stainless steel 'U'-shaped adjustable faceplate 24 x 5 mm, height 2300 mm.
 - top adjustment 350 mm.
 - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with HARDENED STEEL INSERTS

3	2	92	24	25	3,310	1	1	49658 25 0
3	2	92	24	30	3,370	1	1	49658 30 0
3	2	92	24	35	3,430	1	1	49658 35 0
3	2	92	24	40	3,490	1	1	49658 40 0

Certification pr EN 15685:14


| 3 | X | 9 | A | 0 | G | 6/7 | 0 | 6 | 3 |

- ADJUSTABLE METAL STRIKER
- Central cylinder item: divertor (pc.2) item

1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

"MODULAR" ROLLER ASSEMBLY:
 - item 1.06000.00.0 (roller inserts supplied as standard)

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.

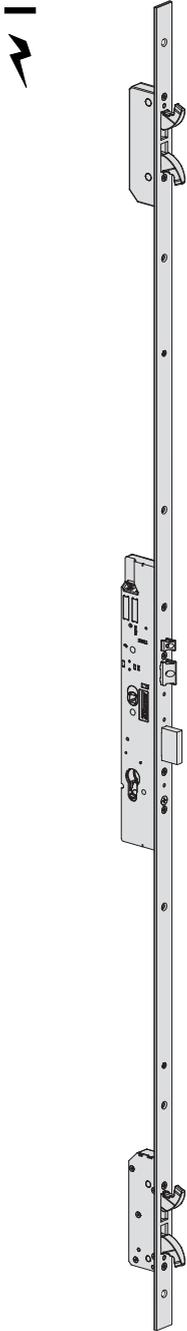

- CENTRE DISTANCE 85 MM
- Stainless steel "flat" adjustable faceplate 24 x 3 mm, height 2300 mm.
 - top adjustment 350 mm.
 - bottom adjustment 150 mm.
- 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt.
- 4 hooks with hardened STEEL INSERTS.
- CE 12V AC voltage
- Absorbed current 3.1 A

3	2	85	24	25	3,520	1	1	19746 25 0				
3	2	85	24	30	3,580	1	1	19746 30 0				
3	2	85	24	35	3,640	1	1	19746 35 0				
3	2	85	24	40	3,700	1	1	19746 40 0				

Certification EN 14846:08

| 3 | X | 9 | 0 | 0 | M | 6/7 | 0 | 2 |

- ADJUSTABLE METAL STRIKER
- Central cylinder item: divertor (pc.2) item

1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers.



- CENTRE DISTANCE 85 MM
- Stainless steel "flat" adjustable faceplate 24 x 3 mm, height 2300 mm.
 - top adjustment 350 mm.
 - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened STEEL INSERTS

3	2	85	24	25	3,310	1	1	49746	25	0
3	2	85	24	30	3,370	1	1	49746	30	0
3	2	85	24	35	3,430	1	1	49746	35	0
3	2	85	24	40	3,490	1	1	49746	40	0

CENTRE DISTANCE 92 MM

- Stainless steel "flat" adjustable faceplate 24 x 3 mm, height 2300 mm.
 - top adjustment 350 mm.
 - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened STEEL INSERTS.

3	2	92	24	25	3,310	1	1	49748	25	0
3	2	92	24	30	3,370	1	1	49748	30	0
3	2	92	24	35	3,430	1	1	49748	35	0
3	2	92	24	40	3,490	1	1	49748	40	0





Certification pr EN 15685:14

| 3 | X | 9 | A | 0 | G | 6 / 7 | 0 | 6 | 3 |

- ADJUSTABLE METAL STRIKER
- Central cylinder item:

1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

"MODULAR" ROLLER ASSEMBLY:
 - item 1.06000.00.0 (roller inserts supplied as standard)

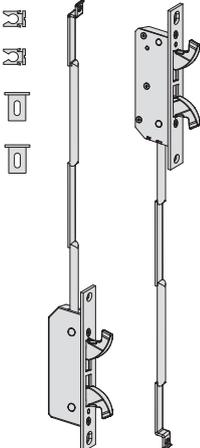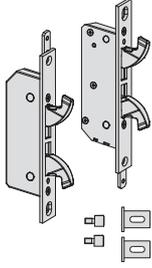Type	Description	Locking points Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Pair of lateral locking points operated by internal rods • 4 hooks with hardened STEEL INSERTS. • Stainless steel faceplate 22 x 3 mm • Closed case • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Pair of rods diameter 8 mm. - Pair of faceplate spacers item 1.06141.65.0 - Rod guide item 1.06224.00.0 (2 pcs) • ON REQUEST: <ul style="list-style-type: none"> Special strikes (see Vademecum) 	1,000	1	1	06443	41	0					
	<ul style="list-style-type: none"> • Pair of lateral locking points operated by external rods • 4 hooks with hardened STEEL INSERTS • Stainless steel faceplate 22 x 3 mm • Closed case • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Pair of external bolt controls - Pair of faceplate spacers item 1.06141.65.0 - Pair of threaded pins • ON REQUEST: <ul style="list-style-type: none"> Special strikes (see Vademecum) 	0,766	1	1	06443	46	0					
	<ul style="list-style-type: none"> • Lock protective plate to increase drill resistance (grade 7 prEN 15685 : 14) for 19000 and 49000 series 	0,100	6	1	06436	10	0					
	<ul style="list-style-type: none"> • Divertors protective plate to increase drill resistance (grade 7 prEN 15685 : 14) for series 19000 and 49000 	0,100	6	1	06436	11	0					
	<ul style="list-style-type: none"> • Microswitch to be used with divertors of locks 19000 and 49000 series 	0,020	1	1	06195	08	0					



3 SCROCCHI

Technical features:

- Case thickness 15.5 mm
- Closed case
- Steel case and cover
- Top and bottom adjustable faceplate
- Three 11-mm thick latchbolts
- 8-mm thick deadbolts with 20 mm protrusion
- 8 mm square spindle
- DIN holes to fix handle plate

Supplied as standard:

- Pair of nylon protective roses item 1.06012.01.0
- Cylinder and rose fixing screws
- Instruction sheet
- Nylon faceplate cover plugs

On request:

- Adjustable metal strikes (see special Vademecum)

Finishes:

- Zinc-plated cases and covers
- Zinc-plated steel faceplate with corrosion resistance up to 480 hours
- Zinc-plated latchbolt and deadbolts

Standards:

- Grade 3 Security in compliance with pr EN15685:14.
- The lock can be CE-certified by German institutes (Rosenheim) because it is always locked in 3 points without having to engage the throws.

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers.



- 3 LATCHBOLTS
- 'U'-shaped adjustable faceplate 24 x 6 mm.
In ZINC-PLATED steel, height 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 3 lateral latchbolts

3	2	92	24	35	3,800	1	1	48816 35 0
3	2	92	24	40	3,820	1	1	48816 40 0

- ADJUSTABLE METAL STRIKER
 - for central lock (pc.1) + for diverter (pc.2)
- | item | Profile |
|----------------|--------------------------------|
| 1.06461.03.1/2 | "steel" profile |
| 1.06461.04.1/2 | for diverter |
| 1.06461.27.1/2 | "R" type profile (overlapping) |
| 1.06461.23.0 | "European groove" profile |

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM															
									Type	Dim.	Hand	Fin.	Pers.	Spec.										
	<ul style="list-style-type: none"> • 3 LATCHBOLTS 	3	2	92	24	35	3,800	1	1	48916	35	0												
	<ul style="list-style-type: none"> • "Flat" adjustable faceplate 24 x 3 mm. In ZINC-PLATED steel, height 2300 mm. - top adjustment 350 mm. - bottom adjustment 150 mm. 	3	2	92	24	40	3,820	1	1	48916	40	0												
	<ul style="list-style-type: none"> • 3 lateral latchbolts 																							
	<ul style="list-style-type: none"> • ADJUSTABLE METAL STRIKER • for central lock (pc.1) + for divertor (pc.2) 																							
	<table border="0"> <tr> <td>item</td> <td>Profile</td> </tr> <tr> <td>1.06461.03.1/2</td> <td>"steel" profile</td> </tr> <tr> <td>1.06461.04.1/2</td> <td>for divertor</td> </tr> <tr> <td>1.06461.27.1/2</td> <td>"R" type profile (overlapping)</td> </tr> <tr> <td>1.06461.23.0</td> <td>"European groove" profile</td> </tr> </table>	item	Profile	1.06461.03.1/2	"steel" profile	1.06461.04.1/2	for divertor	1.06461.27.1/2	"R" type profile (overlapping)	1.06461.23.0	"European groove" profile													
item	Profile																							
1.06461.03.1/2	"steel" profile																							
1.06461.04.1/2	for divertor																							
1.06461.27.1/2	"R" type profile (overlapping)																							
1.06461.23.0	"European groove" profile																							



Type	Description	For locks series	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Zinc-plated steel strike kit 24 x 3 mm RH for "steel" profile • SUPPLIED AS STANDARD - Strike for central lock 1 pc - Strike for divertors 2 pcs 	48816, 48916	0,310	6	1	06461	03	1
	<ul style="list-style-type: none"> • Zinc-plated steel strike kit 24 x 3 mm LH for "steel" profile • SUPPLIED AS STANDARD - Strike for central lock 1 pc - Strike for divertors 2 pcs 	48816, 48916	0,310	6	1	06461	03	2
	<ul style="list-style-type: none"> • Zinc-plated steel 'U'-shaped strike kit 24 x 6 mm RH for "door" profile • SUPPLIED AS STANDARD: - Strike for central lock 1 pc - Strike for divertors 2 pcs 	48816, 48916	0,310	6	1	06461	04	1
	<ul style="list-style-type: none"> • Zinc-plated steel 'U'-shaped strike kit 24 x 6 mm LH for "door" profile • SUPPLIED AS STANDARD: - Strike for central lock 1 pc - Strike for divertors 2 pcs 	48816, 48916	0,310	6	1	06461	04	2
	<ul style="list-style-type: none"> • Reversible stainless steel strike kit for "European groove" profile • SUPPLIED AS STANDARD - Strike for central lock 1 pc - Strike for divertors 2 pcs 	48816, 48916	0,310	6	1	06461	23	0
	<ul style="list-style-type: none"> • Zinc-plated steel strike kit RH for "R" type profile (overlapping) • SUPPLIED AS STANDARD: - Strike for central lock 1 pc - Strike for divertors 2 pcs 2 	48816, 48916	0,310	6	1	06461	27	1
	<ul style="list-style-type: none"> • Zinc-plated steel strike kit LH for "R" type profile (overlapping) • SUPPLIED AS STANDARD: - Strike for central lock 1 pc - Strike for divertors 2 pcs 2 	48816, 48916	0,310	6	1	06461	27	2



Technical features:

- Zinc-plated steel case
- Nickel-plated latch, roller and deadbolt
- Latch or reversible latch/bolt (where this is provided for)
- Voltage 12 V ac CE
- Current absorption 3,1A

Supplied as standard:

- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Special striker plates (see Vademecum)
- Cylinder with pin key series 02400
- Cylinder protective rose item 1.06460.00.0
- Mechanical control button item 1.06110.10.0

Certification:

- This lock series is certified according to the European standard pr EN 15685:14 (mechanical) e EN14846:08 (electric)
- Security class 4 (700 Kg side thrust and 500 Kg front thrust resistance)

Hand:

0 = Non-handed

Type	Description	Locking points Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.



- Black painted steel adjustable U-shaped faceplate 24 x 7 mm, 2,600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 10.5 to 16.5 adjustable latch bolt and bolt
- 3 lateral deadbolts
- Faceplate cover nylon plugs
- 12 V ca CE

3	1	85	24	25	3,500	1	1	16425	25	0
3	1	85	24	30	3,500	1	1	16425	30	0
3	1	85	24	35	3,500	1	1	16425	35	0

- Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 2.300 mm.
upper adjustment 350 mm.
lower adjustment 150 mm.
- 10.5 to 16.5 mm. adjustable latch and piston
- 3 lateral deadbolts
- 12 V ca CE

3	1	85	24	25	3,780	1	1	16625	25	0
3	1	85	24	30	3,800	1	1	16625	30	0
3	1	85	24	35	3,820	1	1	16625	35	0

Certification EN 14846:08

| 3 | X | 8 | A | 0 | F | 4 | 0 | 0 |

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.



- Black lacquered steel adjustable U-shaped faceplate
24 x 7 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 3 lateral deadbolts
- Nylon faceplate cover plugs

Certification pr EN 15685:14

| 3 | C | 8 | A | 0 | F | 4 | 0 | 0 |

3	1	24	25	3,600	1	1	46420 25 0
3	1	24	30	3,620	1	1	46420 30 0
3	1	24	35	3,640	1	1	46420 35 0



- Black lacquered steel adjustable U-shaped faceplate
24 x 7 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch and piston
- 3 lateral deadbolts
- Nylon faceplate cover plugs

- Stainless steel adjustable U-shaped faceplate
24 x 7 mm., 2.300 mm.
upper adjustment 350 mm.
lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral deadbolts


Certification pr EN 15685:14

| 3 | C | 8 | A | 0 | F | 4 | 0 | 0 |

3	1	85	24	25	3,500	1	1	46425 25 0
3	1	85	24	30	3,500	1	1	46425 30 0
3	1	85	24	35	3,500	1	1	46425 35 0


3	1	85	24	25	3,000	1	1	46625 25 0
3	1	85	24	30	3,000	1	1	46625 30 0
3	1	85	24	35	3,640	1	1	46625 35 0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.



- Black lacquered steel adjustable U-shaped faceplate
24 x 7 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch and piston
- 1 lateral deadbolt
- Vertical extension bolts
- Nylon faceplate cover plugs

1	1	85	24	25	3,500	1	1	46445	25	0
1	1	85	24	30	3,500	1	1	46445	30	0
1	1	85	24	35	3,240	1	1	46445	35	0



- Black lacquered steel adjustable U-shaped faceplate
24 x 7 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 2.5 to 16.5 mm. adjustable roller
- 3 lateral deadbolts
- Nylon faceplate cover plugs

3	1	24	25	3,600	1	1	46450	25	0
3	1	24	30	3,500	1	1	46450	30	0
3	1	24	35	3,640	1	1	46450	35	0

- Stainless steel adjustable U-shaped faceplate
24 x 7 mm., 2.300 mm.
upper adjustment 350 mm.
lower adjustment 150 mm.
- 2.5 to 16.5 mm. adjustable roller
- 3 lateral deadbolts

3	1	24	25	3,600	1	1	46650	25	0
3	1	24	30	3,620	1	1	46650	30	0
3	1	24	35	3,640	1	1	46650	35	0


Certification pr EN 15685:14

| 3 | C | 8 | A | 0 | F | 4 | 0 | 0 |

Type	Description	Locking points Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 150 mm. 10.5 to 16.5 mm. adjustable latch and piston 3 lateral deadbolts Nylon faceplate cover plug 	3	1	85	24	25	3,500	1	1	16525	25	0
		3	1	85	24	30	3,500	1	1	16525	30	0
		3	1	85	24	35	3,500	1	1	16525	35	0
	<ul style="list-style-type: none"> Stainless steel adjustable flat faceplate 24 x 7 mm., 2.300 mm. upper adjustment 350 mm. lower adjustment 150 mm. 10.5 to 16.5 mm. adjustable latch and piston 3 lateral deadbolts <p>Certification EN 14846:08</p> <p> 3 X 8 A 0 F 4 0 0 </p>	3	1	85	24	25	3,780	1	1	16725	25	0
		3	1	85	24	30	3,800	1	1	16725	30	0
		3	1	85	24	35	3,820	1	1	16725	35	0

	<ul style="list-style-type: none"> Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 150 mm. 3 lateral deadbolts Nylon faceplate cover plugs <p>Certification pr EN 15685:14</p> <p> 3 C 8 A 0 F 4 0 0 </p>	3	1	24	25	3,600	1	1	46520	25	0
		3	1	24	30	3,620	1	1	46520	30	0
		3	1	24	35	3,640	1	1	46520	35	0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim. Hand	Fin.	Pers. Spec.



- Black lacquered steel adjustable flat faceplate
24 x 3 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral deadbolts
- Nylon faceplate cover plugs


3	1	85	24	25	3,600	1	1	46525	25	0
3	1	85	24	30	3,500	1	1	46525	30	0
3	1	85	24	35	3,500	1	1	46525	35	0

- Stainless steel adjustable flat faceplate
24 x 3 mm., 2.300 mm.
upper adjustment 350 mm.
lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral deadbolts

3	1	85	24	25	3,600	1	1	46725	25	0
3	1	85	24	30	3,620	1	1	46725	30	0
3	1	85	24	35	3,640	1	1	46725	35	0

Certification pr EN 15685:14

| 3 | X | 8 | A | 0 | F | 4 | 0 | 0 |



- Black lacquered steel adjustable flat faceplate
24 x 3 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 150 mm.
- 2.5 to 16.5 mm. adjustable roller
- 3 lateral deadbolts
- Nylon faceplate cover plugs

3	1	24	25	3,500	1	1	46550	25	0
3	1	24	30	3,500	1	1	46550	30	0
3	1	24	35	3,500	1	1	46550	35	0

- Stainless steel adjustable flat faceplate
24 x 3 mm., 2.300 mm.
upper adjustment 350 mm.
lower adjustment 150 mm.
- 2.5 to 16.5 mm. adjustable roller
- 3 lateral deadbolts

3	1	24	25	3,600	1	1	46750	25	0
3	1	24	30	3,620	1	1	46750	30	0
3	1	24	35	3,640	1	1	46750	35	0

Certification pr EN 15685:14

| 3 | C | 8 | A | 0 | F | 4 | 0 | 0 |



Technical features:

- Zinc-plated steel case.
- Stainless steel faceplate
- Can be fitted with additional locking points
- Spindle for operating the deadbolt and reloading pins, which can be locked by key

Hand:

0 = Non-handed

Cylinder to be ordered separately

OE300 (ASIX) series



Supplied as standard:

- Set of nylon roses item 1.06012.01.0
- Set of faceplate spacers item 1.06141.65.0
- Threaded pins for fixing the extension bolts
- Lock and cylinder fixing screws
- Instruction sheet

On request:


- Specific striker (see Vademecum)
- Cylinder protective rose item 1.06460.00.0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.



- Nickel-plated deadbolt
- ON REQUEST:
Cross-key cylinder item 1.02400.10.0
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0
extension bolts operated by internal rods item 1.06443.00.0
extension bolts operated by external rods item 1.06443.05.0
Internal extension rods hook side deadbolts item 1.06443.41.0
External extension rods hook side deadbolts item 1.06443.46.0

1	85	22	25	0,620	1	1	46200	25	0				
1	85	22	30	0,640	1	1	46200	30	0				
1	85	22	35	0,610	1	1	46200	35	0				

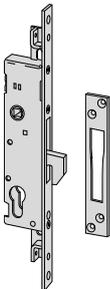

- Nickel-plated hook
- Stainless steel striker item 1.06459.01.0
- ON REQUEST:
Cross-key cylinder item 1.02400.10.0
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0
extension bolts operated by internal rods item 1.06443.00.0
extension bolts operated by external rods item 1.06443.05.0
Internal extension rods hook side deadbolts item 1.06443.41.0
External extension rods hook side deadbolts item 1.06443.46.0

1	85	22	25	0,650	1	1	46265	25	0				
1	85	22	30	0,670	1	1	46265	30	0				
1	85	22	35	0,693	1	1	46265	35	0				



- No frontal closure
- ON REQUEST:
Cross-key cylinder item 1.02400.10.0
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0
extension bolts operated by internal rods item 1.06443.00.0
extension bolts operated by external rods item 1.06443.05.0
Internal extension rods hook side deadbolts item 1.06443.41.0
External extension rods hook side deadbolts item 1.06443.46.0

	85	22	25	0,570	1	1	46275	25	0				
	85	22	30	0,540	1	1	46275	30	0				
	85	22	35	0,560	1	1	46275	35	0				



Technical features:

- Zinc-plated steel case
- Stainless steel faceplate
- Nickel-plated latch, roller, bolt and hook bolt
- Latch or reversible latch/bolt (if this is provided for)
- Current absorption 3,1A
- Voltage 12 V ac CE

Supplied as standard:

- Set of faceplate spacers item 1.06141.65.0
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Special striker plates (see Vademecum)
- Cylinder protective rose item 1.06460.00.0
- Cylinder with pin key series 02400
- Mechanical control button item 1.06110.10.0
- Threaded bushing item 1.06290.05 for extension bolt

Certification:

- This lock series is certified according to the European standard EN 12209:16 - Security class 3 (500 Kg side thrust and 400 Kg front thrust resistance)
- Suitable for doors certified to EN1627:2011 up to WK/RC 2 resistance class

Hand:
0 = Non-handed

Cylinder to be ordered separately
OE300
(ASIX) series



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 		ITEM			
								Type	Dim.	Hand	Fin.




- Only latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0

Certification EN 12209:16

| 3 | X | 8 | 0 | 0 | F | - | H |

85	22	25	0,764	1	1 16205 25 0
85	22	30	0,788	1	1 16205 30 0
85	22	35	0,833	1	1 16205 35 0



- deadbolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0

1	85	22	25	0,798	1	1 16215 25 0
1	85	22	30	0,843	1	1 16215 30 0
1	85	22	35	0,883	1	1 16215 35 0



- Cross-key cylinder with 3 keys
- deadbolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06002.00.0

1	85	22	25	0,907	1	1 16217 25 0
1	85	22	30	0,953	1	1 16217 30 0
1	85	22	35	0,988	1	1 16217 35 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.



- Deadbolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0
- Pre-set for additional locking points
- Threaded pivots for fixing extension bolts
- ON REQUEST:
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
Internal extension bolts item 1.06441.20.0
Pair of external bolt connectors item 1.06442.00.0
extension bolts operated by internal rods item 1.06443.00.0
extension bolts operated by external rods item 1.06443.05.0

1	85	22	25	0,863	1	1	16225	25	0
1	85	22	30	0,908	1	1	16225	30	0
1	85	22	35	0,953	1	1	16225	35	0

Certification EN 12209:16 (For 16215 - 16225)

| 3 | X | 8 | 0 | 0 | F | 3 |



- Cross-key cylinder with 3 keys
- deadbolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Pre-set for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extension bolts
- ON REQUEST:
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
Internal extension bolts item 1.06441.20.0
External bolt connectors item 1.06442.00.0
extension bolts operated by internal rods item 1.06443.00.0
extension bolts operated by external rods item 1.06443.05.0

1	85	22	25	0,953	1	1	16227	25	0
1	85	22	30	1,014	1	1	16227	30	0
1	85	22	35	1,059	1	1	16227	35	0




- deadbolt only
- Set of nylon roses item 1.06012.01.0

1	22	25	0,575	12	1	46210	25	0
1	22	30	0,605	12	1	46210	30	0
1	22	35	0,560	12	1	46210	35	0

- AS ABOVE
- U-shaped faceplate 24x5 mm
- Pair of spacers 3 and 5 mm


1	24	25	0,545	12	1	46213	25	0
1	24	30	0,575	12	1	46213	30	0
1	24	35	0,560	12	1	46213	35	0

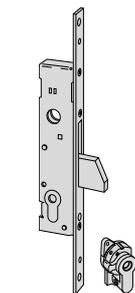

- Cross-key cylinder with 3 keys
- deadbolt only
- Set of nylon roses item 1.06002.00.0


1	22	25	0,650	12	1	46212	25	0
1	22	30	0,670	12	1	46212	30	0
1	22	35	0,690	12	1	46212	35	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- deadbolt only
- Pre-set for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extension bolts
- ON REQUEST:
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
Internal extension bolts item 1.06441.20.0
External bolt connectors item 1.06442.00.0
extension bolts operated by internal rods item 1.06443.00.0
extension bolts operated by external rods item 1.06443.05.0
Internal extension rods hook side deadbolts item 1.06443.41.0
External extension rods hook side deadbolts item 1.06443.46.0

1	22	25	0,630	12	1	46220	25	0
1	22	30	0,650	12	1	46220	30	0
1	22	35	0,680	12	1	46220	35	0

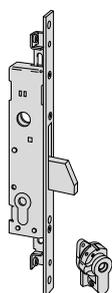

- Cross-key cylinder with 3 keys
- deadbolt only
- Pre-set for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extension bolts
- ON REQUEST:
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
Internal extension bolts item 1.06441.20.0
External bolt connectors item 1.06442.00.0
extension bolts operated by internal rods item 1.06443.00.0
extension bolts operated by external rods item 1.06443.05.0
Internal extension rods hook side deadbolts item 1.06443.41.0
External extension rods hook side deadbolts item 1.06443.46.0

1	22	25	0,695	12	1	46222	25	0
1	22	30	0,690	12	1	46222	30	0
1	22	35	0,710	12	1	46222	35	0

Certification EN 12209:16 (for 46210 - 46213 - 46220 - 46240 - 46260 - 46270)


| 3 | C | 8 | 0 | 0 | F | 3 | H |



- deadbolt and latch
- 11 to 17 mm. adjustable latch
- Set of nylon roses item 1.06012.01.0
- ON REQUEST: (SERIES 46215):
Stainless steel faceplate 25x3 mm with aligned fixing holes (pers. VV)
- AS ABOVE
- U-shaped faceplate 24x5 mm
- Pair of spacers 3 and 5 mm


1	85	22	25	0,640	12	1	46215	25	0
1	85	22	30	0,604	12	1	46215	30	0
1	85	22	35	0,690	12	1	46215	35	0
1	92	22	25	0,610	12	1	46219	25	0
1	92	22	30	0,646	12	1	46219	30	0
1	92	22	35	0,670	12	1	46219	35	0
1	92	24	25	0,610	12	1	46218	25	0
1	92	24	30	0,630	12	1	46218	30	0
1	92	24	35	0,660	12	1	46218	35	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.

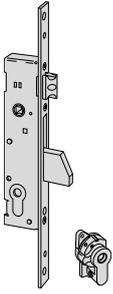

- Cross-key cylinder with 3 keys
- deadbolt and latch
- 11 to 17 mm. adjustable latch
- Set of nylon roses item 1.06002.00.0

1	85	22	25	0,730	12	1	46217	25	0
1	85	22	30	0,740	12	1	46217	30	0
1	85	22	35	0,770	12	1	46217	35	0




- deadbolt and latch
- 11 to 17 mm. adjustable latch bolt
- Pre-set for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extension bolts
- ON REQUEST:
 - Internal cranked extension bolts item 1.06441.00.0
 - Internal straight extension bolts item 1.06441.10.0
 - Internal extension bolts item 1.06441.20.0
 - External bolt connectors item 1.06442.00.0
 - extension bolts operated by internal rods item 1.06443.00.0
 - extension bolts operated by external rods item 1.06443.05.0
 - Internal extension rods hook side deadbolts item 1.06443.41.0
 - External extension rods hook side deadbolts item 1.06443.46.0
 - Stainless steel faceplate 25x3 mm with aligned fixing holes (pers. V V)

1	85	22	25	0,680	12	1	46225	25	0
1	85	22	30	0,725	12	1	46225	30	0
1	85	22	35	0,730	12	1	46225	35	0

Certification EN 12209:16 (for 46215 - 46218 - 46219 - 46225)

| 3 | X | 8 | 0 | 0 | F | 3 | H |

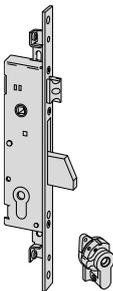

- Cross-key cylinder with 3 keys
- deadbolt and latch
- 11 to 17 mm. adjustable latch
- Pre-set for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extension bolts
- ON REQUEST:
 - Internal ragged extension bolts item 1.06441.00.0
 - Internal straight extension bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - extension bolts operated by internal rods item 1.06443.00.0
 - extension bolts operated by external rods item 1.06443.05.0
 - Internal extension rods hook side deadbolts item 1.06443.41.0
 - External extension rods hook side deadbolts item 1.06443.46.0


1	85	22	25	0,750	12	1	46227	25	0
1	85	22	30	0,790	12	1	46227	30	0
1	85	22	35	0,790	12	1	46227	35	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- deadbolt and roller
- 2.5 to 16.5 mm. adjustable roller
- Set of nylon roses item 1.06012.01.0
- ON REQUEST:
Stainless steel faceplate 25x3 mm with aligned fixing holes (pers. V V)
- AS ABOVE
- U-shaped faceplate 24x5 mm
- Pair of spacers 3 and 5 mm

1	22	25	0,600	12	1 46230 25 0
1	22	30	0,640	12	1 46230 30 0
1	22	35	0,665	12	1 46230 35 0
1	24	25	0,600	12	1 46233 25 0
1	24	30	0,610	12	1 46233 30 0
1	24	35	0,635	12	1 46233 35 0




- deadbolt and roller
- 2.5 to 16.5 mm. adjustable roller
- Pre-set for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extension bolts
- ON REQUEST:
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
Internal extension bolts item 1.06441.20.0
External bolt connectors item 1.06442.00.0
extension bolts operated by internal rods item 1.06443.00.0
extension bolts operated by external rods item 1.06443.05.0

1	22	25	0,660	12	1 46250 25 0
1	22	30	0,690	12	1 46250 30 0
1	22	35	0,715	12	1 46250 35 0


Certification EN 12209:16
(For 46230 - 46233 - 46250)

| 3 | C | 8 | 0 | 0 | F | 3 | H |

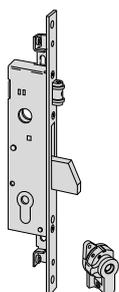

- Cross-key cylinder with 3 keys
- deadbolt and latch
- 2.5 to 16.5 mm. adjustable roller
- Pre-set for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extension bolts
- ON REQUEST:
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0
extension bolts operated by internal rods item 1.06443.00.0
extension bolts operated by external rods item 1.06443.05.0


1	22	25	0,730	12	1 46252 25 0
1	22	30	0,760	12	1 46252 30 0
1	22	35	0,790	12	1 46252 35 0

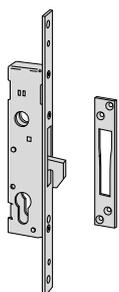

- Laminar steel hook
- Set of nylon roses item 1.06012.01.0
- Zinc plated steel strikier item 1.06459.01.0

1	22	25	0,610	12	1 46240 25 0
1	22	30	0,640	12	1 46240 30 0
1	22	35	0,660	12	1 46240 35 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.

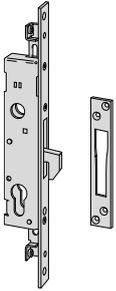

- Laminar steel hook
- Pre-set for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extension bolts
- Zinc plated steel striker item 1.06459.01.0
- ON REQUEST:
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0
Internal extension rods hook side deadbolts item 1.06443.41.0
External extension rods hook side deadbolts item 1.06443.46.0

1	22	25	0,655	12	1	46260	25	0			
1	22	30	0,650	12	1	46260	30	0			
1	22	35	0,740	12	1	46260	35	0			



- No frontal closure
- Pre-set for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extension bolts
- ON REQUEST:
Internal ragged extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
External bolt connectors item 1.06442.00.0
Internal extension rods hook side deadbolts item 1.06443.41.0
External extension rods hook side deadbolts item 1.06443.46.0

	22	25	0,580	12	1	46270	25	0			
	22	30	0,580	12	1	46270	30	0			
	22	35	0,605	12	1	46270	35	0			



Technical features:

- Galvanized steel case, height 64 mm
- Stainless steel faceplate
- Nickel-plated adjustable latchbolt, 11 to 17 mm
- Nickel-plated 3-throw deadbolt, 11 mm
- Square spindle, 8 mm
- Cylinder fixing via lock internal screw


Cylinder to be ordered separately



Supplied as standard:


- Threaded pins for additional lock fixing
- Pair of nylon roses item 1.06012.01.0
- Pair of below-faceplate nylon spacers item 1.06141.65.0
- Rose and lock fixing screws
- Instruction sheets

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
								Type	Dim.	Hand	Fin.

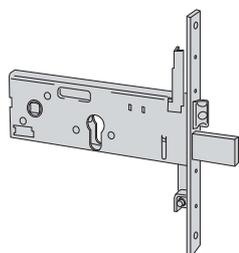

- Stainless steel faceplate 32x3 mm
- Reversible latch and deadbolt
- ON REQUEST:
Adjustable metal strikers (see vademecum)
"MODULAR" roller assembly item 1.06168-00-0
Internal cranked extension bolts item 1.06441.00.0
Internal straight extension bolts item 1.06441.10.0
Pair of external bolt connectors item 1.06442.00.0
extension bolts operated by internal rods item 1.06443.00/21.0
extension bolts operated by external rods item 1.06443.05/26.0
Internal extension rods hook side deadbolts item 1.06443.41.0
External extension rods hook side deadbolts item 1.06443.46.0
Cylinder protective rose item 1.06460-05/50/51/60
Rose for locks series 57300 item 1.06141-56-0 or item 1.06473.00.0

3	67	22	90	0,995	12	1 56357 90 0
3	67	22	100	0,995	12	1 56357 10 0



- "MODULAR" roller assembly for locks series 56357

0,040	12	1 06168 00 0
-------	----	--------------



Technical features:

- Case height 82 mm
- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel deadbolt
- Nickel-plated, reversible latch and roller
- Drill resistant protection plate

- Nylon faceplate spacer
- Lock fixing screws
- Instruction sheet

On request:

- Specific striker (see Vademecum)


Hand:

0 = Non-handed

Supplied as standard:

- 3 keys item 1.00100.00.0 or item 1.00102.00.0
- Set of nylon key guide escutcheons item 1.06123.03.0
- Set of escutcheon fixing screws:
length 60 mm for the version with key item 1.00100.00.0
length 75 mm for the version with key item 1.00102.00.0

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
									Type	Dim.	Hand	Fin.




- Deadbolt and latch



1 00100 00 1

4 67 25 70 1,150 12 1 57312 73 0



- Deadbolt and latch
- Pre-set for additional locking points
- ON REQUEST:
Internal ragged extension bolts item 1.06451.00.0
Internal straight extension bolts item 1.06451.10.0
External bolt connectors item 1.06452.05.0
extension bolts operated by internal rods item 1.06453.05.0




1 00100 00 1

4 67 25 70 1,226 12 1 57317 73 0



1 00102 00 1

4 67 25 70 1,230 12 1 57317 71 0



- Deadbolt and roller
- 2 to 14.5 mm. adjustable roller



1 00100 00 1

4 25 70 1,025 12 1 57320 73 0

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Deadbolt and roller • 2 to 14.5 mm. adjustable roller • Pre-set for additional locking points • ON REQUEST: Internal ragged extension bolts item 1.06451.00.0 Internal straight extension bolts item 1.06451.10.0 External bolt connectors item 1.06452.05.0 extension bolts operated by internal rods item 1.06453.05.0 	 1 00100 00 1	4	25	70	1,080	12	1 57325 73 0				
		 1 00102 00 1	4	25	70	1,100	12	1 57325 71 0				
	<ul style="list-style-type: none"> • Deadbolt only • Pre-set for additional locking points • ON REQUEST: Internal ragged extension bolts item 1.06451.00.0 Internal straight extension bolts item 1.06451.10.0 External bolt connectors item 1.06452.05.0 extension bolts operated by internal rods item 1.06453.05.0 	 1 00100 00 1	4	25	70	1,140	12	1 57335 73 0				



Technical features:

- Case height 78 mm
- Zinc-plated case
- Stainless steel faceplate
- Nickel-plated steel deadbolt
- Nickel-plated roller and reversible latch
- Drill resistant protection plate
- Electrical and mechanical versions are interchangeable
- Current absorption 1,7 A
- Voltage 12 V ac CE

Supplied as standard:

- 3 keys item 1.00100.00.0 or item 1.00102.00.0
- Set of nylon key guide escutcheons item 1.06123.03.0

- Rose fastening screws: length 60 mm for the version with key item 1.00100.00.0 length 75 mm for the version with key item 1.00102.00.0
- Set of nylon faceplate spacers item 1.06141.65.0
- Threaded extension bolts connectors
- Lock fixing screws
- Instruction sheet

On request:


- Specific striker
- Mechanical control button item 1.06110.15.0

Hand:
0 = Non-handed


Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM						
								Type	Dim.	Hand	Fin.	Pers. Spec.		
	<ul style="list-style-type: none"> • Deadbolt and latch • 12 to 18 mm. adjustable latch and piston • Dead-locking latch • Hold-open latch 	 1 00100 00 1	4	67	22	90	1,330	1	1	17352	90	0		
			4	67	22	100	1,385	1	1	17352	10	0		
	<ul style="list-style-type: none"> • Deadbolt and latch • 12 to 18 mm. adjustable latch and piston • Dead-locking latch • Hold-open latch • Pre-set for additional locking points • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 	 1 00100 00 1	4	67	22	90	1,400	1	1	17357	90	0		
			4	67	22	100	1,463	1	1	17357	10	0		
		 1 00102 00 1	4	67	22	90	1,410	1	1	17357	91	0		
			4	67	22	100	1,450	1	1	17357	11	0		
	<ul style="list-style-type: none"> • Deadbolt and latch • 11 to 17 mm. adjustable latch 	 1 00100 00 1	4	67	22	90	1,210	12	1	57352	90	0		
			4	67	22	100	1,316	12	1	57352	10	0		

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
									Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Deadbolt and latch • 11 to 17 mm. adjustable latch • Pre-set for additional locking points • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 	 1 00100 00 1	4	67	22	90	1,275	12	1 57357 90 0				
			4	67	22	100	1,340	12	1 57357 10 0				
	<ul style="list-style-type: none"> • Deadbolt and roller • 2 to 14.5 mm. adjustable roller 	 1 00100 00 1	4	67	22	90	1,305	12	1 57357 91 0				
			4	67	22	100	1,355	12	1 57357 11 0				
	<ul style="list-style-type: none"> • Deadbolt and roller • 2 to 14.5 mm. adjustable roller • Pre-set for additional locking points • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 	 1 00100 00 1	4	22	90	1,225	12	1 57365 90 0					
			4	22	100	1,250	12	1 57365 10 0					
	<ul style="list-style-type: none"> • Deadbolt only 	 1 00100 00 1	4	22	90	1,129	12	1 57370 90 0					
			4	22	100	1,168	12	1 57370 10 0					

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Deadbolt only • Pre-set for additional locking points • Threaded pivots for fixing extension bolts • ON REQUEST: <ul style="list-style-type: none"> Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 	 1 00100 00 1	4	22	90	1,185	12	1	57375	90	0	
			4	22	100	1,250	12	1	57375	10	0	




Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.

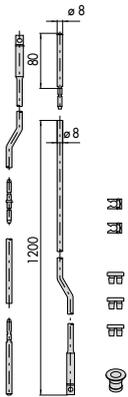


- Zinc plated cranked internal extension bolts
- SUPPLIED AS STANDARD:
Set of 8 mm. diameter rods
Hardened steel tip 8 mm.
item 1.06291.06.0 (2 pcs)
Floor striker item 1.06086.01.0
Joining pin item 1.06291.20.0
Guide rods item 1.06224.00.0 (2 pcs)
Noise proof bushes item 1.06147.00.0

16225, 16227, 17357, 19225, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 49225, 49228, 49250, 56357, 57357, 57365, 57375, 56378	0,610	12	1 06441 00 0
---	-------	----	---------------------

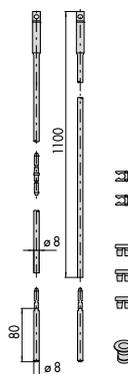

- Zinc plated straight internal extension bolts
- SUPPLIED AS STANDARD:
Set of 8 mm. diameter rods
Hardened steel tip 8 mm.
item 1.06291.06.0 (2 pcs)
Floor striker item 1.06086.01.0
Joining pin item 1.06291.20.0
Guide rods item 1.06224.00.0 (2 pcs)
Noise proof bushes item 1.06147.00.0

16225, 16227, 17357, 19225, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 49225, 49228, 49250, 57357, 57365, 57375, 56378	0,566	12	1 06441 10 0
---	-------	----	---------------------

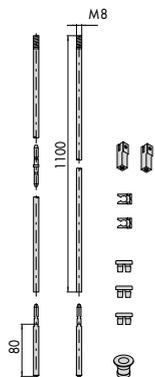

- Zinc plated straight internal extension bolts with screws
- SUPPLIED AS STANDARD:
Set of 8 mm. diameter rods
Hardened steel tip 8 mm. item 1.06291.06.0 (2 pcs)
Floor striker item 1.06086.01.0
Set of threaded bushes (M8) item 1.06290.05.0
Joining pin item 1.06291.20.0
Guide rods item 1.06224.00.0 (2 pcs)
Noise proof bushes item 1.06147.00.0

16225, 16227, 17357, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46270, 56378, 57357, 57365, 57375	0,630	12	1 06441 20 0
---	-------	----	---------------------

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Set of controls for external extension bolts 	16225, 16227, 17357, 19225, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 49225, 49228, 49250, 56357, 57357, 57365, 57375	0,020	12	1	06442	00	0	
	<ul style="list-style-type: none"> • Set of lateral extension bolts operated by internal rods • Swing bolts • 22 x 3 mm. stainless steel faceplate • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Set of faceplate spacers item 1.06141.65.0 Guide rods item 1.06224.00.0 (2 pcs) • Pin connector item 1.06291.20.0 • ON REQUEST: Special striker (see Vademecum) Personalised internal extension bolts item 1.06449.00.0 	16225, 16227, 17357, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 56357, 57357, 57365, 57375, 56378	0,854	1	1	06443	00	0	
	<ul style="list-style-type: none"> • Set of lateral extension bolts operated by external rods • Swing bolts • 22 x 3 mm. stainless steel faceplate • SUPPLIED AS STANDARD: set of external bolt connectors Set of threaded rods • ON REQUEST: Special striker (see Vademecum) 	16225, 16227, 17357, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 56357, 57357, 57365, 57375, 56378	0,513	1	1	06443	05	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Pair of lateral extension bolts operated by internal rods • Horizontally sliding deadbolts with hardened steel inserts and hook bolt • STAINLESS STEEL faceplate 22x3 mm • Pre-set for 4th and 5th locking points • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of rods dia. 8 mm. - Set of faceplate spacers item 1.06141.65.0 - Rod guide item 1.06224.00.0 (2 pcs) - Joining pin item 1.06291.20.0 • ON REQUEST: <ul style="list-style-type: none"> - Special strike plates (see Vademecum) - Internal straight extension bolts item 1.06441.10.0 for 4th and 5th locking points - Threaded pin for bolt extension rods fixing item 1.06449.05.0 - Custom internal bolt extension rods item 1.06449.00.0 	56357, 56378	1,060	1	1	06443	21	0
	<ul style="list-style-type: none"> • Pair of lateral extension bolts operated by external rods • Horizontally sliding deadbolts with hardened steel inserts and hook bolt • STAINLESS STEEL faceplate 22x3 mm • Pre-set for 4th and 5th locking points • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of external bolt connectors - Set of threaded pins • ON REQUEST: <ul style="list-style-type: none"> - Special strike plates (see Vademecum) - Threaded pin item 1.06449.05.0 for fixing 4th and 5th locking point external extension bolts 	56357, 56378	0,766	1	1	06443	26	0
	<ul style="list-style-type: none"> • Internal extension bolts for personalising lateral locking point distance • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> Set of rods diameter 8 mm. Set of pins for fixing rods to lateral extension bolts 	1 06443 00 0, 1 06443 21 0, 1 06443 31 0, 1 06443 41 0	0,495	12	1	06449	00	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Zinc-plated cranked internal extension bolts SUPPLIED AS STANDARD: <ul style="list-style-type: none"> Set of 8 mm diameter bolts Set of 8 mm diameter tips item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Set of rod guide clips item 1.06224.00.0 (2 pcs) Noise-proof bushings item 1.06147.00.0 	57317, 57325, 57335	0,620	12	1	06451	00	0	
	<ul style="list-style-type: none"> Zinc plated internal straight extension bolts SUPPLIED AS STANDARD: <ul style="list-style-type: none"> Set of rods diameter 8 mm. Hardened steel tip diameter 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0 	57317, 57325, 57335	0,575	12	1	06451	10	0	
	<ul style="list-style-type: none"> Set of controls for external extension bolts 	57317, 57325, 57335	0,034	12	1	06452	05	0	
	<ul style="list-style-type: none"> Set of lateral extension bolts operated by internal rods Swing bolts 25 x 3 mm. stainless steel faceplate SUPPLIED AS STANDARD: <ul style="list-style-type: none"> Set of rods diameter 8 mm. Guide rods item 1.06224.00.0 (2 pcs) ON REQUEST: <ul style="list-style-type: none"> Special striker (see Vademecum) Personalised internal rod extension bolts item 1.06419.10.0 	57317, 57325, 57335	0,865	1	1	06453	05	0	

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Set of zinc plated internal extension bolts with screws • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Hardened steel tip diameter 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0 Set of threaded bushes item 1.06290.00.0 	57317, 57325, 57335	0,604	12	1	07088	00	0



Technical features:

- Zinc-plated case
- Zinc-plated stainless steel faceplate (fin.20)
- Nickel-plated roller and deadbolt
- Nickel-plated reversible latch
- Adjustable latch (44660, 44650, 44665 series)
- Aligned deadbolt 10mm thick
- Case cover to protect against dirt and chips

Hand:

0 = Non-handed

Cylinder to be ordered separately



Supplied as standard:

- Cylinder fixing screws
- Instruction sheet

On request:

- Specific striker (see Vademecum)

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- Adjustable latch bolt 10÷16 mm
- Zinc-plated faceplate 22x3

1	85	22	21	0,400	12	1	44650	20	0		
1	85	22	25	0,430	12	1	44650	25	0		
1	85	22	30	0,460	12	1	44650	30	0		
1	85	22	35	0,450	12	1	44650	35	0		

- Adjustable latch bolt 10÷16 mm
- Stainless steel faceplate 22x3

1	85	22	21	0,400	12	1	44650	20	0	20	
1	85	22	25	0,430	12	1	44650	25	0	20	
1	85	22	30	0,460	12	1	44650	30	0	20	
1	85	22	35	0,490	12	1	44650	35	0	20	



REPLACING 44620 SERIES

- Deadbolt and 10÷16 mm adjustable latch (backset 21 mm 10÷13 mm)
- Zinc-plated faceplate 22x3

1	85	22	21	0,407	12	1	44660	20	0		
1	85	22	25	0,431	12	1	44660	25	0		
1	85	22	30	0,470	12	1	44660	30	0		
1	85	22	35	0,505	12	1	44660	35	0		

- Deadbolt and 10÷16 mm adjustable latch (backset 21 mm 10÷13 mm)
- Stainless steel faceplate 22x3

1	85	22	21	0,407	12	1	44660	20	0	20	
1	85	22	25	0,431	12	1	44660	25	0	20	
1	85	22	30	0,470	12	1	44660	30	0	20	
1	85	22	35	0,505	12	1	44660	35	0	20	



REPLACING 44625 SERIES

- Deadbolt and 10÷16 mm adjustable latchbolt (for 21 mm backset, 10 to 13 mm)
- Zinc-plated faceplate 22x3
- Non-centrally positioned deadbolt
- Deadbolt thickness 8.5 mm.

2	85	22	21	0,420	12	1	44665	20	0		
2	85	22	25	0,446	12	1	44665	25	0		
2	85	22	30	0,486	12	1	44665	30	0		
2	85	22	35	0,518	12	1	44665	35	0		



REPLACING 44630 SERIES

- Deadbolt and 2.5÷14.5 mm adjustable latch
- Zinc-plated faceplate 22x3


1	22	21	0,368	12	1	44670	20	0			
1	22	25	0,394	12	1	44670	25	0			
1	22	30	0,470	12	1	44670	30	0			
1	22	35	0,463	12	1	44670	35	0			

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.




- REPLACING 44640 SERIES**
- Latch only
 - Zinc-plated faceplate 22x3

1	22	21	0,334	12	1 44680 20 0
1	22	25	0,357	12	1 44680 25 0
1	22	30	0,396	12	1 44680 30 0
1	22	35	0,435	12	1 44680 35 0



- Zinc-plated steel faceplate
- Laminated steel hook bolt
- Zinc-plated steel flat strike plate item.1.07028.00.0

1	20	30	0,315	1	1 45110 30 0
1	20	35	0,325	1	1 45110 35 0
1	20	40	0,330	1	1 45110 40 0
1	20	45	0,365	1	1 45110 45 0
1	20	50	0,370	1	1 45110 50 0
1	20	60	0,405	1	1 45110 60 0



- Brass faceplate
- Laminated steel hook bolt
- Brass flat strike plate item 1.07028.10.0
- ON REQUEST:
Fin. 12 (nickel-plated)

1	20	30	0,315	1	1 45100 30 0
1	20	35	0,325	1	1 45100 35 0
1	20	40	0,330	1	1 45100 40 0
1	20	45	0,365	1	1 45100 45 0
1	20	50	0,370	1	1 45100 50 0
1	20	60	0,405	1	1 45100 60 0



Technical features:

- Zinc-plated case
- Zinc-plated faceplate
- Brass latch, roller and bolt
- Current absorption 1,4 A
- Voltage 12 V ac CE

Supplied as standard:

- Cylinder fixing screws
- Instruction sheet (if this is provided for)

On request:

- Specific striker (see Vademecum)

Hand:

0 = Non-handed

1 = R.H. inwards

2 = L.H. inwards

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.
	• Dead-locking latch	16	15	0,360	1	1	1	14020	15	1	
		16	15	0,355	1	1	1	14020	15	2	
		16	18	0,371	1	1	1	14020	18	1	
		16	18	0,365	1	1	1	14020	18	2	
	• Dead-locking latch	20	15	0,381	1	1	1	14021	15	1	
		20	15	0,381	1	1	1	14021	15	2	
		20	18	0,394	1	1	1	14021	18	1	
		20	18	0,394	1	1	1	14021	18	2	
	• Nickel-plated faceplate • Nickel-plated deadbolt only • Nickel-plated steel flat striker item 1.07027.00.0	1	20	16	0,265	1	1	44210	16	0	
	• Case height 85 mm. • Cylinder activated non-handed latch	16	15	0,140	1	1	1	44217	15	0	
	• Case height 85 mm. • Cylinder activated non-handed latch	20	15	0,150	1	1	1	44218	15	0	

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • 4.5 mm. extra protruding deadbolt and non-handed latch • Latch can be activated by key 	1	69	14	25	0,365	1	1 44219 25 0				
		1	69	14	30	0,410	1	1 44219 30 0				
	<ul style="list-style-type: none"> • deadbolt and non-handed latch • Latch can be activated by key except for locks with E=15 and 18 	1	69	16	15	0,290	1	1 44220 15 0				
		1	69	16	18	0,310	1	1 44220 18 0				
		1	69	16	25	0,350	1	1 44220 25 0				
		1	69	16	30	0,390	1	1 44220 30 0				
		1	69	16	35	0,425	1	1 44220 35 0				
	<ul style="list-style-type: none"> • deadbolt and non-handed latch • Latch can be activated by key 	1	69	14	35	0,450	1	1 44220 35 0 00 EN				
	<ul style="list-style-type: none"> • deadbolt and non-handed latch • Latch can be activated by key except for locks with E=15 and 18 	1	69	20	15	0,305	1	1 44221 15 0				
		1	69	20	18	0,328	1	1 44221 18 0				
		1	69	20	25	0,360	1	1 44221 25 0				
		1	69	20	30	0,405	1	1 44221 30 0				
		1	69	20	35	0,430	1	1 44221 35 0				
		<ul style="list-style-type: none"> • 4.5 mm. extra protruding deadbolt and non-handed latch • Latch can be activated by key except for locks with E=25 	2	69	14	25	0,390	1	1 44224 25 0			
2			69	14	30	0,434	1	1 44224 30 0				
<ul style="list-style-type: none"> • deadbolt and non-handed latch • Latch can be activated by key except for locks with E=15-18-25 		2	69	16	15	0,318	1	1 44225 15 0				
		2	69	16	18	0,335	1	1 44225 18 0				
		2	69	16	25	0,374	1	1 44225 25 0				
		2	69	16	30	0,416	1	1 44225 30 0				
		2	69	16	35	0,454	1	1 44225 35 0				
<ul style="list-style-type: none"> • ABITHAL PROFILE ROUND VERSION • deadbolt and non-handed latch • Latch can be activated by key 		2	69	14	35	0,450	1	1 44225 35 0 00 EN				
<ul style="list-style-type: none"> • deadbolt and non-handed latch • Latch can be activated by key except for locks with E=15-18-25 		2	69	20	15	0,336	1	1 44226 15 0				
		2	69	20	18	0,355	1	1 44226 18 0				
		2	69	20	25	0,385	1	1 44226 25 0				
		2	69	20	30	0,433	1	1 44226 30 0				
		2	69	20	35	0,465	1	1 44226 35 0				
		<ul style="list-style-type: none"> • Case height 85 mm. • Handle activated non-handed latch 			16	15	0,170	1	1 44227 15 0			
	<ul style="list-style-type: none"> • Case height 85 mm. • Handle activated non-handed latch 			20	15	0,180	1	1 44228 15 0				
	<ul style="list-style-type: none"> • Adjustable deadbolt and roller 	1	16	15	0,265	1	1 44230 15 0					
		1	16	18	0,292	1	1 44230 18 0					
		1	16	25	0,340	1	1 44230 25 0					
		1	16	30	0,375	1	1 44230 30 0					
		1	16	35	0,408	1	1 44230 35 0					
	<ul style="list-style-type: none"> • Adjustable deadbolt and roller 	1	20	15	0,293	1	1 44231 15 0					
		1	20	18	0,313	1	1 44231 18 0					
		1	20	25	0,359	1	1 44231 25 0					
		1	20	30	0,391	1	1 44231 30 0					
		1	20	35	0,426	1	1 44231 35 0					

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
	• Adjustable deadbolt and roller	2	16	15	0,300	1	1	44235	15	0		
		2	16	18	0,320	1	1	44235	18	0		
		2	16	25	0,366	1	1	44235	25	0		
		2	16	30	0,398	1	1	44235	30	0		
		2	16	35	0,434	1	1	44235	35	0		
	• Adjustable deadbolt and roller	2	20	18	0,340	1	1	44236	18	0		
		2	20	25	0,415	1	1	44236	25	0		
		2	20	30	0,419	1	1	44236	30	0		
		2	20	35	0,454	1	1	44236	35	0		
	• Case height 70 mm. • Adjustable roller			16	15	0,135	1	1	44237	15	0	
	• Case height 70 mm. • Adjustable roller			20	15	0,145	1	1	44238	15	0	
	• deadbolt only	1	16	15	0,180	1	1	44240	15	0		
		1	16	18	0,199	1	1	44240	18	0		
		1	16	25	0,234	1	1	44240	25	0		
		1	16	30	0,261	1	1	44240	30	0		
		1	16	35	0,290	1	1	44240	35	0		
	• deadbolt only	1	20	15	0,195	1	1	44241	15	0		
		1	20	18	0,211	1	1	44241	18	0		
		1	20	25	0,246	1	1	44241	25	0		
		1	20	30	0,273	1	1	44241	30	0		
		1	20	35	0,300	1	1	44241	35	0		
	• deadbolt only (without protrusion)	2	20	15	0,175	1	1	44242	15	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.
	• deadbolt only	2	16	15	0,210	1	1	44245	15	0	
		2	16	18	0,225	1	1	44245	18	0	
		2	16	25	0,256	1	1	44245	25	0	
		2	16	30	0,286	1	1	44245	30	0	
		2	16	35	0,315	1	1	44245	35	0	
	• deadbolt only	2	20	15	0,220	1	1	44246	15	0	
		2	20	18	0,239	1	1	44246	18	0	
		2	20	25	0,274	1	1	44246	25	0	
		2	20	30	0,300	1	1	44246	30	0	
		2	20	35	0,329	1	1	44246	35	0	
	<ul style="list-style-type: none"> • Nickel-plated laminar steel • Zinc plated steel flat striker item 1.07028.00.0 	1	20	16	0,255	1	1	45010	16	0	
	<ul style="list-style-type: none"> • Nickel-plated laminated steel hook with throw • Nickel-plated steel guide pin • Zinc plated steel flat striker item 1.07028.05.0 	1	20	16	0,260	1	1	45012	16	0	
	<ul style="list-style-type: none"> • Nickel-plated laminated steel hook with latch bolt • Dead locking latch • Nickel-plated steel guide pin • Zinc plated steel flat striker item 1.07028.05.0 	1	20	16	0,260	1	1	45027	16	0	



Technical features:

- Zinc-plated case
- Zinc-plated faceplate
- Brass latch, roller and deadbolt
- Latch or reversible latch/bolt (where this is provided for)
- Electrical and mechanical versions are interchangeable
- Current absorption 3,1 A
- Voltage 12 V ac CE

Hand:
0 = Non-handed

Cylinder to be ordered separately








Supplied as standard:






- Cylinder fixing screws
- Instruction sheet

On request:

- Specific striker (see Vademecum)
- Mechanical control button item 1.06110.10.0 (electrical versions)

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch 	67	16	70	0,560	1	1	14350	70	0	
		67	16	80	0,595	1	1	14350	80	0	
		67	16	90	0,627	1	1	14350	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch 	67	20	70	0,580	1	1	14351	70	0	
		67	20	80	0,633	1	1	14351	80	0	
		67	20	90	0,643	1	1	14351	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch • 4.5 mm. extra protruding latch and pin 	67	14,7	70	0,576	1	1	14352	70	0	
		67	14,7	80	0,608	1	1	14352	80	0	
		<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch 	67	16	70	0,562	1	1	14450	70	0
67			16	80	0,594	1	1	14450	80	0	
67			16	90	0,629	1	1	14450	90	0	
<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch 		67	20	70	0,580	1	1	14451	70	0	
		67	20	80	0,608	1	1	14451	80	0	
		67	20	90	0,645	1	1	14451	90	0	
<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch • 4.5 mm. extra protruding latch and pin 		67	14,7	70	0,577	1	1	14452	70	0	
		67	14,7	80	0,609	1	1	14452	80	0	
		<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch and deadbolt 	2	67	16	70	0,612	1	1	14460	70
	2		67	16	80	0,656	1	1	14460	80	0
	2		67	16	90	0,709	1	1	14460	90	0
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch and deadbolt 	2	67	20	70	0,627	1	1	14461	70	0
		2	67	20	80	0,665	1	1	14461	80	0
		2	67	20	90	0,722	1	1	14461	90	0
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch and deadbolt • 4.5 mm. extra protruding latch, pin and deadbolt 	2	67	14,7	70	0,624	1	1	14462	70	0
		2	67	14,7	80	0,670	1	1	14462	80	0
			2	67	14,7	90	0,721	1	1	14462	90

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
 <ul style="list-style-type: none"> • Case height 64 mm. • Dead-locking latch only • Hold-open latch 		67	16	70	0,547	1	1	14510	70	0		
		67	16	80	0,580	1	1	14510	80	0		
		67	16	90	0,600	1	1	14510	90	0		
			67	20	70	0,564	1	1	14511	70	0	
			67	20	80	0,580	1	1	14511	80	0	
			67	20	90	0,600	1	1	14511	90	0	
			67	14,7	70	0,554	1	1	14512	70	0	
			67	14,7	80	0,580	1	1	14512	80	0	
			67	14,7	90	0,600	1	1	14512	90	0	
 <ul style="list-style-type: none"> • Case height 44 mm. • Latch with incorporated deadbolt 		1	67	16	60	0,400	12	1	44150	60	0	
		2	67	16	70	0,415	12	1	44150	70	0	
		2	67	16	80	0,445	12	1	44150	80	0	
		2	67	16	90	0,470	12	1	44150	90	0	
			1	67	20	60	0,423	12	1	44151	60	0
			2	67	20	70	0,445	12	1	44151	70	0
			2	67	20	80	0,460	12	1	44151	80	0
			2	67	20	90	0,490	12	1	44151	90	0
			2	67	14,7	70	0,438	12	1	44152	70	0
			2	67	14,7	80	0,455	12	1	44152	80	0
			2	67	14,7	90	0,475	12	1	44152	90	0
			 <ul style="list-style-type: none"> • Case height 64 mm. • Latch with incorporated deadbolt 		1	67	16	60	0,521	12	1	44155
2	67	16			70	0,550	12	1	44155	70	0	
2	67	16			80	0,570	12	1	44155	80	0	
2	67	16			90	0,590	12	1	44155	90	0	
		1		67	20	60	0,531	12	1	44156	60	0
		2		67	20	70	0,576	12	1	44156	70	0
		2		67	20	80	0,590	12	1	44156	80	0
		2		67	20	90	0,610	12	1	44156	90	0
 <ul style="list-style-type: none"> • Case height 44 mm. • Adjustable roller with incorporated deadbolt 		1	16	60	0,384	12	1	44160	60	0		
		2	16	70	0,413	12	1	44160	70	0		
		2	16	80	0,450	12	1	44160	80	0		
		2	16	90	0,470	12	1	44160	90	0		
			1	20	60	0,404	12	1	44161	60	0	
			2	20	70	0,420	12	1	44161	70	0	
			2	20	80	0,450	12	1	44161	80	0	
			2	20	90	0,470	12	1	44161	90	0	
 <ul style="list-style-type: none"> • Case height 77 mm. • deadbolt only 		2	16	70	0,521	1	1	44350	70	0		
		2	20	70	0,529	1	1	44351	70	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Case height 77 mm. deadbolt only 	2	16	70	0,516	1	1	44450	70	0		
	<ul style="list-style-type: none"> Case height 77 mm. deadbolt only 	2	20	70	0,533	1	1	44451	70	0		
	<ul style="list-style-type: none"> Case height 77 mm. deadbolt and latch Latch bolt is withdrawn by the handle 	2	67	16	70	0,590	1	1	44360	70	0	
		2	67	16	80	0,598	1	1	44360	80	0	
		2	67	16	90	0,621	1	1	44360	90	0	
	<ul style="list-style-type: none"> Case height 77 mm. deadbolt and latch Latch bolt is withdrawn by the handle 	2	67	20	70	0,585	1	1	44361	70	0	
		2	67	20	80	0,609	1	1	44361	80	0	
		2	67	20	90	0,641	1	1	44361	90	0	
	<ul style="list-style-type: none"> Case height 77 mm. 4.5 mm. extra protruding deadbolt and latch Latch bolt is withdrawn by the handle 	2	67	14,7	70	0,582	1	1	44362	70	0	
		2	67	14,7	80	0,613	1	1	44362	80	0	
		2	67	14,7	90	0,642	1	1	44362	90	0	
	<ul style="list-style-type: none"> Case height 77 mm. deadbolt and latch 	2	67	16	70	0,568	1	1	44460	70	0	
		2	67	16	80	0,590	1	1	44460	80	0	
		2	67	16	90	0,628	1	1	44460	90	0	
	<ul style="list-style-type: none"> Case height 77 mm. deadbolt and latch 	2	67	20	70	0,583	1	1	44461	70	0	
		2	67	20	80	0,611	1	1	44461	80	0	
		2	67	20	90	0,630	1	1	44461	90	0	
	<ul style="list-style-type: none"> Case height 77 mm. 4.5 mm. extra protruding deadbolt and latch 	2	67	14,7	70	0,587	1	1	44462	70	0	
		2	67	14,7	80	0,605	1	1	44462	80	0	
		2	67	14,7	90	0,639	1	1	44462	90	0	
	<ul style="list-style-type: none"> Case height 77 mm. Adjustable deadbolt and roller 	2	16	70	0,576	1	1	44370	70	0		
		2	16	80	0,579	1	1	44370	80	0		
		2	16	90	0,610	1	1	44370	90	0		
	<ul style="list-style-type: none"> Case height 77 mm. Adjustable deadbolt and roller 	2	20	70	0,568	1	1	44371	70	0		
		2	20	80	0,590	1	1	44371	80	0		
		2	20	90	0,624	1	1	44371	90	0		
	<ul style="list-style-type: none"> Case height 77 mm. Adjustable deadbolt and roller 	2	16	70	0,542	1	1	44470	70	0		
		2	16	80	0,583	1	1	44470	80	0		
		2	16	90	0,607	1	1	44470	90	0		
	<ul style="list-style-type: none"> Case height 77 mm. Adjustable deadbolt and roller 	2	20	70	0,559	1	1	44471	70	0		
		2	20	80	0,601	1	1	44471	80	0		
		2	20	90	0,620	1	1	44471	90	0		



Technical features:

- Case height 82 mm
- Zinc-plated case
- Zinc-plated faceplate
- Brass latch, roller and bolt
- Electrical versions are interchangeable with item 44115/6 and item 44145/6
- Current absorption 1,3 A
- Voltage 12 V ac CE

Supplied as standard:

- Cylinder fixing screws
- Instruction sheet (if this is provided for)

On request:

- Specific striker (see Vademecum)
- Mechanical control button item 1.06110.10.0

Hand:

0 = Non-handed




1 = R.H. inwards

2 = L.H. inwards

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM					
								Type	Dim.	Hand	Fin. Pers. Spec.		
	• Dead-locking latch	48	16	58	0,530	12	1	14010	60	1			
		48	16	58	0,530	12	1	14010	60	2			
		48	20	58	0,550	12	1	14011	60	1			
		48	20	58	0,565	12	1	14011	60	2			
	• Dead-locking latch • Hold-open latch	48	16	58	0,556	12	1	14012	60	1			
		48	16	58	0,556	12	1	14012	60	2			
		48	16	58	0,557	12	1	14017	60	1			
		48	16	58	0,557	12	1	14017	60	2			
		• deadbolt only	2	16	58	0,485	12	1	44110	60	0		
			2	20	58	0,485	12	1	44111	60	0		
		• deadbolt only • Interchangeable with 14010 series	2	16	58	0,475	12	1	44115	60	0		
			2	20	58	0,485	12	1	44116	60	0		
	• deadbolt and non-handed latch	2	48	16	58	0,553	12	1	44120	60	0		
		2	48	20	58	0,570	12	1	44121	60	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
 <ul style="list-style-type: none"> • deadbolt and adjustable roller 		2	16	58	0,517	12	1	44130	60	0		
		2	20	58	0,530	12	1	44131	60	0		
 <ul style="list-style-type: none"> • Non-handed latch-bolt • Latch-bolt with incorporated deadbolt 		1	48	16	58	0,500	12	1	44140	60	0	
		1	48	20	58	0,510	12	1	44141	60	0	
 <ul style="list-style-type: none"> • Non-handed latch-bolt • Latch-bolt with incorporated deadbolt • Interchangeable with series 14010 		1	48	16	58	0,500	12	1	44145	60	0	
		1	48	20	58	0,515	12	1	44146	60	0	

Technical features:

- Rated voltage 12-24V ac and 12-24V dc CE.
- Long lipped ZAL stainless alloy casing
- Steel or stainless steel interchangeable faceplates

Supplied as standard:

- Faceplate fixing screws
- Faceplate spacer (series 05020, 05021, 05005.00.0.20)

On request:

- Booster module item 1.07022.00.0

Hand:
0 = Non-handed


1 = R.H. inwards

L.H. outwards

2 = L.H. inwards


R.H. outwards

Type	Description	Faceplate	Unit weight	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.

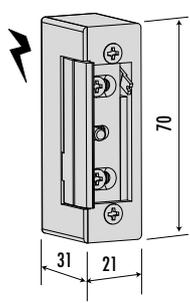


<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac CE - Current absorption 0,7 A • Hold open catch mechanism • Hold open device 	0,185	12	1	15100 00 0				
<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac CE - Current absorption 0,7A • Hold open catch mechanism 	0,185	12	1	15101 00 0				
<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac/dc CE - Current absorption 0,7A • Hold open device 	0,170	12	1	15102 00 0				
<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac/dc CE - Current absorption 0,7A 	0,185	12	1	15110 00 0				
<ul style="list-style-type: none"> • Electric striker casing • Voltage 24V ac CE - Current absorption 0,4A • Hold open catch mechanism • Hold open device 	0,185	12	1	15120 00 0				
<ul style="list-style-type: none"> • Electric striker casing • Voltage 24V ac CE - Current absorption 0,4A • Hold open catch mechanism 	0,185	12	1	15121 00 0				
<ul style="list-style-type: none"> • Electric striker casing • Voltage 24V ac/dc CE- Current absorption 0,4A • Hold open device 	0,185	12	1	15122 00 0				
<ul style="list-style-type: none"> • Electric striker casing • Voltage 24V ac/dc CE- Current absorption 0,4A 	0,185	12	1	15130 00 0				
<ul style="list-style-type: none"> • Electric striker casing • Live coils: opening is only obtained if power supply is cut • Voltage 12V dc CE - Current absorption 0,20A 	0,185	12	1	15140 00 0				
<ul style="list-style-type: none"> • Electric striker casing • Live coils: opening is only obtained if power supply is cut • Voltage 24V dc CE - Current absorption 0,12A 	0,185	12	1	15150 00 0				


Type	Description	Faceplate	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac CE - Current absorption 0,7A • Inside hold open catch mechanism • Hold open device 		0,185	12	1	15160	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V dc CE - Current absorption 0,25A 		0,185	12	1	15170	00	0	
	<ul style="list-style-type: none"> • Electric striker casing without coil • Hold open device 		0,170	12	1	15180	00	0	




	<ul style="list-style-type: none"> • Electric strike body • 1 microswitch for latch position • Adjustable long lip • Voltage 10/24V AC/DC EC • Absorbed current 0.24 A at 10 V DC 		0,280	12	1	15200	00	0	
--	--	--	-------	----	---	-------	----	---	--



	<ul style="list-style-type: none"> • Square corner steel flat faceplate compatible with latch only locks • FINISHES gold fin. 06 silver fin. 07 nickel-plated fin. 12 brass lacquered fin. 38 satin-finished stainless steel fin. 20 	25	0,070	6	1	05005	00	0 06	
		25	0,070	6	1	05005	00	0 07	
		25	0,070	6	1	05005	00	0 12	
		25	0,070	6	1	05005	00	0 20	
		25	0,070	6	1	05005	00	0 38	

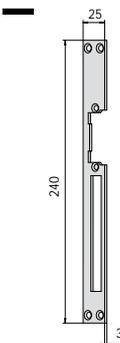

	<ul style="list-style-type: none"> • Square corner steel flat faceplate • For use with latch locks 44600, 46000, 49000, 57300 series • SUPPLIED AS STANDARD spacer of nylon item 1.06141.84.0 (2 pair 3mm) 	25	0,098	6	1	05020	00	0	
--	---	----	-------	---	---	-------	----	---	--

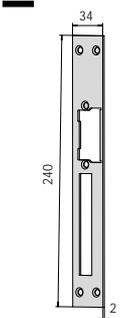


	<ul style="list-style-type: none"> • Square corner steel flat faceplate • For use with latch locks 44600, 46000, 49000, 57300 series • SUPPLIED AS STANDARD spacer of nylon item 1.06141.85.0 (2 pair 3 mm) 	34	0,085	6	1	05021	00	1	
		34	0,085	6	1	05021	00	2	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.71.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,173	12	1	06463	05 0
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,166	12	1	06463	06 0
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,160	12	1	06463	07 0
	<ul style="list-style-type: none"> • For roller locks use nylon insert item 1.06141.71.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,150	12	1	06463	09 0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 	19000, 49000, 43200, 43700, 43800	0,180	12	1	06463	16	0	
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 	19000, 49000, 43200, 43700, 43800	0,170	12	1	06463	17	0	
	<ul style="list-style-type: none"> • Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,185	12	1	06463	21	0	
	<ul style="list-style-type: none"> • REPLACES ITEM 1.06463.08.0 • Lateral adjustment 4 mm • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,130	12	1	06463	22	0	
	<ul style="list-style-type: none"> • IDEM • Central part in stainless steel 		0,129	12	1	06463	23	0	


Type	Description	For series/item	Unit weight	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.

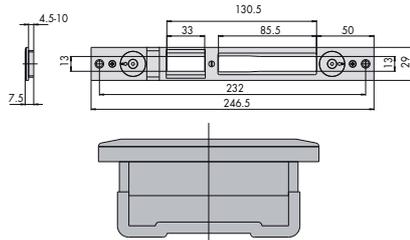

- REPLACING ITEM 1.06463.04.0
- Lateral adjustment 2.5 mm.
- 4.5 to 10 mm adjustable thickness.
- For roller locks, use nylon insert item 1.06141.70.0

16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,150	12	1	06463	24	0
	0,150	12	1	06463	25	0


- AS ABOVE
- Stainless steel

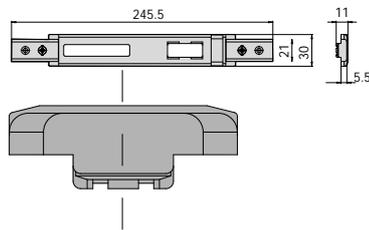

- Lateral adjustment 8 mm
- For roller locks use nylon insert item 1.06141.71.0
- PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc.

19000, 49000, 43200, 43700, 43800	0,195	12	1	06463	31	0
-----------------------------------	-------	----	---	-------	----	---


- ON REQUEST:
- nickel-plated brass (fin. 12)

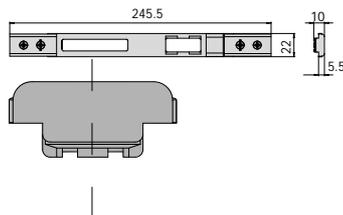

- REPLACES ITEM 1.06463.18.0
- Lateral adjustment 4 mm
- Central part in lacquered steel
- For roller locks use nylon insert item 1.06141.71.0

19000, 49000, 43200, 43700, 43800	0,145	12	1	06463	32	0
-----------------------------------	-------	----	---	-------	----	---

- IDEM
- Central part in stainless steel

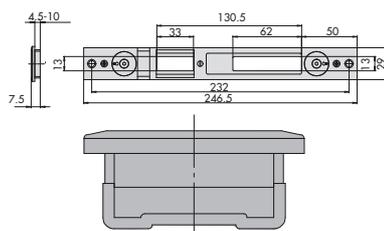

- REPLACING ITEM 1.06463.14.0
- Lateral adjustment 2.5 mm
- 4.5 to 10 mm adjustable thickness.
- For roller locks, use nylon insert item 1.06141.70.0



19000, 49000, 43200, 43700, 43800	0,158	12	1	06463	34	0
-----------------------------------	-------	----	---	-------	----	---

- IDEM
- Central part in stainless steel

	0,158	12	1	06463	35	0
--	-------	----	---	-------	----	---


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM											
					Type	Dim.	Hand	Fin.	Pers.	Spec.						
	<ul style="list-style-type: none"> For roller locks use nylon insert item 1.06141.71.0 	1 06443 00 0,	0,053	12	1	06465	02	0								
		1 06443 05 0,														
1 06453 05 0,																
46200,46210,																
46220,46420,																
46520,56357,																
57330,57335,																
57370,57375																
	<ul style="list-style-type: none"> For roller locks use nylon insert item 1.06141.71.0 	1 06443 00 0,								0,108	12	1	06465	03	0	
		1 06443 05 0,														
1 06443 31 0,																
1 06443 36 0,																
1 06443 41 0,																
1 06443 46 0,																
1 06453 05 0,																
17352,17357,																
19000,43700,																
43800,46200,																
46210,46220,																
46420,46520,																
49000,56357,																
57312,57317,																
57320,57325,																
57330,57335,																
57352,57357,																
57360,57365,																
57370,57375																
	<ul style="list-style-type: none"> Lateral adjustment 2,5 mm For roller locks use nylon insert item 1.06141.71.0 	1 06443 00 0,	0,125	12	1	06465	05	0								
		1 06443 05 0,														
1 06443 31 0,																
1 06443 36 0,																
1 06443 41 0,																
1 06443 46 0,																
1 06453 05 0,																
17352,17357,																
19000,43700,																
43800,46200,																
46210,46220,																
46420,46520,																
49000,56357,																
57312,57317,																
57320,57325,																
57330,57335,																
57352,57357,																
57360,57365,																
57370,57375																

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.

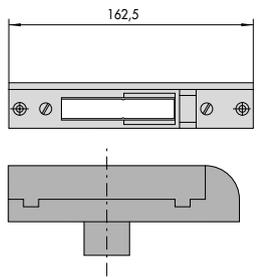


- Lateral adjustment 2,5 mm
- For roller locks use nylon insert item 1.06141.70.0

1 06443 00 0,	0,122	12	1 06465 06 0
1 06443 05 0,			
1 06443 31 0,			
1 06443 36 0,			
1 06443 41 0,			
1 06443 46 0,			
1 06453 05 0,			
17352, 17357,			
19000, 43700,			
43800, 46200,			
46210, 46220,			
46420, 46520,			
49000, 56357,			
57312, 57317,			
57320, 57325,			
57330, 57335,			
57352, 57357,			
57360, 57365,			
57370, 57375			

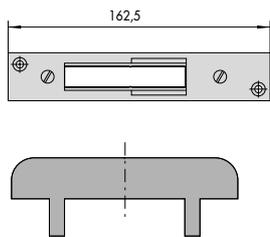


- Lateral adjustment 2,5 mm
- For roller locks use nylon insert item 1.06141.70.0

1 06443 00 0,	0,117	12	1 06465 07 0
1 06443 05 0,			
1 06443 31 0,			
1 06443 36 0,			
1 06443 41 0,			
1 06443 46 0,			
1 06453 05 0,			
17352, 17357,			
19000, 43700,			
43800, 46200,			
46210, 46220,			
46420, 46520,			
49000, 56357,			
57312, 57317,			
57320, 57325,			
57330, 57335,			
57352, 57357,			
57360, 57365,			
57370, 57375			

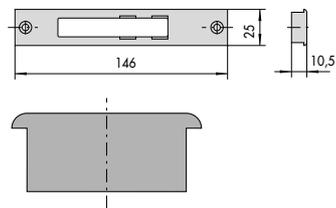

- For roller locks use nylon insert item 1.06141.70.0

1 06443 00 0,	0,099	12	1 06465 08 0
1 06443 05 0,			
1 06453 05 0,			
46200, 46210,			
46220, 46420,			
46520			

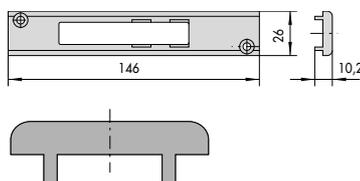


- For roller locks use nylon insert item 1.06141.70.0

1 06443 00 0,	0,115	12	1 06465 10 0
1 06443 05 0,			
1 06453 05 0,			
46200, 46210,			
46220, 46420,			
46520			

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. • REQUEST: nickel-plated brass (fin. 12) 	1 06443 00 0, 1 06443 05 0, 1 06443 31 0, 1 06443 36 0, 1 06443 41 0, 1 06443 46 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,140	12	1	06465	21	0	
	<ul style="list-style-type: none"> • REPLACES ITEM 1.06465.02.0 • Lateral adjustment 4 mm • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0 	1 06443 00 0, 1 06443 05 0, 1 06443 31 0, 1 06443 36 0, 1 06443 41 0, 1 06443 46 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,112	12	1	06465	22	0	
<ul style="list-style-type: none"> • IDEM • Central part in stainless steel 			0,112	12	1	06465	23	0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.

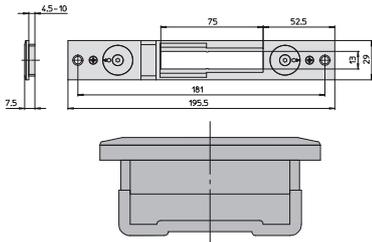

- REPLACING ITEM 1.06463.04.0
- Lateral adjustment 2.5 mm
- 4.5 to 10 mm adjustable thickness.
- For roller locks, use nylon insert item 1.06141.70.0

1 06443 00 0,	0,125	12	1 06465 24 0
1 06443 05 0,			
1 06443 31 0,			
1 06443 36 0,			
1 06443 41 0,			
1 06443 46 0,			
1 06453 05 0,			
17352, 17357,			
19000, 43700,			
43800, 46200,			
46210, 46220,			
46420, 46520,			
49000, 56357,			
57312, 57317,			
57320, 57325,			
57330, 57335,			
57352, 57357,			
57360, 57365,			
57370, 57375			

- AS ABOVE
- Stainless steel

	0,125	12	1 06465 25 0
--	-------	----	---------------------

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	• Black nylon rose	02400	0,001	100	1	06002	00	0	
	• Set of black nylon roses for European profile cylinders		0,004	100	1	06012	01	0	
	• Set of black nylon roses for oval cylinders		0,004	100	1	06027	01	0	
	• Nickel-plated steel screw	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,006	50	1	06048	02	0	
	• Nickel-plated steel screw	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,008	50	1	06048	03	0	
	• Zinc plated steel flat striker	44220, 44221, 44225, 44226	0,050	25	1	06077	16	0	
	• Zinc plated steel flat striker	44220, 44221, 44225, 44226	0,070	25	1	06077	20	0	
	• Zinc plated steel flat striker	44230, 44231, 44235, 44236	0,052	25	1	06078	16	0	
	• Zinc plated steel flat striker	44230, 44231, 44235, 44236	0,070	25	1	06078	20	0	
	• Zinc plated steel flat striker	44240, 44241, 44245, 44246	0,030	25	1	06079	16	0	

Type	Description	For series/item	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	• Zinc plated steel flat striker	44240, 44241, 44245, 44246	0,045	25	1 06079	20	0	
	• Zinc plated steel flat striker	44360, 44361, 44460, 44461	0,037	25	1 06079	77	0	
	• Zinc plated steel flat striker	44237, 44238	0,025	25	1 06080	16	0	
	• Zinc plated steel flat striker	44237, 44238	0,034	25	1 06080	20	0	
	• Brass floor striker diameter 11 mm. • USED FOR: extension bolts with 10 mm. diameter rods	1 06415 00 0, 1 06441 15 0, 1 07088 03 0, 1 07088 04 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57019, 57020, 57024, 57033, 57055, 57215, 57217, 57255, 57259, 57265, 57296, 57831, 57837, 57851, 57857	0,016	12	1 06086	00	0	
	• Brass floor striker, diameter 9 mm. • USED FOR: Internal extension bolts with 8 mm. diameter rods	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,013	12	1 06086	01	0	
	• Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: Internal extension bolts with 8 and 10 mm. diameter rods multi-point locks series 46445 extension bolt extension bolt for Multitop item 1.06449.11.0	1 06415 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57019, 57020, 57024, 57033, 57055, 57215, 57217, 57255, 57259, 57265, 57296, 57831, 57837, 57851, 57857	0,020	12	1 06086	02	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Nylon push-button for electric locks with hold-open device (except series 14020 and 14021) 		0,020	12	1	06110	15	0	
	<ul style="list-style-type: none"> Set of chrome-plated brass key guides 	17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,038	5	1	06123	00	1	
	<ul style="list-style-type: none"> Set of nylon key guides 	17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,035	5	1	06123	03	0	
	<ul style="list-style-type: none"> Set of nylon faceplate spacers (8 mm.) for Alpha and Esedra Doors Shops profiles Fitting both mid-rail horizontal locks and narrow frame upright locks 		0,010	25	1	06141	52	0	
	<ul style="list-style-type: none"> Set of nylon faceplate spacers (2 mm.) 	44200, 44600	0,002	25	1	06141	53	0	
	<ul style="list-style-type: none"> Nylon roller insert for striker of locks series 44600 		0,003	25	1	06141	55	0	
	<ul style="list-style-type: none"> Nylon roller insert for striker of locks series 57300 	1 56357 10 0, 1 56357 90 0, 1 56358 90 0	0,004	12	1	06141	56	0	
	<ul style="list-style-type: none"> Nylon faceplate spacer (2.5 mm.) for mid-rail locks with 16 and 20 mm. faceplate 		0,011	25	1	06141	57	0	
	<ul style="list-style-type: none"> Nylon faceplate spacer (5 mm.) for locks with 16 and 20 mm. faceplate 		0,016	25	1	06141	63	0	
	<ul style="list-style-type: none"> Set of nylon faceplate spacers (5 mm.) for locks and upright locks 		0,003	25	1	06141	65	0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Nylon faceplate spacer (3 mm.) for locks with 16 and 20 mm. faceplate 		0,010 25	1	06141	66	0
	<ul style="list-style-type: none"> Nylon faceplate spacer (5 mm.) for locks with 16 and 20 mm. faceplate 		0,010 25	1	06141	67	0
	<ul style="list-style-type: none"> Set of nylon faceplate spacers (3 mm.) 	16200, 17000, 19200, 46200, 49200, 56357, 57000	0,005 25	1	06141	68	0
	<ul style="list-style-type: none"> Set of nylon faceplate spacers (2 mm.) 	16200, 17000, 19200, 46200, 49200, 56357, 57000	0,001 25	1	06141	69	0
	<ul style="list-style-type: none"> Nylon roller insert 	1 06463 06 0, 1 06463 07 0, 1 06463 16 0, 1 06463 17 0, 1 06463 24 0, 1 06463 34 0, 1 06465 06 0, 1 06465 07 0, 1 06465 08 0, 1 06465 09 0, 1 06465 10 0, 1 06465 24 0	0,004 12	1	06141	70	0
	<ul style="list-style-type: none"> Nylon roller insert 	1 06463 05 0, 1 06463 08 0, 1 06463 09 0, 1 06463 15 0, 1 06463 18 0, 1 06463 19 0, 1 06463 21 0, 1 06463 22 0, 1 06463 23 0, 1 06463 31 0, 1 06463 32 0, 1 06463 33 0, 1 06465 02 0, 1 06465 03 0, 1 06465 05 0, 1 06465 21 0, 1 06465 22 0, 1 06465 23 0	0,003 12	1	06141	71	0
	<ul style="list-style-type: none"> Nylon cover for DOUBLE-LEAF Ekip 50 door profil 	1 06463 05 0, 1 06463 15 0, 1 06465 05 0	0,010 12	1	06141	74	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Nylon roller insert 	1 06141 40 0, 1 06141 41 0, 1 06141 42 0, 1 06141 43 0, 1 06141 44 0, 1 06141 46 0	0,002	12	1	06141	75	0
	<ul style="list-style-type: none"> • Nylon roller insert 	1 06285 30 0, 1 06285 32 0, 1 06285 34 0, 1 06285 36 0, 1 06285 38 0, 1 06285 40 0, 1 06285 42 0, 1 06285 44 0	0,002	12	1	06141	76	0
	<ul style="list-style-type: none"> • Striker spacer (1,5 mm.) 	1 06285 36 0, 1 06463 04 0, 1 06463 14 0, 1 06465 04 0, 1 06465 08 0, 1 06465 14 0	0,005	25	1	06141	77	0
	<ul style="list-style-type: none"> • Nylon faceplate spacer (3 mm.) 	16200, 18200, 46200, 48200	0,020	12	1	06141	78	0
	<ul style="list-style-type: none"> • Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height from 7.5 to 10 mm) 	1 06141 40 0, 1 06285 36 0, 1 06463 04 0, 1 06463 14 0, 1 06463 24 0, 1 06463 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 04 0, 1 06465 24 0, 1 06465 25 0, 1 06465 34 0, 1 06465 35 0, 1 06465 44 0	0,019	25	1	06141	79	0
	<ul style="list-style-type: none"> • Upper striker for extension bolt • Black nylon 	1 07089 52 0	0,022	25	1	06141	80	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Nylon roller insert 	1 06278 06 0, 1 06278 28 0	0,002 25				1 06141 82 0
	<ul style="list-style-type: none"> Nylon faceplate spacer (3 mm.) 	1 05020 00 0	0,012 12				1 06141 84 0
	<ul style="list-style-type: none"> Nylon faceplate spacer (3 mm.) 	1 05021 00 1, 1 05021 00 2	0,025 25				1 06141 85 0
	<ul style="list-style-type: none"> Nylon roller insert 	1 06232 05 0, 1 06461 25 0, 1 06461 30 0, 1 06461 35 0, 1 06461 40 0, 1 06461 45 0	0,002 12				1 06141 86 0
	<ul style="list-style-type: none"> Set of additional spacers for cylinder protection roses for profiles wider than 65-87 mm. Spacers from 2 mm. (11 pieces) Screws M5 x 110 mm. (2 pieces) 	1 06460 05 0	0,145 1				1 06141 87 0
	<ul style="list-style-type: none"> Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height from 3 to 7.5 mm) 	1 06463 24 0, 1 06463 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 24 0, 1 06465 25 0, 1 06465 34 0, 1 06465 35 0	0,019 25				1 06141 89 0
	<ul style="list-style-type: none"> Spacer + long lip for electric strikes 		0,031 12				1 06141 95 0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Faceplate long lip for electric strikes 		0,047	12	1	06141	96	0	
	<ul style="list-style-type: none"> • Noise proof bushes for bolts diameter 8,5 mm. (pc.2) diameter 10 mm. (pc.1) 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,004	25	1	06147	00	0	
	<ul style="list-style-type: none"> • Noise proof bushes for bolts diameter 10 mm. (1 piece) 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,001	100	1	06147	01	0	
	<ul style="list-style-type: none"> • Zinc-plated steel flat strike 	44650, 44660, 44665, 44680	0,096	25	1	06157	00	0	
	<ul style="list-style-type: none"> • Zinc-plated steel flat strike 	44670	0,100	25	1	06167	00	0	
	<ul style="list-style-type: none"> • Nylon guide rod 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06443 00 0, 1 06443 21 0, 1 06443 31 0, 1 06443 41 0, 1 06451 00 0, 1 06451 10 0, 1 06453 05 0, 1 07088 00 0	0,003	25	1	06224	00	0	
	<ul style="list-style-type: none"> • Zinc plated steel flat striker • Includes a pair of spacers item 1.06141.65.0 (roller insert item. 1.06141.86.0) 	44600, 46000	0,065	25	1	06232	05	0	
	<ul style="list-style-type: none"> • Zinc plated steel flat striker • Includes a pair of spacers item 1.06141.65.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0	0,069	25	1	06232	06	0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Zinc plated steel striker 	46215, 46217, 46225, 46227, 46325, 46327	0,086 25	1	06232	20	0
	<ul style="list-style-type: none"> • Stainless steel faceplate (25 mm.) 	46215, 46217, 46225, 46227	0,141 12	1	06233	00	0
	<ul style="list-style-type: none"> • Stainless steel faceplate (25 mm.) 	16215, 16217, 16225, 16227	0,160 12	1	06233	01	0
	<ul style="list-style-type: none"> • Stainless steel faceplate (25 mm.) 	46230, 46250, 46252	0,130 12	1	06233	02	0
	<ul style="list-style-type: none"> • Stainless steel faceplate (25 mm.) 	46200, 46210, 46212, 46220, 46222, 46240, 46260, 46265	0,144 12	1	06233	03	0
	<ul style="list-style-type: none"> • Set of threaded bushes (M5) in nylon 	1 07088 00 0, 57317, 57325, 57335	0,010 12	1	06290	00	0
	<ul style="list-style-type: none"> • Set of threaded bushes (M8) in metal 	1 06441 20 0, 16325, 17358, 56358, 56378, 57358, 57378	0,050 12	1	06290	05	0
	<ul style="list-style-type: none"> • Set of threaded bushes (M8) in metal 	19225, 49225, 49228, 49250	0,050 12	1	06290	06	0
	<ul style="list-style-type: none"> • Pair of threaded steel bushings (M8), anti-unscrewing 	56016, 57016, 57035, 57226, 57318, 57336	0,025 12	1	06290	10	0
	<ul style="list-style-type: none"> • Zinc plated steel saw resistant rod diameter 8 mm. • Lateral push resistance KN 8 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,036 12	1	06291	01	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Zinc plated hardened steel single-piece rod diameter 8 mm. • Lateral push resistance KN 14 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,038	12	1	06291	06	0	
	<ul style="list-style-type: none"> • Zinc-plated joining pin for bolt extension rods 	1 06415 00 0, 1 06416 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0, 1 07088 04 0	0,016	12	1	06291	20	0	
	<ul style="list-style-type: none"> • Stainless steel flat striker 25 x 3 mm. 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46212, 46220, 46222, 46240, 46260, 46265, 46420, 46520	0,057	12	1	06459	01	0	
	<ul style="list-style-type: none"> • Stainless steel flat striker 25 x 1.5 mm. 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46212, 46220, 46222, 46240, 46260, 46265, 46420, 46520	0,034	12	1	06459	02	0	
	<ul style="list-style-type: none"> • Sinterised stainless steel cylinder protection rose 	16000, 46000	0,125	1	1	06460	00	0	
	<ul style="list-style-type: none"> • Protective rose for cylinders RS3, ASTRAL (with long key, CL special execution) and ASIX in chrome-plated carbonitrided steel complete with: 2 mm spacers (19pcs), 1 mm spacer (2pcs) screws M5 x 73 mm. inside escutcheon • ON REQUEST: external ring item 1.06473.60.0 in polished, chrome-plated satin-finished steel 	19000, 49000	0,485	1	1	06460	05	0	

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.
	• Stainless steel flat striker 25 x 3 mm.	46215, 46217, 46225, 46227, 46425, 46435, 46445, 46525, 46625, 46725	0,082	12	1	06461	01	0
	• Stainless steel flat striker 25 x 1.5 mm.	46215, 46217, 46225, 46227, 46425, 46435, 46445, 46525, 46625, 46725	0,050	12	1	06461	02	0
	• Stainless steel flat striker 24 x 1.5 mm.	19000, 49000	0,053	12	1	06461	07	0
	• Stainless steel flat striker 25 x 3 mm.	46230, 46250, 46252, 46450, 46550, 46650, 46750	0,085	12	1	06461	11	0
	• Stainless steel flat striker 24 x 1,5 mm.	19000, 49000	0,034	12	1	06461	12	0
	• Stainless steel flat striker 36x2 mm for FORSTER "UNICO" profile for Multitop locks with latch+deadb and roller+deadb	19000, 49000	0,080	12	1	06461	17	0
	• Stainless steel flat striker 25 x 3 mm.	57320, 57325, 57360, 57365	0,075	12	1	06461	20	0
	• Stainless steel flat striker 25 x 3 mm.	56357, 57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,067	12	1	06461	21	0
	• Stainless steel flat striker 36 x 2 mm.	19000, 49000	0,046	12	1	06461	22	0

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Stainless steel "U" striker 24x6 mm for locks with latch/roller and swing bolt (roller insert item 1.06141.86.0) 		0,098 12	1	06461	25	0	
	<ul style="list-style-type: none"> Stainless steel "U" striker 24x6 mm for locks with swing bolt only 		0,065 12	1	06461	26	0	
	<ul style="list-style-type: none"> Stainless steel flat striker 24 x 3 mm. For roller locks use nylon insert item 1.06141.86.0 	19000, 49000	0,093 12	1	06461	30	0	
	<ul style="list-style-type: none"> Stainless steel flat striker 24 x 3 mm. 	19000, 49000	0,065 12	1	06461	34	0	
	<ul style="list-style-type: none"> Stainless steel U-shaped striker 24 x 6 mm. For roller locks use nylon insert item 1.06141.86.0 	19000, 49000	0,098 12	1	06461	35	0	
	<ul style="list-style-type: none"> Stainless steel U-shaped striker 24 x 6 mm. 	19000, 49000	0,065 12	1	06461	39	0	
	<ul style="list-style-type: none"> Stainless steel flat striker 24 x 3 mm. with deadbolt protection case For roller locks use nylon insert item 1.06141.86.0 	19000, 49000	0,182 12	1	06461	40	0	
	<ul style="list-style-type: none"> Stainless steel U-shaped striker 24 x 6 mm. For roller locks use nylon insert item 1.06141.86.0 	19000, 49000	0,182 12	1	06461	45	0	


Type	Description	For series/item	Unit weight 	Pieces 	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Stainless steel U-shaped striker 25 x 3 mm with nylon slide 	16205, 16207, 16215, 16217, 16225, 16227, 16425, 16435, 16445, 16525, 16625, 16725	0,077	12	1	06462	01	0	
	<ul style="list-style-type: none"> Stainless steel U-shaped striker 25 x 3 mm. 	17352, 17357, 57352, 57357, 57370, 57375	0,058	12	1	06462	20	0	
	<ul style="list-style-type: none"> Brass oval inside escutcheon for European profile cylinders Finish: Polished lacquered brass 		0,100	12	1	06473	20	0	
	<ul style="list-style-type: none"> Finish: Nickel-plated, satin-finished and chrome brass 		0,100	12	1	06473	20	0 B1	
	<ul style="list-style-type: none"> Brass oval inside escutcheon for European profile cylinders with adjustable shaft Finish: Polished lacquered brass 		0,100	12	1	06473	30	0	
	<ul style="list-style-type: none"> Finish: Nickel-plated, satin-finished and chrome brass 		0,100	12	1	06473	30	0 B1	
	<ul style="list-style-type: none"> Polished, chrome-plated satin-finished external ring 	1 06460 05 0	0,025	12	1	06473	60	0	
	<ul style="list-style-type: none"> Set of nylon contacts for electric locks complete with spacers: 2 mm. (6 pieces) 5 mm. (1 piece) 		0,047	6	1	06511	00	0	
	<ul style="list-style-type: none"> Set of coils 12 V ac CE 	14010, 14011, 14012, 14017	0,030	6	1	07013	00	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	• Zinc plated steel flat striker	44210	0,035	25	1	07027	00	0	
	• Zinc plated steel flat striker	45010, 45110	0,035	25	1	07028	00	0	
	• Brass flat striker	45100	0,035	25	1	07028	10	0	
	• Set of coils • 12 V ac CE	14020, 14021	0,027	6	1	07047	00	0	
	• Set of coils • 12 V ac CE	14350, 14351, 14352, 14450, 14451, 14452, 14460, 14461, 14462, 14510, 14511, 14512, 15500, 16000, 17500, 18000	0,035	6	1	07086	00	0	
	• Set of coils • 24 V ac CE	14350, 14351, 14352, 14450, 14451, 14452, 14460, 14461, 14462, 14510, 14511, 14512, 15500, 16000, 17500, 18000	0,035	6	1	07086	01	0	
	• Set of coils • 12 V ac CE	17352, 17353, 17357, 17358	0,035	6	1	07128	00	0	

Type	Description	For series/item	Unit weight 	Pieces 	ITEM
					Type Dim. Hand Fin. Pers. Spec.
	14010, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44210, 44227, 44240, 44245, 44350, 44450	0,016 25	1 06062 00 0		
	14010, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44210, 44227, 44240, 44245, 44350, 44450	0,019 25	1 06072 00 0		
	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 46200, 46210, 46220, 46420, 57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,024 25	1 06141 35 0		
	57320, 57325, 57360, 57365	0,030 25	1 06141 36 0		
	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 46200, 46210, 46220, 57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,034 25	1 06141 37 0		
	57320, 57325, 57360, 57365	0,030 25	1 06141 38 0		


Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<p>• For roller locks item 57320 - 57325 - 57360 - 57365 use nylon insert item 1.06141.75.0</p>	17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,035	25	1	06141	40	0
		17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,025	25	1	06141	42	0
		17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,029	25	1	06141	44	0
		44220, 44221, 44225, 44226	0,014	25	1	06277	01	0
		14460, 14461, 44120, 44121, 44360, 44361, 44460, 44461	0,018	25	1	06277	02	0
		44130, 44230, 44235, 44236, 44237, 44238, 44370, 44371, 44470, 44471	0,030	25	1	06277	03	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.

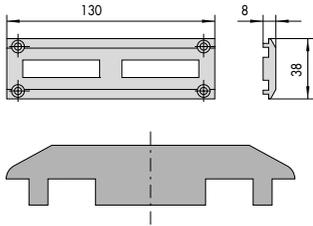


44220, 44221, 44225,
44226

0,030 25 **1 06277 10 0**

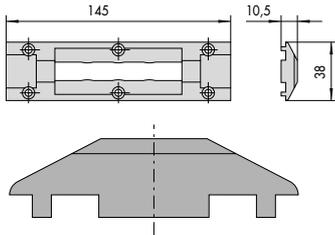


14460, 14461, 44120,
44121, 44360, 44361,
44460, 44461

0,026 25 **1 06277 11 0**

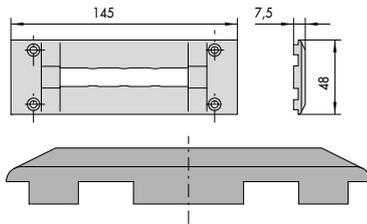


14460, 44120, 44360,
44460

0,021 25 **1 06277 14 0**

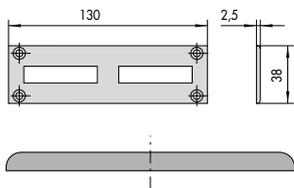


44221, 44226

0,015 25 **1 06277 28 0**

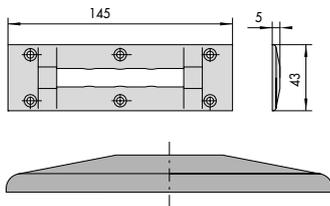

14461, 44121, 44361,
44461

0,018 25 **1 06277 32 0**

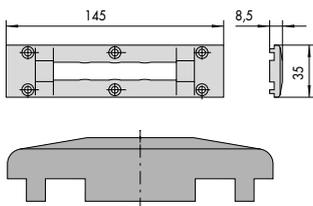


14461, 44121, 44361,
44461

0,030 25 **1 06277 41 0**


Type	Description	For series/item	Unit weight Pieces	ITEM		
				Type	Dim.	Hand Fin.
 		14461, 44121, 44361, 44461	0,030	25	1	06277 44 0
 		44219, 44221, 44224, 44226	0,012	25	1	06277 76 0
 		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,016	25	1	06277 77 0
 		44131, 44231, 44236, 44238, 44371, 44471	0,016	25	1	06277 78 0
 		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,030	25	1	06277 80 0
 		44219, 44220, 44221, 44224, 44225, 44226	0,007	25	1	06277 88 0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.

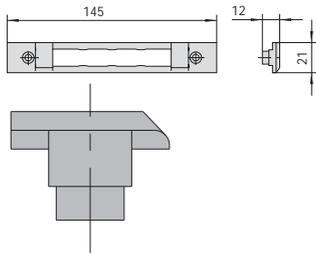


14460, 14461, 14462,
44120, 44121, 44360,
44361, 44362, 44460,
44461, 44462

0,013 25 **1 06277 89 0**

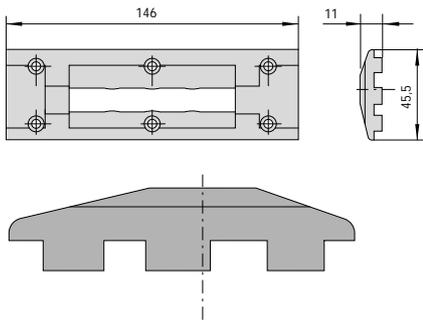


14461, 44121, 44361,
44461

0,030 25 **1 06277 92 0**

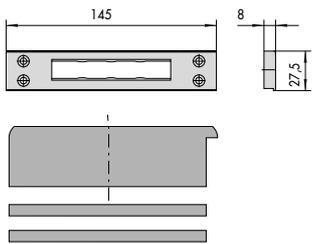


14460, 14461, 14462,
44120, 44121, 44360,
44361, 44362, 44460,
44461, 44462

0,030 25 **1 06277 95 0**

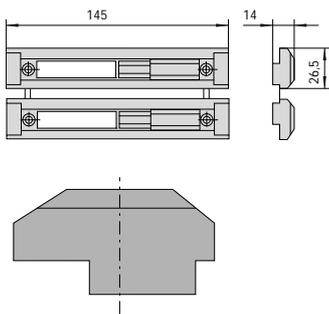

44131, 44231, 44236,
44238, 44371, 44471

0,048 12 **1 06277 98 0**

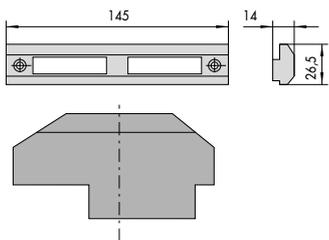

44221, 44226

0,023 25 **1 06277 99 0**

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
		44219, 44220, 44221, 44224, 44225, 44226	0,019	25	1	06278	01	0
		14460, 14461, 14462, 44120, 44121, 44360, 44361, 44362, 44460, 44461, 44462	0,022	25	1	06278	02	0
		14011, 14021, 14351, 14451, 14461, 14511, 44111, 44116, 44121, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44361, 44451, 44461	0,020	25	1	06278	04	0
		44131, 44231, 44236, 44238, 44371, 44471	0,017	25	1	06278	05	0
	<ul style="list-style-type: none"> For roller locks item 44230 - 44235 - 44370 - 44470 use nylon insert item 1.06141.82.0 	44220, 44225, 44230, 44235, 44360, 44370, 44460, 44470	0,020	25	1	06278	06	0
	<ul style="list-style-type: none"> For lock 1.5C611.45.0.00.EN on round ABITHAL profile 		0,026	12	1	06278	07	0


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM					
					Type	Dim.	Hand	Fin.	Pers.	Spec.
	44220, 44225	0,035 25 1 06278 16 0								
	14460, 44120, 44360, 44460	0,033 25 1 06278 17 0								
	44131, 44231, 44236, 44238, 44371, 44471	0,025 25 1 06278 19 0								
	44221, 44226	0,025 25 1 06278 20 0								
	14461, 44121, 44361, 44461	0,026 25 1 06278 21 0								
	44131, 44231, 44236, 44238, 44371, 44471	0,035 25 1 06278 22 0								

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
 		44219, 44221, 44224, 44226	0,017	25	1	06278	26 0
 		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,022	25	1	06278	27 0
 	• Use nylon roller insert item 1.06141.82.0	44131, 44231, 44236, 44238, 44371, 44471	0,030	25	1	06278	28 0
 		44219, 44221, 44224, 44226	0,019	25	1	06278	64 0
 		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,021	25	1	06278	65 0
 		44131, 44231, 44236, 44238, 44371, 44471	0,019	25	1	06278	66 0


Type	Description	For series/item	Unit weight 	Pieces 	ITEM	Type	Dim.	Hand	Fin.	Pers.	Spec.
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,030	25	1 06278 80 0						
		16205, 16215, 16225, 16425, 16625, 46215, 46225, 46425, 46435, 46445, 46625	0,025	25	1 06285 25 0						
		16205, 16215, 16225, 16425, 16625, 46215, 46225, 46425, 46435, 46445, 46625	0,035	12	1 06285 27 0						
	<ul style="list-style-type: none"> For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,026	12	1 06285 30 0						
	<ul style="list-style-type: none"> For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,035	12	1 06285 32 0						
	<ul style="list-style-type: none"> For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,020	12	1 06285 34 0						

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,030	25	1	06285	35	0
	<ul style="list-style-type: none"> For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,030	12	1	06285	36	0
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,015	25	1	06285	37	0
	<ul style="list-style-type: none"> For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,048	6	1	06285	38	0
	<ul style="list-style-type: none"> For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,072	6	1	06285	42	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.

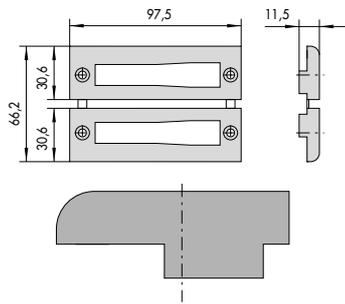


1 06443 00 0, 1 06443 05 0, 0,030 12 **1 06285 43 0**
 1 06453 05 0, 46200,
 46210, 46220, 46420,
 46520

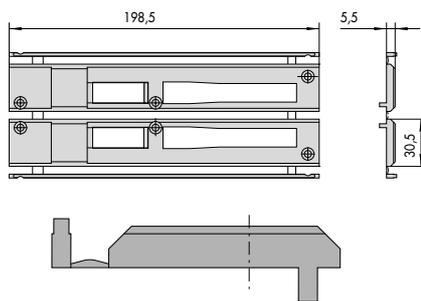


• For roller locks item 46230 - 16205, 16215, 16225,
 46250 - 46450 - 46550 - 46650 16425, 16525, 16625,
 - 46750 use nylon insert item 16725, 46215, 46225,
 1.06141.76.0 46230, 46250, 46425,
 46435, 46445, 46450,
 46525, 46550, 46625,
 46650, 46725, 46750

0,060 6 **1 06285 44 0**

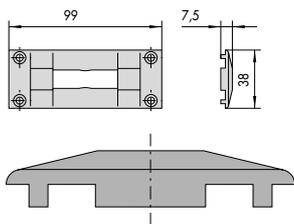

14010, 14011, 14012, 0,014 25 **1 06287 02 0**
 14017, 14020, 14021,
 14350, 14351, 14450,
 14451, 14510, 14511,
 44110, 44111, 44115,
 44116, 44140, 44141,
 44145, 44146, 44150,
 44151, 44155, 44156,
 44160, 44161, 44227,
 44228, 44240, 44241,
 44245, 44246, 44350,
 44351, 44450, 44451

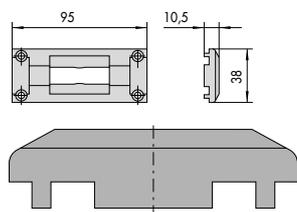


14010, 14011, 14012, 0,030 25 **1 06287 11 0**
 14017, 14020, 14021,
 14350, 14351, 14450,
 14451, 14510, 14511,
 44110, 44111, 44115,
 44116, 44140, 44141,
 44145, 44146, 44150,
 44151, 44155, 44156,
 44160, 44161, 44227,
 44228, 44240, 44241,
 44245, 44246, 44350,
 44351, 44450, 44451

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers.
		14011, 14012, 14017, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44227, 44240, 44245, 44350, 44450	0,016	25	1	06287	14	0
		14011, 14012, 14017, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44227, 44240, 44245, 44350, 44450	0,024	25	1	06287	17	0
		14011, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44451	0,017	25	1	06287	21	0
		14010, 14011, 14012, 14017, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,015	25	1	06287	26	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
		14010, 14011, 14012, 14017, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,014	25	1	06287	27 0
		14011, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44451	0,015	25	1	06287	29 0
		14011, 14021, 14351, 14352, 14451, 14452, 14511, 14512, 44111, 44116, 44141, 44146, 44151, 44152, 44156, 44157, 44161, 44162, 44228, 44241, 44246, 44351, 44451	0,030	25	1	06287	50 0
	• For roller locks item item 44670 use nylon insert item 1.06141.55.0	44620, 44621, 44625, 44626, 44630, 44635, 44640	0,022	25	1	06287	64 0
		14011, 14021, 14351, 14352, 14451, 14452, 14511, 14512, 44111, 44116, 44141, 44146, 44151, 44152, 44156, 44157, 44161, 44162, 44228, 44241, 44246, 44351, 44451	0,016	25	1	06287	65 0


Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
		14011, 14021, 14351, 14352, 14451, 14452, 14511, 14512, 44111, 44116, 44141, 44146, 44151, 44152, 44156, 44157, 44161, 44162, 44228, 44241, 44246, 44351, 44451	0,012	25	1	06287	77	0
		44620, 44621, 44625, 44626, 44640	0,012	25	1	06287	88	0
		14010, 14011, 14012, 14017, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,011	25	1	06287	89	0
		14011, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44451	0,023	25	1	06287	92	0
		44620, 44621, 44625, 44626, 44640	0,022	25	1	06287	94	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.












14010, 14011, 14012,
14017, 14020, 14021,
14350, 14351, 14352,
14450, 14451, 14452,
14510, 14511, 14512,
44110, 44111, 44115,
44116, 44140, 44141,
44145, 44146, 44150,
44151, 44152, 44155,
44156, 44157, 44160,
44161, 44162, 44227,
44228, 44240, 44241,
44245, 44246, 44350,
44351, 44450, 44451

0,020 25 **1 06287 95 0**



14011, 14021, 14351,
14451, 14511, 44111,
44116, 44141, 44146,
44151, 44156, 44161,
44228, 44241, 44246,
44351, 44451

0,017 25 **1 06287 97 0**

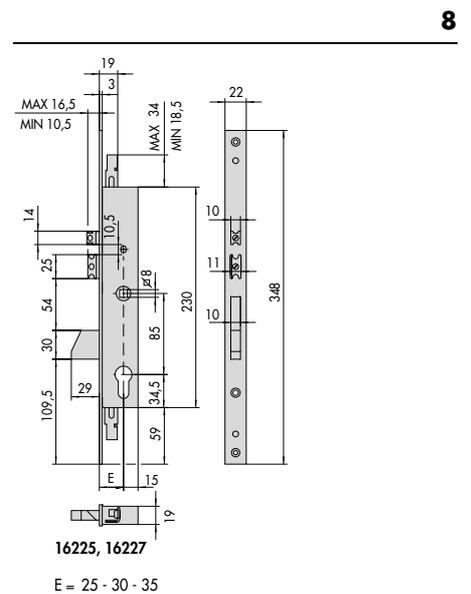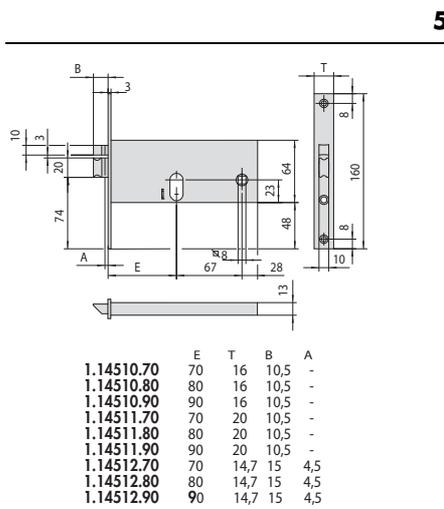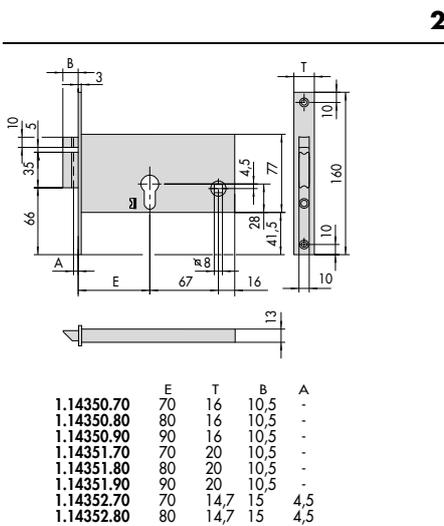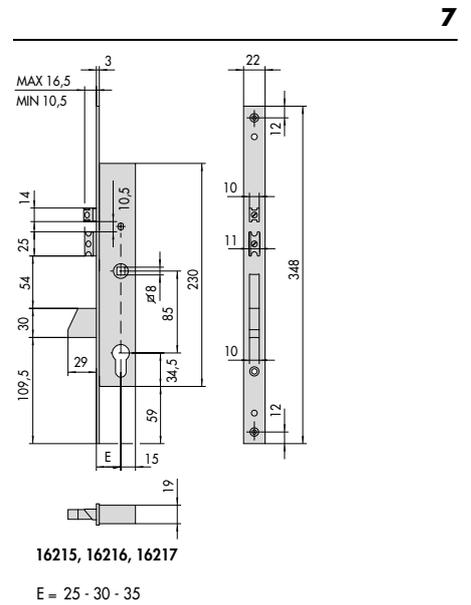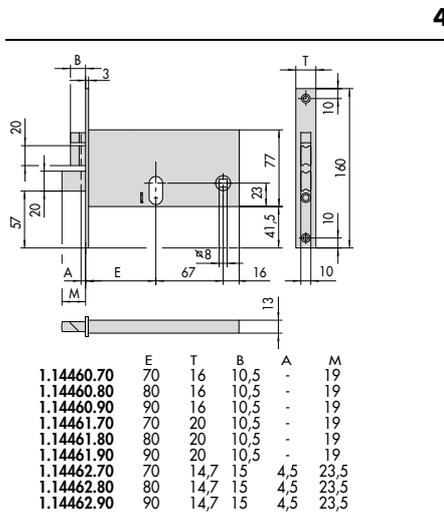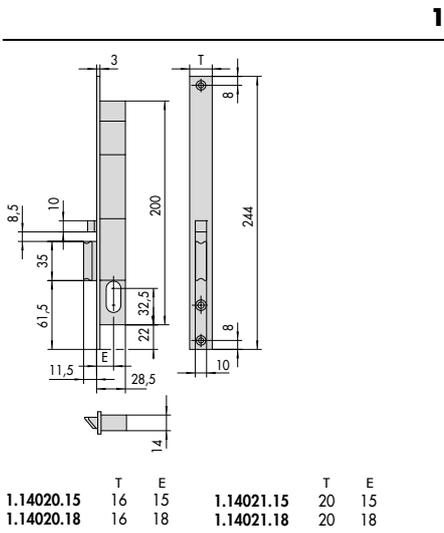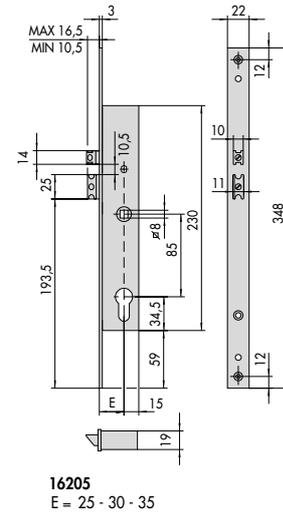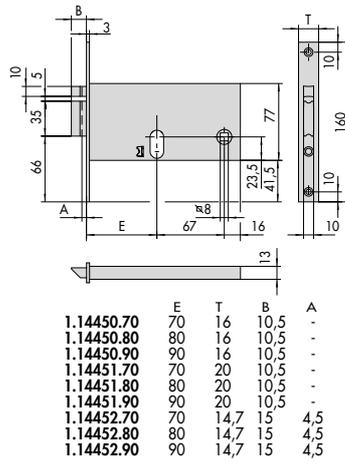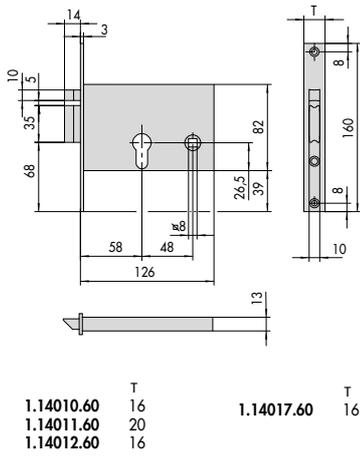

1

2

3

4


5

6


7

8

9

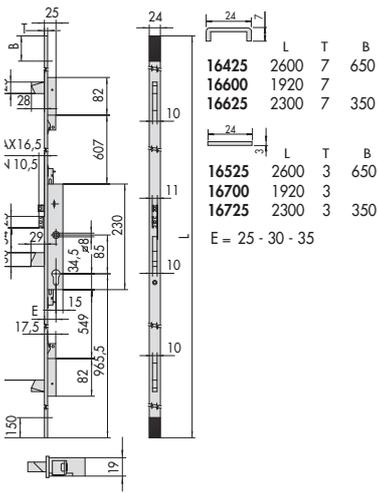


10

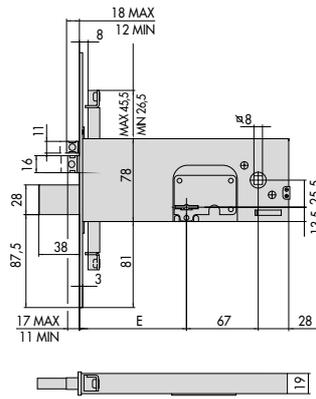

17357

E = 90 - 100


13

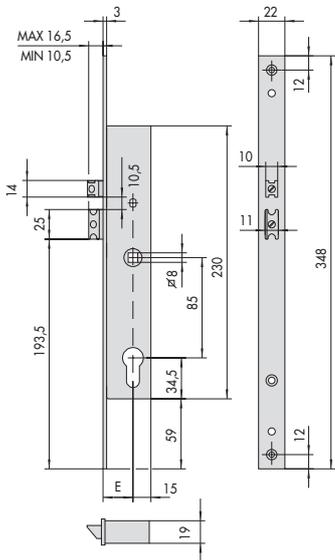

16605

E = 25 - 30 - 35


11

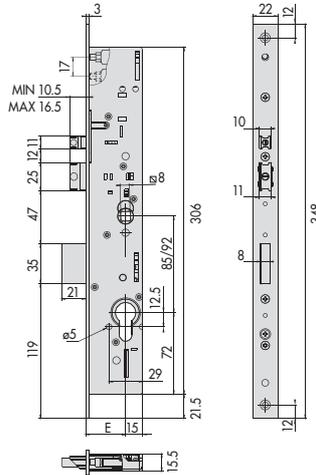

19225


E = 25-30-35-40

14

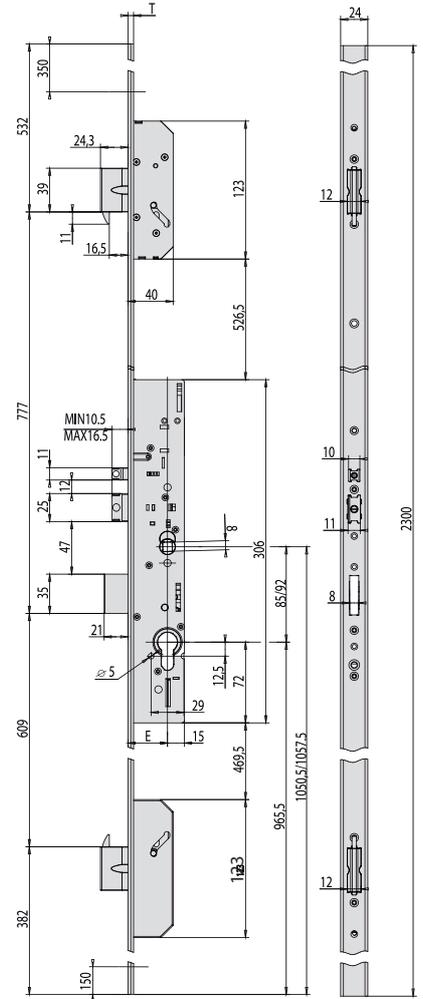


* ADJUSTEMENT

E = 25 - 30 - 35 - 40

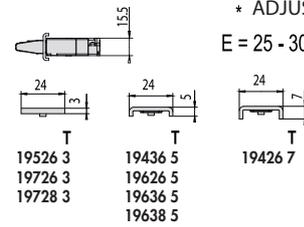


15

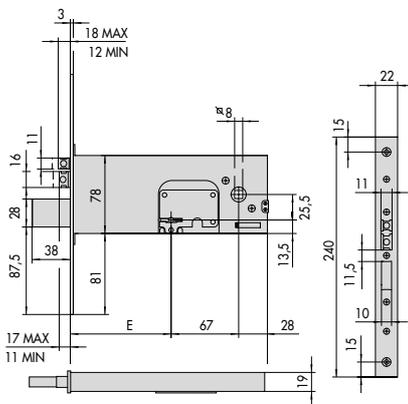

17352

E = 90 - 100


12

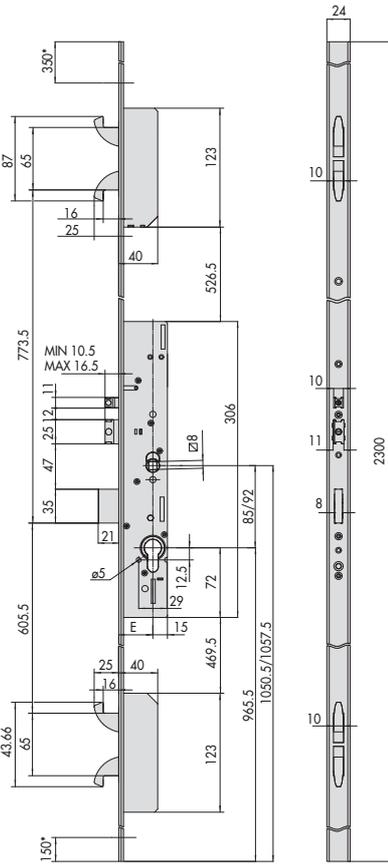


* RASABILITÀ
E = 25 - 30 - 35 - 40




19656 19746

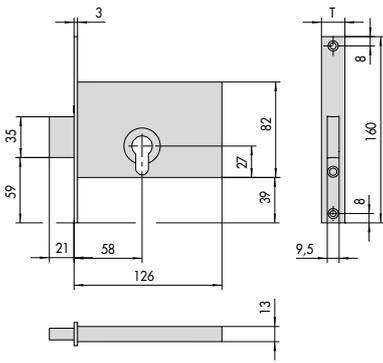


	T
1.44115.60	16
1.44116.60	20

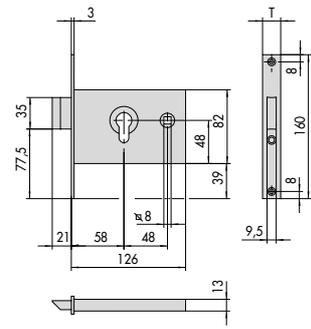


	T
1.44140.60	16
1.44141.60	20

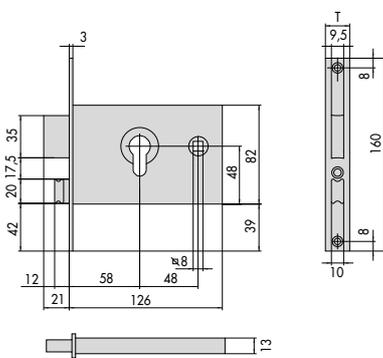


	T
1.44120.60	16
1.44121.60	20

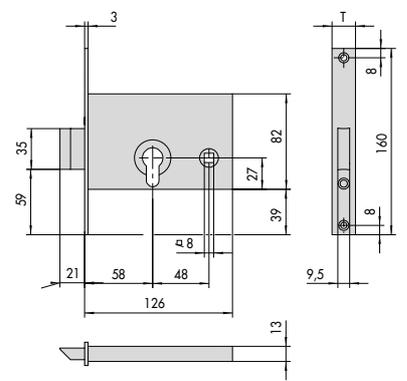


	T
1.44145.60	16
1.44146.60	20

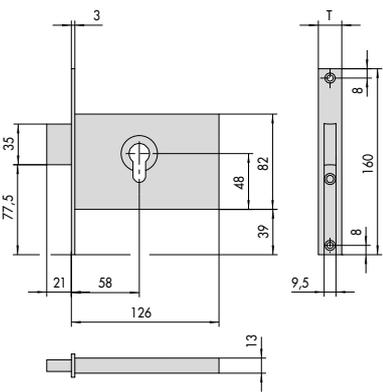


	T
1.44110.60	16
1.44111.60	40

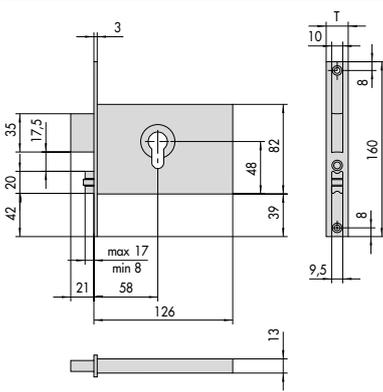


	T
1.44130.60	16
1.44131.60	20

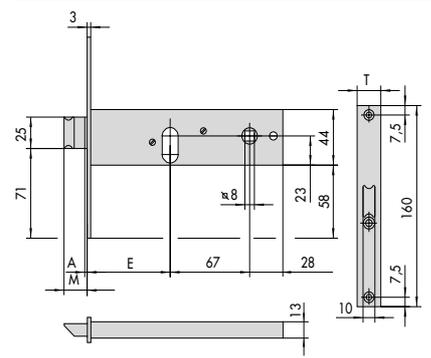


	E	T	M	A
1.44150.60	60	16	19	-
1.44150.70	70	16	28	-
1.44150.80	80	16	28	-
1.44150.90	90	16	28	-
1.44151.60	60	20	19	-
1.44151.70	70	20	28	-
1.44151.80	80	20	28	-
1.44151.90	90	20	28	-
1.44152.70	70	14,7	32,5	4,5
1.44152.80	80	14,7	32,5	4,5
1.44152.90	90	14,7	32,5	4,5

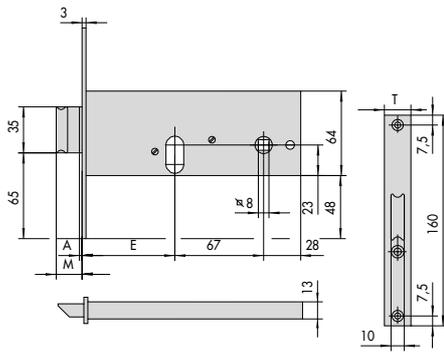

	E	T	M	A
1.44155.60	60	16	19	..
1.44155.70	70	16	28	..
1.44155.80	80	16	28	..
1.44155.90	90	16	28	..
1.44156.60	60	20	19	..
1.44156.70	70	20	28	..
1.44156.80	80	20	28	..
1.44156.90	90	20	28	..
1.44157.70	70	14,7	32,5	4,5

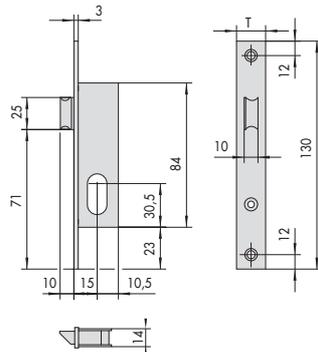

	T
1.44217.15	16
1.44218.15	20

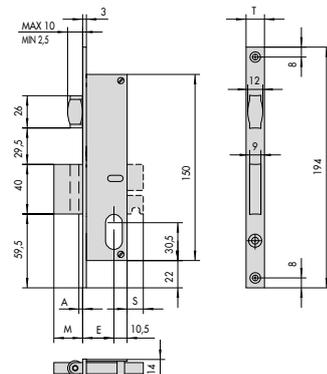


	E	T	M	A	B	S		E	T	M	A	B	S	
1.44230.15	15	16	11	2	10	..	-	1.44235.15	15	16	18	2	10	13
1.44230.18	18	16	11	2	10	..	-	1.44235.18	18	16	18	2	10	13
1.44230.25	25	16	11	2	10	..	-	1.44235.25	25	16	18	2	10	13
1.44230.30	30	16	11	2	10	..	-	1.44235.30	30	16	18	2	10	13
1.44230.35	35	16	11	2	10	..	-	1.44235.35	35	16	18	2	10	13
1.44231.15	15	20	11	2	10	..	-	1.44236.15	15	20	18	2	10	13
1.44231.18	18	20	11	2	10	..	-	1.44236.18	18	20	18	2	10	13
1.44231.25	25	20	11	2	10	..	-	1.44236.25	25	20	18	2	10	13
1.44231.30	30	20	11	2	10	..	-	1.44236.30	30	20	18	2	10	13
1.44231.35	35	20	11	2	10	..	-	1.44236.35	35	20	18	2	10	13


24

27


30

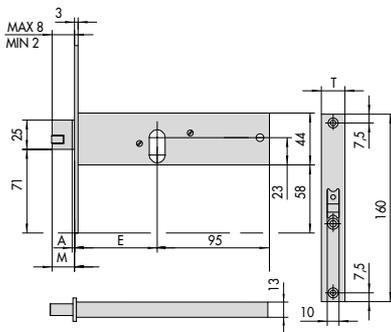

	E	T	M	A
1.44160.60	60	16	19	..
1.44160.70	70	16	28	..
1.44160.80	80	16	28	..
1.44160.90	90	16	28	..
1.44161.60	60	20	19	..
1.44161.70	70	20	28	..
1.44161.80	80	20	28	..
1.44161.90	90	20	28	..

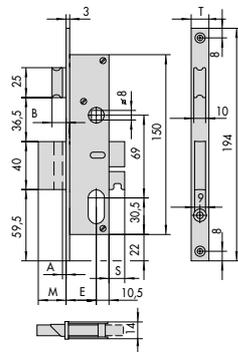

	E	T	M	A	B	S		E	T	M	A	B	S	
1.44219.25	25	14,7	16	6,5	14,5	..	-	1.44224.25	25	14,7	23	6,5	14,5	13
1.44219.30	30	14,7	16	6,5	14,5	..	-	1.44224.30	30	14,7	23	6,5	14,5	13
1.44220.15	15	16	11	2	10	..	-	1.44225.15	15	16	18	2	10	13
1.44220.18	18	16	11	2	10	..	-	1.44225.18	18	16	18	2	10	13
1.44220.25	25	16	11	2	10	..	-	1.44225.25	25	16	18	2	10	13
1.44220.30	30	16	11	2	10	..	-	1.44225.30	30	16	18	2	10	13
1.44220.35	35	16	11	2	10	..	-	1.44225.35	35	16	18	2	10	13
1.44221.15	15	20	11	2	10	..	-	1.44226.15	15	20	18	2	10	13
1.44221.18	18	20	11	2	10	..	-	1.44226.18	18	20	18	2	10	13
1.44221.25	25	20	11	2	10	..	-	1.44226.25	25	20	18	2	10	13
1.44221.30	30	20	11	2	10	..	-	1.44226.30	30	20	18	2	10	13
1.44221.35	35	20	11	2	10	..	-	1.44226.35	35	20	18	2	10	13

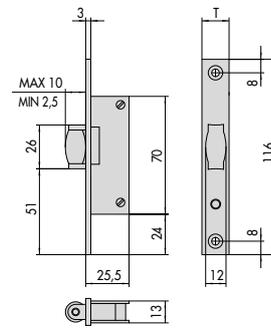


	T
1.44237.15	16
1.44238.15	20


25

28


31

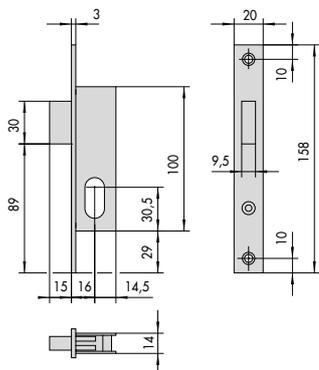

1.44210.16

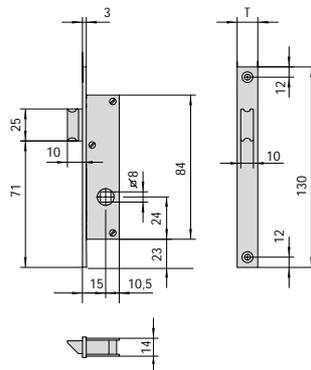

ARTICOLO	T
1.44227.15	16
1.44228.15	20

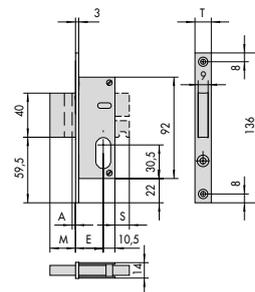


	E	T	M	A	B	S		E	T	M	A	B	S	
1.44240.15	15	16	11	2	10	..	-	1.44245.15	15	16	18	2	10	13
1.44240.18	18	16	11	2	10	..	-	1.44245.18	18	16	18	2	10	13
1.44240.25	25	16	11	2	10	..	-	1.44245.25	25	16	18	2	10	13
1.44240.30	30	16	11	2	10	..	-	1.44245.30	30	16	18	2	10	13
1.44240.35	35	16	11	2	10	..	-	1.44245.35	35	16	18	2	10	13
1.44241.15	15	20	11	2	10	..	-	1.44246.15	15	20	18	2	10	13
1.44241.18	18	20	11	2	10	..	-	1.44246.18	18	20	18	2	10	13
1.44241.25	25	20	11	2	10	..	-	1.44246.25	25	20	18	2	10	13
1.44241.30	30	20	11	2	10	..	-	1.44246.30	30	20	18	2	10	13
1.44241.35	35	20	11	2	10	..	-	1.44246.35	35	20	18	2	10	13
1.44242.15	15	20	11	-							


26

29


32

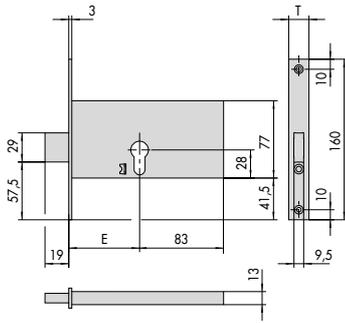

	E	T
1.44350.70	70	16
1.44351.70	70	20

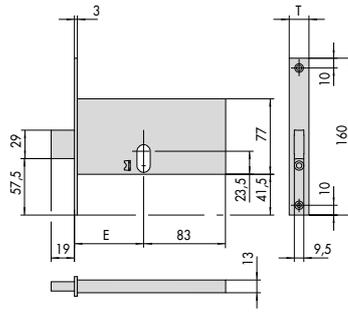

	E	T
1.44450.70	70	16
1.44451.70	70	20

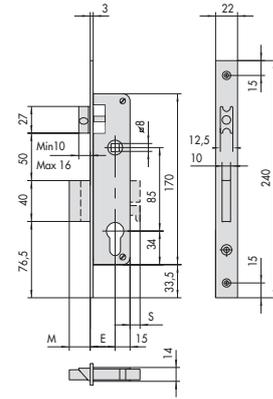


	E	M	E	M	S
1.44660.20	21	15	1.44665.20	21	20 8,5
1.44660.25	25	15	1.44665.25	25	20 8,5
1.44660.30	30	15	1.44665.30	30	20 8,5
1.44660.35	35	15	1.44665.35	35	20 8,5
1.44650.20	21				
1.44650.25	25				
1.44650.30	30				
1.44650.35	35				


33

36


39

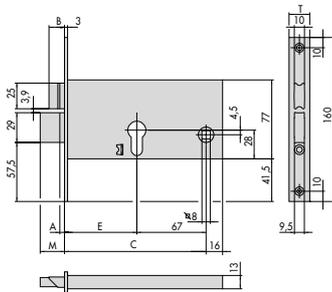

	E	T	M	A	B
1.44360.70	70	16	19	-	10,5
1.44360.80	80	16	19	-	10,5
1.44360.90	90	16	19	-	10,5
1.44361.70	70	20	19	-	10,5
1.44361.80	80	20	19	-	10,5
1.44361.90	90	20	19	-	10,5
1.44362.70	70	14,7	23,5	4,5	15
1.44362.80	80	14,7	23,5	4,5	15
1.44362.90	90	14,7	23,5	4,5	15

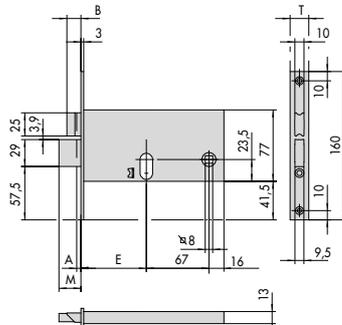

	E	T	M	A	B
1.44460.70	70	16	19	-	19
1.44460.80	80	16	19	-	19
1.44460.90	90	16	19	-	19
1.44461.70	70	20	19	-	10,5
1.44461.80	80	20	19	-	10,5
1.44461.90	90	20	19	-	10,5
1.44462.70	70	14,7	23,5	4,5	15
1.44462.80	80	14,7	23,5	4,5	15
1.44462.90	90	14,7	23,5	4,5	15

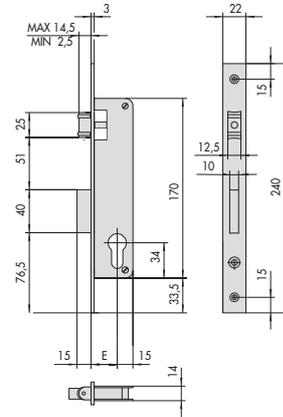


	E
1.44670.20	21
1.44670.25	25
1.44670.30	30
1.44670.35	35


34

37


40

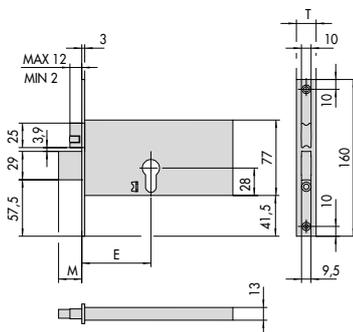

	E	T	M
1.44370.70	70	16	19
1.44370.80	80	16	19
1.44370.90	90	16	19
1.44371.70	70	20	19
1.44371.80	80	20	19
1.44371.90	90	20	19

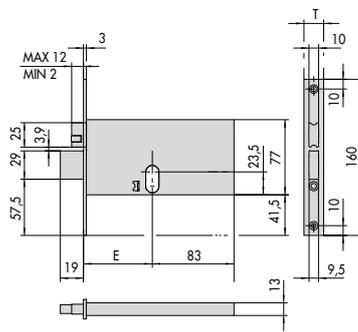

	E	T
1.44470.70	70	16
1.44470.80	80	16
1.44470.90	90	16
1.44471.70	70	20
1.44471.80	80	20
1.44471.90	90	20

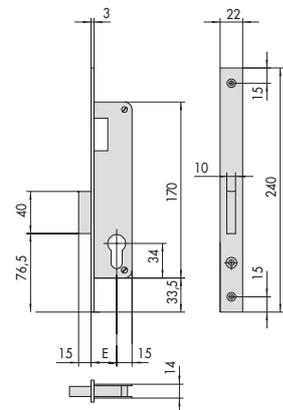


	E
1.44680.20	21
1.44680.25	25
1.44680.30	30
1.44680.35	35


35

38

41

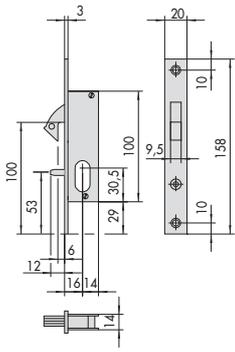


45010, 45012, 45027

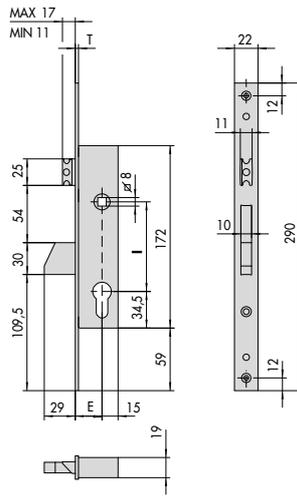

	I	T
46215	85	3
46217	85	3
46218	92	5
46219	92	3

E = 25 - 30 - 35

42

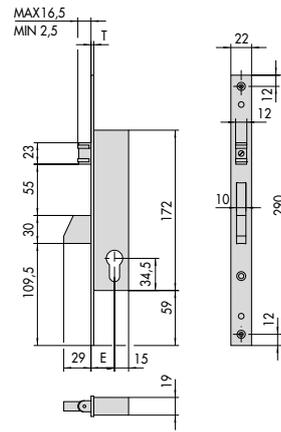


	T
46230	3
46233	5


E = 25 - 30 - 35

45


48

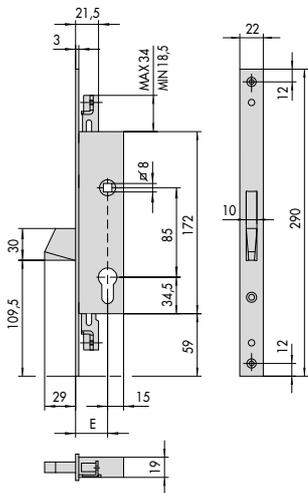

46200
E = 25 - 30 - 35

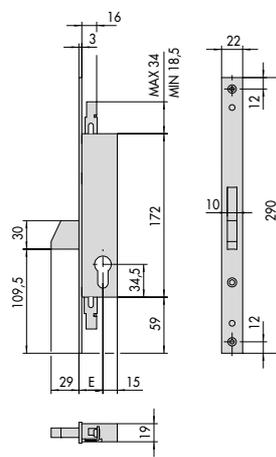

46220, 46222
E = 25 - 30 - 35

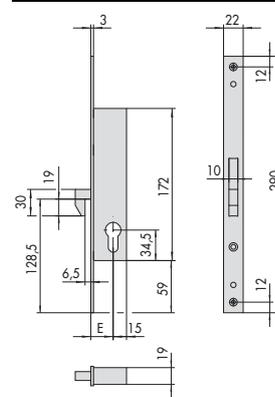


46240
E = 25 - 30 - 35

43


46

49

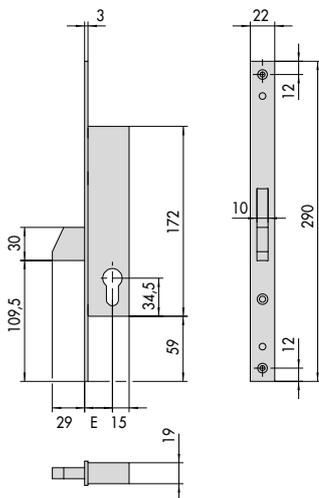


	T
46210	3
46212	3
46213	5

E = 25 - 30 - 35

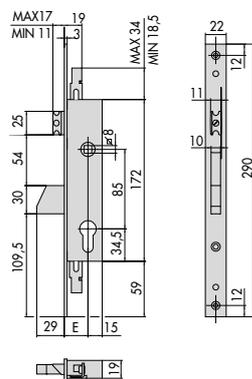

46225, 46227
E = 25 - 30 - 35

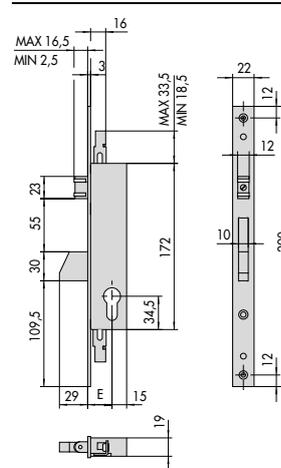


46250, 46252
E = 25 - 30 - 35

44


47

50

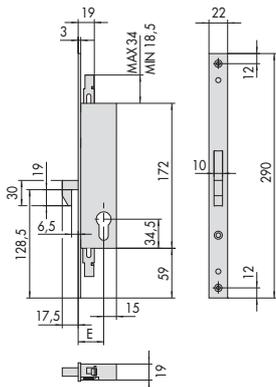


46260, 46262

E = 25 - 30 - 35

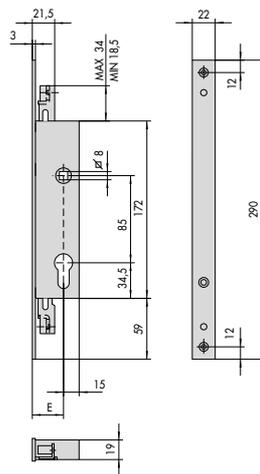

46275

E = 25 - 30 - 35

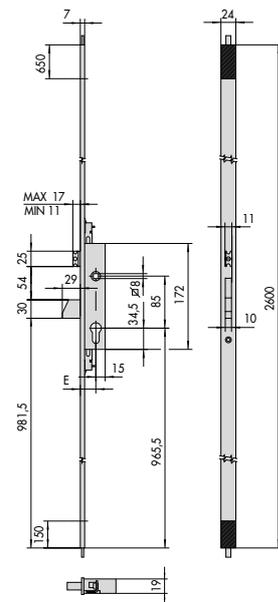


46445

E = 25 - 30 - 35

51


54

57

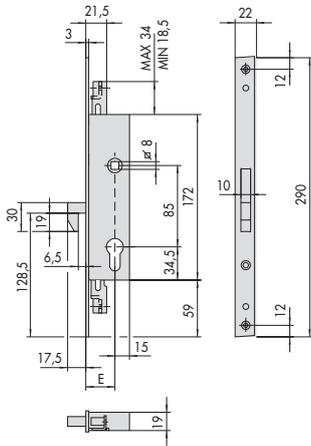

46265


E = 25 - 30 - 35

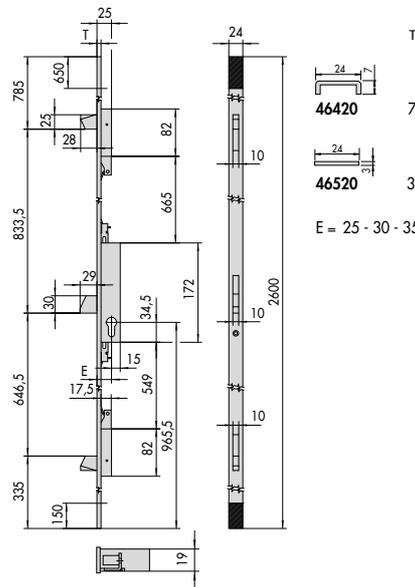

E = 25 - 30 - 35


52

55

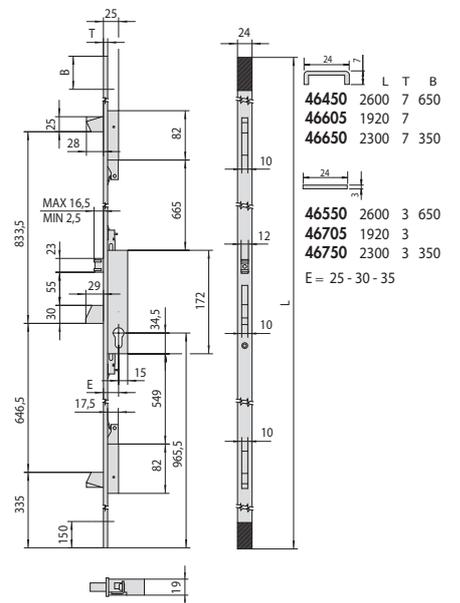


E = 25 - 30 - 35

58

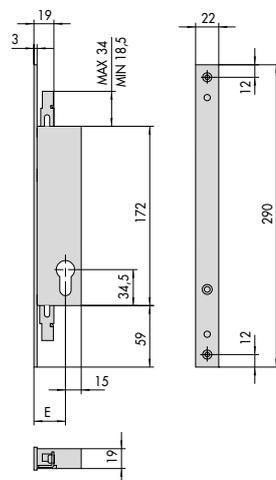

46270


E = 25 - 30 - 35

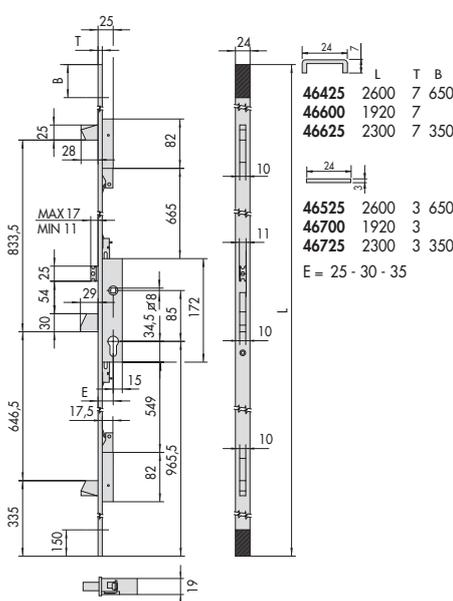


E = 25 - 30 - 35

53


56

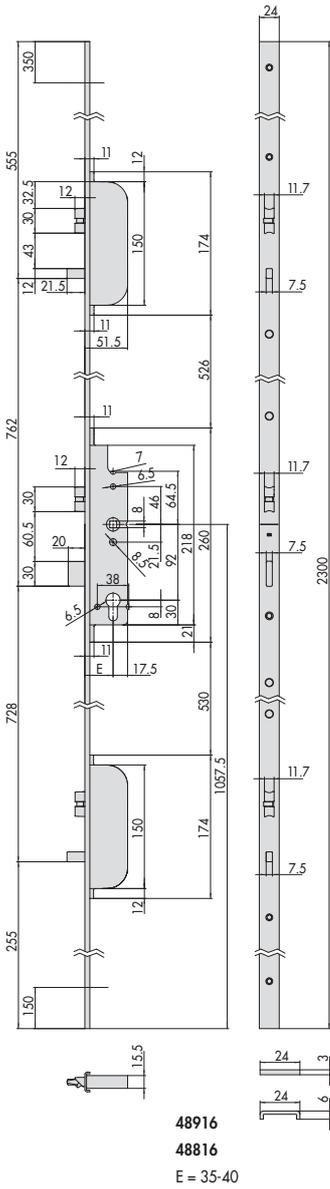


59

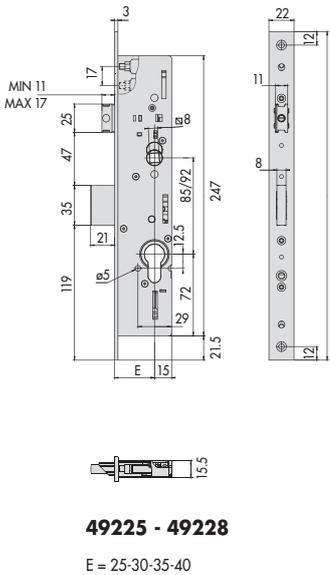


60

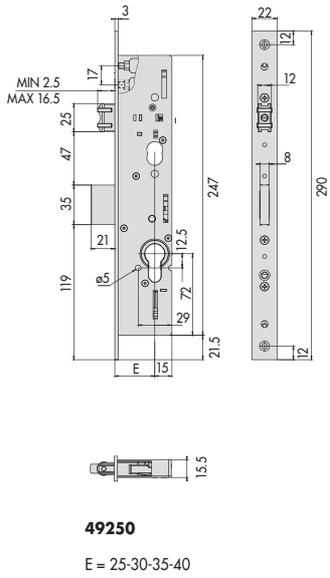


61

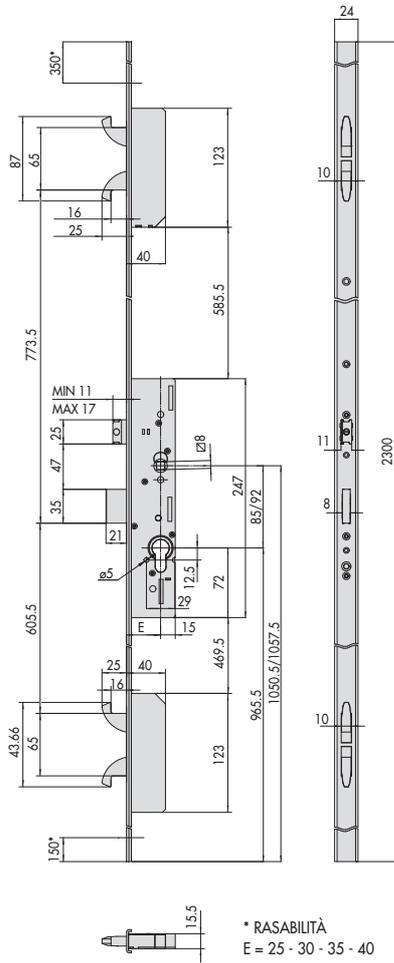


62

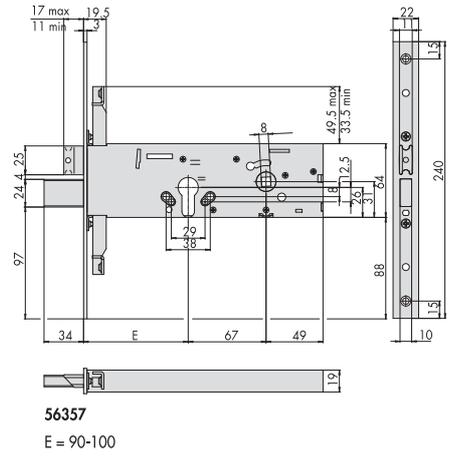


63

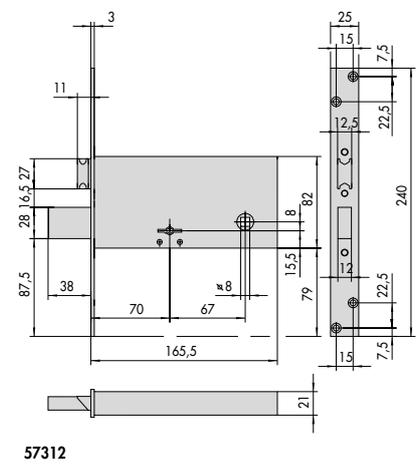


64

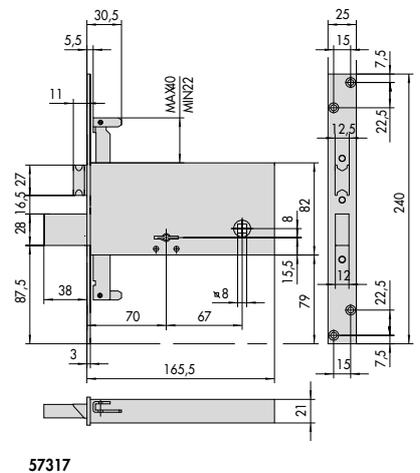

65

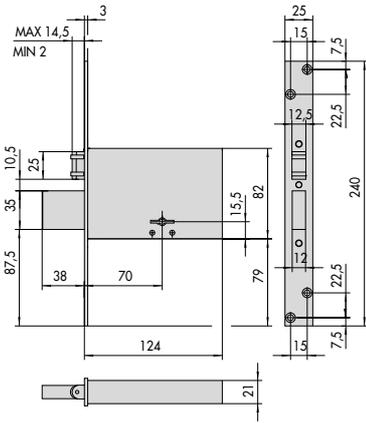


57320

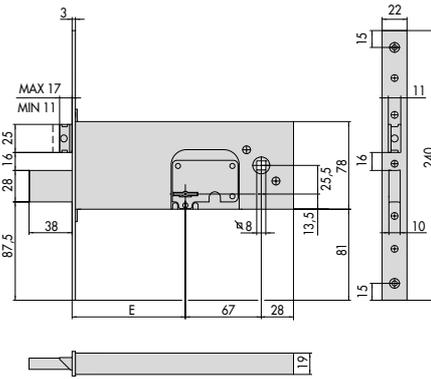

57352

E = 90 - 100

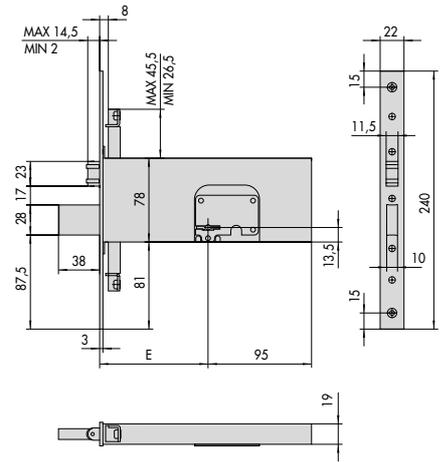


57365

E = 90 - 100


66

69

72

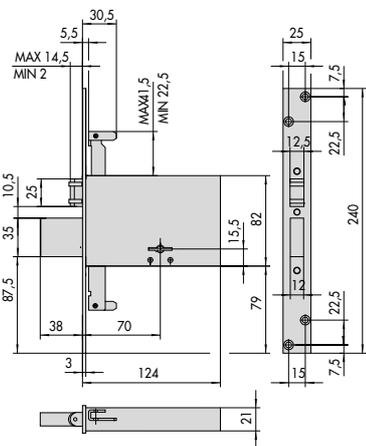


57325

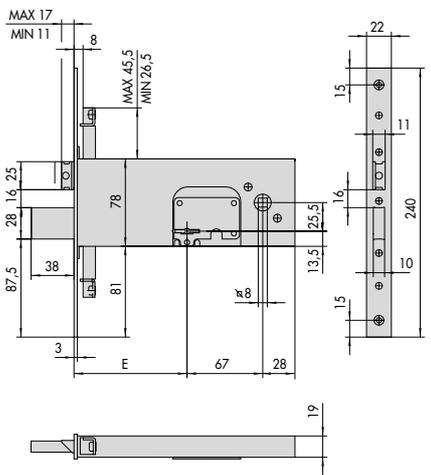

57357

E = 90 - 100

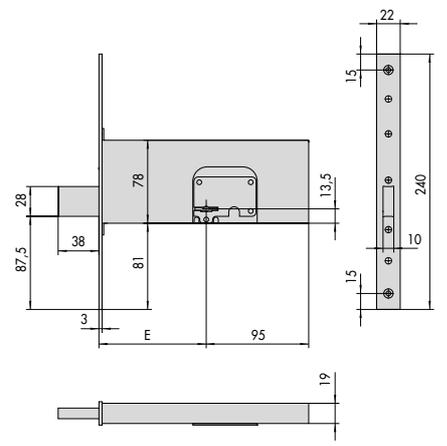


57370

E = 90 - 100


67

70

73

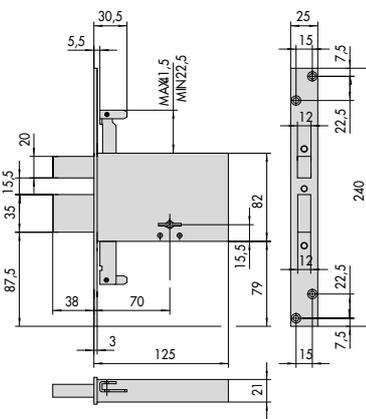


57335

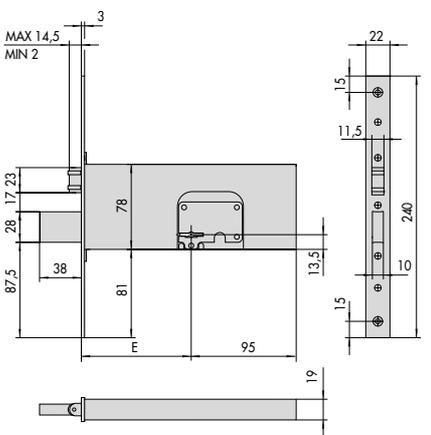

57360

E = 90 - 100

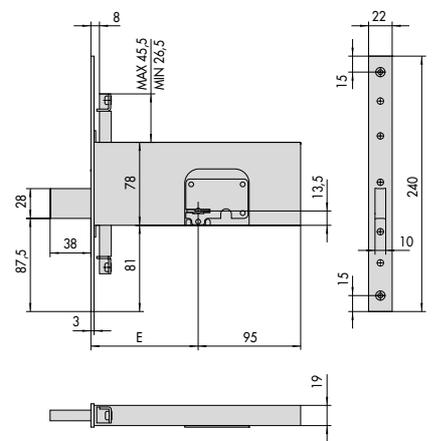

57375

E = 90 - 100

68

71



74



Locks for wooden doors



Cylinder electric rim locks - Elettrika	293	Four-throw double-bit key mortice locks with multiple deadbolt	324
Electric rim locks.....	294	Two-throw double-bit key mortice locks.....	326
Electric rim locks for heavy doors	296	Two-throw double-bit key mortice locks with multiple deadbolt	328
Electric mortice locks.....	297	Rim locks.....	329
Electric strikers for mortice locks	298	Double-bit key rim locks	331
Electric striker for mortice locks	301	Multipoint cylinder mortice locks	333
Rim locks	302	Multipoint double-bit key mortice locks	338
Rim latches.....	306	Project Line handles.....	341
Rim latches with opening limiting device.....	307	Accessories for electric locks	343
Multithrow cylinder rim locks	308	Accessories for cylinder rim locks	346
Cylinder mortice locks	309	Accessories for cylinder mortice locks	347
Cylinder mortice locks CISA Logo Line series.....	311	Accessories for double-bit key mortice locks.....	350
Cylinder mortice locks	312	Accessories for Heavy Duty mortice locks.....	354
Three-throw cylinder mortice locks	314	Accessories for double-bit key rim locks	355
Cylinder mortice locks with multiple deadbolt	316	Accessories for multipoint mortice locks	357
Heavy Duty cylinder mortice locks.....	317	Dimensional drawing	364
Cylinder mortice locks	321		
Four-throw double-bit key or twin double-bit key mortice locks.....	322		





Project Line

DESIGN HANDLES FOR SPECIAL PLACES

CISA Project Line handles and protective roses: introducing design into the workplace. CISA chose handles from the Project Line range for its new offices in Faenza, because attention to detail and stylish design are just as important in the workplace as anywhere else. As always, it is the details that make the difference.

Features and functions

- Handles and protective roses in satin-finished AISI 304 stainless steel.
- Handle levers pre-mounted on mechanism with return spring.
- Fixed directly or using through screws on 38 to 54 mm thick doors. Fixing screws and square spindle provided.
- Steel fixing base with high-resistance galvanising specifically for external applications (versions with oval protective rose only).

HANDLES



Pair of handles
item 1 07070 70 0



Pair of handles
item 1 07070 80 0



Pair of handles
item 1 07070 71 0



Pair of handles
item 07070 81 0



Pair of handles
item 1 07070 73 0



Pair of handles
item 1 07070 82 0



Pair of handles
item 1 07070 72 0

PROTECTIVE ROSES



Pair of protective roses for Euro profile cylinders
item 1 06093 00 0



Pair of solid protective roses
item 1 06093 01 0



Pair of protective roses for Patent locks or similar
item 1 06093 02 0



Thumb turn for bathroom doors
item 1 06093 10 0



Thumb turn for bathroom doors with vacant/engaged indicator
item 1 06093 11 0



Pair of protective roses for Euro profile cylinders
item 1 06093 04 0

Certifications

- Grade 3 – category of use (in places with high frequency of use).
- EN1906 - Grade 7 durability (200,000 cycles).
- EN1670 - Grade 2 corrosion resistance – 96 hours.
- EN1634 – Fire resistance - 2 hours on wooden doors and 4 hours on metal doors.



Technical features:

- Painted protective steel case
- Metal striker with stainless steel swinging pin
- Rotary hook deadbolt in extruded aluminium
- 12 V ac CE
- Non-handed and with a variable backset from 50 to 80 mm
- Rated current 3A

Supplied as standard:

- Striker
- Instruction sheet
- Fixing screws
- 2 spacers for the striker
- 3 keys item 1.01070.10.1

On request:

- Booster item 1.07022.00.0
- Booster plus item 1.07022.10.0
- BTicino coil item 1.07025.10.0
- Microswitch item 1.07023.00.0
- Open door indicator item 1.07126.01.0

Standards:

- ELETTRIKA is certified according to the European standard EN 14846:08



| 3 | X | 2 | 0 | 0 | M | 6 | 0 | 2 |

Security degree 6
(2,000 Kg lateral thrust)

Hand:

0 = Non-handed

Elettrika

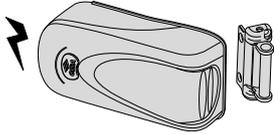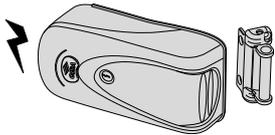Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
 <ul style="list-style-type: none"> • Inner push-button 		 Art. 1 06500 00 0	50-80	2,450	1	1	1A610 00 0				
	• Version with Booster item 1.07022.10.0		50-80	2,450	1	1	1A610 00 0 00 PC				
		 Art. 1 06200 55 0	50-80	2,350	1	1	1A611 00 0				
 <ul style="list-style-type: none"> • Inner push-button • Hold open device • Brass rose 		 Art. 1 06115 00 0	50-80	2,500	1	1	1A630 00 0				
		 Art. 1 06150 00 0	50-80	2,350	1	1	1A631 00 0				



Technical features:

- Steel case and striker, painted aluminium grey
- Dead-locking latch
- 12 V ac CE
- Rated current 2,5A

Supplied as standard:

- Striker
- 3 keys item 1.01070.10.1
- Fixing screws
- Instruction sheet

On request:

- Booster module item 1.07022.00.0

Standards:

- This electric lock series is certified according to the European standard EN 14846:08:


| 3 | C | 2 | 0 | 0 | L | 3 | 0 | 2 |

- Security degree 3
(500 Kg lateral thrust and 200 Kg front load)

Hand:

- 1 = R.H. inwards
- 2 = L.H. inwards
- 3 = R.H. outwards
- 4 = L.H. outwards

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.

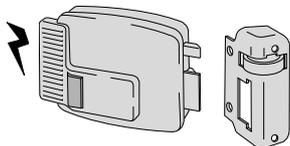

• Inside push-button




1 02500 00 0

50	1,515	1	1	11610	50	1				
50	1,440	1	1	11610	50	2				
60	1,515	1	1	11610	60	1				
60	1,445	1	1	11610	60	2				
70	1,440	1	1	11610	70	1				
70	1,450	1	1	11610	70	2				
80	1,440	1	1	11610	80	1				
80	1,440	1	1	11610	80	2				



1 02552 50 0

50	1,445	1	1	11611	50	1				
50	1,434	1	1	11611	50	2				
60	1,520	1	1	11611	60	1				
60	1,520	1	1	11611	60	2				
70	1,445	1	1	11611	70	1				
70	1,440	1	1	11611	70	2				
80	1,439	1	1	11611	80	1				
80	1,444	1	1	11611	80	2				

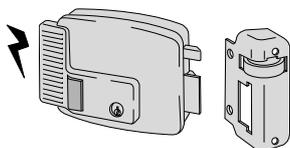

• Inside push-button and cylinder
• Hold-open device



1 02104 00 0

50	1,538	1	1	11630	50	1				
50	1,523	1	1	11630	50	2				
60	1,591	1	1	11630	60	1				
60	1,591	1	1	11630	60	2				
70	1,558	1	1	11630	70	1				
70	1,527	1	1	11630	70	2				
80	1,536	1	1	11630	80	1				
80	1,531	1	1	11630	80	2				



1 02110 00 0

50	1,539	1	1	11631	50	1				
50	1,524	1	1	11631	50	2				
60	1,510	1	1	11631	60	1				
60	1,510	1	1	11631	60	2				
70	1,510	1	1	11631	70	1				
70	1,510	1	1	11631	70	2				

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM								
							Type	Dim.	Hand	Fin.	Per.s.	Spec.			
	<ul style="list-style-type: none"> • Manual throw deadbolt • Inside push-button and cylinder 	 1 02146 00 0	2	50	1,656	1	1	11670	50	1					
			2	50	1,650	1	1	11670	50	2					
			2	60	1,660	1	1	11670	60	1					
			2	60	1,670	1	1	11670	60	2					
			2	70	1,670	1	1	11670	70	1					
			2	70	1,665	1	1	11670	70	2					
			2	80	1,675	1	1	11670	80	1					
			2	80	1,675	1	1	11670	80	2					
					 1 02145 00 0	2	50	1,657	1	1	11671	50	1		
						2	50	1,654	1	1	11671	50	2		
						2	60	1,747	1	1	11671	60	1		
						2	60	1,666	1	1	11671	60	2		
						2	70	1,664	1	1	11671	70	1		
						2	70	1,670	1	1	11671	70	2		
2	80	1,678				1	1	11671	80	1					
2	80	1,679				1	1	11671	80	2					
	<ul style="list-style-type: none"> • FOR OUTWARD OPENING DOORS • Inside push-button 	 1 02500 00 0	50	1,490	1	1	11610	50	3						
			50	1,490	1	1	11610	50	4						
			60	1,494	1	1	11610	60	3						
			60	1,495	1	1	11610	60	4						
			70	1,496	1	1	11610	70	3						
			70	1,486	1	1	11610	70	4						
			80	1,492	1	1	11610	80	3						
			80	1,480	1	1	11610	80	4						
				<ul style="list-style-type: none"> • FOR OUTWARD OPENING DOORS • Inside push-button and cylinder • Hold-open device 	 1 02104 00 0	50	1,538	1	1	11630	50	3			
						50	1,523	1	1	11630	50	4			
60	1,591	1				1	11630	60	3						
60	1,591	1				1	11630	60	4						



Technical features:

- Steel case and striker, painted semi-opaque black
- Inside knob
- 12 V ac CE
- Rated current 0,81 A


Hand:

- 1 = R.H. inwards
- 2 = L.H. inwards


Supplied as standard:

- Striker
- 3 keys item 1.01210.00.2
- Fixing screws
- Instruction sheet

Type	Description	Cylinder	Throws	Backset	Unit weight	Pieces	ITEM			
							Type	Dim.	Hand	Fin.

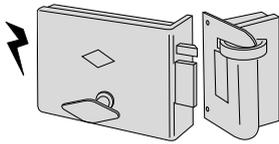

- Inside knob
- Black painted, semi-opaque



1 02520 00 0

60	3,345	1	1	13010 60 1					
60	3,350	1	1	13010 60 2					
70	3,338	1	1	13010 70 1					
70	3,314	1	1	13010 70 2					
80	3,320	1	1	13010 80 1					
80	3,322	1	1	13010 80 2					
90	3,300	1	1	13010 90 1					
90	3,286	1	1	13010 90 2					
100	3,334	1	1	13010 10 1					
100	3,322	1	1	13010 10 2					
110	3,574	1	1	13010 11 1					
110	3,260	1	1	13010 11 2					
120	3,600	1	1	13010 12 1					
120	3,260	1	1	13010 12 2					



Technical features:

- Zinc-plated steel case
- Satin brass faceplate and striker
- Reversible, electric latch
- 12 V ac CE
- Rated current 2,8 A

Supplied as standard:

- Electric contacts 1.06510.00.0
- Striker
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Satin nickel-plated brass (fin. 12)


Hand:

0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.



- Manual latch and deadbolt
- SUPPLIED AS STANDARD:
striker item 1.06035.00.0 (L=25 mm.)

2	22	40	0,997	1	1 12010 40 0
2	22	50	1,040	1	1 12010 50 0
2	22	60	1,130	1	1 12010 60 0
2	22	70	1,138	1	1 12010 70 0

- Manual latch and deadbolt
- SUPPLIED AS STANDARD:
striker item 1.06218.00.0 (L=37 mm.)

2	22	40	1,047	1	1 12015 40 0
2	22	50	1,100	1	1 12015 50 0
2	22	60	1,180	1	1 12015 60 0
2	22	70	1,188	1	1 12015 70 0

- Automatic latch and deadbolt
- SUPPLIED AS STANDARD:
striker item 1.06035.00.0 (L=25 mm.)

2	22	40	0,975	1	1 12011 40 0
2	22	50	1,055	1	1 12011 50 0
2	22	60	1,144	1	1 12011 60 0
2	22	70	1,215	1	1 12011 70 0

- Automatic latch and deadbolt
- SUPPLIED AS STANDARD:
striker item 1.06218.00.0 (L=37 mm.)

2	22	40	1,047	1	1 12016 40 0
2	22	50	1,116	1	1 12016 50 0
2	22	60	1,180	1	1 12016 60 0
2	22	70	1,255	1	1 12016 70 0



Technical features:

- Rated voltage 12-24V ac and 12-24V dc CE.
- Long lipped ZAL stainless alloy casing
- Steel or stainless steel interchangeable faceplates

Supplied as standard:

- Faceplate fixing screws
- Faceplate spacer (series 05020, 05021, 05005.00.0.20)

On request:

- Booster module item 1.07022.00.0

Hand:

0 = Non-handed


1 = R.H. inwards

L.H. outwards

2 = L.H. inwards

R.H. outwards

Type	Description	Faceplate	Unit weight	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.

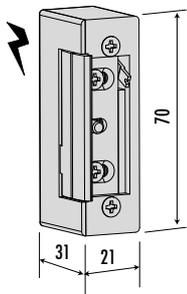

- Electric striker casing
- Voltage 12V ac CE - Current absorption 0,7 A
- Hold open catch mechanism
- Hold open device

0,185 12 1 15100 00 0

- Electric striker casing
- Voltage 12V ac CE - Current absorption 0,7A
- Hold open catch mechanism

0,185 12 1 15101 00 0

- Electric striker casing
- Voltage 12V ac/dc CE - Current absorption 0,7A
- Hold open device

0,170 12 1 15102 00 0

- Electric striker casing
- Voltage 12V ac/dc CE - Current absorption 0,7A

0,185 12 1 15110 00 0

- Electric striker casing
- Voltage 24V ac CE - Current absorption 0,4A
- Hold open catch mechanism
- Hold open device

0,185 12 1 15120 00 0

- Electric striker casing
- Voltage 24V ac CE - Current absorption 0,4A
- Hold open catch mechanism

0,185 12 1 15121 00 0

- Electric striker casing
- Voltage 24V ac/dc CE- Current absorption 0,4A
- Hold open device

0,185 12 1 15122 00 0


- Electric striker casing
- Voltage 24V ac/dc CE- Current absorption 0,4A

0,185 12 1 15130 00 0

- Electric striker casing
- Live coils: opening is only obtained if power supply is cut
- Voltage 12V dc CE - Current absorption 0,20A


0,185 12 1 15140 00 0

Type	Description	Faceplate Kg	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Electric striker casing • Live coils: opening is only obtained if power supply is cut • Voltage 24V dc CE - Current absorption 0,12A 	0,185	12	1	15150	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac CE - Current absorption 0,7A • Inside hold open catch mechanism • Hold open device 	0,185	12	1	15160	00	0	
	<ul style="list-style-type: none"> • Electric striker casing • Voltage 12V ac CE - Current absorption 0,25A 	0,185	12	1	15170	00	0	
	<ul style="list-style-type: none"> • Electric striker casing without coils • Hold open device 	0,170	12	1	15180	00	0	

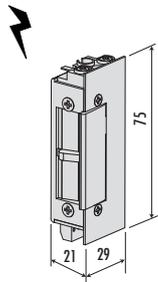


- Electric striker casing
- 1 microswitch
- Adjustable long lip
- Voltage 10/24V ac/dc CE
- Current absorption 0,24A a 10V dc

0,280 12 1 15200 00 0

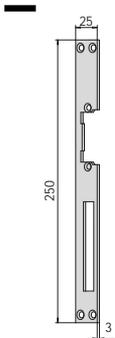




- Square corner steel flat faceplate
- FINISHES
 - gold fin. 06
 - silver fin. 07
 - nickel-plated fin. 12
 - brass lacquered fin. 38

25 0,092 12 1 05001 00 0 06
 25 0,092 12 1 05001 00 0 07
 25 0,092 12 1 05001 00 0 12
 25 0,092 12 1 05001 00 0 38

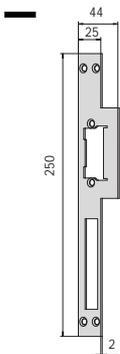

- Square corner steel flat faceplate
- FINISHES
 - hammered gold fin. 06
 - hammered silver fin. 07
 - satin-finished stainless steel fin. 20
 - painted brass fin. 38

25 0,083 12 1 05002 00 1 06
 25 0,083 12 1 05002 00 2 06
 25 0,083 12 1 05002 00 1 07
 25 0,083 12 1 05002 00 2 07
 25 0,083 12 1 05002 00 1 20
 25 0,083 12 1 05002 00 2 20
 25 0,083 12 1 05002 00 1 38
 25 0,092 12 1 05002 00 2 38

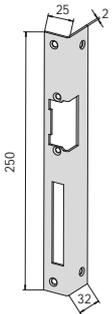Type	Description	Faceplate	Unit weight	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	• Steel angular faceplate with square corners	25	0,160	6	1	05003	00	1	06
	• FINISHES	25	0,160	6	1	05003	00	2	06
	gold fin. 06	25	0,160	6	1	05003	00	1	07
	silver fin. 07	25	0,160	6	1	05003	00	2	07
	• Steel angular faceplate with round corners	25	0,160	6	1	05004	00	1	06
	• FINISHES	25	0,160	6	1	05004	00	2	06
	gold fin. 06	25	0,160	6	1	05004	00	1	07
	silver fin. 07	25	0,160	6	1	05004	00	2	07
	• Steel flat faceplate with square corners for use with latch only locks	25	0,070	6	1	05005	00	0	06
	• FINISHES	25	0,070	6	1	05005	00	0	07
	gold fin. 06	25	0,070	6	1	05005	00	0	12
	silver fin. 07	25	0,070	6	1	05005	00	0	20
	nickel-plated fin. 12	25	0,070	6	1	05005	00	0	38
	brass lacquered fin. 38								
	satin-finished stainless steel fin. 20								



Technical features:

- Zal stainless alloy asymmetrical casing
- Power input 12V
- effect painted steel faceplate.
- Hold-open device
- Hold-open catch mechanism

Hand:

0 = Non-handed

Supplied as standard:

- Instruction sheet

Finishes:

- gold effect (fin.06)
- silver effect (fin.07)

Type	Description	Faceplate	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.



- Non-handed flat faceplate
- For locks series 5C000, 53000, 56000, 57200, 57800

25	0,330	1	1	15001	00	0	06
25	0,340	1	1	15001	00	0	07



- Non-handed flat faceplate
- For locks series 5C000, 53000, 56000, 57200, 57800

25	0,302	1	1	15005	00	0	06
25	0,305	1	1	15005	00	0	07



Technical features:

- Steel case and striker, painted amaranth red
- Brass latch and deadbolt
- Brass draw-back pull and knob


Hand:

- 1 = R.H. inwards
- 2 = L.H. inwards

Supplied as standard:

- Striker
- 3 keys item 1.01070.10.1 (C2000 key bow)
- Fixing screws

Type	Description	Cylinder	Throws	Backset	Kg	Pieces	ITEM			
							Type	Dim.	Hand	Fin. Pers. Spec.

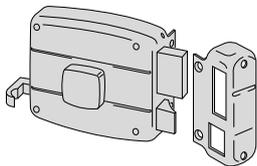

- Inside draw-back pull and knob
- Deadbolt and latch




1 02500 00 0

2	40	0,893	1	1	50110 40 1
2	40	0,893	1	1	50110 40 2
2	50	0,950	1	1	50110 50 1
2	50	0,950	1	1	50110 50 2
2	60	1,025	1	1	50110 60 1
2	60	1,025	1	1	50110 60 2
2	70	1,100	1	1	50110 70 1
2	70	1,083	1	1	50110 70 2



1 02552 50 0

2	40	0,890	1	1	50111 40 1
2	40	0,890	1	1	50111 40 2
2	50	0,960	1	1	50111 50 1
2	50	0,954	1	1	50111 50 2
2	60	1,039	1	1	50111 60 1
2	60	1,039	1	1	50111 60 2
2	70	1,100	1	1	50111 70 1
2	70	1,100	1	1	50111 70 2

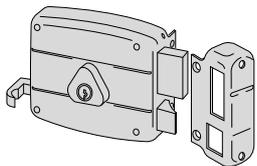

- Inside draw-back pull and cylinder
- Deadbolt and latch



1 02102 00 0








2	40	0,890	1	1	50120 40 1
2	40	0,890	1	1	50120 40 2
2	50	0,960	1	1	50120 50 1
2	50	0,950	1	1	50120 50 2
2	60	1,030	1	1	50120 60 1
2	60	1,030	1	1	50120 60 2
2	70	1,100	1	1	50120 70 1
2	70	1,100	1	1	50120 70 2






1 02106 00 0

2	40	0,890	1	1	50121 40 1
2	40	0,890	1	1	50121 40 2
2	50	0,950	1	1	50121 50 1
2	50	0,960	1	1	50121 50 2
2	60	1,045	1	1	50121 60 1
2	60	1,050	1	1	50121 60 2
2	70	1,100	1	1	50121 70 1
2	70	1,100	1	1	50121 70 2

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Peris. Spec.
<ul style="list-style-type: none"> • Inside draw-back pull and cylinder • Deadbolt and latch 	<p>1 02102 00 0</p>	3 60 1,075 1 1	50125 60 1								
		3 60 1,075 1 1	50125 60 2								
		3 60 1,080 1 1	50126 60 1								
		3 60 1,080 1 1	50126 60 2								
		2 40 0,820 1 1	50130 40 1								
		2 40 0,820 1 1	50130 40 2								
<ul style="list-style-type: none"> • Inside knob • Deadbolt only 	<p>1 02106 00 0</p>	2 50 0,880 1 1	50130 50 1								
		2 50 0,880 1 1	50130 50 2								
		2 60 0,945 1 1	50130 60 1								
		2 60 0,950 1 1	50130 60 2								
		2 70 1,000 1 1	50130 70 1								
		2 70 1,000 1 1	50130 70 2								
		2 40 0,820 1 1	50131 40 1								
		2 40 0,820 1 1	50131 40 2								
	<p>1 02552 50 0</p>	2 50 0,875 1 1	50131 50 1								
		2 50 0,875 1 1	50131 50 2								
		2 60 0,950 1 1	50131 60 1								
		2 60 0,950 1 1	50131 60 2								
		2 70 1,025 1 1	50131 70 1								
		2 70 1,025 1 1	50131 70 2								
<ul style="list-style-type: none"> • Inside knob • Deadbolt only 	<p>1 02106 00 0</p>	2 40 0,820 1 1	50141 40 1								
		2 40 0,820 1 1	50141 40 2								
		2 50 0,880 1 1	50141 50 1								
		2 50 0,880 1 1	50141 50 2								
		2 60 0,970 1 1	50141 60 1								
		2 60 0,960 1 1	50141 60 2								
		2 70 1,030 1 1	50141 70 1								
		2 70 1,035 1 1	50141 70 2								
		<ul style="list-style-type: none"> • Inside draw-back pull and cylinder • Deadbolt and latch 	<p>1 02102 00 0</p>	2 40 0,890 1 1	50160 40 1						
				2 40 0,890 1 1	50160 40 2						
2 50 0,960 1 1	50160 50 1										
2 50 0,960 1 1	50160 50 2										
2 60 1,020 1 1	50160 60 1										
2 60 1,020 1 1	50160 60 2										
<ul style="list-style-type: none"> • Inside draw-back pull and cylinder • Deadbolt and latch 	<p>1 02106 00 0</p>	2 40 0,890 1 1	50161 40 1								
		2 40 0,890 1 1	50161 40 2								
		2 50 0,960 1 1	50161 50 1								
		2 50 0,960 1 1	50161 50 2								
		2 60 1,020 1 1	50161 60 1								
		2 60 1,020 1 1	50161 60 2								

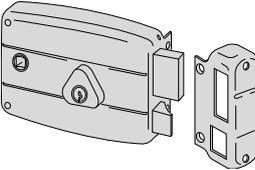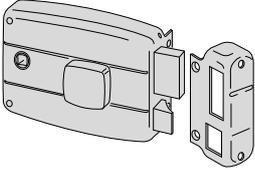Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM					
							Type	Dim.	Hand	Fin.	Pers.	Spec.
 <ul style="list-style-type: none"> • Inside cylinder • Deadbolt and latch • Through spindle 		 1 02102 00 0	2	60	1,130	1	1	50170	60	1		
			2	60	1,130	1	1	50170	60	2		
			2	60	1,146	1	1	50171	60	1		
			2	60	1,160	1	1	50171	60	2		
 <ul style="list-style-type: none"> • Inside knob • Deadbolt and latch • Through spindle 		 1 02106 00 0	2	60	1,130	1	1	50180	60	1		
			2	60	1,130	1	1	50180	60	2		
			2	60	1,150	1	1	50181	60	1		
			2	60	1,140	1	1	50181	60	2		
 <ul style="list-style-type: none"> • Inside knob • Deadbolt and latch • Through spindle 		 1 02102 00 0	2	45	1,200	1	1	50210	45	1		
			2	45	1,185	1	1	50210	45	2		
			2	45	1,180	1	1	50211	45	1		
			2	45	1,180	1	1	50211	45	2		
 <ul style="list-style-type: none"> • Inside draw-back pull and cylinder • Deadbolt and latch 		 1 02102 00 0	2	45	1,150	1	1	50220	45	1		
			2	45	1,140	1	1	50220	45	2		
			2	45	1,130	1	1	50221	45	1		
			2	45	1,130	1	1	50221	45	2		

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM						
							Type	Dim.	Hand	Fin.	Pers. Spec.		
 <ul style="list-style-type: none"> • Lock case and striker painted in aluminium color • Nickel-plated draw-back pull and cylinder • Hold-open device 		 1 02102 00 0	2	50	0,960	1	1	50320	50	1			
			2	50	0,960	1	1	50320	50	2			
			2	60	1,030	1	1	50320	60	1			
			2	60	1,030	1	1	50320	60	2			
		 1 02106 00 0	2	50	0,950	1	1	50321	50	1			
			2	50	0,950	1	1	50321	50	2			
			2	60	1,050	1	1	50321	60	1			
			2	60	1,050	1	1	50321	60	2			
 <ul style="list-style-type: none"> • Inside draw-back pull and knob • Deadbolt and latch • Hold-open device 		 1 02500 00 0	2	40	0,910	1	1	50330	40	1			
			2	40	0,910	1	1	50330	40	2			
			2	50	0,960	1	1	50330	50	1			
			2	50	0,960	1	1	50330	50	2			
			2	60	1,030	1	1	50330	60	1			
			2	60	1,030	1	1	50330	60	2			
			 <ul style="list-style-type: none"> • Inside draw-back pull and cylinder • Deadbolt and latch • Hold-open device 		 1 02102 00 0	2	40	0,910	1	1	50340	40	1
						2	40	0,910	1	1	50340	40	2
2	50	0,960				1	1	50340	50	1			
2	50	0,960				1	1	50340	50	2			
2	60	1,030				1	1	50340	60	1			
2	60	1,030				1	1	50340	60	2			



Technical features:

- Steel case and striker, painted amaranth red
- Brass latch, deadbolt and draw-back pull
- PVC knobs

Hand:

0 = Non-handed

Supplied as standard:

- Striker
- 3 keys item 1.01070.10.1 (C2000 key bow)
- Fixing screws
- Instruction sheet

On request:

- STANDARD: painted amaranth red
- ON REQUEST: painted aluminium, with a nickel-plated cylinder (fin. 95) (for 54310, 54315, 54340, 54341 series)

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM			
							Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> • Inside knob • Latch-bolt only • Hold-open device 		60	0,659	1	1	54310	60	0	
			60	0,645	1	1	54311	60	0	
	<ul style="list-style-type: none"> • Inside knob • Latch-bolt only • Dead-locking latch with hold-open device 		60	0,663	1	1	54315	60	0	
			60	0,658	1	1	54316	60	0	
	<ul style="list-style-type: none"> • Inside knob • deadbolt only 		2	60	0,700	1	1	54340	60	0
			2	60	0,673	1	1	54341	60	0



Technical features:

- Die-cast alloy case and striker
- Steel deadbolt
- Steel limiting device
- Grey PVC knob
- Nickel-plated cylinder

Hand:

0 = Non-handed

Supplied as standard:

- Striker
- 3 keys item 1.01070.10.1 (C2000 key bow)
- Fixing screws
- Instruction sheet

Finishes:

- STANDARD:
painted metallized aluminium,
nickel plated cylinder

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Inside knob • deadbolt only 		60	0,973	1	1	54510	60	0		
	<ul style="list-style-type: none"> • Inside knob • deadbolt only 		2	60	1,015	1	1	54550	60	0	
	<ul style="list-style-type: none"> • Inside cylinder • Fixed knob • deadbolt only 		2	60	1,040	1	1	54560	60	0	
	<ul style="list-style-type: none"> • Inside knob • deadbolt only • Opening limiting device 		2	60	1,061	1	1	54570	60	0	



Technical features:

- Purple red painted steel case, striker and plate
- Nickel-plated ground steel deadbolt
- Nickel-plated steel thumb turns

Hand:

1 = R.H. inwards

Supplied as standard:

- 3 keys item 1.01070.10.1
- Striker
- Fixing screws
- Brass roses

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM			
							Type	Dim.	Hand	Fin. Pers. Spec.
<ul style="list-style-type: none"> • deadbolt only 		<p>1.0G500.00.0</p>	6	50	1,345	1	1	55051	50	1
			6	60	1,345	1	1	55051	60	1
		<p>0G200</p>	6	50	1,250	1	1	55054	50	1
			6	60	1,335	1	1	55054	60	1
<ul style="list-style-type: none"> • deadbolt and latch 		<p>1.0G500.00.0</p>	6	50	1,345	1	1	55071	50	1
			6	60	1,345	1	1	55071	60	1
		<p>0G200</p>	6	50	1,335	1	1	55074	50	1
			6	60	1,335	1	1	55074	60	1



Technical features:

- Zinc-plated case and cover
- Brass removable faceplate and strike.
- Non-handed brass flat latch.
- 2 to 13 mm adjustable brass roller.
- Double-throw brass deadbolt, single throw for bathroom doors
- Can be fitted with roses and through-screw handle plates (except for 35 mm backset)
- Can be fitted with cylinder protective roses l = 38 mm and 29 mm (only l = 29 mm for 35 backset)

Finishes:

- ON REQUEST:
Satin nickel-plated brass (Fin. 12)
Stainless steel (Fin. 20)

Hand:

0 = Non-handed


Cylinder to be ordered separately



Supplied as standard:


- Striker
- Fixing screws for lock, striker and cylinder

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- deadbolt and latch
- SUPPLIED AS STANDARD:
striker item 1.06102.13.0

2	85	22	35	0,658	1	1	5C110	35	0			
2	85	22	40	0,724	1	1	5C110	40	0			
2	85	22	45	0,752	1	1	5C110	45	0			
2	85	22	50	0,720	1	1	5C110	50	0			
2	85	22	60	0,750	1	1	5C110	60	0			
2	85	22	70	0,827	1	1	5C110	70	0			




- deadbolt and latch
- SUPPLIED AS STANDARD:
striker item 1.06279.11.0

2	85	22	35	0,680	1	1	5C130	35	0			
2	85	22	40	0,706	1	1	5C130	40	0			
2	85	22	45	0,734	1	1	5C130	45	0			
2	85	22	50	0,768	1	1	5C130	50	0			
2	85	22	60	0,800	1	1	5C130	60	0			
2	85	22	70	0,866	1	1	5C130	70	0			



- Roller deadbolt
- SUPPLIED AS STANDARD:
striker item 1.06149.00.0


2	22	35	0,630	1	1	5C120	35	0				
2	22	40	0,680	1	1	5C120	40	0				
2	22	45	0,700	1	1	5C120	45	0				
2	22	50	0,740	1	1	5C120	50	0				
2	22	60	0,750	1	1	5C120	60	0				
2	22	70	0,800	1	1	5C120	70	0				



- Roller deadbolt
- SUPPLIED AS STANDARD:
striker


2	22	35	0,630	1	1	5C140	35	0				
2	22	40	0,680	1	1	5C140	40	0				
2	22	45	0,700	1	1	5C140	45	0				
2	22	50	0,740	1	1	5C140	50	0				
2	22	60	0,750	1	1	5C140	60	0				
2	22	70	0,800	1	1	5C140	70	0				

Type	Description	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM			
							Type	Dim. Hand Fin.	Pers. Spec.	



- For bathroom doors
- deadbolt and latch
- SUPPLIED AS STANDARD: striker item 1.06102.13.0

1	85	22	35	0,650	1	1	5C150 35 0			
1	85	22	40	0,690	1	1	5C150 40 0			
1	85	22	45	0,748	1	1	5C150 45 0			
1	85	22	50	0,750	1	1	5C150 50 0			
1	85	22	60	0,810	1	1	5C150 60 0			
1	85	22	70	0,890	1	1	5C150 70 0			



- For bathroom doors
- deadbolt and latch
- 8 mm spindle
- SUPPLIED AS STANDARD: striker item 1.06279.11.0

1	85	22	45	0,748	1	1	5C170 45 0			
1	85	22	50	0,750	1	1	5C170 50 0			
1	85	22	60	0,810	1	1	5C170 60 0			
1	85	22	70	0,890	1	1	5C170 70 0			



Technical features:

- Zinc-plated case and cover
- Brass removable faceplate and strike.
- Non-handed brass flat latch.
- 2 to 13 mm adjustable brass roller.
- Double-throw brass deadbolt, single throw for bathroom doors
- Can be fitted with roses and through-screw handle plates (except for 35 mm backset)
- Can be fitted with cylinder protective roses
l = 38 mm and 29 mm
(only l = 29 mm for 35 backset)

Supplied as standard:

- Strike plate
- Fixing screws for lock, striker and cylinder

Finishes:


- Finishes available at no extra charge:
 - nickel-plated steel (Fin. 12)
 - bronze-plated steel (Fin. 47)

Hand:
0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- deadbolt and latch
- SUPPLIED AS STANDARD:
striker item 1.06102.10.0

2	85	22	35	0,628	1	1	5C611	35	0		
2	85	22	40	0,643	1	1	5C611	40	0		
2	85	22	45	0,668	1	1	5C611	45	0		
2	85	22	50	0,718	1	1	5C611	50	0		
2	85	22	60	0,768	1	1	5C611	60	0		
2	85	22	70	0,768	1	1	5C611	70	0		




- deadbolt and latch
- SUPPLIED AS STANDARD:
striker item 1.06100.10.0

2	85	22	35	0,658	1	1	5C631	35	0		
2	85	22	40	0,678	1	1	5C631	40	0		
2	85	22	45	0,718	1	1	5C631	45	0		
2	85	22	50	0,718	1	1	5C631	50	0		
2	85	22	60	0,768	1	1	5C631	60	0		
2	85	22	70	0,820	1	1	5C631	70	0		



- Roller deadbolt
- SUPPLIED AS STANDARD:
striker item 1.06102.10.0

2		22	40	0,620	1	1	5C621	40	0		
2		22	45	0,670	1	1	5C621	45	0		
2		22	50	0,718	1	1	5C621	50	0		
2		22	60	0,778	1	1	5C621	60	0		



- For toilet doors
- deadbolt and latch
- SUPPLIED AS STANDARD:
striker item 1.06100.10.0

1	85	22	45	0,730	1	1	5C671	45	0		
1	85	22	50	0,767	1	1	5C671	50	0		
1	85	22	60	0,826	1	1	5C671	60	0		
1	85	22	70	0,868	1	1	5C671	70	0		



Technical features:

- Faceplate and striker: in both satin brass and brass plated satin steel version
- Zinc-plated steel case
- Reversible latch
- Roller can be adjusted from 2,5 ÷ 14,5 mm.
- Aligned deadbolt 10 mm thick
- Case cover to protect against dirt and chips

Hand:

0 = Non-handed

Cylinder to be ordered separately




Supplied as standard:

- Striker
- Lock and cylinder fixing screws

On request:

- Nickel-plated (Fin. 12)

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.



REPLACING 52010 SERIES


- Satin brass faceplate
- Deadbolt and latch
- SUPPLIED AS STANDARD:
- Satin brass strike plate item 1.06163.00.0

1	85	22	21	0,492	12	1	5C010	20	0			
1	85	22	25	0,506	12	1	5C010	25	0			
1	85	22	30	0,557	12	1	5C010	30	0			

REPLACING 52011 SERIES

- Satin brass steel faceplate
- Deadbolt and latch
- SUPPLIED AS STANDARD:
- Satin brass-plated steel strike plate item 1.06152.00.0

1	85	22	21	0,450	12	1	5C011	20	0			
1	85	22	25	0,511	12	1	5C011	25	0			
1	85	22	30	0,530	12	1	5C011	30	0			



REPLACING 52021 SERIES

- Steel faceplate
- Deadbolt and satin brass adjustable roller
- SUPPLIED AS STANDARD:
- Satin brass-plated steel strike plate item 1.06162.00.0

1	22	21	0,446	12	1	5C021	20	0				
1	22	25	0,473	12	1	5C021	25	0				
1	22	30	0,505	12	1	5C021	30	0				



REPLACING 52031 SERIES

- Satin brass-plated steel faceplate
- Deadbolt and latch
- SUPPLIED AS STANDARD:
- Satin brass-plated steel strike plate item 1.06243.00.0

1	85	22	21	0,500	12	1	5C031	20	0			
1	85	22	25	0,530	12	1	5C031	25	0			
1	85	22	30	0,570	12	1	5C031	30	0			

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM					
								Type	Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • Satin brass faceplate • Deadbolt only • SUPPLIED AS STANDARD: • Satin brass strike plate item 1.07032.00.0 	1	22	25	0,360	1	1	52210	25	0			
		1	22	30	0,380	1	1	52210	30	0			
	<ul style="list-style-type: none"> • Satin brass faceplate • Latch only • SUPPLIED AS STANDARD: • Satin brass strike plate item 1.06107.00.0 		22	60	0,439	1	1	52300	60	0			
	<ul style="list-style-type: none"> • Satin brass faceplate • Deadbolt only • SUPPLIED AS STANDARD: • Satin brass strike plate item 1.07032.00.0 	2	22	35	0,410	1	1	52310	35	0			
		2	22	40	0,430	1	1	52310	40	0			
		2	22	45	0,451	1	1	52310	45	0			
		2	22	50	0,470	1	1	52310	50	0			
		2	22	60	0,500	1	1	52310	60	0			
		2	22	70	0,530	1	1	52310	70	0			



Technical features:

- Zinc-plated steel case

Supplied as standard:


- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Protective rose item 1.06490.02.0, 1.06460.50/51/60/0
- Spacers item 1.06472.40.0


Hand:
0 = Non-handed

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.




- Deadbolt only in zinc-plated steel, 1 locking point
- Zinc-plated faceplate and strike
- Interchangeable with series 57010 (double-bitted key locks)
- SUPPLIED AS STANDARD:
Roses item 1.06043.00.0 (2 pcs)
Strike item 1.06283.02.0.B7

3	25	52	0,825	1	1	56010	50	0		
3	25	60	0,875	1	1	56010	60	0		
3	25	70	0,925	1	1	56010	70	0		

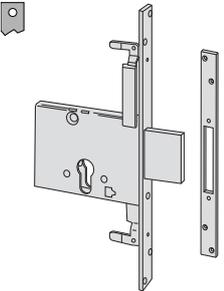

- Deadbolt only in zinc-plated steel, 3 locking points
- Zinc-plated faceplate and strike
- Interchangeable with series 57015 (double bitted key locks)
- SUPPLIED AS STANDARD:
Roses item 1.06043.00.0 (2 pcs)
Strike item 1.06283.02.0.B7
Guide plate for extension bolts item 1.06085.00.0 (2pcs)
Top strike item 1.06084.00.0
- ON REQUEST:
Extension bolts item 1.06415.00.0
Floor strike item 1.06086.00.0


3	25	60	0,925	1	1	56015	60	0		
3	25	70	0,975	1	1	56015	70	0		

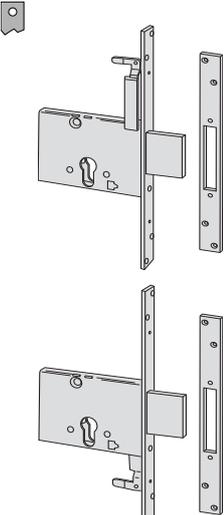

- Deadbolt only in zinc-plated steel, lock set
- Zinc-plated steel faceplate and strike
- Interchangeable with 57020 series (double-bitted key)
- SUPPLIED AS STANDARD:
Escutcheons item 1.06043.00.0 (4 pcs)
Strike item 1.06283.02.0.B7 (2 pcs)
Guide plate for extension bolts, item 1.06085.00.0 (2pcs)
Top strike item 1.06084.00.0
- ON REQUEST:
Extension bolts item 1.06416.00.0
Floor strike item 1.06086.00.0


3	25	60	1,750	1	1	56020	60	0		
3	25	70	1,850	1	1	56020	70	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.

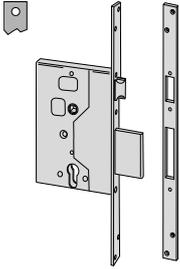


- Nickel-plated steel deadbolt and latchbolt
- Faceplate and strike in nickel-plated satin-finished steel
- SUPPLIED AS STANDARD:
Strike item 1.06271.00.0

3 85 25 60 1,300 1 1 56250 60 0

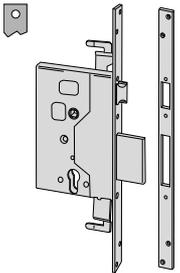

- Nickel-plated steel deadbolt and latchbolt
- Faceplate and strike in nickel-plated satin-finished steel
- Pre-set for additional locking points
- SUPPLIED AS STANDARD:
Strike item 1.06272.00.0
Pair of guide plates for the extension bolts, item 1.06085.00.0
Top strike item. 1.06084.00.0
- ON REQUEST:
Extension bolts item 1.06415.00.0
Floor strike item 1.06086.00.0

3 85 25 60 1,535 1 1 56255 60 0

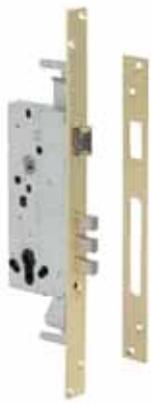

Technical features:

- Painted brass plated satin steel faceplate and striker
- Zinc-plated steel case
- Flat, reversible, nickel-plated latch
- Nickel-plated steel triple bolt

Supplied as standard:


- Striker
- Cylinder fixing screws

Hand:
0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.




- Deadbolt and latch
- SUPPLIED AS STANDARD:
striker item 1.06279.12.0

2	85	22	45	0,805	1	1	52520	45	0		
2	85	22	50	0,835	1	1	52520	50	0		
2	85	22	60	0,915	1	1	52520	60	0		



- Deadbolt and latch
- SUPPLIED AS STANDARD:
striker item 1.06278.11.0

2	85	22	45	0,800	1	1	52521	45	0		
2	85	22	50	0,840	1	1	52521	50	0		
2	85	22	60	0,905	1	1	52521	60	0		

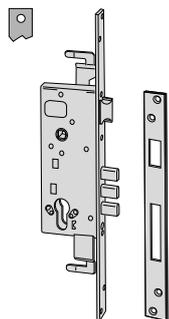

- Deadbolt and latch
- Pre-set for additional locking points
- SUPPLIED AS STANDARD:
striker item 1.06284.00.0
Two guides for extension bolts item 1.06085.00.0
Upper striker item 1.06084.00.0
- ON REQUEST:
extension bolts item 1.06415.00.0
Floor striker item 1.06086.00.0

2	85	25	45	1,145	1	1	52526	45	0		
2	85	25	50	1,180	1	1	52526	50	0		
2	85	25	60	1,245	1	1	52526	60	0		

Technical features:

- Laquered polished brass removable faceplate and striker
- Zinc-plated steel case
- Reversible, nickel-plated silent action latch
- Nickel-plated bolt for latch dead-locking (if provided)
- Nickel-plated cut-resistant deadbolt, with a 25 mm. protrusion
- Anti-corrosion galvanised internal components

Supplied as standard:

- Striker
- Fixing screws
- Instruction sheet

On request:

- Satin stainless steel faceplate and striker (fin 20)

Standards:

- Locks with satin stainless steel faceplate and striker (finish 20), are certified fire-resistant by the American Underwrite Laboratories (UL LISTED R 14945(N))
- CE mark in compliance with the directive 89/106/CEE, only for item with (fin. 20)
- Standard reference:
UNI EN 179
UNI EN 1125
UNI EN 12209

Hand:
0 = Non-handed

Cylinder to be ordered separately

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.

- For entrance doors
- Deadbolt and dead-locking latch
- OPERATION:
the latch-bolt is operated by handle or cylinder from either side
The deadbolt is operated by cylinder from either side
- SUPPLIED AS STANDARD:
Square striker item 1.06106.20.0

1	85	22	60	0,950	1	1 52710 60 0
1	85	22	70	1,000	1	1 52710 70 0
1	85	22	80	1,050	1	1 52710 80 0
1	85	22	90	1,100	1	1 52710 90 0

- For entrance doors
- Deadbolt and dead-locking latch
- OPERATION:
the latch-bolt is operated by handle or cylinder from either side
The deadbolt is operated by cylinder from either side
- SUPPLIED AS STANDARD:
Square striker item 1.06106.25.0






1	85	22	60	0,950	1	1 52711 60 0
1	85	22	70	1,000	1	1 52711 70 0
1	85	22	80	1,050	1	1 52711 80 0
1	85	22	90	1,100	1	1 52711 90 0

- For bathroom and bedroom
- deadbolt and latch
- OPERATION:
the latch-bolt is operated by handle from either side
The deadbolt is operated by a 8 mm spindle
- SUPPLIED AS STANDARD:
Square striker item 1.06155.20.0





1	85	22	60	0,950	1	1 52730 60 0
1	85	22	70	1,000	1	1 52730 70 0
1	85	22	80	1,050	1	1 52730 80 0

- For bathroom and bedroom
- deadbolt and latch
- OPERATION:
the latch-bolt is operated by handle from either side
The deadbolt is operated by a 8 mm spindle
- SUPPLIED AS STANDARD:
Round striker item 1.06155.25.0

1	85	22	60	0,950	1	1 52731 60 0
1	85	22	70	1,000	1	1 52731 70 0
1	85	22	80	1,050	1	1 52731 80 0
1	85	22	90	1,100	1	1 52731 90 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
 <ul style="list-style-type: none"> • For passage doors • Latch-bolt only • OPERATION: The latch-bolt is operated by handle from either side • SUPPLIED AS STANDARD: Square striker item 1.06156.20.0 	22 60 0,900 1 1	52750 60 0										
	22 70 0,950 1 1	52750 70 0										
	22 80 1,000 1 1	52750 80 0										
 <ul style="list-style-type: none"> • For passage doors • Latch-bolt only • OPERATION: The latch-bolt is operated by handle from either side • SUPPLIED AS STANDARD: Round striker item 1.06156.25.0 	22 60 0,900 1 1	52751 60 0										
	22 70 0,950 1 1	52751 70 0										
	22 90 1,050 1 1	52751 90 0										
 <ul style="list-style-type: none"> • For external doors • Dead-locking latch-bolt only • OPERATION: The latch-bolt is operated by handle or cylinder from either side The outside handle must be de-activated • SUPPLIED AS STANDARD: Square striker item 1.06158.20.0 	1 85 22 60 0,900 1 1	52755 60 0										
	1 85 22 70 0,950 1 1	52755 70 0										
	1 85 22 80 1,000 1 1	52755 80 0										
 <ul style="list-style-type: none"> • For external doors • Dead-locking latch-bolt only • OPERATION: The latch-bolt is operated by handle or cylinder from either side The outside handle must be de-activated • SUPPLIED AS STANDARD: Round striker item 1.06158.25.0 	85 22 60 0,900 1 1	52756 60 0										
	85 22 70 0,950 1 1	52756 70 0										
	85 22 80 1,000 1 1	52756 80 0										
 <ul style="list-style-type: none"> • FUNCTION TYPE B: • For panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch only with antipicking device • Split square spindle • Reversible panic function • The outside handle can be disactivated with the key • Outside: the latch can be operated with the handle, the key activates/disactivates the handle • Inside: the latch can be operated with the handle or the panic exit device, the key activates/disactivates the outside handle • Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains disactivated after the door is closed (in stand-by) 	85 22 60 0,900 1 1	52760 60 0										
	85 22 70 0,950 1 1	52760 70 0										
	85 22 90 1,050 1 1	52760 90 0										

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 		ITEM			
								Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • FUNCTION TYPE B: • For panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch only with antipicking device • Split square spindle • Reversible panic function • The outside handle can be disactivated with the key • Outside: the latch can be operated with the handle, the key activates/disactivates the handle • Inside: the latch can be operated with the handle or panic exit device, the key activates/disactivates the outside handle • Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains disactivated after the door is closed (in stand-by) 	85	22	60	0,900	1	1	52761	60	0	
		85	22	70	0,950	1	1	52761	70	0	
		85	22	80	1,000	1	1	52761	80	0	
		85	22	90	1,050	1	1	52761	90	0	
	<ul style="list-style-type: none"> • For cabinet doors • deadbolt only • OPERATION: The deadbolt is operated by cylinder from either side • SUPPLIED AS STANDARD: Square striker item 1.06159.20.0 	1	22	60	0,900	1	1	52780	60	0	
		1	22	70	0,950	1	1	52780	70	0	
		1	22	80	1,000	1	1	52780	80	0	
		1	22	90	1,050	1	1	52780	90	0	
	<ul style="list-style-type: none"> • For cabinet doors • deadbolt only • OPERATION: The deadbolt is operated by cylinder from either side • SUPPLIED AS STANDARD: Round striker item 1.06159.25.0 	1	22	60	0,900	1	1	52781	60	0	
		1	22	70	0,950	1	1	52781	70	0	
		1	22	80	1,000	1	1	52781	80	0	
		1	22	90	1,050	1	1	52781	90	0	
	<ul style="list-style-type: none"> • FUNCTION TYPE A: for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Through square spindle • The deadbolt is automatically released when closing the the door • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52840	60	0
		1	85	22	70	1,000	1	1	52840	70	0
		1	85	22	80	1,050	1	1	52840	80	0
		1	85	22	90	1,100	1	1	52840	90	0
	<ul style="list-style-type: none"> • FUNCTION TYPE A: for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Through square spindle • The deadbolt is automatically released when closing the the door • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52860	60	0
		1	85	22	70	1,000	1	1	52860	70	0
		1	85	22	80	1,050	1	1	52860	80	0
		1	85	22	90	1,100	1	1	52860	90	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • FUNCTION TYPE A: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch and deadbolt with antipicking device • Through square spindle • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52842	60	0
		1	85	22	70	1,000	1	1	52842	70	0
		1	85	22	80	1,050	1	1	52842	80	0
		1	85	22	90	1,100	1	1	52842	90	0
	<ul style="list-style-type: none"> • FUNCTION TYPE A: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch and deadbolt with antipicking device • Through square spindle • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52862	60	0
		1	85	22	70	1,000	1	1	52862	70	0
		1	85	22	80	1,050	1	1	52862	80	0
		1	85	22	90	1,100	1	1	52862	90	0
	<ul style="list-style-type: none"> • FUNCTION TYPE D: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Split square spindle • Reversible panic function • Outside: the latch can be operated with the handle • Inside: latch and deadbolt are operated with the handle or the panic exit device • The key operates only the deadbolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the deadbolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open) 	1	85	22	60	0,950	1	1	52844	60	0
		1	85	22	70	1,000	1	1	52844	70	0
		1	85	22	80	1,050	1	1	52844	80	0
		1	85	22	90	1,100	1	1	52844	90	0
	<ul style="list-style-type: none"> • FUNCTION TYPE D: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Split square spindle • Reversible panic function • Outside: the latch can be operated with the handle • Inside: latch and deadbolt are operated with the handle or the panic exit device • The key operates only the deadbolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the deadbolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open) 	1	85	22	60	0,950	1	1	52864	60	0
		1	85	22	70	1,000	1	1	52864	70	0
		1	85	22	80	1,050	1	1	52864	80	0
		1	85	22	90	1,100	1	1	52864	90	0



Technical features:

- Satin lacquered brass faceplate and striker
- Semi-matt black lacquered steel case
- Reversible, nickel-plated latch
- Nickel-plated, antipicking bolt (if provided)
- Nickel-plated deadbolt
- Can be fitted with: escutcheons, roses, handle plates and through screws
- Through-spindle

Hand:

0 = Non-handed

Cylinder to be ordered separately




Supplied as standard:

- Striker
- Striker and cylinder fixing screws

On request:


- Satin lacquered chrome-plated finish (fin. 18)

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- FUNCTION TYPE A:
- FOR PANIC FUNCTION DOORS (for the suitable panic exit device to install, see the relevant catalogue)
- Deadbolt and dead-locking latch
- SUPPLIED AS STANDARD:
striker item 1.06106.01.0
- ON REQUEST:
Faceplate 18x240 (pers. AG)
Without antipicking bolt (suffix AF)

1	85	22	40	0,720	1	1 52810 40 1				
1	85	22	40	0,720	1	1 52810 40 2				
1	85	22	45	0,760	1	1 52810 45 0				
1	85	22	50	0,780	1	1 52810 50 0				
1	85	22	60	0,840	1	1 52810 60 0				
1	85	22	70	0,920	1	1 52810 70 0				




- FUNCTION TYPE A:
- FOR PANIC FUNCTION DOORS (for the suitable panic exit device to install, see the relevant catalogue)
- Deadbolt and dead-locking latch
- SUPPLIED AS STANDARD:
striker item 1.06106.05.0
- ON REQUEST:
Faceplate 18x240 (spec. AG)
Without antipicking bolt (suffix AF)

1	85	22	40	0,720	1	1 52830 40 1				
1	85	22	40	0,720	1	1 52830 40 2				
1	85	22	45	0,760	1	1 52830 45 0				
1	85	22	50	0,780	1	1 52830 50 0				
1	85	22	60	0,840	1	1 52830 60 0				
1	85	22	70	0,920	1	1 52830 70 0				




- FOR PASSAGE DOORS
- Latch bolt only
- Supplied as standard strikers

	85	22	60	0,790	1	1 52318 60 0				
--	----	----	----	-------	---	--------------	--	--	--	--



- FOR PASSAGE DOORS
- Latch bolt only
- Supplied as standard strikers

	85	22	60	0,790	1	1 52338 60 0				
--	----	----	----	-------	---	--------------	--	--	--	--

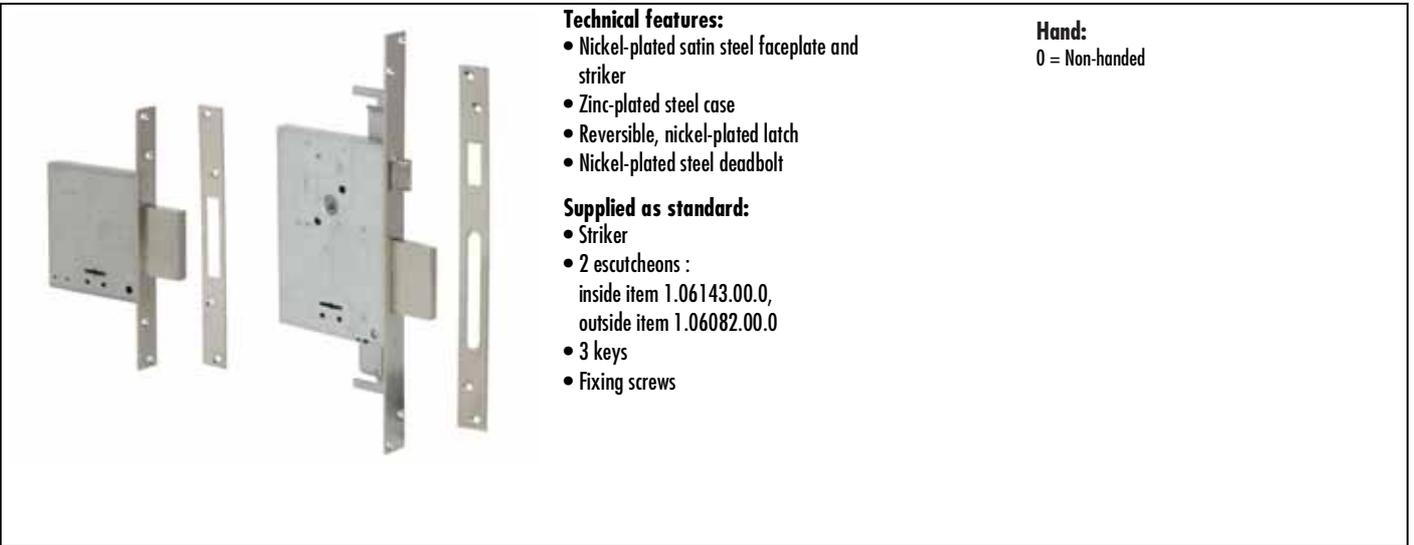

Technical features:

- Nickel-plated satin steel faceplate and striker
- Zinc-plated steel case
- Reversible, nickel-plated latch
- Nickel-plated steel deadbolt

Hand:

0 = Non-handed

Supplied as standard:

- Striker
- 2 escutcheons :
inside item 1.06143.00.0,
outside item 1.06082.00.0
- 3 keys
- Fixing screws

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.

	<ul style="list-style-type: none"> • Deadbolt only • SUPPLIED AS STANDARD: striker item 1.06231.00.0 		1 00100 00 1	4	25 52	1,150	1	1 57010 50 0			
				4	25 60	1,200	1	1 57010 60 0			
				4	25 70	1,250	1	1 57010 70 0			
			1 00102 00 1	4	25 52	1,160	1	1 57010 51 0			
				4	25 60	1,310	1	1 57010 61 0			
				4	25 70	1,280	1	1 57010 71 0			

	<ul style="list-style-type: none"> • Deadbolt only • Pre-set for additional locking points • SUPPLIED AS STANDARD: striker item 1.06235.00.0 Two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 		1 00100 00 1	4	25 60	1,385	1	1 57015 60 0		
				4	25 70	1,430	1	1 57015 70 0		
					1 00102 00 1	4	25 60	1,410	1	1 57015 61 0
		4	25 70			1,460	1	1 57015 71 0		

	<ul style="list-style-type: none"> • Pair of locks deadbolt only • Pre-set for additional locking points • SUPPLIED AS STANDARD: two strikers item 1.06235.00.0 two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06416.00.0 Floor striker item 1.06086.00.0 		1 00100 00 1	4	25 60	2,455	1	1 57020 60 0		
				4	25 70	2,540	1	1 57020 70 0		
					1 00102 00 1	4	25 60	2,610	1	1 57020 61 0
		4	25 70			2,550	1	1 57020 71 0		

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
									Type	Dim. Hand	Fin.	Peris. Spec.	
	<ul style="list-style-type: none"> • Deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06271.00.0 	 1 00100 00 1	4	85	25	60	1,475	1	1 57250 60 0				
		 1 00102 00 1	4	85	25	60	1,500	1	1 57250 61 0				
	<ul style="list-style-type: none"> • Deadbolt and latch • Pre-set for additional locking points • SUPPLIED AS STANDARD: striker item 1.06272.00.0 Two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 	 1 00100 00 1	4	85	25	60	1,700	1	1 57255 60 0				
		 1 00102 00 1	4	85	25	60	1,750	1	1 57255 61 0				
	<ul style="list-style-type: none"> • For metal profiles • deadbolt and latch • Pre-set for additional locking points • Without striker • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 	 1 00100 00 1	4	85	25	60	1,500	1	1 57256 60 0				



Technical features:


- Painted, brass plated satin steel faceplate and striker
- Zinc-plated steel case
- Reversible, nickel-plated latch
- Nickel-plated steel multiple deadbolts


Supplied as standard:


- Striker
- 2 escutcheons: inside item 1.06143.00.0, outside item 1.06082.00.0
- 3 keys
- Fixing screws

Hand:
0 = Non-handed


Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
									Type	Dim.	Hand	Fin.

	<ul style="list-style-type: none"> • 3 deadbolts only • SUPPLIED AS STANDARD: striker item 1.06283.00.0 	 1 00101 00 1	4	25	50	1,065	1	1	57028 50 0				
		 1 00102 00 1	4	25	51	1,065	1	1	57028 51 0				

	<ul style="list-style-type: none"> • 4 deadbolts only • SUPPLIED AS STANDARD: striker item 1.06283.01.0 	 1 00101 00 1	4	25	60	1,150	1	1	57028 60 0				
		 1 00102 00 1	4	25	61	1,150	1	1	57028 61 0				

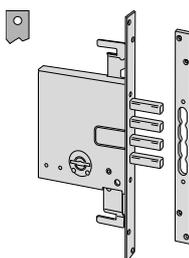	<ul style="list-style-type: none"> • 4 deadbolts only • Pre-set for additional locking points • SUPPLIED AS STANDARD: Two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 striker item 1.06283.02.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 	 1 00101 00 1	4	25	60	1,400	1	1	57033 60 0				
---	--	---	---	----	----	-------	---	---	------------	--	--	--	--

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim. Hand	Fin.	Peris. Spec.

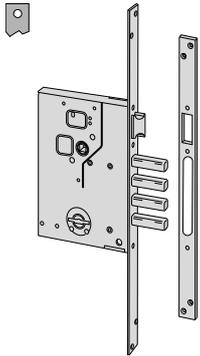

- Latch and 4 deadbolts
- SUPPLIED AS STANDARD:
striker item 1.06284.00.0




1 00101 00 1

4 85 25 60 1,410 1 1 57260 60 0



1 00102 00 1

4 85 25 60 1,425 1 1 57260 61 0

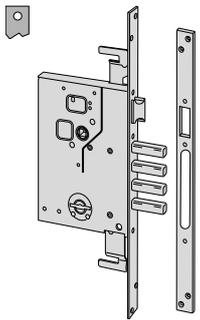

- Latch and 4 deadbolts
- Pre-set for additional locking points
- SUPPLIED AS STANDARD:
Two guides for extension bolts item 1.06085.00.0
Upper striker item 1.06084.00.0
striker item 1.06284.00.0
- ON REQUEST:
extension bolts item 1.06415.00.0
Floor striker item 1.06086.00.0



1 00101 00 1

4 85 25 60 1,700 1 1 57265 60 0



1 00102 00 1

4 85 25 60 1,715 1 1 57265 61 0



Technical features:

- Nickel-plated steel faceplate and striker
- Zinc-plated steel case
- Flat, reversible, nickel-plated latch
- Nickel-plated steel deadbolt
- Adjustable roller from 2 to 13 mm


Hand:

0 = Non-handed

Supplied as standard:

- Striker
- 2 escutcheons: inside item 1.06143.00.0, outside item 1.06082.00.0
- 3 keys
- Fixing screws

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- Deadbolt and latch
- SUPPLIED AS STANDARD: striker item 1.06279.00.0



1 00100 00 1

2	85	22	40	0,950	1	1	57210 40 0
2	85	22	45	0,900	1	1	57210 45 0
2	85	22	50	1,000	1	1	57210 50 0
2	85	22	60	1,070	1	1	57210 60 0



- Deadbolt and latch
- SUPPLIED AS STANDARD: striker item 1.06278.00.0




1 00100 00 1

2	85	22	40	0,935	1	1	57211 40 0
2	85	22	45	0,980	1	1	57211 45 0
2	85	22	50	1,020	1	1	57211 50 0
2	85	22	60	1,070	1	1	57211 60 0



1 00102 00 1

2	85	22	40	0,890	1	1	57211 41 0
2	85	22	45	0,890	1	1	57211 46 0
2	85	22	50	1,030	1	1	57211 51 0
2	85	22	60	1,075	1	1	57211 61 0

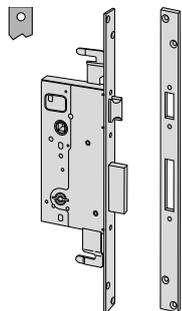

- Deadbolt and latch
- Pre-set for additional locking points
- SUPPLIED AS STANDARD: striker item 1.06272.00.0
- Two guides for extension bolts item 1.06085.00.0
- Upper striker item 1.06084.00.0
- ON REQUEST: extension bolts item 1.06415.00.0
- Floor striker item 1.06086.00.0



1 00100 00 1

2	85	25	45	1,340	1	1	57215 45 0
2	85	25	50	1,360	1	1	57215 50 0
2	85	25	60	1,420	1	1	57215 60 0



1 00102 00 1

2	85	25	45	1,340	1	1	57215 46 0
2	85	25	50	1,365	1	1	57215 51 0
2	85	25	60	1,430	1	1	57215 61 0

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.

	<ul style="list-style-type: none"> • Deadbolt and roller latch • Pre-set for additional locking points • SUPPLIED AS STANDARD: Special striker Two guides for extension bolts item 1.06085.00.0 Top striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 	 1 00100 00 1	2	85	25	45	1,280	1	1 57217 45 0				
			2	85	25	50	1,310	1	1 57217 50 0				
			2	85	25	60	1,260	1	1 57217 60 0				

	<ul style="list-style-type: none"> • Deadbolt only • SUPPLIED AS STANDARD: striker item 1.06282.00.0 	 1 00100 00 1	2	22	40	0,690	1	1 57220 40 0				
			2	22	45	0,710	1	1 57220 45 0				
			2	22	50	0,730	1	1 57220 50 0				
			2	22	60	0,765	1	1 57220 60 0				
		 1 00102 00 1	2	22	40	0,700	1	1 57220 41 0				
			2	22	45	0,640	1	1 57220 46 0				
			2	22	50	0,740	1	1 57220 51 0				
			2	22	60	0,680	1	1 57220 61 0				

	<ul style="list-style-type: none"> • Deadbolt only • Pre-set for additional locking points • SUPPLIED AS STANDARD: striker item 1.06235.00.0 Two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 	 1 00100 00 1	2	25	45	0,945	1	1 57225 45 0				
			2	25	50	0,960	1	1 57225 50 0				
			2	25	60	1,000	1	1 57225 60 0				
			 1 00102 00 1	2	25	45	0,950	1	1 57225 46 0			
		2		25	50	0,960	1	1 57225 51 0				
		2		25	60	1,000	1	1 57225 61 0				

	<ul style="list-style-type: none"> • Pair of locks deadbolt only • Pre-set for additional locking points • SUPPLIED AS STANDARD: Two strikers item 1.06235.00.0 Two guides for extension bolts item 1.06085.00.0 Top striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06416.00.0 Floor striker item 1.06086.00.0 	 1 00100 00 1	2	25	45	1,670	1	1 57230 45 0				
			2	25	50	1,720	1	1 57230 50 0				
			2	25	60	1,790	1	1 57230 60 0				
			 1 00102 00 1	2	25	45	1,680	1	1 57230 46 0			
		2		25	50	1,735	1	1 57230 51 0				
		2		25	60	1,812	1	1 57230 61 0				



Technical features:

- Painted, brass plated steel faceplate and striker
- Zinc-plated steel case
- Flat, reversible, nickel-plated latch
- Nickel-plated steel multiple deadbolts

Hand:

0 = Non-handed

Supplied as standard:

- Striker
- Escutcheons item 1.06144.10.0
- 3 keys
- Fixing screws

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM					
								Type	Dim. Hand	Fin.	Pers. Spec.		
	<ul style="list-style-type: none"> • Latch and 3 deadbolts • SUPPLIED AS STANDARD: striker item 1.06279.12.0 		2	85	22 45	0,960	1	1	57290	45	0		
			2	85	22 50	1,030	1	1	57290	50	0		
			2	85	22 60	1,095	1	1	57290	60	0		
			2	85	22 45	0,960	1	1	57290	46	0		
			2	85	22 50	1,030	1	1	57290	51	0		
			2	85	22 60	1,085	1	1	57290	61	0		
	<ul style="list-style-type: none"> • Latch and 3 deadbolts • SUPPLIED AS STANDARD: striker item 1.06278.11.0 		2	85	22 45	1,000	1	1	57291	45	0		
			2	85	22 50	1,030	1	1	57291	50	0		
			2	85	22 60	1,100	1	1	57291	60	0		
			2	85	22 45	0,960	1	1	57291	46	0		
			2	85	22 50	1,035	1	1	57291	51	0		
			2	85	22 60	0,960	1	1	57291	61	0		
	<ul style="list-style-type: none"> • Latch and 3 deadbolts • Pre-set for additional locking points • SUPPLIED AS STANDARD: Two plates item 1.06085.00.0 Upper striker item 1.06084.00.0 striker item 1.06284.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0 		2	85	25 45	1,340	1	1	57296	45	0		
			2	85	25 50	1,400	1	1	57296	50	0		
			2	85	25 60	1,435	1	1	57296	60	0		
			2	85	25 45	1,396	1	1	57296	46	0		
			2	85	25 50	1,370	1	1	57296	51	0		
			2	85	25 60	1,450	1	1	57296	61	0		



Technical features:

- Steel case and striker, painted in a metallized, antique bronze colour
- Nickel-plated steel latch
- Nickel-plated steel multiple deadbolts

Supplied as standard:

- Striker
- Outside escutcheon item 1.06043.00.0
- Inside escutcheon item 1.06458.11.0
- Fixing screws
- Instruction sheet

On request:

- Protective rose for item 1.06490.02.0 , 1.06490.02.0.B1
- Spacer item 1.06472.40.0

Hand:


1 = R.H. inwards

2 = L.H. inwards

Cylinder to be ordered separately




Type	Description	Key item	Throws	Backset	Unit weight 	Pieces 	ITEM			
							Type	Dim.	Hand	Fin.




- 4 deadbolts only

2	64	2,120	1	1	56152 60 1
2	64	2,120	1	1	56152 60 2




- 4 deadbolts only
- SUPPLIED AS STANDARD:
2 extension bolts item 1.06425.07.0
2 divertor item 1.06418.00.0

2	64	2,130	1	1	56162 60 1
2	64	2,130	1	1	56162 60 2

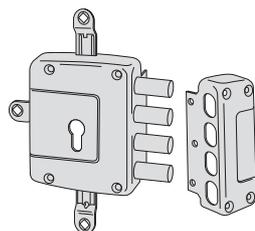

- 4 deadbolts only
- SUPPLIED AS STANDARD:
Secondary divertor case
- ON REQUEST:
Extension bolts item 1.06426.07.0
2 divertor item 1.06418.00.0


2	64	2,710	1	1	56172 60 1
2	64	2,710	1	1	56172 60 2



- Latch and 3 deadbolts
- Draw-back pull


2	64	2,120	1	1	56157 60 1
2	64	2,120	1	1	56157 60 2

Type	Description	Key item	Throws	Backset	Unit weight 	Pieces 	ITEM				
							Type	Dim.	Hand	Fin.	Pers.



- Latch and 3 deadbolts
- Draw-back pull
- SUPPLIED AS STANDARD:
2 extension bolts item 1.06425.07.0
2 divertor item 1.06418.00.0

2	64	2,130	1	1	56167 60 1
2	64	2,130	1	1	56167 60 2

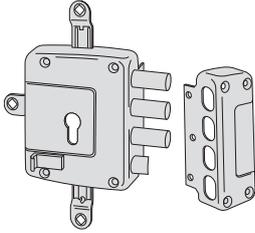

- Latch and 3 deadbolts
- Draw-back pull
- ON REQUEST:
2 extension bolts item 1.06425.07.0
2 divertor item 1.06418.00.0

2	64	2,710	1	1	56177 60 1
2	64	2,710	1	1	56177 60 2



Technical features:

- Steel case and striker, painted in a metallized, antique bronze colour
- Nickel-plated steel latch
- Nickel-plated steel multiple deadbolts
- External draw-back pull
- Picking resistant protection device on the latch lever
- External key guide


Hand:

- 1 = R.H. inwards
- 2 = L.H. inwards

Supplied as standard:

- Striker
- Outside escutcheon item 1.06140.00.0
- 3 keys:
 - item 1.00125.00.1 for hand 1
 - item 1.00125.00.2 for hand 2
- Fixing screws
- Instruction sheet

Type	Description	Key item	Throws	Backset	Unit weight	Pieces	ITEM			
							Type	Dim.	Hand	Fin.




- 4 deadbolts only



1 00125 00 1/2

4	64	2,510	1	1	57152 60 1
4	64	2,510	1	1	57152 60 2




- 4 deadbolts only
- SUPPLIED AS STANDARD:
 - 2 extension bolts item 1.06425.07.0
 - 2 diverter item 1.06418.00.0



1 00125 00 1/2

4	64	2,520	1	1	57162 60 1
4	64	2,520	1	1	57162 60 2

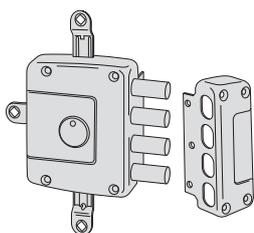


- 4 deadbolts only
- SUPPLIED AS STANDARD:
- Secondary diverter case
- ON REQUEST
 - 2 extension bolts item 1.06426.07.0
 - 2 diverter item 1.06418.00.0



1 00125 00 1/2

4	64	3,100	1	1	57172 60 1
4	64	3,100	1	1	57172 60 2






- Latch and 3 deadbolts
- Draw-back pull



1 00125 00 1/2

4	64	2,510	1	1	57157 60 1
4	64	2,510	1	1	57157 60 2

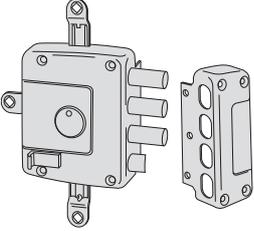Type	Description	Key item	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
 <ul style="list-style-type: none"> • Latch and 3 deadbolts • Draw-back pull • SUPPLIED AS STANDARD: 2 extension bolts item 1.06425.07.0 2 divertor item 1.06418.00.0 	 1 00125 00 1/2	4	64	2,520	1	1	57167	60	1		
		4	64	2,520	1	1	57167	60	2		
 <ul style="list-style-type: none"> • Latch and 3 deadbolts • Draw-back pull • ON REQUEST: 2 extension bolts item 1.06425.07.0 2 divertor item 1.06418.00.0 	 1 00125 00 1/2	4	64	3,100	1	1	57177	60	1		
		4	64	3,100	1	1	57177	60	2		
 <ul style="list-style-type: none"> • Top and bottom locking • Inside coin activated piece • ON REQUEST: 2 extension bolts item 1.06425.07.0 (pc.2) 				0,735	1	1	57192	00	0		



Technical features:

- Zinc-plated steel case
- Reversible flat latch with double chamfer, nickel-plated
- Nickel-plated deadbolt, either in a regular or multiple bolts configuration

Supplied as standard:

- Fixing screws for lock and striker
- Instruction sheet

Hand:

0 = Non-handed

Cylinder to be ordered separately



Type	Description	DEADBOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
										Type	Dim.	Hand	Fin.



- bronze-plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm.
- Latch-bolt and 3 lateral deadbolts
- ON REQUEST:
Set of bronze-plated strikers item 1.07174.00.0
bronze-plated striker item 1.06329.00.0
bronze-plated long lip item 1.06293.00.0



3	2	85	22	45	2,600	6	1	53002	45	0		
3	2	85	22	50	2,600	6	1	53002	50	0		
3	2	85	22	60	2,700	6	1	53002	60	0		

- Yellow zinc plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm.
- Latch-bolt and 3 lateral deadbolts
- ON REQUEST:
Set of yellow zinc plated strikers item 1.07174.00.0.82
Yellow zinc plated striker item 1.06329.00.0.82
Brass long lip item 1.06293.01.0




3	2	85	22	45	3,420	6	1	53002	45	0	82	
3	2	85	22	50	3,420	6	1	53002	50	0	82	
3	2	85	22	60	3,420	6	1	53002	60	0	82	

- High-resistance zinc-plated flat faceplate 22x3 mm, 1600 mm.
- 3 lateral deadbolts
- ON REQUEST:
High-resistance zinc-plated strike plate set item 1.07174.00.0.B7
High-resistance zinc-plated strike plate item 1.06329.00.0.B7



3	2	85	22	45	3,000	6	1	53002	45	0	B7	
3	2	85	22	50	2,600	6	1	53002	50	0	B7	
3	2	85	22	60	2,700	6	1	53002	60	0	B7	

Type	Description	DEADBOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
										Type	Dim.	Hand	Fin.

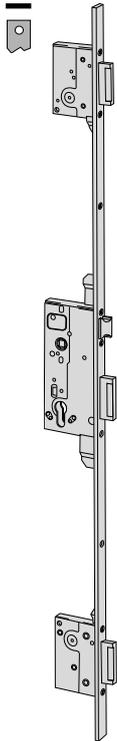

- bronze-plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm.
- Latch-bolt and 3 lateral deadbolts
- ON REQUEST:
Set of bronze-plated strikers item 1.07175.00.0
bronze-plated striker item 1.06328.00.0
bronze-plated long lip item 1.06293.00.0



3	2	85	22	45	2,600	6	1	53003	45	0		
3	2	85	22	50	4,000	6	1	53003	50	0		
3	2	85	22	60	4,000	6	1	53003	60	0		

- Yellow zinc plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm.
- Latch-bolt and 3 lateral deadbolts
- ON REQUEST:
Set of yellow zinc plated strikers item 1.07175.00.0.82
Yellow zinc plated striker item 1.06328.00.0.82
Brass long lip item 1.06293.01.0




3	2	85	22	45	2,600	6	1	53003	45	0	82	
3	2	85	22	50	3,420	6	1	53003	50	0	82	
3	2	85	22	60	3,420	6	1	53003	60	0	82	

- High-resistance zinc-plated flat faceplate 22x3 mm, 1600 mm.
- Latch and 3 lateral deadbolts
- ON REQUEST:
High-resistance zinc-plated strike plate set item 1.07175.00.0.B7
High-resistance zinc-plated strike plate item 1.06328.00.0.B7



3	2	85	22	45	2,600	6	1	53003	45	0	B7	
3	2	85	22	50	4,000	6	1	53003	50	0	B7	
3	2	85	22	60	4,000	6	1	53003	60	0	B7	

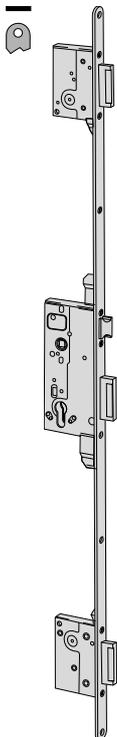


- Lacquered satin brass adjustable 'flat' faceplate 22 x 3 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 3 lateral deadbolts
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07176.00.0
Set of long lipped lacquered satin brass strikers item 1.07176.10.0
Lacquered satin brass adjustable striker item 1.06330.00.0



3	2	85	22	50	4,750	2	1	53035	50	0		
3	2	85	22	60	4,750	2	1	53035	60	0		

Type	Description	DEADBOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
										Type	Dim. Hand	Fin.	Pers. Spec.

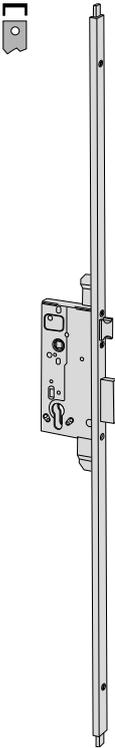

- Lacquered satin brass adjustable U-shaped faceplate
22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and central deadbolt
- Vertical extension bolts
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
1 floor striker item 1.06086.00.0
- ON REQUEST:
Lacquered satin brass striker item 1.06279.11.0
Long lipped lacquered satin brass striker item 1.06213.05.0
(2 pcs required)




3	2	85	22	45	4,750	2	1	53131	45	0
3	2	85	22	50	4,750	2	1	53131	50	0
3	2	85	22	60	4,750	2	1	53131	60	0

- Lacquered satin brass adjustable U-shaped faceplate
22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and central deadbolt
- Vertical extension bolts
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.6292.01.0
1 floor striker item 1.06086.00.0
- ON REQUEST:
Lacquered satin brass striker item 1.06279.11.0
Long lipped lacquered satin brass striker item 1.06213.05.0
(2 pcs required)



3	2	85	22	45	4,750	2	1	53151	45	0
3	2	85	22	50	4,750	2	1	53151	50	0
3	2	85	22	60	4,750	2	1	53151	60	0

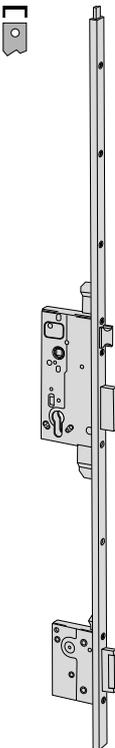

- Lacquered satin brass adjustable U-shaped faceplate
22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 2 lateral deadbolts
- Top vertical extension bolt
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07178.00.0
Set of long lipped lacquered satin brass strikers item 1.07178.10.0




3	2	85	22	45	3,900	2	1	53133	45	0
3	2	85	22	50	3,900	2	1	53133	50	0
3	2	85	22	60	3,900	2	1	53133	60	0

- Lacquered satin brass adjustable U-shaped faceplate
22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 2 lateral deadbolts
- Top vertical extension bolt
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07179.00.0
Set of long lipped lacquered satin brass strikers item 1.07179.10.0



3	2	85	22	50	3,900	2	1	53153	50	0
3	2	85	22	60	3,900	2	1	53153	60	0

Type	Description	DEADBOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
										Type	Dim.	Hand	Fin.	Pers.

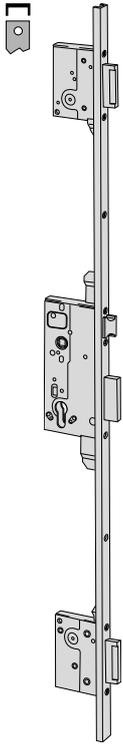

- Lacquered satin brass adjustable U-shaped faceplate
22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 3 lateral deadbolts
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07176.00.0
Set of long lipped lacquered satin brass strikers item 1.07176.10.0
Lacquered satin brass adjustable striker item 1.06330.00.0




3	2	85	22	45	4,750	2	1	53135 45 0
3	2	85	22	50	4,750	2	1	53135 50 0
3	2	85	22	60	4,750	2	1	53135 60 0

- Lacquered satin brass adjustable U-shaped faceplate
22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 3 lateral deadbolts
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07177.00.0
Set of long lipped lacquered satin brass strikers item 1.07177.10.0
Lacquered satin brass adjustable striker item 1.06331.00.0



3	2	85	22	45	4,750	2	1	53155 45 0
3	2	85	22	50	4,750	2	1	53155 50 0
3	2	85	22	60	4,750	2	1	53155 60 0

Type	Description	DEADBOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
										Type	Dim.	Hand	Fin.

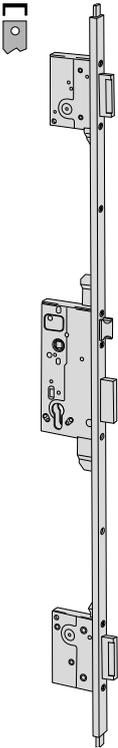

- Lacquered satin brass adjustable U-shaped faceplate
22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 3 lateral deadbolts
- Vertical extension bolts
- SUPPLIED AS STANDARD:
2 upper strikers item 1.06292.00.0 and item 1.06292.01.0
1 floor striker item 1.06086.00.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07176.00.0
Set of long lipped lacquered satin brass strikers
item 1.07176.10.0
Lacquered satin brass adjustable striker item 1.06330.00.0



5	2	85	22	45	3,900	2	1	53137 45 0
5	2	85	22	50	3,900	2	1	53137 50 0
5	2	85	22	60	3,900	2	1	53137 60 0

- Lacquered satin brass adjustable U-shaped faceplate
22 x 10 mm., 2.600 mm.
upper adjustment 650 mm.
lower adjustment 35 mm.
- Latch-bolt and 3 lateral deadbolts
- Vertical extension bolts
- SUPPLIED AS STANDARD:
2 upper strikers item 1.06292.00.0 and item 1.06292.01.0
1 floor striker item 1.06086.00.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07177.00.0
Set of long lipped lacquered satin brass strikers
item 1.07177.10.0
Lacquered satin brass adjustable striker item 1.06331.00.0



5	2	85	22	45	4,750	2	1	53157 45 0
5	2	85	22	50	3,900	2	1	53157 50 0
5	2	85	22	60	4,750	2	1	53157 60 0



Technical features:

- Zinc-plated steel case
- Reversible flat latch with double chamfer, nickel-plated
- Nickel-plated deadbolt, either in a regular or multiple bolts configuration
- U shaped adjustable faceplate (22 x 10) in satin finish laquered brass, 2,600 mm. height
upper adjustment 650 mm.
lower adjustment 35 mm.


Hand:

0 = Non-handed

Supplied as standard:

- 3 keys
- Fixing screws for lock and striker
- Instruction sheet

Type	Description	DEADBOLTS	Key item	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
											Type	Dim.	Hand	Fin.

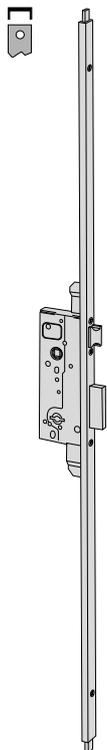

- Lacquered satin brass adjustable faceplate
- Latch-bolt and central deadbolt
- Vertical extension bolts
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
1 floor striker item 1.06086.00.0
1 Inside escutcheon item 1.06143.00.0
1 Outside escutcheon item 1.06082.00.0
- ON REQUEST:
Lacquered satin brass striker item 1.06279.11.0
Long lipped lacquered satin brass striker item 1.06213.05.0 (2 pcs. required)



1 00100 00 1

3	2	85	22	45	4,750	2	1	57831	45	0
3	2	85	22	50	4,750	2	1	57831	50	0
3	2	85	22	60	4,750	2	1	57831	60	0



1 00102 00 1

3	2	85	22	45	4,750	2	1	57831	46	0
3	2	85	22	50	4,750	2	1	57831	51	0
3	2	85	22	60	4,750	2	1	57831	61	0



1 00101 00 1

3	2	85	22	45	4,750	2	1	57851	45	0
3	2	85	22	50	4,750	2	1	57851	50	0
3	2	85	22	60	4,750	2	1	57851	60	0


- Lacquered satin brass adjustable faceplate
- Latch-bolt and central deadbolt
- Vertical extension bolts
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
1 floor striker item 1.06086.00.0
Escutcheons item 1.06144.10.0
- ON REQUEST:
Lacquered satin brass striker item 1.06279.11.0
Long lipped lacquered satin brass striker item 1.06213.05.0 (2 pcs. required)



1 00102 00 1

3	2	85	22	45	4,750	2	1	57851	46	0
3	2	85	22	50	4,750	2	1	57851	51	0
3	2	85	22	60	4,750	2	1	57851	61	0

Type	Description	DEADBOLTS	Key item	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
											Type	Dim.	Hand	Fin.

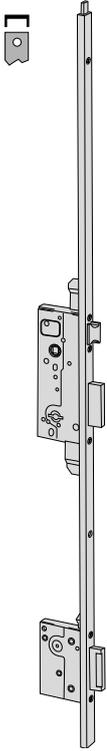

- Lacquered satin brass adjustable faceplate
- Latch-bolt and 2 lateral deadbolts
- Top vertical extension bolt
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
1 Inside escutcheon item 1.06143.00.0
1 Outside escutcheon item 1.06082.00.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07178.00.0
Set of long lipped lacquered satin brass striker item 1.07178.10.0



1 00100 00 1

3	2	85	22	45	4,750	2	1 57833 45 0
3	2	85	22	50	4,750	2	1 57833 50 0
3	2	85	22	60	4,750	2	1 57833 60 0



1 00102 00 1

3	2	85	22	45	4,750	2	1 57833 46 0
3	2	85	22	50	4,750	2	1 57833 51 0
3	2	85	22	60	4,750	2	1 57833 61 0



1 00101 00 1

3	2	85	22	45	4,750	2	1 57853 45 0
3	2	85	22	50	4,750	2	1 57853 50 0
3	2	85	22	60	4,750	2	1 57853 60 0

- Lacquered satin brass adjustable faceplate
- Latch-bolt and 2 lateral deadbolts
- Top vertical extension bolt
- SUPPLIED AS STANDARD:
2 top strikers item 1.06292.00.0 and item 1.06292.01.0
Escutcheons item 1.06144.10.0
- ON REQUEST:
Set of lacquered satin brass strikers item 1.07179.00.0
Set of long lipped lacquered satin brass striker item 1.07179.10.0



1 00102 00 1

3	2	85	22	45	4,750	2	1 57853 46 0
3	2	85	22	50	4,750	2	1 57853 51 0

Type	Description	DEADBOLTS	Key item	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
											Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Lacquered satin brass adjustable faceplate • Latch-bolt and 3 lateral deadbolts • SUPPLIED AS STANDARD: Inside escutcheon item 1.06143.00.0 Outside escutcheon item 1.06082.00.0 • ON REQUEST: Set of lacquered satin brass strikers item 1.07176.00.0 Set of long lipped lacquered satin brass striker item 1.07176.10.0 Lacquered satin brass adjustable striker item 1.06330.00.0 		1 00100 00 1	3	2	85	22	45	4,750	2	1	57835	45	0
				3	2	85	22	50	4,750	2	1	57835	50	0
				3	2	85	22	60	4,750	2	1	57835	60	0
			1 00102 00 1	3	2	85	22	45	4,750	2	1	57835	46	0
				3	2	85	22	50	4,750	2	1	57835	51	0
				3	2	85	22	60	4,750	2	1	57835	61	0
			1 00101 00 1	3	2	85	22	45	4,750	2	1	57855	45	0
				3	2	85	22	50	4,750	2	1	57855	50	0
				3	2	85	22	60	4,750	2	1	57855	60	0
			1 00102 00 1	3	2	85	22	45	4,750	2	1	57855	46	0
				3	2	85	22	50	4,750	2	1	57855	51	0
				3	2	85	22	60	4,750	2	1	57855	61	0



Technical features:

- Handles and protective roses in satin-finished AISI 304 stainless steel.
- Handle levers pre-mounted on mechanism with return spring.
- Fixed directly or using through screws on 38 to 54 mm thick doors. Fixing screws and square spindle provided

Certifications:

- Grade 3 - category of use (in places with high frequency of use)
- EN1906 - Grade 7 durability (200,000 cycles)
- EN1670 - Grade 2 corrosion resistance - 96 hours
- EN1634 - Fire resistance - 2 hours on wooden doors and 4 hours on metal doors

Project line

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim. Hand	Fin.	Pers. Spec.	
	• Pair of handles PL Oval series					0,300	1	1 07070 70 0				
	• Pair of handles PL Oval series. • Supplied as standard: pair of protective roses for Euro profile cylinder					0,300	1	1 07070 80 0				
	• Pair of handles PL Angle series.					0,300	1	1 07070 71 0				
	• Pair of handles PL Angle series. • Supplied as standard: pair of protective roses for Euro profile cylinder.					0,300	1	1 07070 81 0				
	• Pair of handles PL Arcus series					0,300	1	1 07070 72 0				
	• Pair of handles PL Radius series.					0,300	1	1 07070 73 0				
	• Pair of handles PL Radius series. • Supplied as standard: pair of protective roses for Euro profile cylinder					0,300	1	1 07070 82 0				

Type	Description	Throws	Centre Distance	Focaplate	Backset	Unit weight 	Pieces 	ITEM						
								Type	Dim.	Hand	Fin.	Pers.	Spec.	
	• Pair of protective roses for Euro profile cylinders					0,070	1	1	06093	00	0			
	• Pair of solid protective roses					0,070	1	1	06093	01	0			
	• Pair of protective roses for Patent locks or similar					0,070	1	1	06093	02	0			
	• Pair of protective roses for Euro profile cylinders					0,070	1	1	06093	04	0			
	• Thumb turn for bathroom doors.					0,070	1	1	06093	10	0			
	• Thumb turn for bathroom doors WITH vacant/engaged indicator.					0,090	1	1	06093	11	0			

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Angular non-handed brass striker 	12010, 12011	0,110 6	1	06035	00 0	
	<ul style="list-style-type: none"> Brass push-button ON REQUEST: Nichel plated brass (fin. 12) 	12010, 12011, 12015, 12016	0,037 6	1	06110	00 0	
	<ul style="list-style-type: none"> Angular non-handed brass striker 	12015, 12016	0,163 6	1	06218	00 0	
	<ul style="list-style-type: none"> Nylon contact set complete with spacers: 2 mm. (Pcs. 4) 	11000, 12000, 13000	0,035 6	1	06510	00 0	
	<ul style="list-style-type: none"> Coil set 12 V ac 	12010, 12011, 12015, 12016	0,051 6	1	07009	00 0	
	<ul style="list-style-type: none"> Coil set 12 V ac 	13010	0,071 6	1	07012	00 0	
	<ul style="list-style-type: none"> Gray lacquered steel striker with roller 	11610, 11611, 11630, 11631	0,178 6 0,178 6	1 1	07017	10 1 10 2	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Striker 	1A610, 1A611, 1A630, 1A631	0,200	6	1	07021	10	0	
	<ul style="list-style-type: none"> • 1 mm spacer for striker 	1A610, 1A611, 1A630, 1A631	0,025	12	1	07021	11	0	
	<ul style="list-style-type: none"> • Striker set including: slide anchoring plate screws 	11610, 11921, 11931	0,100 0,100	1 1	1	07018	10	3 4	
	<ul style="list-style-type: none"> • Gray lacquered steel striker with roller 	11670, 11671	0,210 0,210	6 6	1	07019	10	1 2	
	<ul style="list-style-type: none"> • Coil set • 12 V ac • Black nylon support 	11610, 11611, 11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,087 0,087	6 6	1	07118	00	1 2	
	<ul style="list-style-type: none"> • Coil set • 24 V ac • Black nylon support 	11610, 11611, 11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,075 0,082	6 6	1	07118	01	1 2	

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Adjustable coil set 12 V ac Blue nylon support 	11610,11611,	0,075	6	1	07120	00	1
		11630,11631, 11670,11671, 11721,11731, 11761,11771, 11823,11921, 11931	0,074	6	1	07120	00	2
	<ul style="list-style-type: none"> Adjustable coil set 24 V ac Blue nylon support 	11610,11611,	0,075	6	1	07120	01	1
		11630,11631, 11670,11671, 11721,11731, 11761,11771, 11823,11921, 11931	0,075	6	1	07120	01	2
	<ul style="list-style-type: none"> Coil set 12V ac CE 	1A610,1A611, 1A630,1A631, 1A721,1A731	0,092	6	1	07025	00	0

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Metalized aluminium spacer set 	54570, 57580	0,180	6	1	06091	10	0
	<ul style="list-style-type: none"> • Amaranth red lacquered steel striker 	50110, 50111, 50115, 50120, 50121, 50150, 50151, 50160, 50170, 50171, 50180, 50181	0,104 0,090	6 6	1	07024	00	1 2

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> Long lipped, brass plated steel striker with round corners 	5C031, 5C130, 5C631, 5C671	0,049 25				1 06098 00 0
	<ul style="list-style-type: none"> Brass plated steel striker with round corners 	5C631, 5C641, 5C671	0,087 25				1 06100 10 0
	<ul style="list-style-type: none"> Brass plated striker with round corners 	5C140	0,096 25				1 06100 15 0
	<ul style="list-style-type: none"> Long lipped, brass plated steel striker with round corners 	52641	0,056 25				1 06101 10 0
	<ul style="list-style-type: none"> Long lipped, brass plated steel striker 	52621	0,058 25				1 06102 10 0
	<ul style="list-style-type: none"> Long lipped, brass striker 	5C110	0,057 25				1 06102 13 0
	<ul style="list-style-type: none"> Long lipped, brass striker 	52300	0,040 25				1 06107 00 0
	<ul style="list-style-type: none"> Long lipped, brass striker 	5C120	0,055 25				1 06149 00 0
	<ul style="list-style-type: none"> Long lipped, brass plated steel striker with round corners 	52031	0,090 25				1 06150 00 0
	<ul style="list-style-type: none"> Long lipped, brass plated steel striker 	52011	0,052 25				1 06152 00 0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Long lipped, brass plated steel striker	5C021	0,550	25	1	06162	00	0	
	• Long lipped brass striker	52010	0,055	25	1	06163	00	0	
	• Brass plated steel striker	5C120, 5C611, 5C621, 5C651	0,074	25	1	06206	00	0	
	• Long lipped brass striker	5C130, 5C170, 53131, 53151, 57831, 57851	0,055	25	1	06213	05	0	
	• Brass striker	5C110	0,062	25	1	06216	00	0	
	• Long lipped brass plated steel striker	5C110, 5C611, 5C651	0,050	25	1	06223	00	0	
	• Brass plated steel striker	5C110, 5C611, 5C651	0,053	25	1	06226	00	0	
	• Brass plated steel striker with round corners	5C130, 5C631, 5C671	0,098	25	1	06243	00	0	
	• Polished, chrome-plated satin-finished external ring	1 06460 05 0, 1 06460 06 0	0,025	12	1	06473	60	0	

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Brass striker 	52210, 52310	0,025	25	1	07032	00	0
	<ul style="list-style-type: none"> • Protective rose for cylinder series RS3, ASTRAL (with long key CL) and ASIX, in polished golden finish carbonitrided steel • Complete with: Spacers 2 mm. (pcs.19), 1 mm. (pcs. 2) Outside cover plates 2 mm. (pcs.2) Screws M5 x 73 mm. Inner rose 	12000, 52000, 53000	0,500	1	1	06460	15	0
	<ul style="list-style-type: none"> • Carbonitrided steel protection rose with polished brass finish • 2 screws (M6) • AVAILABLE FINISHES: Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) Polished chrome (fin. 18) 	0A310, 0B310, 08310, 08710	0,310	1	1	06460	50	0
	<ul style="list-style-type: none"> • Carbonitrided steel rotor protection for roses series 06460 and 06461 	0A310, 0B310, 08310, 08510, 08710	0,009	50	1	06460	01	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Inside brass escutcheon 	57000	0,035	12	1	06081	00	0
	<ul style="list-style-type: none"> • Outside brass escutcheon 	1 06119 00 0, 1 06142 00 0, 57000	0,030	12	1	06082	00	0
	<ul style="list-style-type: none"> • Hollow outside brass escutcheon 	1 06119 00 0, 1 06142 00 0, 57000	0,031	12	1	06083	00	0
	<ul style="list-style-type: none"> • Top steel striker 	52526, 56015, 56020, 56255, 57015, 57020, 57024, 57033, 57215, 57217, 57255, 57296	0,028	12	1	06084	00	0
	<ul style="list-style-type: none"> • Brass floor striker diameter 11 mm. • FOR: extension bolts with rods diameter 10 mm 	1 06415 00 0, 1 06441 15 0, 1 07088 03 0, 1 07088 04 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57019, 57020, 57024, 57033, 57055, 57215, 57217, 57255, 57259, 57265, 57296, 57831, 57837, 57851, 57857	0,016	12	1	06086	00	0

Type	Description	For series/item	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: Internal extension bolts with 8 and 10 mm. diameter rods multi-point locks series 46445 extension bolt for Multitop item 1.06449.11.0 		0,020	12	1	06086	02	0
	<ul style="list-style-type: none"> • Nylon key guide, with eight spacers 	57000	0,050	12	1	06142	00	0
	<ul style="list-style-type: none"> • Inside brass escutcheon with plug 	57000	0,032	12	1	06143	00	0
	<ul style="list-style-type: none"> • Nickel-plated steel striker 	57010	0,117	25	1	06231	00	0
	<ul style="list-style-type: none"> • Nickel-plated steel striker 	57015, 57020, 57220, 57225, 57230	0,124	25	1	06235	00	0
	<ul style="list-style-type: none"> • Nickel-plated steel striker 	56250, 57250	0,126	25	1	06271	00	0
	<ul style="list-style-type: none"> • Nickel-plated steel striker 	56255, 57215, 57255	0,131	25	1	06272	00	0
	<ul style="list-style-type: none"> • Long lipped nickel-plated steel striker 	56255, 57255	0,146	25	1	06275	00	0
	<ul style="list-style-type: none"> • Nickel-plated steel striker 	57211	0,100	12	1	06278	00	0

Type	Description	For series/item	Unit weight Pieces	ITEM		
				Type	Dim.	Hand
	<ul style="list-style-type: none"> Lacquered brass plated satin steel striker 	52521, 57291	0,120 12	1	06278	11 0
	<ul style="list-style-type: none"> Nickel-plated steel striker with round corners 	57210	0,096 12	1	06279	00 0
	<ul style="list-style-type: none"> Lacquered brass plated satin steel striker with round corners 	52520, 57290	0,120 12	1	06279	12 0
	<ul style="list-style-type: none"> Long lipped nickel-plated steel striker 	57211, 57215	0,145 25	1	06281	00 0
	<ul style="list-style-type: none"> Nickel-plated steel striker 	57220	0,079 25	1	06282	00 0
	<ul style="list-style-type: none"> Lacquered brass plated steel striker 	1 57028 60 0	0,100 12	1	06283	01 0
	<ul style="list-style-type: none"> Lacquered brass plated steel striker 	56010, 56015, 56020	0,100 12	1	06283	02 0 B7
	<ul style="list-style-type: none"> Lacquered brass plated steel striker 	52526, 57260, 57265, 57296	0,131 25	1	06284	00 0
	<ul style="list-style-type: none"> Long lipped lacquered brass plated steel striker 	57260, 57265	0,140 25	1	06284	01 0
	<ul style="list-style-type: none"> Zinc plated steel saw resistant tip, 10 mm. Side push resistance KN 15 	1 06415 00 0, 1 06416 00 0, 1 06441 15 0	0,056 12	1	06291	00 0

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Peris. Spec.
	<ul style="list-style-type: none"> • Zinc plated hardened steel tip, dia. 10 mm. • Side push resistance KN 25 	1 06415 00 0, 1 06416 00 0, 1 06441 15 0, 1 07088 03 0	0,054	12	1 06291 05 0			
	<ul style="list-style-type: none"> • Zinc plated steel pin connector 	1 06415 00 0, 1 06416 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0	0,016	12	1 06291 20 0			
	<ul style="list-style-type: none"> • Zinc plated extension bolts • SUPPLIED AS STANDARD: • Pair of bolts dia. 8 mm. • Pair of tips dia. 10 mm. item 1.06291.05.0 (2 pieces) 	52526, 56015, 56016, 56255, 57015, 57016, 57019, 57033, 57035, 57055, 57215, 57217, 57225, 57226, 57255, 57256, 57259, 57265, 57296, 57318, 57336	0,533	12	1 06415 00 0			
	<ul style="list-style-type: none"> • Zinc plated extension bolt • SUPPLIED AS STANDARD: • Bolt dia. 8 mm. • Pair of tips dia. 10 mm. item 1.06291.05.0 (2 pieces) 	56020, 57020, 57024, 57230	0,350	10	1 06416 00 0			

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Indicator of occupancy 	52842, 52844, 52862, 52864	0,015	6	1	06146	00	0
	<ul style="list-style-type: none"> Split follower 	52760, 52761, 52844, 52864	0,047	25	1	07206	01	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Polished brass protective rose for use with Euro profile cylinders 		0,024	100	1	06043	00	0
	<ul style="list-style-type: none"> Outside brass escutcheon 	56152, 56157, 56162, 56167, 56172, 56177, 57152, 57157, 57162, 57167, 57172, 57177	0,029	12	1	06140	00	0
	<ul style="list-style-type: none"> Hollow outside brass escutcheon A = 10, door thickness 60 mm. 	56152, 56157, 56162, 56167, 56172, 56177, 57152, 57157, 57162, 57167, 57172, 57177	0,032	12	1	06140	01	0
	<ul style="list-style-type: none"> Hollow outside brass escutcheon A = 22, door thickness 70 mm. 	56152, 56157, 56162, 56167, 56172, 56177, 57152, 57157, 57162, 57167, 57172, 57177	0,037	12	1	06140	02	0
	<ul style="list-style-type: none"> Bronze lacquered steel top striker 	56162, 56167, 56172, 56177, 57162, 57167, 57172, 57177, 57192	0,100	12	1	06236	00	0
	<ul style="list-style-type: none"> Brass floor striker with sprung dust cover 	56162, 56167, 56172, 56177, 57162, 57167, 57172, 57177, 57192	0,028	12	1	06237	01	0
	<ul style="list-style-type: none"> Set of bronze lacquered steel divertor 	56162, 56167, 56172, 56177, 57162, 57167, 57172, 57177, 57192	0,029	12	1	06418	00	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Bronze lacquered steel bar guide 	56162, 56167, 56172, 56177, 57162, 57167, 57172, 57177, 57192	0,030	24	1	06422	00	0	
	<ul style="list-style-type: none"> • Bronze lacquered steel long adjustable extension bolt 	56162, 56167, 56172, 56177, 57162, 57167, 57172, 57177, 57192	0,766	6	1	06424	00	0	
	<ul style="list-style-type: none"> • Complete set of bolt extension rods for locks with 3 locking points • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of bolt extension rods - Top strike item 1.06236.00.0 - Floor strike item 1.06237.00.0 - 2 rod guide clips item 1.06422.00.0 	56162, 56167, 57162, 57167, 57192	1,500	1	1	06425	07	0	
	<ul style="list-style-type: none"> • Complete set of bolt extension rods for locks with 5 locking points • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - 2 sets of top/bottom bolt extension rods - 2 top strikes item 1.06236.00.0 - 2 floor strikes item 1.06237.00.0 - 4 rod guide clips item 1.06422.00.0 	56172, 56177, 57172, 57177	3,300	1	1	06426	07	0	
	<ul style="list-style-type: none"> • Inside aluminium escutcheon painted in metallic antique bronze colour 		0,036	12	1	06458	11	0	
	<ul style="list-style-type: none"> • Bronze lacquered steel striker 	56152, 56157, 56162, 56167, 56172, 56177, 57152, 57157, 57162, 57167, 57172, 57177	0,320	2	1	07054	00	0	
	<ul style="list-style-type: none"> • Bronze lacquered steel top striker 	56152, 56157, 56162, 56167, 56172, 56177, 57152, 57157, 57162, 57167, 57172, 57177	0,442	2	1	07055	00	0	

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Nickel-plated steel screw 	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,006	50	1 06048 02 0			
	<ul style="list-style-type: none"> Nickel-plated steel screw 	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,008	50	1 06048 03 0			
	<ul style="list-style-type: none"> Inside brass escutcheon 	57000	0,035	12	1 06081 00 0			
	<ul style="list-style-type: none"> Outside brass escutcheon 	1 06119 00 0, 1 06142 00 0, 57000	0,030	12	1 06082 00 0			
	<ul style="list-style-type: none"> Hollow outside brass escutcheon 	1 06119 00 0, 1 06142 00 0, 57000	0,031	12	1 06083 00 0			
	<ul style="list-style-type: none"> Polished brass key guide escutcheon with ten spacers AVAILABLE FINISHES: Bronze anodised aluminium (fin. 47) Chrome-plated brass (fin.18) 	57000	0,094	5	1 06119 00 0			
	<ul style="list-style-type: none"> Inside brass escutcheon with plug 	57000	0,032	12	1 06143 00 0			

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Polished brass rose with key guide For double bitted locks AVAILABLE FINISHES: Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64) Polished chrome plated (Fin B1) 		0,105	6	1	06144	10	1	
	<ul style="list-style-type: none"> Nylon key guide, including 2 supports for escutcheon and 3 spacers For double bit key locks 		0,066	6	1	06144	15	0	
	<ul style="list-style-type: none"> Polished brass cover for escutcheon and key guide AVAILABLE FINISHES: Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64) Polished chrome plated (Fin B1) 	1 06144 10 1, 1 06144 15 0	0,030	50	1	06144	50	1	
	<ul style="list-style-type: none"> Brass long lipped striker 	5C130, 5C170, 53131, 53151, 57831, 57851	0,055	25	1	06213	05	0	
	<ul style="list-style-type: none"> bronze-plated steel central striker Yellow zinc plated steel central striker 	53002	0,100	12	1	06279	10	0	
	<ul style="list-style-type: none"> Lacquered satin brass central striker 	5C130, 5C170, 53035, 53131, 53133, 53135, 53137, 53151, 53153, 53155, 53157, 57831, 57833, 57835, 57851, 57853, 57855	0,096	12	1	06279	11	0	
	<ul style="list-style-type: none"> Brass upper striker (single-leaf doors) 	53131, 53133, 53137, 53151, 53153, 53157, 57831, 57833, 57851, 57853	0,060	12	1	06292	00	0	


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Brass upper striker (double-leaf doors) 	53131, 53133, 53137, 53151, 53153, 53157, 57831, 57833, 57851, 57853	0,060	12	1	06292	01	0	
	<ul style="list-style-type: none"> • Long lip in bronze-plated brass for central strikers • Long lip in lacquered satin brass for central strikers 	53002, 53003	0,040	25	1	06293	00	0	
	<ul style="list-style-type: none"> • Top and bottom striker in bronze-plated steel, for lateral deadbolts 	53003	0,100	12	1	06322	00	0	
	<ul style="list-style-type: none"> • Top and bottom striker in bronze-plated steel, for lateral deadbolts • Top and bottom striker in yellow zinc plated steel, for lateral deadbolts • Top and bottom striker in lacquered satin brass, for lateral deadbolts 	53002, 53002, 53035, 53133, 53135, 53137, 57833, 57835	0,100	12	1	06323	00	0	82
	<ul style="list-style-type: none"> • Top and bottom striker in lacquered satin brass, for lateral deadbolts 	53153, 53155, 53157, 57853, 57855	0,120	12	1	06325	00	0	
	<ul style="list-style-type: none"> • Square striker (1.600 mm.) in bronze-plated steel • Square striker (1.600 mm.) in yellow zinc plated steel • Square strike plate (1600 mm.) in high resistance zinc-plated steel 	53003, 53003, 53003	0,800	6	1	06328	00	0	82
	<ul style="list-style-type: none"> • Round striker (1.600 mm.) in bronze-plated steel • Round striker (1.600 mm.) in yellow zinc plated steel 	53002, 53002	0,800	6	1	06329	00	0	82
			0,800	6	1	06329	00	0	B7

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM		
					Type	Dim. Hand Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Adjustable striker in lacquered satin brass 	53035, 53135, 53137, 53155, 53157, 57835, 57837, 57855, 57857	1,300	6	1	06331 00 0	
	<ul style="list-style-type: none"> Protective rose for cylinder series RS3, ASTRAL (with long key CL) and ASIX, in polished golden finish carbonitrited steel Complete with: Spacers 2 mm. (pcs.19), 1 mm. (pcs. 2) Outside cover plates 2 mm. (pcs.2) Screws M5 x 73 mm. Inner rose 	12000, 52000, 53000	0,500	1	1	06460 15 0	
	<ul style="list-style-type: none"> Set of vertical extension bolts including 2 upper strikers (flat, square) and 1 floor striker 	53000, 57000	0,533	1	1	07173 00 0	
	<ul style="list-style-type: none"> Set of bronze-plated steel strikers: pcs. 1 item 1.06279.10.0 pcs 2 item 1.06323.00.0 	53002	0,266	6	1	07174 00 0	
	<ul style="list-style-type: none"> Set of yellow zinc plated steel strikers: pcs. 1 item 1.06279.10.0.82 pcs. 2 item 1.06323.00.0.82 	53002	0,180	6	1	07174 00 0 82	
	<ul style="list-style-type: none"> High resistance zinc-plated steel strike plate set: 1 pc central strike 2 pcs side deadbolt strike 	53002	0,266	6	1	07174 00 0 87	

Type	Description	For series/item	Unit weight 	Pieces 	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Set of bronze-plated steel strikers: pcs. 1 item 1.06278.10.0 pcs. 2 item 1.06322.00.0 	53003	0,300	6	1	07175	00	0	
	<ul style="list-style-type: none"> • Set of yellow zinc plated steel strikers: pcs. 1 item 1.06278.10.0.82 pcs. 2 item 1.06322.00.0.82 	53003	0,300	6	1	07175	00	0.82	
	<ul style="list-style-type: none"> • High resistance zinc-plated steel strike plate set: pz. 1 item 1.06278.10.0.B7 pz. 2 item 1.06322.00.0.B7 	53003	0,300	6	1	07175	00	0.B7	
	<ul style="list-style-type: none"> • Set of lacquered satin brass strikers: pcs. 1 item 1.06279.11.0 pcs. 2 item 1.06323.01.0 	53035, 53135, 53137, 57835	0,300	6	1	07176	00	0	
	<ul style="list-style-type: none"> • Set of lacquered satin brass strikers: pcs. 2 item 1.06213.05.0 pcs. 2 item 1.06323.01.0 	53035, 53135, 53137, 57835	0,300	6	1	07176	10	0	
	<ul style="list-style-type: none"> • Set of lacquered satin brass strikers: pcs. 1 item 1.06279.11.0 pcs. 2 item 1.06325.00.0 	53155, 53157, 57855	0,275	6	1	07177	00	0	
	<ul style="list-style-type: none"> • Set of lacquered satin brass strikers: pcs. 2 item 1.06213.05.0 pcs. 2 item 1.06325.00.0 	53155, 53157, 57855	0,300	6	1	07177	10	0	


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Set of lacquered satin brass strikers: pcs. 1 item 1.06279.11.0 pcs. 1 item 1.06323.01.0 	53133, 57833	0,192	6	1	07178	00	0	
	<ul style="list-style-type: none"> Set of lacquered satin brass strikers: pcs. 2 item 1.06213.05.0 pcs. 1 item 1.06323.01.0 	53133, 57833	0,200	6	1	07178	10	0	
	<ul style="list-style-type: none"> Central cylinder lock with latch-bolt and flat-type deadbolt 	53002, 53003, 53035, 53131, 53133, 53135, 53137	0,770 0,800 0,860	1 1 1	1	52507	45	0 0 0	
	<ul style="list-style-type: none"> Central cylinder lock with roller latch and flat-type deadbolt 	53002, 53003, 53035, 53131, 53133, 53135, 53137	1,145 0,770 1,145	1 1 1	1	52508	45 50 60	0 0 0	
	<ul style="list-style-type: none"> Central cylinder lock with latch-bolt and pin-operated deadbolt 	53151, 53153, 53155, 53157	0,735 0,765 0,800	1 1 1	1	52527	45 50 60	0 0 0	
	<ul style="list-style-type: none"> Central cylinder lock with roller latch and pin-operated deadbolt 	53151, 53153, 53155, 53157	0,700 0,700 0,805	1 1 1	1	52528	45 50 60	0 0 0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Double bit key central lock with latch-bolt and flat-type deadbolt • 3 key blanks item 1.00100.00.1 	57831, 57833,	0,845	1	1	57218 45 0	
		57835	0,870	1	1	57218 50 0	
			0,925	1	1	57218 60 0	
	<ul style="list-style-type: none"> • Double bit key central lock with latch-bolt and flat-type deadbolt • 3 key blanks item 1.00102.00.1 	57831, 57833,	0,850	1	1	57218 46 0	
		57835	0,880	1	1	57218 51 0	
			0,940	1	1	57218 61 0	
	<ul style="list-style-type: none"> • Double bit key central lock with roller latch and flat-type deadbolt • 3 key blanks item 1.00100.00.1 	57831, 57833,	1,340	1	1	57219 45 0	
		57835	1,340	1	1	57219 50 0	
	<ul style="list-style-type: none"> • Double bit key central lock with latch-bolt and pin-operated deadbolt • 3 key blanks item 1.00100.00.1 	57851, 57853,	1,340	1	1	57298 45 0	
		57855	0,845	1	1	57298 50 0	
			0,910	1	1	57298 60 0	
	<ul style="list-style-type: none"> • Double bit key central lock with latch-bolt and pin-operated deadbolt • 3 key blanks item 1.00102.00.1 	57851, 57853,	1,340	1	1	57298 46 0	
		57855	1,340	1	1	57298 51 0	
			1,340	1	1	57298 61 0	
	<ul style="list-style-type: none"> • Double bit key central lock with roller latch and pin-operated deadbolt • 3 key blanks item 1.00100.00.1 	57851, 57853,	0,950	1	1	57299 45 0	
		57855	0,815	1	1	57299 50 0	
			0,875	1	1	57299 60 0	

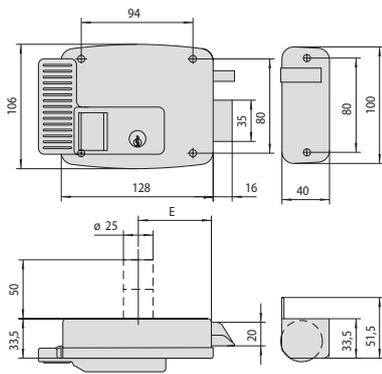


11611-11631

E = 50 - 60 - 70 - 80

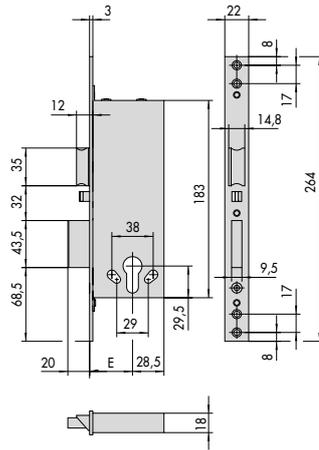


12010, 12011, 12015, 12016

E = 40 - 50 - 60 - 70




**15100, 15101, 15102,
15110, 15120, 15121,
15122, 15130, 15140
15150, 15160, 15170,
15180**

1

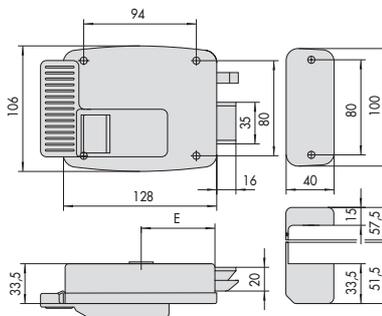

11610 - 11630

E = 50 - 60 - 70 - 80

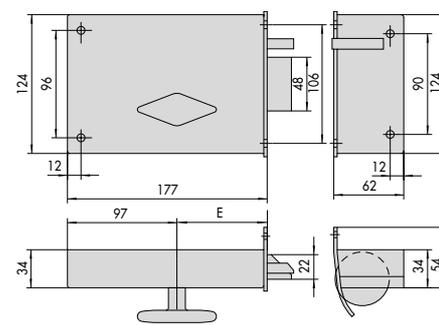


13010

E = 60 - 70 - 80 - 90 - 100 - 110 - 120


4

8

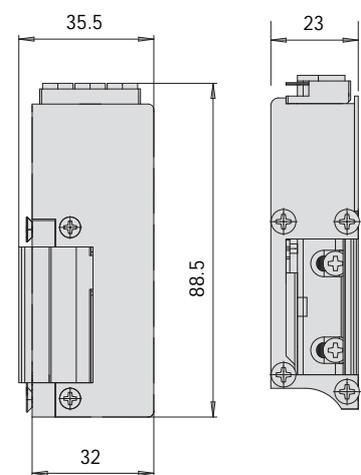


15300

2

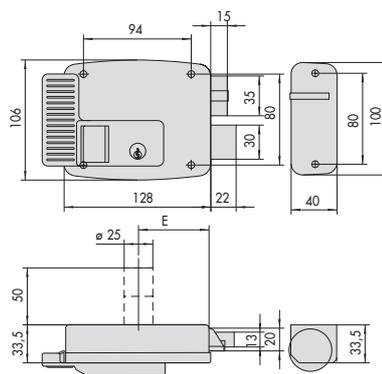

11670, 11761, 11671, 11771


E = 50 - 60 - 70 - 80

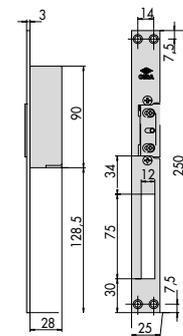

1.15001.00

5

9

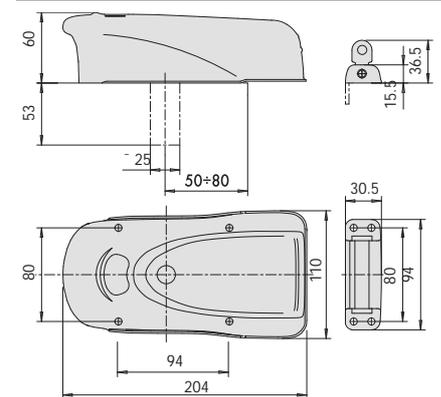


1A610, 1A611, 1A630, 1A631, 1A721, 1A731


3

7


10

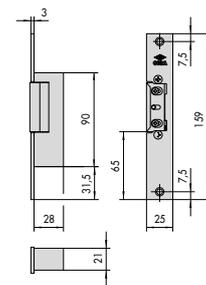


1.15005.00

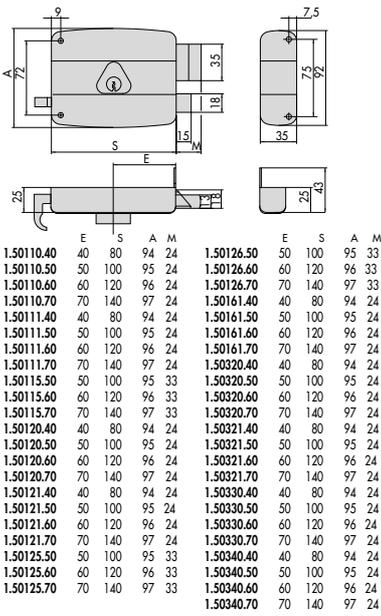


11

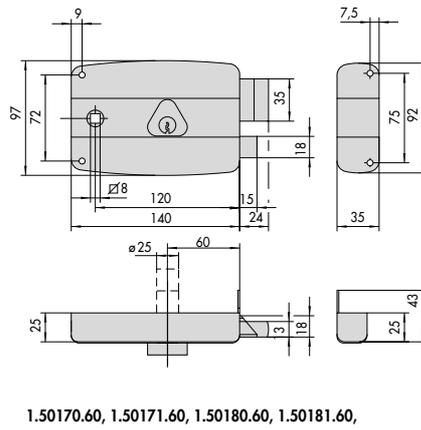


14

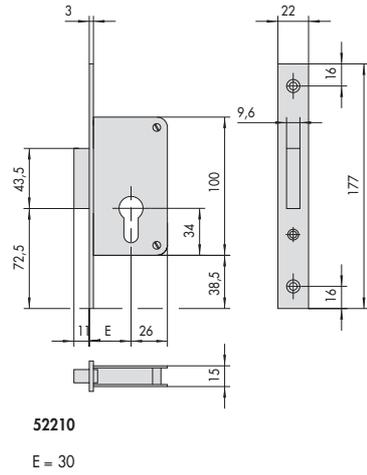


17

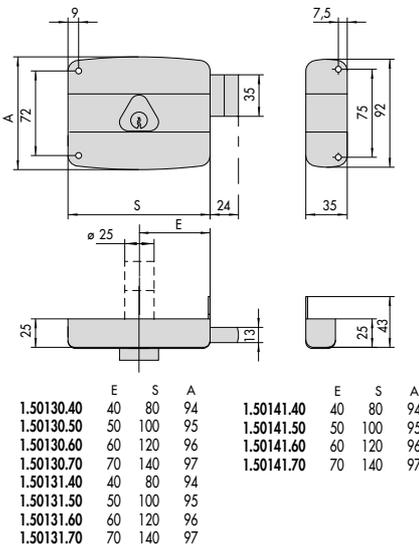


12

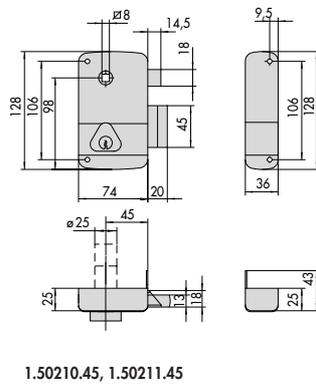


15

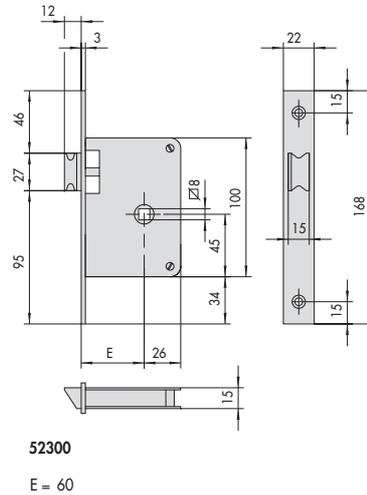


18

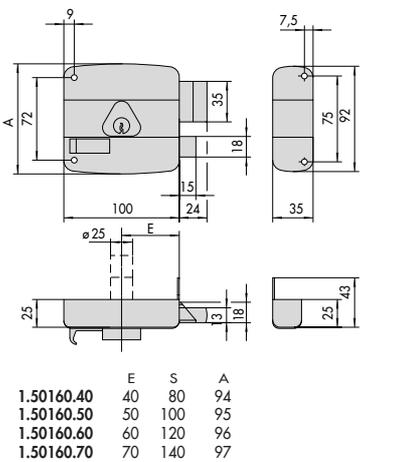


13

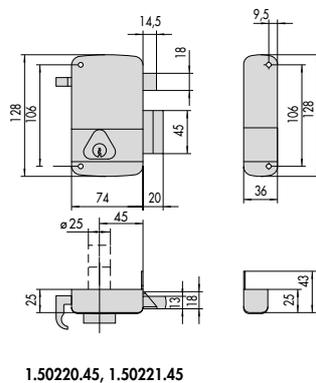

16

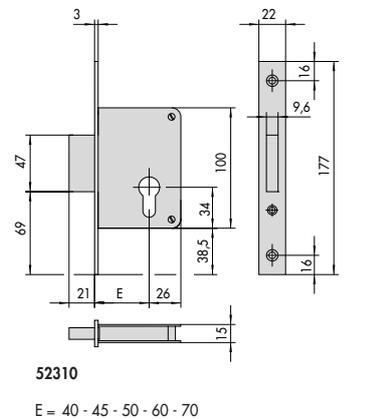


19

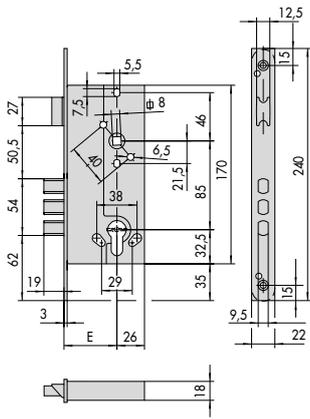

- 52521
- 52520
- 57291
- 57290


E = 45 - 50 - 60

20

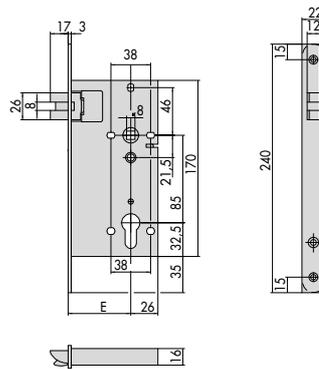

52750, 52751


23

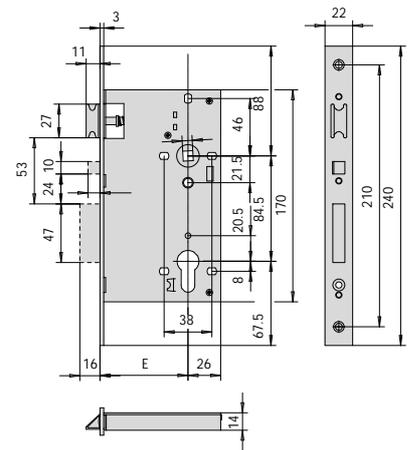

- 52118, 52158, 52318, 52810
- 52138, 52178, 52338, 52830

E = 40 - 45 - 50 - 60 - 70


26

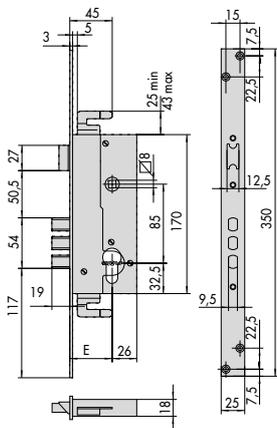

- 52526
- 57296


E = 45 - 50 - 60

21

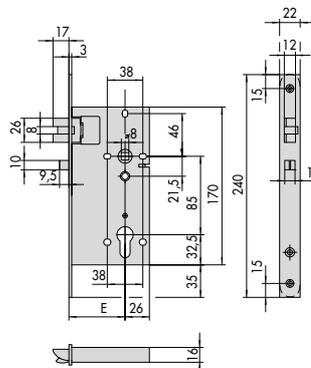

52755, 52756, 52760, 52761


24

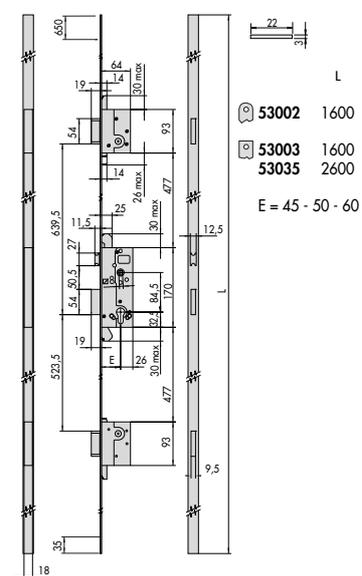

- 53002 1600
- 53003 1600
- 53035 2600


E = 45 - 50 - 60

27

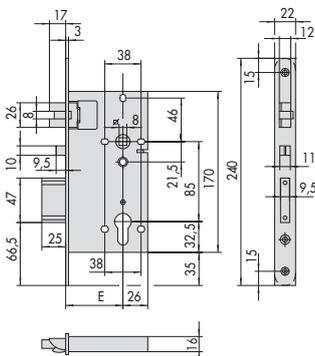


52710, 52711, 52730, 52731, 52840, 52842, 52844, 52860, 52862, 52864

22

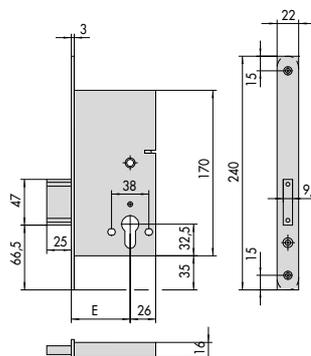

52780, 52781, 52871, 52891


25

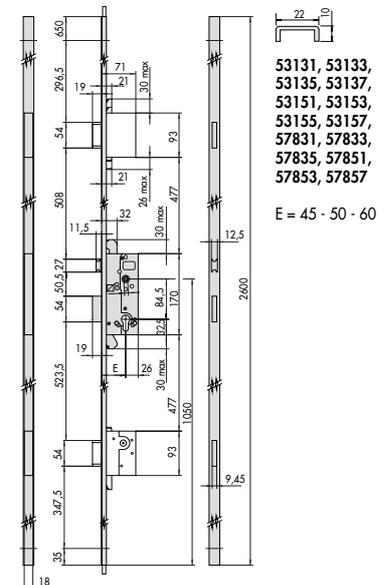

- 53131, 53133, 53135, 53137, 53151, 53153, 53155, 53157, 57831, 57833, 57835, 57851, 57853, 57857


E = 45 - 50 - 60

28

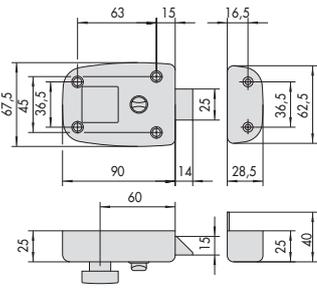


54310, 54311, 54315, 54316,

29

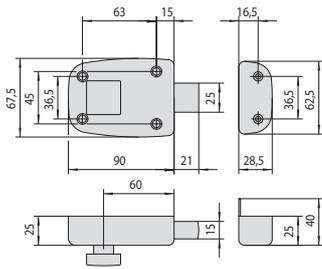


54340, 54341

30

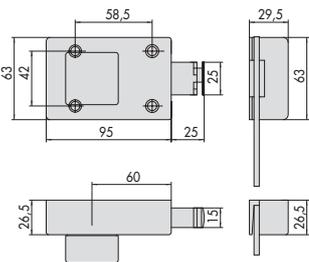


54510, 54550, 54560

31

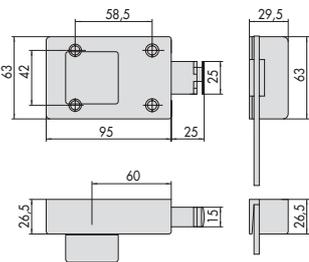


54570

32

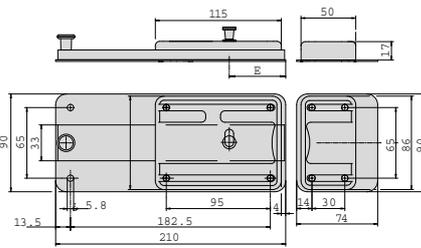


55051, 55054, 55071, 55074

33

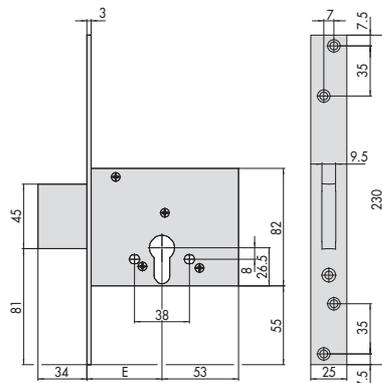


56010
E = 52 - 60 - 70

34

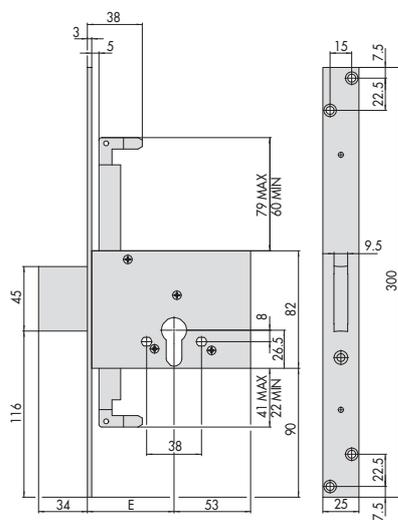


56015
E = 60 - 70


35

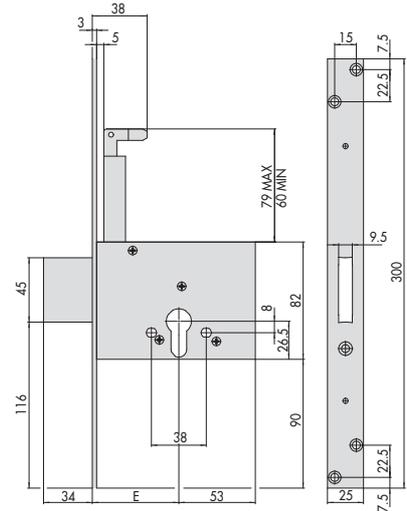

56020
E = 60 - 70

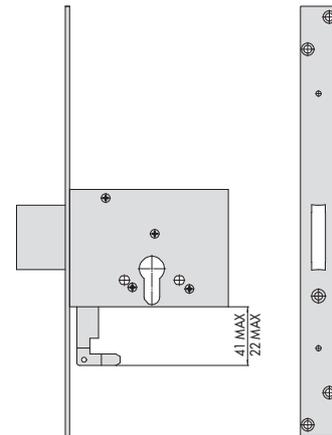


36

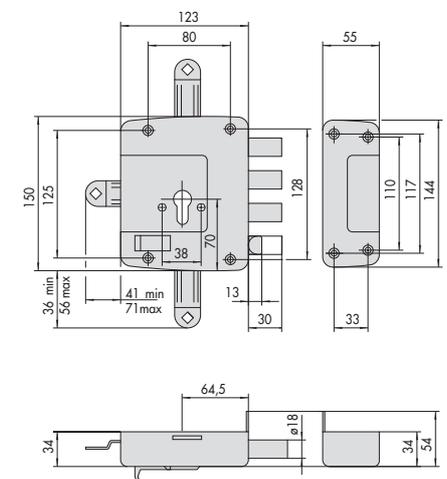


56152, 56162, 56172, 56157, 56167, 56177

37

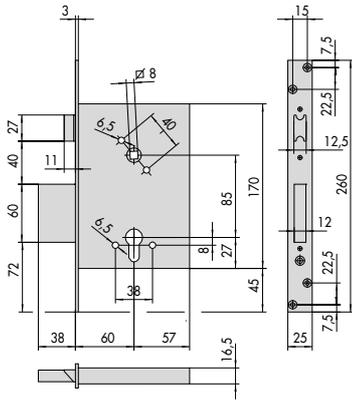


1.56250.60

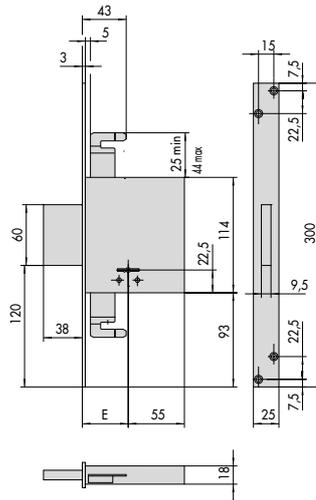

57015, 57019
E = 60 - 70

1.57055.60
E = 60

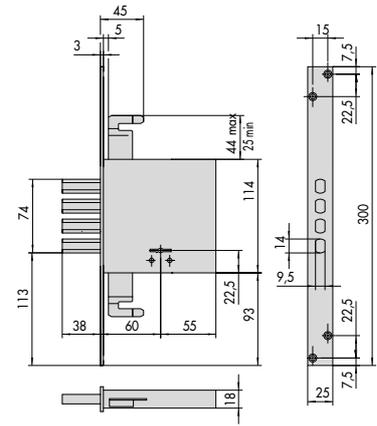


1.57033.60


38

41


44

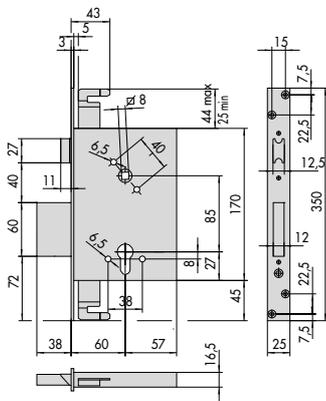

1.56255.60

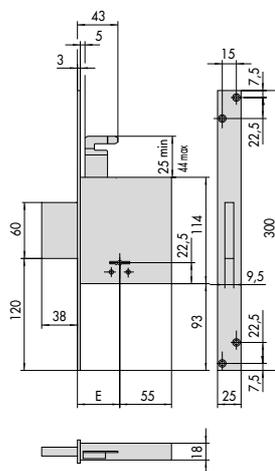

57020, 57024
E = 60 - 70

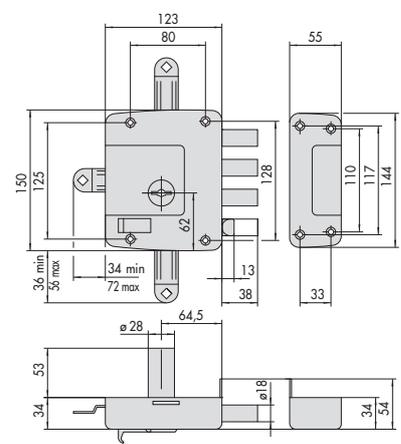


**1.57152.60, 1.57157.60, 1.57162.60,
1.57167.60, 1.57172.60, 1.57177.60**


39

42


45

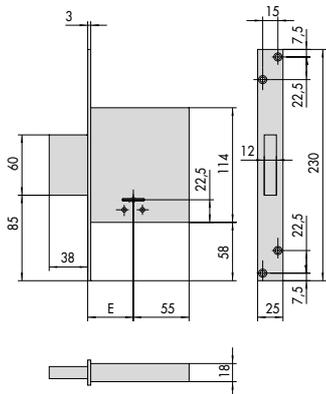

57010, 57014 57050
E = 52 - 60 - 70 E = 52 - 60

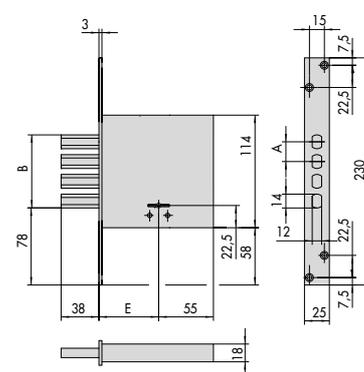

	F	A	B
1.57028.50	52	23	60
1.57028.60	60	20	74

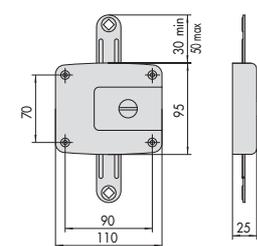


1.57192.00


40

43


46

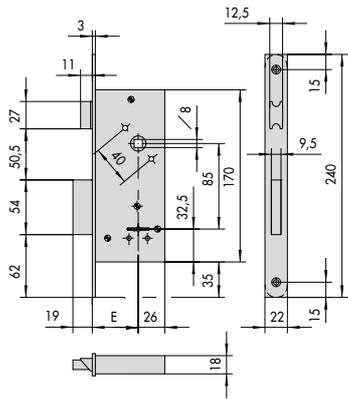

57210
57211
E = 40 - 45 - 50 - 60

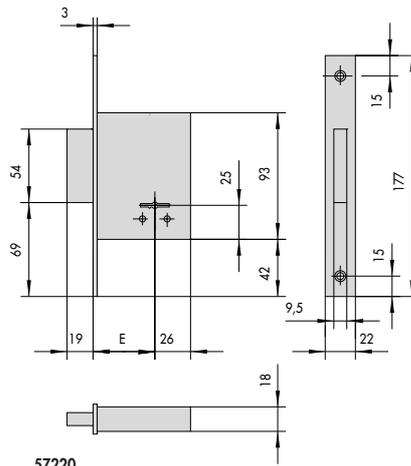


57220
E = 40 - 45 - 50 - 60

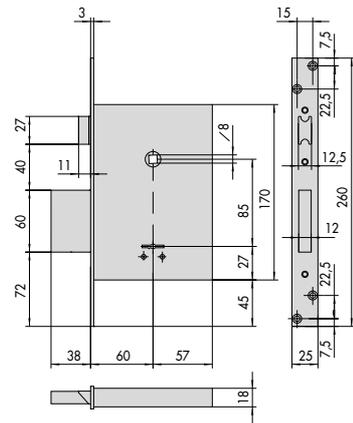


57250, 57254

47

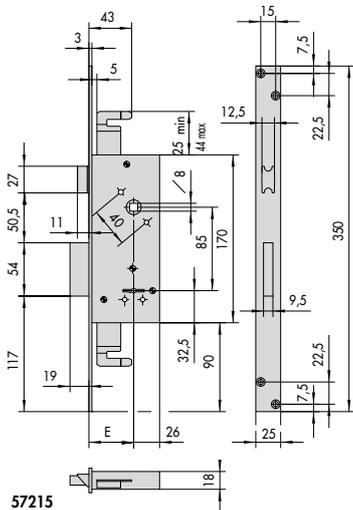

57215
E = 45 - 50 - 60


48

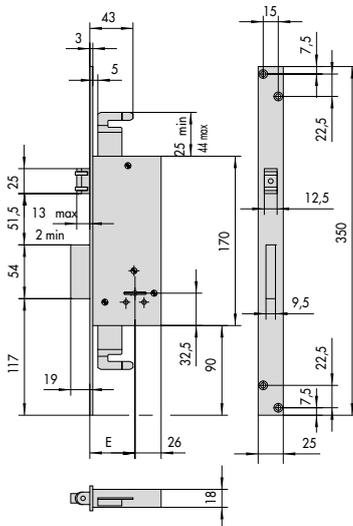

57217
E = 45 - 50 - 60


49

50

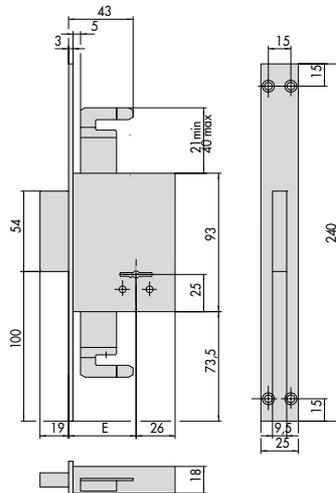

57225
E = 45 - 50 - 60


51

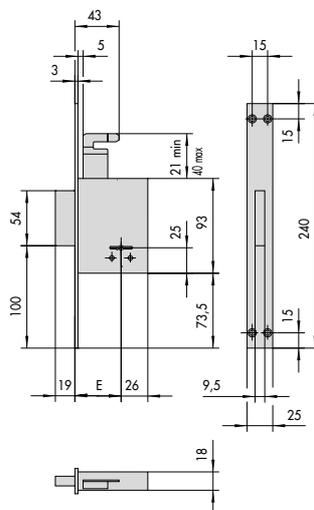

57230
E = 45 - 50 - 60


52

53

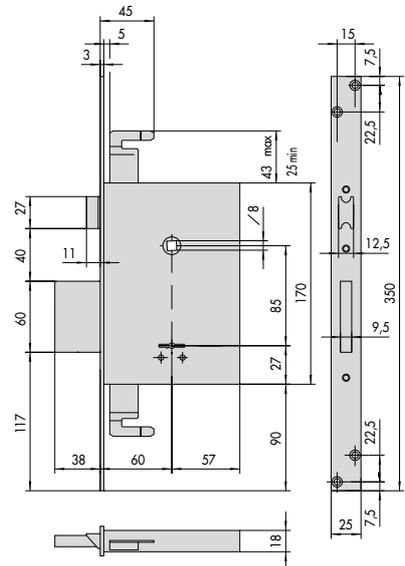


57255, 57259

54

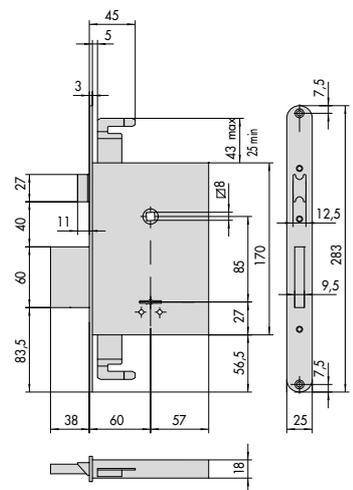


1.57256.60


55

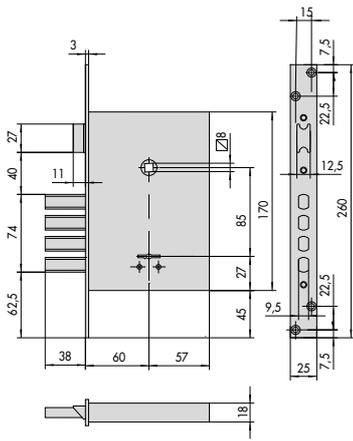

57260

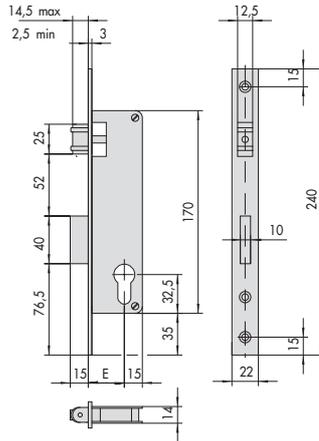

5C021
E = 21 - 25 - 30

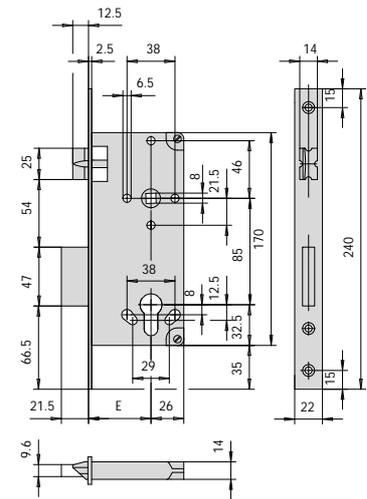


5C611, 5C651
5C631, 5C671
E = 35 - 40 - 45 - 50 - 60 - 70


56

59


62

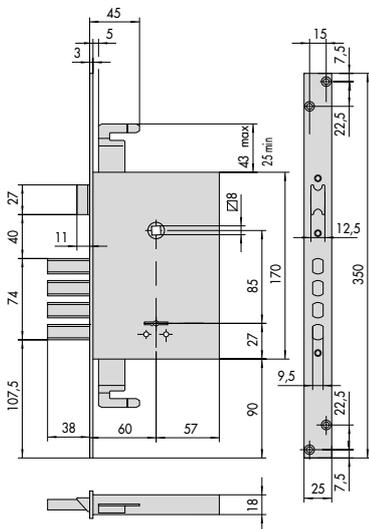

57265

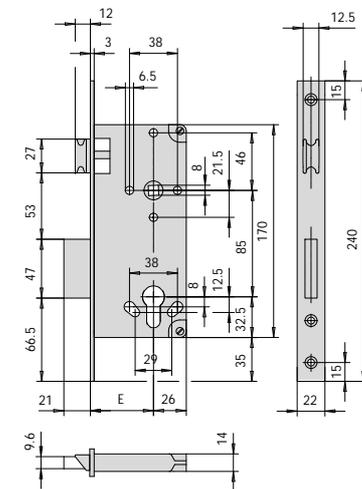

5C110, 5C150, 5C611, 5C651
5C130, 5C170, 5C631, 5C671
E = 35 - 40 - 45 - 50 - 60 - 70

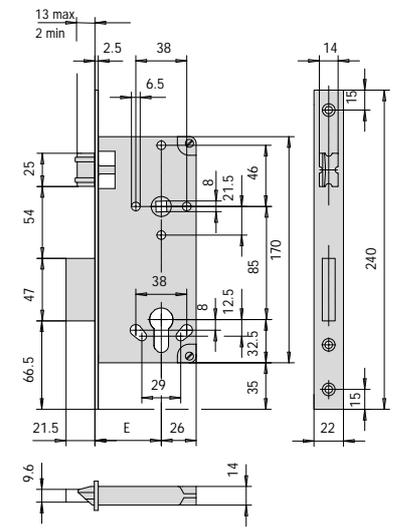


5C621
5C641
E = 35 - 40 - 45 - 50 - 60 - 70


57

60

63

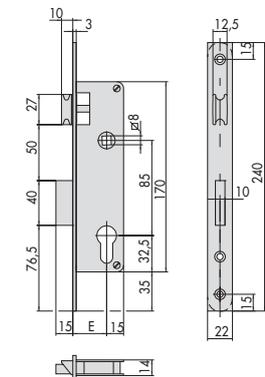

5C010, 5C011,
5C031
E = 21 - 25 - 30

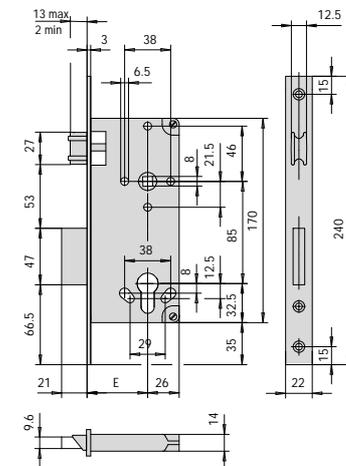

5C120, 5C621
5C140, 5C641
E = 35 - 40 - 45 - 50 - 60 - 70

58

61




Locks for armour plated doors



MyEVO rim powered electronic locks	373
MyEVO mortice powered electronic locks.....	374
MyEVO locks configuration components.....	375
Comfortlock panic function rim locks	377
Comfortlock panic function mortice locks.....	378
Cylinder rim locks Cisa Revolution PRO	379
Cylinder mortice locks Cisa Revolution PRO	380
Cylinder rim locks with gear mechanism	381
Cylinder mortice locks with gear mechanism.....	383
Exitlock system functions	385
Exitlock panic function rim locks	386
Exitlock panic function mortice locks	387
Double-bit key rekeyable rim locks.....	388

Double-bit key rekeyable mortice locks	390
Spare keys for rekeyable double-bit key locks	392
Double-bit key rim locks.....	393
Double-bit key mortice locks	395
Multifunction rim locks	397
Multifunction mortice locks	405
Double-bit key cylinders	413
Protection roses	415
Locks for blocking systems	422
Electric strikers for armour plated door locks	423
Accessories for armour plated door locks.....	424
Dimensional drawings	433





MYEVO

SOLUTIONS FOR
ARMOURED DOORS



SMART AUTOMATIC CLOSING

Shutting the door automatically activates the system and engages all the deadbolts until it is completely locked.



3 DIFFERENT OPERATING MODES WITHOUT KEYS

- Different opening controls to choose from.
- With keypad only
- With RFID credentials only (transponder)
- With keypad and transponder



ACCESS WITH TRADITIONAL KEY

- The lock can always be opened using a mechanical key.



ACCESS CONTROL

Personalised codes which can be easily activated and deactivated and/or RFID credentials (transponder) allow access to different people.



3 DIFFERENT MODES FOR VERSATILE USE

- AUTOMATIC: just push the door and it shuts securely: the deadbolts automatically engage.
- SEMI-AUTOMATIC: when the door is shut, the deadbolts do not engage so you can open it with the handle.
- HOLD OPEN: the door is always open. The latchbolt and deadbolt never engage even when the door is pushed to.



CERTIFIED LOCK

Security and operation have been tested in accordance with EN 12209:03 and EN 14846:10.



SILENT OPERATION

The operating mechanism has been designed to keep noise to an absolute minimum.



ACOUSTIC AND LIGHT ALARMS

Acoustic and light alarms on the keypad, RFID reader and button indicate whether the system is working properly.

External keypad



Transponder



Internal button





Technical features:

- Powered latch-bolt, deadbolt and extension bolts for automatic operation
- Automatic closing of the door
- Emergency opening with the mechanical key
- Steel case and cover
- Nickel-plated deadbolts.
- Nickel-plated non-handed latchbolt.
- Anti-crush plates for fixing screws
- Steel extension bolts

Supplied as standard:

- 12V - 2.3 AH lead battery
- Connecting cables

Finishes:

- Zinc-plated aluminium

Standards:

- Product in compliance with European Standard pr EN 12209:99

Hand:


0 = Non-handed

Cylinder to be ordered separately



MyEVO

Type	Description	DEADBOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim. Hand	Fin.

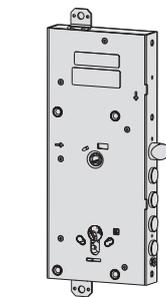

- CISA motorised lock
- Rim version
- Latchbolt and deadbolt
- SUPPLIED AS STANDARD:
- door status contacts strip with cable

4	3,5	28		85	64	4,800	1	1	E6516 28 0
3	3,5	38		85	64	4,800	1	1	E6516 38 0



MyEVO

Technical features:

- Powered latch-bolt, deadbolt and extension bolts for automatic operation
- Automatic closing of the door
- Emergency opening with the mechanical key
- Steel case and cover
- Nickel-plated faceplate.
- Nickel-plated deadbolts.
- Nickel-plated non-handed latchbolt.
- Anti-crush plates for fixing screws
- Steel extension bolts

Supplied as standard:

- 12V - 2.3 AH lead battery
- Connecting cables

Finishes:

- Zinc-plated aluminium

Standards:

- Product in compliance with European Standard pr EN 12209:2003

Hand:

0 = Non-handed

Cylinder to be ordered separately



Type	Description	DEADBOLTS									ITEM				
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers.
		4	28	85	35	67	3,800	1	1	E6536	28	0			



- CISA motorised lock
- Mortice version
- Latchbolt and deadbolt
- SUPPLIED AS STANDARD:
 - door status contacts strip with cable

Type	Description	Unit weight	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Door status contacts strip 	0,035	1	1	06510	50	0	
	<ul style="list-style-type: none"> • INTERNAL BUTTON - Graphite black finish 	0,385	1	1	06525	51	0 L6	
	<ul style="list-style-type: none"> - Dove grey finish 	0,385	1	1	06525	51	0 L7	
	<ul style="list-style-type: none"> - Aluminium finish 	0,385	1	1	06525	51	0 L8	
	<ul style="list-style-type: none"> - White pearl finish 	0,385	1	1	06525	51	0 L9	
	<ul style="list-style-type: none"> • EXTERNAL KEYPAD - Graphite black finish 	0,385	1	1	06525	71	0 L6	
	<ul style="list-style-type: none"> - Dove grey finish 	0,385	1	1	06525	71	0 L7	
	<ul style="list-style-type: none"> - Aluminium finish 	0,385	1	1	06525	71	0 L8	
	<ul style="list-style-type: none"> - White pearl finish 	0,385	1	1	06525	71	0 L9	
	<ul style="list-style-type: none"> • EXTERNAL KEYPAD AND TRANSPONDER - Graphite black finish 	0,385	1	1	06525	73	0 L6	
	<ul style="list-style-type: none"> - Dove grey finish 	0,385	1	1	06525	73	0 L7	
	<ul style="list-style-type: none"> - Aluminium finish 	0,385	1	1	06525	73	0 L8	
	<ul style="list-style-type: none"> - White pearl finish 	0,385	1	1	06525	73	0 L9	
	<ul style="list-style-type: none"> • EXTERNAL TRANSPONDER - Graphite black finish 	0,385	1	1	06525	75	0 L6	
	<ul style="list-style-type: none"> - Dove grey finish 	0,385	1	1	06525	75	0 L7	
	<ul style="list-style-type: none"> - Aluminium finish 	0,385	1	1	06525	75	0 L8	
	<ul style="list-style-type: none"> - White pearl finish 	0,385	1	1	06525	75	0 L9	

Type	Description	Unit weight	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • USER CARD • Kit of 5 cards 	0,085	1	1	06526	11	0	
	<ul style="list-style-type: none"> • USER MINI CARD • Kit of 5 cards 	0,085	1	1	06526	21	0	
	<ul style="list-style-type: none"> • CHANGE AND SAFE MODE CARD KIT 	0,085	1	1	06526	30	0	
	<ul style="list-style-type: none"> • MASTER AND RESET CARD KIT 	0,085	1	1	06526	40	0	
	<ul style="list-style-type: none"> • Power supply for motorised lock (24V, DC). • Powered by electrical system or by rechargeable batteries 	0,492	1	1	07060	03	0	
	<ul style="list-style-type: none"> • Power supply cable (when lock is powered by the mains) 	0,600	1	1	07030	70	0	
	<ul style="list-style-type: none"> • Cable to open door using remote control (e.g. Intercom, button) 	0,600	1	1	07030	72	0	
	<ul style="list-style-type: none"> • Battery holder group with cable (for 12 x 1.5V AA batteries, not included) 	0,600	1	1	07030	80	0	



Technical features:

- Steel case and cover.
- Zinc-plated high resistant steel deadbolts.
- Zinc-plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.

Finishes:

- Zinc aluminum.

Hand:


0 = Non-handed

Cylinder to be ordered separately



ComFortlock

Type	Description	DEADBOLTS								ITEM			
		No.	Projection	Centre distance	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	Type	Dim. Hand	Fin.



- Deadbolt and latch
- Pre-setting for additional locking points
- Operation:
- Closing from inside deadbolts operated by rotating handle upwards and/or with key.

4	3,5	27	2	85	64	2,650	1	1 56815 27 0
4	3,5	28	2	85	64	2,650	1	1 56815 28 0
3	3,5	38	2	85	64	2,650	1	1 56815 38 0
4	3,5	27	2	85	64	2,550	5	1 56815 47 0
4	3,5	28	2	85	64	2,550	5	1 56815 48 0
3	3,5	38	2	85	64	2,550	5	1 56815 58 0

Opening from inside:
latchbolt with handle and/or key
deadbolts by rotating handle downwards
(function to be selected according to user's choice)
and/or key

Closing from outside
deadbolts operated by rotating handle upwards
and/or with key

Opening from outside:
latchbolt with handle and/or key
deadbolts with key



CE

Technical features:

- Steel case and cover.
- Zinc-plated high resistant steel faceplate
- Zinc-plated high resistant steel deadbolts.
- Zinc-plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.

Finishes:

- Zinc aluminum.

Hand:


0 = Non-handed

Cylinder to be ordered separately



ComFortlock

Type	Description	DEADBOLTS								ITEM				
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	Type	Dim.	Hand	Fin.

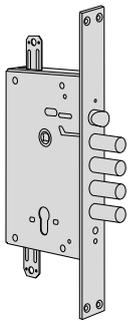

- Deadbolt and latch
- Pre-setting for additional locking points
- Operation:
 - Closing from inside
deadbolts operated by rotating handle upwards and/or with key.
 - Opening from inside:
latchbolt with handle and/or key
deadbolts by rotating handle downwards
(function to be selected according to user's choice)
and/or key
 - Closing from outside
deadbolts operated by rotating handle upwards and/or with key
 - Opening from outside:
latchbolt with handle and/or key
deadbolts with key

4	28	2	85	35	67	2,800	1	1	56835 28 0
4	28	2	85	35	67	2,700	5	1	56835 48 0



Technical features:

- LOCK FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED
- Effort reducer gear-operated system
- Zinc-plated steel case
- High-resistance zinc-plated reversible latch
- High resistance zinc-plated deadbolts
- Package: 1 pc or 5 pcs
- (industrial package)
- Two different dimensions are available as standard to meet various installation requirements.
- CE 12V ac voltage
- Absorbed current:3.1 A


Hand:
0 = Non-handed

Cylinder to be ordered separately




CISA Revolution PRO

Type	Description	DEADBOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand




- Deadbolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-set for additional locking points

4	3,5	28	2	85	64	2,660	1	1 15515 28 B
3	3,5	38	2	85	64	2,520	1	1 15515 38 B
4	3,5	28	2	85	64	2,430	1	1 15515 48 B
3	3,5	38	2	85	64	2,220	1	1 15515 58 B




- Deadbolt only
- Pre-set for additional locking points

5	3,5	28	2	85	64	2,370	1	1 56505 28 B
4	3,5	38	2	85	64	2,370	1	1 56505 38 B
5	3,5	28	2	85	64	2,370	5	1 56505 48 B



- Deadbolt and latch
- Pre-set for additional locking points

4	3,5	25	2	85	64	2,650	1	1 56515 28 B
3	3,5	38	2	85	64	2,320	1	1 56515 38 B
4	3,5	28	2	85	64	2,346	5	1 56515 48 B
3	3,5	38	2	85	64	2,300	5	1 56515 58 B



- Deadbolt and latch
- Pre-set for additional locking points

4	3,5	28	2	85	64	2,550	1	1 B6515 28 B
3	3,5	38	2	85	64	2,550	1	1 B6515 38 B
4	3,5	28	2	85	64	2,620	5	1 B6515 48 B
3	3,5	38	2	85	64	2,620	5	1 B6515 58 B



Technical features:

- LOCK FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED
- Effort reducer gear-operated system
- Zinc-plated steel case
- High-resistance zinc-plated reversible latch
- High resistance zinc-plated deadbolts
- High resistance zinc-plated steel faceplate
- Package: 1 pc or 5 pcs (industrial packing)
- Two different dimensions are available as standard to meet various installation requirements.
- CE 12V ac voltage
- Absorbed current: 3.1 A

Hand:


0 = Non-handed

Cylinder to be ordered separately




CISA Revolution PRO

Type	Description	DEADBOLTS								ITEM				
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.

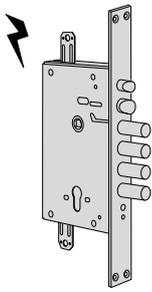


- Deadbolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-set for additional locking points

4	28	2	85	35	67	2,790	1	1	15535 28 B
4	28	2	85	35	67	2,490	5	1	15535 48 B

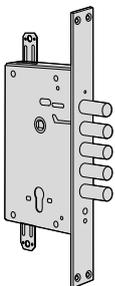


- Deadbolt only
- Pre-set for additional locking points

5	28	2	85	35	67	2,650	1	1	56525 28 B
5	28	2	85	35	67	2,600	5	1	56525 48 B

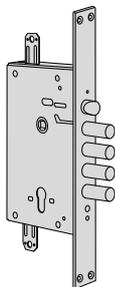

- Deadbolt and latch
- Pre-set for additional locking points

4	28	2	85	35	67	2,800	1	1	56535 28 B
4	28	2	85	35	67	2,600	5	1	56535 48 B

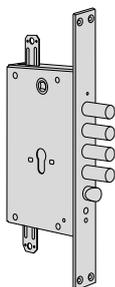

- Deadbolt and latch
- Pre-set for additional locking points

4	28	2	85	35	67	3,100	1	1	B6535 28 B
4	38	2	85	35	67	2,600	1	1	B6535 38 B
4	28	2	85	35	67	2,300	5	1	B6535 48 B
4	38	2	85	35	67	2,300	5	1	B6535 58 B



Technical features:

- Geared operating device for reduced key effort
- Zinc-plated steel case
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant steel bolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE


Hand:
0 = Non-handed

Cylinder to be ordered separately




Revolution

Type	Description	DEADBOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand




- Deadbolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-set for additional locking points

4	3,5	25	2	85	64	2,520	1	1 15515 25 0
4	3,5	27	2	85	64	2,520	1	1 15515 27 0
4	3,5	28	2	85	64	2,660	1	1 15515 28 0
3	3,5	38	2	85	64	2,520	1	1 15515 38 0
4	3,5	27	2	85	64	2,220	5	1 15515 47 0
4	3,5	28	2	85	64	2,430	5	1 15515 48 0
3	3,5	38	2	85	64	2,220	5	1 15515 58 0



- Deadbolt only
- Pre-set for additional locking points


5	3,5	25	2	85	64	2,370	1	1 56505 25 0
5	3,5	27	2	85	64	2,370	1	1 56505 27 0
5	3,5	28	2	85	64	2,370	1	1 56505 28 0
4	3,5	32	2	85	64	2,370	1	1 56505 32 0
4	3,5	38	2	85	64	2,370	1	1 56505 38 0
5	3,5	28	2	85	64	2,235	5	1 56505 48 0
4	3,5	38	2	85	64	2,240	5	1 56505 58 0



- Deadbolt and latch
- Pre-set for additional locking points


4	3,5	25	2	85	64	2,320	1	1 56515 25 0
4	3,5	27	2	85	64	2,320	1	1 56515 27 0
4	3,5	28	2	85	64	2,650	1	1 56515 28 0
3	3,5	32	2	85	64	2,320	1	1 56515 32 0
3	3,5	38	2	85	64	2,320	1	1 56515 38 0
4	3,5	28	2	85	64	2,346	5	1 56515 48 0
3	3,5	38	2	85	64	2,300	5	1 56515 58 0
4	3,5	27	2	92	64	2,320	1	1 56615 27 0
4	3,5	28	2	92	64	2,320	1	1 56615 28 0
4	3,5	27	2	92	64	2,020	5	1 56615 47 0
4	3,5	28	2	92	64	2,370	5	1 56615 48 0
3	3,5	38	2	92	64	2,360	5	1 56615 58 0

Type	Description	DEADBOLTS								ITEM				
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.




- Deadbolt only
- Pre-set for additional locking points

5	3,5	28	2	85	64	2,370	1	1	B6505 28 0
4	3,5	38	2	85	64	2,370	1	1	B6505 38 0
5	3,5	28	2	85	64	2,070	5	1	B6505 48 0
4	3,5	38	2	85	64	2,070	5	1	B6505 58 0



- Deadbolt and latchbolt
- Pre-set for additional locking points

4	3,5	25	2	85	64	2,550	1	1	B6515 25 0
4	3,5	28	2	85	64	2,550	1	1	B6515 28 0
3	3,5	38	2	85	64	2,550	1	1	B6515 38 0
4	3,5	28	2	85	64	2,620	5	1	B6515 48 0
3	3,5	38	2	85	64	2,600	5	1	B6515 58 0



- Deadbolt and latchbolt
- Pre-set for additional locking points

4	3,5	28	2	92	64	2,550	1	1	B6615 28 0
3	3,5	38	2	92	64	2,550	1	1	B6615 38 0
4	3,5	28	2	92	64	2,020	5	1	B6615 48 0
3	3,5	38	2	92	64	2,020	5	1	B6615 58 0



Technical features:

- Geared operating device for reducing key effort
- Zinc-plated steel case
- Zinc-plated high resistant satin steel faceplate
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant steel deadbolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE


Hand:
0 = Non-handed

Cylinder to be ordered separately




Revolution

Type	Description	DEADBOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand

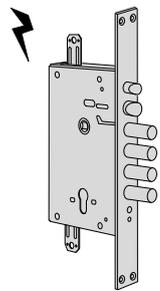


- Deadbolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-set for additional locking points

4	28	2	85	35	67	2,790	1	1 15535	28	0			
4	28	2	85	35	67	2,490	5	1 15535	48	0			

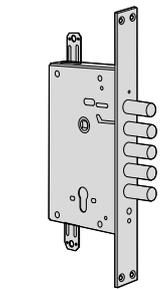

- Deadbolt only
- Pre-set for additional locking points


5	28	2	85	35	67	2,650	1	1 56525	28	0			
5	28	2	85	35	67	2,600	5	1 56525	48	0			

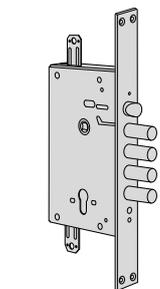

- Deadbolt and latch
- Pre-set for additional locking points


4	28	2	85	35	67	2,800	1	1 56535	28	0			
4	28	2	85	35	67	2,600	5	1 56535	48	0			

Type	Description	DEADBOLTS								ITEM				
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.

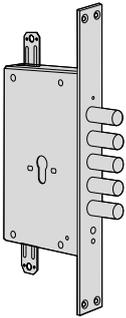

- Deadbolt only
- Pre-set for additional locking points

5	28	2	85	35	67	2,650	1	1	B6525 28 0
5	38	2	85	35	67	2,650	1	1	B6525 38 0
5	28	2	85	35	67	2,350	5	1	B6525 48 0
5	38	2	85	35	67	2,350	5	1	B6525 58 0

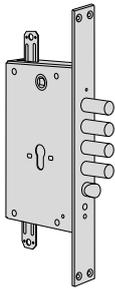

- Deadbolt and latch
- Pre-set for additional locking points

4	28	2	85	35	67	3,100	1	1	B6535 28 0
4	38	2	85	35	67	2,600	1	1	B6535 38 0
4	28	2	85	35	67	2,300	5	1	B6535 48 0
4	38	2	85	35	67	2,300	5	1	B6535 58 0

TYPE	CONTROLS	OPERATION
<p>A</p> <p>ACCESS FROM OUTSIDE WITH KEY ONLY</p> <p>For doors to be only opened from the outside by authorized personnel using a key.</p>	<p>INSIDE</p> <ul style="list-style-type: none"> • Panic exit device to open • Key to close with deadbolt <p>OUTSIDE</p> <ul style="list-style-type: none"> • Key to operate the latch or deadbolt 	<p>Access from outside with key only.</p> <p>Access from outside only possible by using a key.</p>
<p>B</p> <p>OUTSIDE HANDLE ENABLED/DISABLED</p> <p>For doors opening to the outside and for buildings in which free access must be programmed.</p>	<p>INSIDE</p> <ul style="list-style-type: none"> • Panic exit device to open • Key to close with deadbolt or enable/disable the outside handle <p>OUTSIDE</p> <ul style="list-style-type: none"> • The key operates the deadbolt or enables/disables the outside handle to control the latchbolt 	<p>The outside handle can be enabled by turning the key all the way in the opening direction (the handle will continue to be enabled when the key is taken out).</p> <p>By closing the door with the deadbolt, the outside handle will be disabled and remain so even after opening the door via the panic exit device.</p>
<p>D</p> <p>OUTSIDE HANDLE ALWAYS ENABLED</p> <p>For doors located in passage areas (e.g. corridors).</p>	<p>INSIDE</p> <ul style="list-style-type: none"> • Panic exit device to open • Key to close with deadbolt <p>OUTSIDE</p> <ul style="list-style-type: none"> • Key to operate the deadbolt. The handle is enabled by the latch with the deadbolt pulled back 	<p>The outside handle is always enabled when the deadbolt is pulled back.</p> <p>After operating the panic exit device, access from the outside is always possible until the deadbolt is operated via the key.</p>



Technical features:

- Steel case and cover.
- Zinc plated high resistant steel deadbolts.
- Zinc plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:

- Striker plate series 06220.

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric striker series 15300
- For panic exits (UNI EN 1125) Panic exit device series 59607 + horizontal bar series 07007 or item 59711.10/11

For fire door (spec. FR)

- For additional locking points
Divertor item series 06433.00/01/11
Pair of bolts item 06425.06.0
Striker plates item 06220.28/29.0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 plus horizontal bar series 07007 or item 59711-10/11
- For emergency exits (UNI EN 179)
Handle item 1.07070.50.0
Pair of handles item 1.07070.60.0

Finishes:

- Zinc aluminum.

Standards:

- UNI EN 179
- UNI EN 1125
- UNI EN 12209


Hand:
0 = Non-handed

Cylinder to be ordered separately



Exitlock

Type	Description	DEADBOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.



- Deadbolt and latch
- Pre-set for additional locking points

• FUNCTION TYPE A

- Inside:
The panic exit device and/or the handle to open
The key to close with the deadbolt
- Outside:
The key to close with the deadbolt.

4	3,5	27	2	85	64	2,650	1	1	56917 27 0
4	3,5	28	2	85	64	2,650	1	1	56917 28 0
3	3,5	38	2	85	64	2,650	1	1	56917 38 0
4	3,5	27	2	85	64	2,550	5	1	56917 47 0
4	3,5	28	2	85	64	2,550	5	1	56917 48 0
3	3,5	38	2	85	64	2,550	5	1	56917 58 0

• FUNCTION TYPE D

- Inside:
The panic exit device and/or the handle to open
The key to close with the deadbolt
- Outside:
The key to close with the deadbolt. When the deadbolt is withdrawn, the handle is activated and can operate the latch

• FUNCTION TYPE B

- Inside:
Panic exit device and/or handle to open
Key to close with deadbolt and enable or disable the outside handle when latch is operated
- Outside:
Key to close with deadbolt and enable or disable the outside handle when latch is operated

4	3,5	27	2	85	64	2,650	1	1	56916 27 0
4	3,5	28	2	85	64	2,650	1	1	56916 28 0
3	3,5	38	2	85	64	2,650	1	1	56916 38 0
4	3,5	27	2	85	64	2,550	5	1	56916 47 0
4	3,5	28	2	85	64	2,550	5	1	56916 48 0
3	3,5	38	2	85	64	2,550	5	1	56916 58 0



Technical features:

- Steel case and cover.
- Zinc-plated high resistant steel faceplate
- Zinc-plated high resistant steel deadbolts.
- Zinc-plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:

- Striker plate series 06220.

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric strikerst series 15300

- For additional locking points
Divertor item series 06433.00/01/11
Pair of bolts item 06425.06.0
Striker plates item 06221.28/29.0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 plus horizontal bar series 07007 or item 59711-10/11
- For fire door (spec. FR)
- For emergency exits (UNI EN 179)
Handle item 1.07070.50.0
Pair of handles item 1.07070.60.0

Finishes:

- Zinc aluminum.

Standards:

- UNI EN 179
- UNI EN 1125
- UNI EN 12209


Hand:
0 = Non-handed

Cylinder to be ordered separately



Exitlock

Type	Description	DEADBOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand

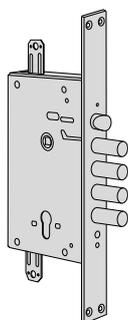

- Deadbolt and latch
- Pre-setting for additional locking points

• FUNCTION TYPE A

- Inside:
The panic exit device and/or the handle to open
The key to close with the deadbolt
- Outside:
The key to close with the deadbolt.

4	28	2	85	35	67	2,800	1	1	56937	28	0
4	28	2	85	35	67	2,650	5	1	56937	48	0

• FUNCTION TYPE D

- Inside:
The panic exit device and/or the handle to open
The key to close with the deadbolt
- Outside:
The key to close with the deadbolt. When the deadbolt is withdrawn, the handle is activated and can operate the latch

• FUNCTION TYPE B

- Inside:
Panic exit device and/or handle to open
Key to close with deadbolt and enable or disable the outside handle when latch is operated
- Outside:
Key to close with deadbolt and enable or disable the outside handle when latch is operated

4	28	2	85	35	67	2,800	1	1	56936	28	0
4	28	2	85	35	67	2,650	5	1	56936	48	0



Technical features:

- The NEW CAMBIO FACILE system allows to re-key the lock by using a special re-keying tool and the keys, so that it is not necessary to disassemble the lock or any of its parts
- Zinc-plated steel case
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant, steel deadbolts
- Pre-set for additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Operation:

- VERSION WITH CONSTRUCTION KEY: the key operates the 4 throws

Hand:
A = Non-handed

Supplied as standard:


- Keys
- Re-keying tool
- Key guide item 1.06142.01.0
- Inside escutcheon item 1.06143.00.0
- Outside escutcheon item 1.06082.00.0

Standards:


- **New manipulation and picking protection system: active on all six levers to block the lock in the event of burglary attempts**
- European Patent EP 2212493 B1

New CambioFacile


Type	Description	Key item	DEADBOLTS								ITEM	
			No.	Projection	Distance	Throws	Centre Distance	Facplate	Backset	Unit weight	Pieces	Type




- CONSTRUCTION KEY VERSION
- Deadbolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0




4	3,5	27	4	85	64	2,750	1	1	17665 27 A
4	3,5	28	4	85	64	2,750	1	1	17665 28 A
4	3,5	38	3	85	64	2,750	1	1	17665 38 A
4	3,5	27	4	85	64	2,450	5	1	17665 47 A
4	3,5	28	4	85	64	2,450	5	1	17665 48 A
3	3,5	38	4	85	64	2,450	5	1	17665 58 A




- CONSTRUCTION KEY VERSION
- Deadbolt only




5	3,5	25	4	85	64	2,550	1	1	57655 25 A
5	3,5	27	4	85	64	2,550	1	1	57655 27 A
5	3,5	28	4	85	64	2,550	1	1	57655 28 A
4	3,5	32	4	85	64	2,550	1	1	57655 32 A
4	3,5	38	4	85	64	2,550	1	1	57655 38 A
5	3,5	27	4	85	64	2,250	5	1	57655 47 A
5	3,5	28	4	85	64	2,250	5	1	57655 48 A
4	3,5	38	4	85	64	2,250	5	1	57655 58 A




- CONSTRUCTION KEY VERSION
- Deadbolt and latch





4	3,5	25	4	85	64	2,700	1	1	57665 25 A
4	3,5	27	4	85	64	2,700	1	1	57665 27 A
4	3,5	28	4	85	64	2,700	1	1	57665 28 A
3	3,5	32	4	85	64	2,700	1	1	57665 32 A
3	3,5	38	4	85	64	2,700	1	1	57665 38 A
4	3,5	27	4	85	64	2,400	5	1	57665 47 A
4	3,5	28	4	85	64	2,400	5	1	57665 48 A
3	3,5	38	4	85	64	2,400	5	1	57665 58 A

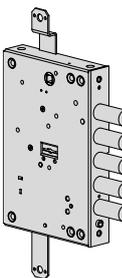

- VERSION WITH CONSTRUCTION KEY
- Deadbolt only



5	3,5	28	4	85	64	2,550	1	1	B7655 28 A
4	3,5	38	4	85	64	2,550	1	1	B7655 38 A
5	3,5	28	4	85	64	2,250	5	1	B7655 48 A
4	3,5	38	4	85	64	2,250	5	1	B7655 58 A

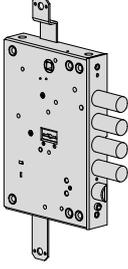Type	Description	Key item	DEADBOLTS							ITEM		Type	Dim.	Hand	Fin.	Pers. Spec.		
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces							
 <ul style="list-style-type: none"> • VERSION WITH CONSTRUCTION KEY • Deadbolt and latchbolt 		 3 art. 1 00163 00 1	4	3,5	28	4	85	64	2,700	1	1 B7665 28 A							
			3	3,5	38	4	85	64	2,700	1	1 B7665 38 A							
			 4 art. 1 00120 00 1	4	3,5	28	4	85	64	2,400	5	1 B7665 48 A						
			 1 art. 1 00120 00 1 construction key	3	3,5	38	4	85	64	2,400	5	1 B7665 58 A						



Technical features:

- The NEW CAMBIO FACILE system allows to re-key the lock by using a special re-keying tool and the keys, so that it is not necessary to disassemble the lock or any of its parts
- Zinc-plated steel case
- Zinc-plated high resistant satin steel faceplate
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant, steel deadbolts
- Pre-set for additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Operation:

- VERSION WITH CONSTRUCTION KEY: the key operates the 4 throws

Hand:
A = Non-handed

Supplied as standard:


- Keys
- Re-keying tool
- Inside escutcheon item 1.06143.00.0
- Outside escutcheon item 1.06082.00.0

On request:


- **New manipulation and picking protection system: active on all six levers to block the lock in the event of burglary attempts**
- European Patent EP 2212493 B1

New CambioFacile


Type	Description	Key item	DEADBOLTS							Unit weight	Kg	Pieces	ITEM			
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset				Type	Dim.	Hand	Fin.

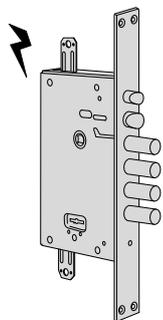


- CONSTRUCTION KEY VERSION
- Deadbolt and latch
- Electrically controlled deadlocking latch
- Slide item 1.06224.50.0




4	28	4	85	35	67	3,000	1	1	17685 28 A
4	28	4	85	35	67	2,850	5	1	17685 48 A



1	art.	1	00120 00 1	construction key
---	------	---	------------	------------------

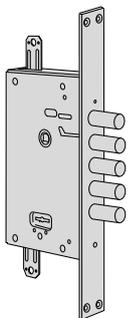


- CONSTRUCTION KEY VERSION
- Deadbolt only




5	28	4	85	35	67	2,800	1	1	57675 28 A
5	28	4	85	35	67	2,600	5	1	57675 48 A



1	art.	1	00120 00 1	construction key
---	------	---	------------	------------------

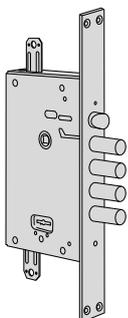

- CONSTRUCTION KEY VERSION
- Deadbolt and latch




4	28	4	85	35	67	2,950	1	1	57685 28 A
4	28	4	85	35	67	2,650	5	1	57685 48 A





1	art.	1	00120 00 1	construction key
---	------	---	------------	------------------

Type	Description	Key item	DEADBOLTS							Unit weight	Pieces	ITEM			
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Kg	Type			Dim. Hand	Fin.	Pers. Spec.	

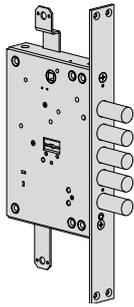




- VERSION WITH CONSTRUCTION KEY
- Deadbolt only

	5	28	4	85	35	67	2,800	1	1 B7675 28 A
	3 art. 1 00162 00 1	4	38	4	85	35	67	2,800	1
	5	28	4	85	35	67	2,500	5	1 B7675 48 A
	1 art. 1 00120 00 1 construction key	4	38	4	85	35	67	2,500	5

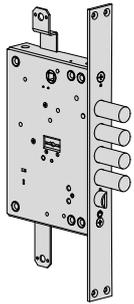

- VERSION WITH CONSTRUCTION KEY
- Deadbolt and latchbolt

	4	28	4	85	35	67	2,950	1	1 B7685 28 A
	3 art. 1 00162 00 1	3	38	4	85	35	67	2,950	1
	3	38	4	85	35	67	2,650	5	1 B7685 58 A
	1 art. 1 00120 00 1 construction key								

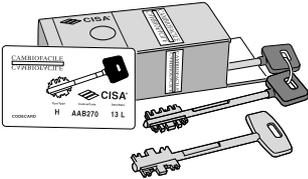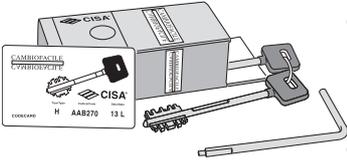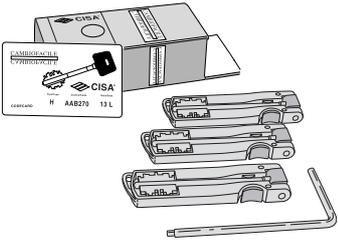Type	Description	Unit weight Kg	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
 <p>CambioFacile</p>	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 3 keys item 1.00162.00.1 1 change key 	0,135	1	1	06520	00	1	
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 5 keys item 1.00162.00.1 1 change key 	0,185	1	1	06520	01	1	
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 3 keys item 1.00163.00.1 1 change key 	0,145	1	1	06520	10	1	
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 5 keys item 1.00163.00.1 1 change key 	0,200	1	1	06520	11	1	
 <p>New CambioFacile</p>	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 3 keys item 1.00162.00.1 1 change key 	0,130	1	1	06520	50	1	
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 5 keys item 1.00162.00.1 1 change key 	0,185	1	1	06520	51	1	
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 3 keys item 1.00163.00.1 1 change key 	0,130	1	1	06520	60	1	
	<ul style="list-style-type: none"> SUPPLIED AS STANDARD: 5 keys item 1.00163.00.1 1 change key 	0,190	1	1	06520	61	1	
 <p>New CambioFacile</p>	<ul style="list-style-type: none"> STANDARD SUPPLY: 3 keys item 1.00170.00.1 1 changing tool 	0,130	1	1	06520	55	1	
	<ul style="list-style-type: none"> STANDARD SUPPLY: 3 keys item 1.00171.00.1 1 changing tool 	0,130	1	1	06520	65	1	
	<ul style="list-style-type: none"> Group of construction keys for rekeyable armoured door locks NEW CAMBIO FACILE SUPPLIED AS STANDARD: 1 construction key (Italian biting) 	0,033	1	1	06521	50	1	
	<ul style="list-style-type: none"> Changing tool for NEW CAMBIO FACILE locks 	0,045	10	1	06522	00	0	



Technical features:

- Zinc-plated steel case
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant steel bolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Supplied as standard:

- Keys
- Key guide item 1.06142.01.0
- Inside escutcheon item 1.06143.00.0
- Outside escutcheon item 1.06082.00.0


Hand:

0 = Non-handed


Operation:

- VERSION WITH CONSTRUCTION KEY: the key operates the latch
- VERSION WITH SERVICE KEY: the key operates the latch and first 2 throws

Type	Description	Key item	DEADBOLTS							ITEM			
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.




- Deadbolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-set for additional locking points




3 Art. 1 00123 00 1

4	3,5	28	4	85	64	2,570	1	1 17515 28 0
3	3,5	38	4	85	64	2,570	1	1 17515 38 0
4	3,5	28	4	85	64	2,270	5	1 17515 48 0
3	3,5	38	4	85	64	2,270	5	1 17515 58 0




- Deadbolt only
- Pre-set for additional locking points




3 Art. 1 00123 00 1

5	3,5	28	4	85	64	2,380	1	1 57505 28 0
4	3,5	38	4	85	64	2,380	1	1 57505 38 0

- SERVICE KEY VERSION
- deadbolt only
- Pre-set for additional locking points



3 art. 1 00123 00 1



1 art. 1 00120 00 1 service key

5	3,5	28	4	85	64	2,400	1	1 57506 28 0
4	3,5	38	4	85	64	2,400	1	1 57506 38 0


- Deadbolt only
- Pre-set for additional locking points
- Cover plate item 1.06228.00.0



3 Art. 1 00123 00 1

5	43,5	28	4	85	64	2,580	1	1 57507 28 0
---	------	----	---	----	----	-------	---	--------------

Type	Description	Key item	DEADBOLTS							ITEM				
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand



- Deadbolt and latch
- Pre-set for additional locking points

	4	3,5	28	4	85	64	2,430	1	1	57515 08 0
2 art. 1 00125 00 1										
	1									
1 art. 1 00120 00 1										

- Deadbolt and latch
- Pre-set for additional locking points

	4	3,5	25	4	85	64	2,430	1	1	57515 25 0
3 Art. 1 00123 00 1	4	3,5	27	4	85	64	2,600	1	1	57515 27 0
	4	3,5	28	4	85	64	2,600	1	1	57515 28 0
	3	3,5	32	4	85	64	2,430	1	1	57515 32 0
	3	3,5	38	4	85	64	2,430	1	1	57515 38 0
	4	3,5	28	4	85	64	2,260	5	1	57515 48 0

- CONSTRUCTION KEY VERSION
- Deadbolt and latch
- Pre-set for additional locking points


	4	3,5	28	4	85	64	2,450	5	1	57515 68 0
3 art. 1 00123 00 1										
	1									
1 art. 1 00120 00 1 construction key										

- SERVICE KEY VERSION
- Deadbolt and latch
- Pre-set for additional locking points

	4	3,5	28	4	85	64	2,450	1	1	57516 28 0
3 art. 1 00123 00 1	3	3,5	38	4	85	64	2,450	1	1	57516 38 0
	1									
1 art. 1 00120 00 1 service key										


- Deadbolt and latch
- Pre-set for additional locking points
- Cover plate item 1.06228.00.0

	4	43,5	28	4	85	64	2,630	1	1	57517 28 0
3 Art. 1 00123 00 1	3	43,5	38	4	85	64	2,630	1	1	57517 38 0



- Deadbolt only
- Pre-set for additional locking points

	5	3,5	25	4	85	64	2,380	1	1	87505 25 0
3 Art. 1 00123 00 1	5	3,5	28	4	85	64	2,380	1	1	87505 28 0
	4	3,5	38	4	85	64	2,380	1	1	87505 38 0
	5	3,5	28	4	85	64	2,380	5	1	87505 48 0
	4	3,5	38	4	85	64	2,380	5	1	87505 58 0



- Deadbolt and latch
- Pre-set for additional locking points

	4	3,5	25	4	85	64	2,430	1	1	87515 25 0
3 Art. 1 00123 00 1	4	3,5	28	4	85	64	2,800	1	1	87515 28 0
	3	3,5	38	4	85	64	2,685	1	1	87515 38 0
	4	3,5	28	4	85	64	2,590	5	1	87515 48 0
	3	3,5	38	4	85	64	2,500	5	1	87515 58 0



Technical features:

- Zinc-plated steel case
- Zinc-plated high resistant satin steel faceplate
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant steel deadbolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Supplied as standard:

- Keys
- Inside escutcheon item 1.06143.02.0
- Outside escutcheon item 1.06082.01.0


Hand:

0 = Non-handed


Operation:

- VERSION WITH CONSTRUCTION KEY:
the key operates the latch
- VERSION WITH SERVICE KEY:
the key operates the latch and first 2 throws

Type	Description	Key item	DEADBOLTS							Unit weight	Pieces	ITEM			
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset			Type	Dim.	Hand	Fin.

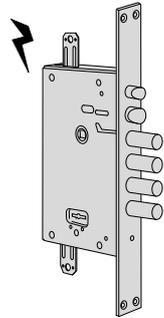


- Deadbolt and latch
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0
- Pre-set for additional locking points




3 art. 1 00122 00 1

4	28	4	85	35	67	2,840	1	1 17535 28 0
4	28	4	85	35	67	2,540	5	1 17535 48 0

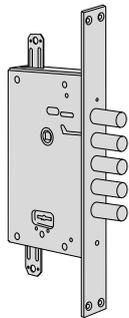


- Deadbolt only
- Pre-set for additional locking points




3 art. 1 00122 00 1

5	28	4	85	35	67	2,750	1	1 57525 28 0
---	----	---	----	----	----	-------	---	--------------

- SERVICE KEY VERSION
- Deadbolt only
- Pre-set for additional locking points



3 art. 1 00122 00 1



1 art. 1 00121 00 1 service key

5	28	4	85	35	67	2,600	1	1 57526 28 0
---	----	---	----	----	----	-------	---	--------------

Type	Description	Key item	DEADBOLTS								ITEM							
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> • Deadbolt only • Pre-set for additional locking points 		4	28	4	85	35	67	2,780	1	1	57535	28	0				
		3 art. 1 00122 00 1	4	28	4	85	35	67	2,500	5	1	57535	48	0				
	<ul style="list-style-type: none"> • CONSTRUCTION KEY VERSION • Deadbolt and latch • Pre-set for additional locking points 		4	28	4	85	35	67	2,520	5	1	57535	68	0				
		3 art. 1 00122 00 1	4	28	4	85	35	67	2,800	1	1	57535	88	0				
			1 art. 1 00121 00 1	1 construction key														
	<ul style="list-style-type: none"> • SERVICE KEY VERSION • Deadbolt and latch • Pre-set for additional locking points 		5	28	4	85	35	67	2,800	1	1	57536	28	0				
		3 art. 1 00122 00 1		1 art. 1 00121 00 1 service key														
		1 art. 1 00121 00 1	1 service key															
		<ul style="list-style-type: none"> • Deadbolt only • Pre-set for additional locking points 		5	28	4	85	35	67	2,580	1	1	87525	28	0			
			3 art. 1 00122 00 1	5	38	4	85	35	67	2,580	1	1	87525	38	0			
5			28	4	85	35	67	2,580	5	1	87525	48	0					
5			38	4	85	35	67	2,580	5	1	87525	58	0					
	<ul style="list-style-type: none"> • Deadbolt and latch • Pre-set for additional locking points 		4	28	4	85	35	67	3,100	1	1	87535	28	0				
		3 art. 1 00122 00 1	4	38	4	85	35	67	2,780	1	1	87535	38	0				
		4	28	4	85	35	67	2,600	5	1	87535	48	0					
		4	38	4	85	35	67	2,600	5	1	87535	58	0					



Technical features:

- Zinc-plated steel case
- Zinc-plated high resistant steel deadbolts:
n° 4 for the lower lock
n° 1 for the upper lock
- Zinc-plated high resistant reversible latch
- Can be fitted with additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Operation:

- VERSION WITH SECURITY FUNCTION: the upper lock blocks the lower lock when the latter is locked
- VERSION WITH SERVICE KEY: the upper lock key operates the latch and upper deadbolt
- VERSION WITH SERVICE KEY AND OPENING LIMITING DEVICE: the upper lock key operates the latch and

upper deadbolt; the opening limiting device is activated by operating the first throw of the upper lock

Supplied as standard:

- Keys (only for those items with double-bit key locks)


Standards:

- **New manipulation and picking protection system on NEW CAMBIO FACILE locks: active on all six levers to block the lock in the event of burglary attempts**
European Patent EP 2212493 B1


Cylinder to be ordered separately



Type	Description	Key item	DEADBOLTS				Unit weight	Pieces	ITEM				
			No.	Projection Distance	Throws	Centre Distance			Faceplate	Backset	Kg		Type

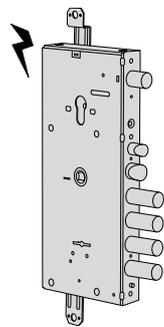


- VERSION WITH SERVICE LOCK
- 2 throw secondary cylinder lock
- Double bitted 6 lever main lock
- Electric operation self locking latchbolt
- Slide item 1.06224.50.0




3 Art. 1 00123 00 1

3,5	28	85	64	3,100	1	1 17766 28 0
3,5	28	85	64	2,880	5	1 17766 48 0

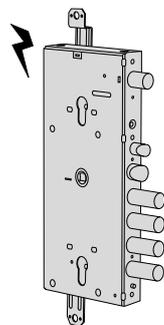






- VERSION WITH SERVICE LOCK
- 2 throw secondary cylinder lock
- 2 throw main cylinder lock
- Electric operation self locking latchbolt
- Slide item 1.06224.50.0


3,5	28	85	64	2,900	1	1 16766 28 0
3,5	28	85	64	3,140	5	1 16766 48 0

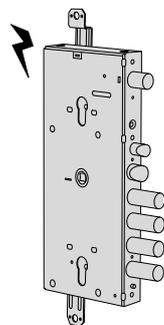


- VERSION WITH SERVICE LOCK
- 2-throw secondary cylinder lock
- 2-throw main cylinder lock
- **FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)**
- Electrically controlled dead-locking latch
- Slide item 1.06224.50.0


3,5	28	85	64	2,900	1	1 16766 28 B
3,5	28	85	64	3,140	5	1 16766 48 B

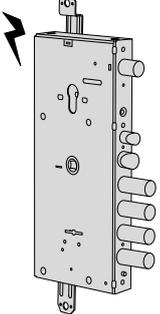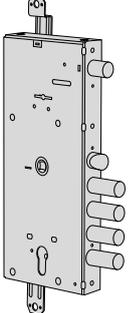Type	Description	Key item	DEADBOLTS							ITEM								
			No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • Double bit 6 lever NEW CAMBIO FACILE main lock with construction key, 4 throws • Electric operation self locking latchbolt • Slide item 1.06224.50.0 		3,5	28	85	64	3,500	1	1	17966	28	A						
			3 art. 1 00163 00 1	3,5	28	85	64	3,200	5	1	17966	48	A					
			1 art.															
			1 00120 00 1 construction key															
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Double bit 6 lever secondary lock, 2 throws • Cylinder main lock, 2 throws 		3,5	28	85	64	3,100	1	1	56715	28	0						
			3 Art. 1 00123 00 1	3,5	28	85	64	2,800	5	1	56715	48	0					
			3 Art. 1 00123 00 1															
				3,5	28	85	64	3,100	1	1	56715	28	B					
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated whrn the main lock is in its closed position • Double bit 6 lever secondary lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 		3,5	28	85	64	3,100	1	1	56716	28	0						
			3 Art. 1 00123 00 1	3,5	28	85	64	2,800	5	1	56716	48	0					
			3 Art. 1 00123 00 1															
				3,5	28	85	64	3,100	1	1	56716	28	B					
<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Double bit 6 lever secondary lock, 2 throws • Cylinder main lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 		3,5	28	85	64	3,100	1	1	56716	28	0							
		3 Art. 1 00123 00 1	3,5	28	85	64	2,800	5	1	56716	48	0						
		3 Art. 1 00123 00 1																
			3,5	28	85	64	3,100	1	1	56716	28	B						

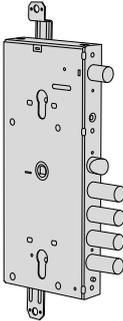Type	Description	Key item	DEADBOLTS							ITEM			
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws 		3,5	28	85	64	2,900	1	1 56765 28 0				
			3,5	28	85	64	3,100	5	1 56765 48 0				
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 		3,5	28	85	64	2,900	1	1 56765 28 B				
			3,5	28	85	64	3,100	5	1 56765 48 B				
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws 		3,5	28	85	64	2,900	1	1 56766 28 0				
			3,5	28	85	64	3,100	5	1 56766 48 0				
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 		3,5	28	85	64	2,900	1	1 56766 28 B				
			3,5	28	85	64	3,100	5	1 56766 48 B				

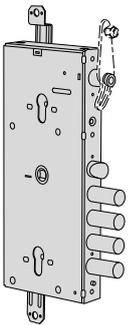Type	Description	Key item	DEADBOLTS							ITEM						
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER 		3,5	28	85	64	2,900	1	1	56767	28	0				
			3,5	28	85	64	2,600	5	1	56767	48	0				
	<ul style="list-style-type: none"> • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		3,5	28	85	64	2,900	1	1	56767	28	B				
			3,5	28	85	64	2,600	5	1	56767	48	B				
	<ul style="list-style-type: none"> • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		3,5	28	85	64	2,900	1	1	56768	28	0				
			3,5	28	85	64	3,140	5	1	56768	48	0				
	<ul style="list-style-type: none"> • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		3,5	28	85	64	2,900	1	1	56768	28	B				
			3,5	28	85	64	3,140	5	1	56768	48	B				
	<ul style="list-style-type: none"> • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		3,5	28	85	64	2,900	1	1	56768	28	B				
			3,5	28	85	64	3,140	5	1	56768	48	B				

Type	Description	Key item	DEADBOLTS							ITEM				
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.

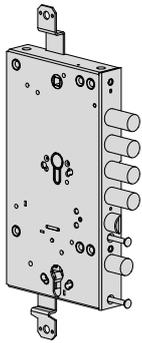

- VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws

3,5	28	85	64	2,900	1	1	B6764 28 0
3,5	38	85	64	2,900	1	1	B6764 38 0
3,5	28	85	64	3,100	5	1	B6764 48 0
3,5	38	85	64	3,100	5	1	B6764 58 0

- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws


3,5	28	85	64	2,900	1	1	B6765 28 0
3,5	38	85	64	2,900	1	1	B6765 38 0
3,5	28	85	64	3,100	5	1	B6765 48 0
3,5	38	85	64	3,100	5	1	B6765 58 0

- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws


3,5	28	85	64	2,900	1	1	B6766 28 0
3,5	38	85	64	2,900	1	1	B6766 38 0
3,5	38	85	64	3,100	5	1	B6766 58 0

- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws
- **FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)**

3,5	28	85	64	2,900	1	1	B6766 28 B
3,5	38	85	64	2,900	1	1	B6766 38 B
3,5	38	85	64	3,100	1	1	B6766 48 B
3,5	38	85	64	3,100	5	1	B6766 58 B

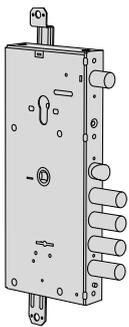


- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws










3,5	28	85	64	3,100	1	1	57765 28 0
3,5	28	85	64	2,900	5	1	57765 48 0


- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws



3,5	28	85	64	3,100	1	1	57766 28 0
3,5	28	85	64	2,900	5	1	57766 48 0

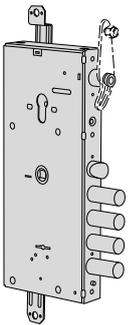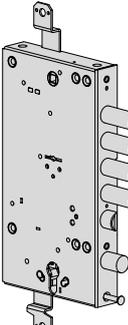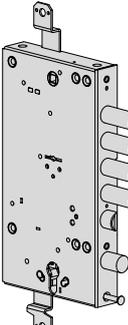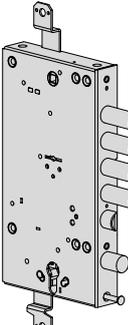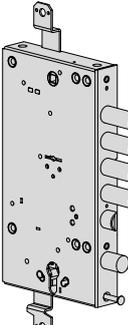Type	Description	Key item	DEADBOLTS							ITEM							
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	 3 Art. 1 00123 00 1	3,5	28	85	64	3,100	1	1	57767 28 0							
			3,5	28	85	64	2,900	5	1	57767 48 0							
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Double bit 6 lever main lock, 4 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	 3 Art. 1 00123 00 1	3,5	28	85	64	3,100	1	1	57768 28 0							
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws 	 3 Art. 1 00123 00 1	3,5	28	85	64	3,100	1	1	B7764 28 0							
			3,5	38	85	64	3,100	1	1	B7764 38 0							
			3,5	28	85	64	2,900	5	1	B7764 48 0							
			3,5	38	85	64	2,900	5	1	B7764 58 0							
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws 	 3 Art. 1 00123 00 1	3,5	38	85	64	3,100	1	1	B7765 38 0							
			3,5	28	85	64	2,900	5	1	B7765 48 0							
			3,5	38	85	64	2,900	5	1	B7765 58 0							
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws 	 3 Art. 1 00123 00 1	3,5	28	85	64	3,100	1	1	B7766 28 0							
			3,5	38	85	64	3,100	1	1	B7766 38 0							
			3,5	28	85	64	2,900	5	1	B7766 48 0							
			3,5	38	85	64	2,900	5	1	B7766 58 0							

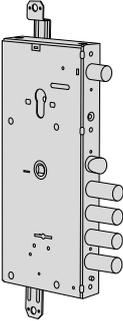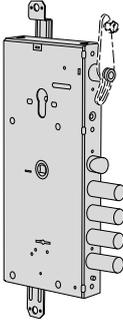Type	Description	Key item	DEADBOLTS						ITEM		
			No.	Projection Distance	Throws	Centre Distance	Facaplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand Fin. Pers. Spec.
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00163 00 1	3,5	28	85	64	3,400	1	1 57965 28 A		
			3,5	28	85	64	3,100	5	1 57965 48 A		
		 1 art. 1 00120 00 1 construction key									
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00163 00 1	3,5	28	85	64	3,400	1	1 57966 28 A		
			3,5	28	85	64	3,100	5	1 57966 48 A		
		 1 art. 1 00120 00 1 construction key									
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	 3 art. 1 00163 00 1	3,5	28	85	64	3,400	1	1 57967 28 A		
			3,5	28	85	64	3,100	5	1 57968 48 A		
		 1 art. 1 00120 00 1 construction key									
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	 3 art. 1 00163 00 1	3,5	28	85	64	3,100	5	1 57968 48 A		
			3,5	28	85	64	3,100	5	1 57968 48 A		
		 1 art. 1 00120 00 1 construction key									

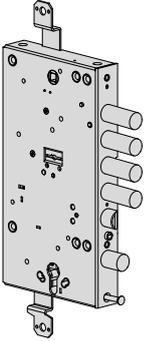Type	Description	Key item	DEADBOLTS							ITEM							
			No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws, NEW CAMBIO FACILE, with construction key 	 3 art. 1 00163 00 1	3,5	28	85	64	3,400	1	1	B7964 28 A							
			3,5	38	85	64	3,400	1	1	B7964 38 A							
			3,5	28	85	64	3,100	5	1	B7964 48 A							
			3,5	38	85	64	3,100	5	1	B7964 58 A							
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00163 00 1	3,5	28	85	64	3,400	1	1	B7965 28 A							
			3,5	38	85	64	3,400	1	1	B7965 38 A							
			3,5	28	85	64	3,100	5	1	B7965 48 A							
			3,5	38	85	64	3,100	5	1	B7965 58 A							
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00163 00 1	3,5	28	85	64	3,400	1	1	B7966 28 A							
			3,5	38	85	64	3,400	1	1	B7966 38 A							
			3,5	28	85	64	3,100	5	1	B7966 48 A							
			3,5	38	85	64	3,100	5	1	B7966 58 A							



Technical features:

- Zinc-plated steel case
- Zinc-plated high resistant satin steel faceplate
- Zinc-plated high resistant steel deadbolts: n° 4 for the lower lock n° 1 for the upper lock
- Zinc-plated high resistant reversible latch
- Can be fitted with additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developed according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Operation:

- **VERSION WITH SECURITY FUNCTION:** the upper lock blocks the lower lock when the latter is locked

- **VERSION WITH SERVICE KEY:** the upper lock key operates the latch and upper deadbolt
- **VERSION WITH SERVICE KEY AND OPENING LIMITING DEVICE:** the upper lock key operates the latch and upper deadbolt; the opening limiting device is activated by operating the first throw of the upper lock

Cylinder to be ordered separately




Supplied as standard:

- Keys (only for those items with double-bit key locks)


Standards:

- **New manipulation and picking protection system on NEW CAMBIO FACILE locks:** active on all six levers to block the lock in the event of burglary attempts
European Patent EP 2212493 B1


Type	Description	Key item	DEADBOLTS							ITEM			
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.	Pers. Spec.

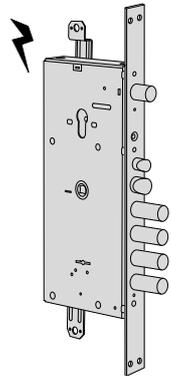

- **VERSION WITH SERVICE LOCK**
- 2 throw secondary cylinder lock
- Double bitted 6 lever main lock
- Electric operation self locking latchbolt
- Slide item 1.06224.50.0



28	85	35	67	3,600	1	1 17786 28 0
28	85	35	67	3,300	5	1 17786 48 0

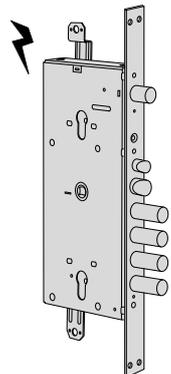


- **VERSION WITH SERVICE LOCK**
- 2 throw secondary cylinder lock
- 2 throw main cylinder lock
- Electric operation self locking latchbolt
- Slide item 1.06224.50.0

28	85	35	67	3,800	1	1 16786 28 0
28	85	35	67	3,500	5	1 16786 48 0


- **VERSION WITH SERVICE LOCK**
- 2-throw secondary cylinder lock
- 2-throw main cylinder lock
- **FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)**
- Electrically controlled dead locking latch
- Slide item 1.06224.50.0

28	85	35	67	3,800	1	1 16786 28 B
28	85	35	67	3,500	5	1 16786 48 B


Type	Description	Key item	DEADBOLTS							ITEM				
			No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand

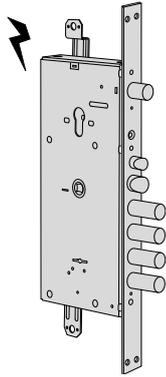


- VERSION WITH SERVICE LOCK
- 2 throw secondary cylinder lock
- Double bitted 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key
- Electric operation self locking latchbolt
- Slide item 1.06224.50.0




	28	85	35	67	3,735	1	1	17986 28 A
3 art. 1 00162 00 1	28	85	35	67	3,700	5	1	17986 48 A



1 art. 1 00120 00 1 construction key

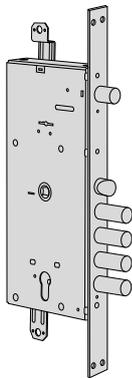


- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Double bit 6 lever secondary lock, 2 throws
- Cylinder main lock, 2 throws



3 art. 1 00122 00 1

	28	85	35	67	3,800	1	1	56735 28 0
	28	85	35	67	3,500	5	1	56735 48 0


- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated whrn the main lock is in its closed position
- Double bit 6 lever secondary lock, 2 throws
- Main cylinder lock, 2 throws
- FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)



3 art. 1 00122 00 1

	28	85	35	67	3,800	1	1	56735 28 B
	28	85	35	67	3,500	5	1	56735 48 B


- VERSION WITH SERVICE LOCK
- Double bitted 6 lever secondary lock, 2 throws
- Cylinder main lock, 2 throws



3 art. 1 00122 00 1


	28	85	35	67	3,800	1	1	56736 28 0
	28	85	35	67	3,500	5	1	56736 48 0

- VERSION WITH SERVICE LOCK
- Double bit 6 lever secondary lock, 2 throws
- Main cylinder lock, 2 throws
- FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)




3 art. 1 00122 00 1

	28	85	35	67	3,800	1	1	56736 28 B
	28	85	35	67	3,500	5	1	56736 48 B

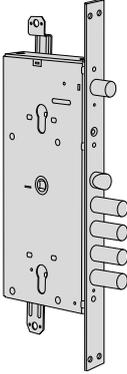Type	Description	Key item	DEADBOLTS							ITEM			
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws 		28	85	35	67	3,600	1	1	56785	28	0	
			28	85	35	67	3,300	5	1	56785	48	0	
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 		28	85	35	67	3,600	1	1	56785	28	B	
			28	85	35	67	3,300	5	1	56785	48	B	
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • 2 throw main cylinder lock 		28	85	35	67	3,600	1	1	56786	28	0	
			28	85	35	67	3,300	5	1	56786	48	0	
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) 		28	85	35	67	3,600	1	1	56786	28	B	
			28	85	35	67	3,300	5	1	56786	48	B	

Type	Description	Key item	DEADBOLTS							ITEM						
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		28	85	35	67	3,600	1	1	56787	28	0				
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 		28	85	35	67	3,600	1	1	56787	28	B				
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	28	85	35	67	3,400	1	1	56788	28	0					
		28	85	35	67	3,400	5	1	56788	48	0					
<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	28	85	35	67	3,400	1	1	56788	28	B						
	28	85	35	67	3,400	5	1	56788	48	B						

Type	Description	Key item	DEADBOLTS						ITEM	
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	Type

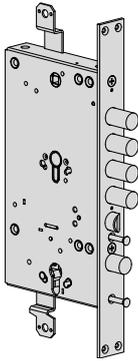

- VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws

28	85	35	67	3,600	1	1	B6784 28 0
38	85	35	67	3,600	1	1	B6784 38 0
28	85	35	67	3,300	5	1	B6784 48 0
38	85	35	67	3,300	5	1	B6784 58 0

- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws


28	85	35	67	3,600	1	1	B6785 28 0
38	85	35	67	3,600	1	1	B6785 38 0
28	85	35	67	3,300	5	1	B6785 48 0
38	85	35	67	3,300	5	1	B6785 58 0

- VERSION WITH SERVICE LOCK
- 2 throw secondary cylinder lock
- 2 throw main cylinder lock


28	85	35	67	3,600	1	1	B6786 28 0
38	85	35	67	3,600	1	1	B6786 38 0
28	85	35	67	3,300	5	1	B6786 48 0
38	85	35	67	3,300	5	1	B6786 58 0

- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Main cylinder lock, 2 throws
- FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)

28	85	35	67	3,600	1	1	B6786 28 B
38	85	35	67	3,600	1	1	B6786 38 B
28	85	35	67	3,300	5	1	B6786 48 B
38	85	35	67	3,300	5	1	B6786 58 B

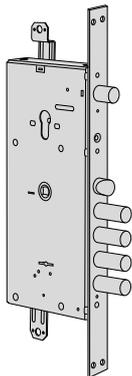


- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws




28	85	35	67	3,600	1	1	57785 28 0
28	85	35	67	3,300	5	1	57785 48 0

- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws




28	85	35	67	3,600	1	1	57786 28 0
28	85	35	67	3,300	5	1	57786 48 0

Type	Description	Key item	DEADBOLTS							ITEM				
			No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand

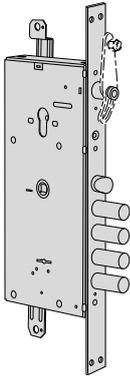


- VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws
- TO ORDER SEPARATELY:
Limiting device chain item 1.06421.10.1/2



3 art. 1 00122 00 1

28	85	35	67	3,300	5	1	57787 48 0
----	----	----	----	-------	---	---	-------------------


- VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY
- Secondary thumb turn lock, 2 throws
- Double bit 6 lever main lock, 4 throws
- TO ORDER SEPARATELY:
Limiting device chain item 1.06421.10.1/2



3 art. 1 00122 00 1

28	85	35	67	3,600	1	1	57788 28 0
----	----	----	----	-------	---	---	-------------------

28	85	35	67	3,300	5	1	57788 48 0
----	----	----	----	-------	---	---	-------------------

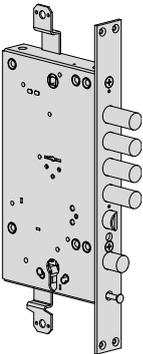

- VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws



3 Art. 1 00123 00 1

28	85	35	67	3,600	1	1	B7784 28 0
----	----	----	----	-------	---	---	-------------------

38	85	35	67	3,600	1	1	B7784 38 0
----	----	----	----	-------	---	---	-------------------

28	85	35	67	3,300	5	1	B7784 48 0
----	----	----	----	-------	---	---	-------------------

38	85	35	67	3,300	5	1	B7784 58 0
----	----	----	----	-------	---	---	-------------------

- VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws



3 Art. 1 00123 00 1


28	85	35	67	3,600	1	1	B7785 28 0
----	----	----	----	-------	---	---	-------------------

38	85	35	67	3,600	1	1	B7785 38 0
----	----	----	----	-------	---	---	-------------------

28	85	35	67	3,300	5	1	B7785 48 0
----	----	----	----	-------	---	---	-------------------

38	85	35	67	3,300	5	1	B7785 58 0
----	----	----	----	-------	---	---	-------------------

- VERSION WITH SERVICE LOCK
- Secondary cylinder lock, 2 throws
- Double bit 6 lever main lock, 4 throws



3 Art. 1 00123 00 1



28	85	35	67	3,600	1	1	B7786 28 0
----	----	----	----	-------	---	---	-------------------

38	85	35	67	3,600	1	1	B7786 38 0
----	----	----	----	-------	---	---	-------------------

28	85	35	67	3,300	5	1	B7786 48 0
----	----	----	----	-------	---	---	-------------------

38	85	35	67	3,300	5	1	B7786 58 0
----	----	----	----	-------	---	---	-------------------

Type	Description	Key item	DEADBOLTS						Unit weight Kg	Pieces	ITEM				
			No.	Projection Distance	Throws	Centre Distance	Faceplate Backset	Type			Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00162 00 1 1 art. 1 00120 00 1 construction key	28	85	35	67	4,000	1	1 57985 28 A						
			28	85	35	67	3,800	1	1 57986 28 A						
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00162 00 1 1 art. 1 00120 00 1 construction key	28	85	35	67	3,800	1	1 57986 28 A						
			28	85	35	67	3,500	5	1 57986 48 A						
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	 3 art. 1 00162 00 1 1 art. 1 00120 00 1 construction key	28	85	35	67	4,000	1	1 57987 28 A						
			28	85	35	67	3,700	5	1 57987 48 A						
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2 	 3 art. 1 00162 00 1 1 art. 1 00120 00 1 construction key	28	85	35	67	3,700	5	1 57988 48 A						

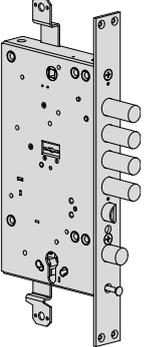Type	Description	Key item	DEADBOLTS							ITEM								
			No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight Kg	Pieces	Type	Dim.	Hand	Fin.	Pers.	Spec.	
	<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws, NEW CAMBIO FACILE, with construction key 	 3 art. 1 00164 00 1  1 art. 1 00120 00 1 construction key	28	85	35	67	4,000	1	1	B7984 28 A								
			38	85	35	67	4,000	1	1	B7984 38 A								
			28	85	35	67	3,700	5	1	B7984 48 A								
			38	85	35	67	3,700	5	1	B7984 58 A								
			<hr/>															
			<ul style="list-style-type: none"> • VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00164 00 1  1 art. 1 00120 00 1 construction key	28	85	35	67	4,000	1	1	B7985 28 A						
	38	85			35	67	4,000	1	1	B7985 38 A								
	28	85			35	67	3,700	5	1	B7985 48 A								
	38	85			35	67	3,700	5	1	B7985 58 A								
	<hr/>																	
	<ul style="list-style-type: none"> • VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key 	 3 art. 1 00164 00 1  1 art. 1 00120 00 1 construction key			38	85	35	67	3,800	1	1	B7986 38 A						
			28	85	35	67	3,700	5	1	B7986 48 A								
38			85	35	67	3,700	5	1	B7986 58 A									



Technical features:

- 11-pin bitting.
- Pins
- Wear resistant bronze
- Hardened steel pins in first position.
- Drivers
- Brass
- Hardened steel driver in first position
- Phosphor bronze springs
- Hardened steel gate

Operation:

- The key rotation activates/open a window which allows key introduction

Supplied as standard:

- Fixing screws.
- Instruction sheet
- Keys bitted on stem only
- Keys bitted on stem and bits (for New Cambio facile locks)


On request:

- Hardened steel protective rose for double bit key cylinder.

Finishes:


- Standard:
 - polished brass fin. 00
- On request:
 - polished chrome fin. 18
 - gun burrel fin. 46

Type	Description	For series/item	L	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.

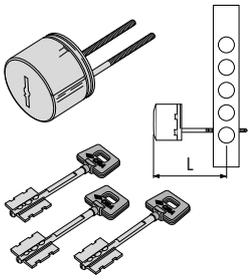	<ul style="list-style-type: none"> • May be combined with 6 lever double bit key locks, for armoured doors • Bitted keys only on stem • For lock combination , bit the key by duplicating main key • SUPPLIED AS STANDARD: 3 keys item 1.00162.00.1 	53,0	0,580	1	1	02715	10	1		
	<ul style="list-style-type: none"> • May be combined with 6 lever double bit key locks, for armoured doors • Bitted keys only on stem • For lock combination , bit the key by duplicating main key • SUPPLIED AS STANDARD: 3 keys item 1.00163.00.1 	70,0	0,605	1	1	02715	11	1		


Type	Description	For series/item	L	Unit weight	Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00162.00.1 	53,0	0,350	1	1	02716 00 1					
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00162.00.1 	53,0	0,840	1	1	02716 01 1					
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00163.00.1 	70,0	0,350	1	1	02716 10 1					
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00163.00.1 	70,0	0,400	1	1	02716 11 1					
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00162.00.1 	53,0	0,665	1	1	02716 50 1					
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00162.00.1 	53,0	0,820	1	1	02716 51 1					
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00163.00.1 	70,0	0,350	1	1	02716 60 1					
	<ul style="list-style-type: none"> • May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00163.00.1 	70,0	0,833	1	1	02716 61 1					

Type	Description	For series/item	L	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers. Spec.




- Nickel-plated steel screws

06460, 06461, 105,0 0,020 25 1 06047 51 0
06480, 06485

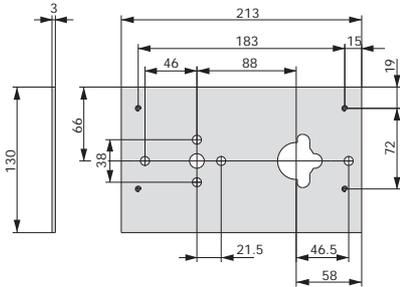


- Steel welding plate
- For double-bit key locks

57000 0,660 12 1 06429 00 0

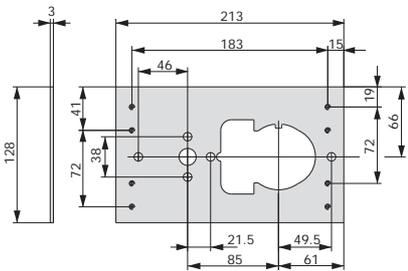


- Steel welding plate
- For cylinder and double-bit key locks

56000, 57000 0,552 12 1 06429 05 0

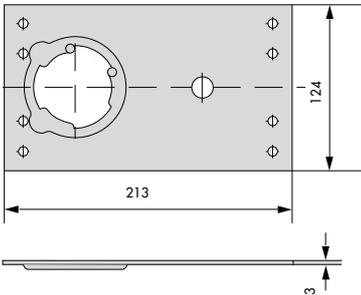


- Steel welding plate for assembly of protection roses series 06485

15000, 56000 0,552 12 1 06429 06 0

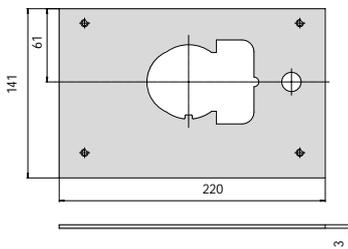

- Steel welding plate
- For cylinder and double-bit key locks

86515, 87515 0,650 12 1 06429 10 0

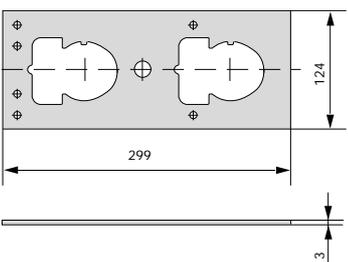








- Steel welding plate
- For double hole locks

56700, 57700, 57900 0,695 12 1 06429 15 0


Type	Description	For series/item	Unit weight	Pieces	ITEM					
					Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> Steel welding plate for assembly of protection roses series 06485 	56765, 56766, 56767, 56768, 56785, 56786, 56787, 56788	0,950	12	1	06429	16	0		
	<ul style="list-style-type: none"> Steel welding plate for assembly of protection roses series 06485 	56715, 56716, 56735, 56736	0,950	12	1	06429	18	0		
	<ul style="list-style-type: none"> Steel welding plate for assembly of protection roses series 06485 	57765, 57766, 57785, 57786, 57787, 57915, 57916, 57917, 57935, 57936, 57937, 57965, 57966, 57967, 57985, 57986, 57987	0,950	12	1	06429	20	0		
	<ul style="list-style-type: none"> Manganese steel anti-drill protection For double bit key locks May be combined with welding plates 	1 06429 05 0, 1 06429 10 0, 1 06429 15 0, 1 06429 18 0, 1 06429 20 0	0,075	12	1	06429	50	0		
	<ul style="list-style-type: none"> Manganese steel anti-drill protection For cylinder key locks May be combined with welding plates 	1 06429 05 0, 1 06429 10 0, 1 06429 15 0, 1 06429 18 0, 1 06429 20 0	0,075	12	1	06429	51	0		
	<ul style="list-style-type: none"> Carbonitrided steel protection rose for bit key cylinder series 02715 and 02716 May be combined with 6 lever and NEW CAMBIO FACILE locks Use assembly plate item 1.06429.05.0 or 1.06429.15.0 SUPPLIED AS STANDARD: Hardened steel hole protection plate Plate ring AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) satin-finished nickel-plated chrome (fin. B1) 		0,280	1	1	06429	60	1		

Type	Description	For series/item	L	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Polished brass internal rose to be combined with European profile cylinders on locks series 15000, 56000 AVAILABLE FINISHES: Anodised dark brown (fin. 58) Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) 			0,036	12	1	06458	10	0	
	<ul style="list-style-type: none"> Polished brass internal rose to be combined with European profile cylinders with adjustable knob on locks series 15000, 56000 AVAILABLE FINISHES: Anodised dark brown (fin. 58) Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) Polished chrome (fin. 18) 	0A317, 0H3S7, 0L3S7, 0M317		0,037	12	1	06458	20	0	
	<ul style="list-style-type: none"> Carbonitrided steel protection rose with polished brass finish 2 screws L. 45 mm. (M6) AVAILABLE FINISHES: Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) Polished chrome (fin. 18) 	0A310, 0H3S0, 0L3S1, 0M311	45,0	0,200	1	1	06460	40	0	
	<ul style="list-style-type: none"> Carbonitrided steel protection rose with polished brass finish 2 screws (M6) AVAILABLE FINISHES: Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) Polished chrome (fin. 18) 	0A310, 0H3S0, 0L3S1, 0M311	70,0	0,310	1	1	06460	50	0	
		0A310, 0H3S0, 0L3S1, 0M311	110,0	0,320	1	1	06460	51	0	
		08815	70,0	0,310	1	1	06460	60	0	
		0A317, 0H3S7, 0L3S7, 0M317	70,0	0,335	1	1	06461	50	0	
		0A317, 0H3S7, 0L3S7, 0M317	110,0	0,325	1	1	06461	51	0	
		08887	70,0	0,200	1	1	06461	60	0	
		08887	110,0	0,325	1	1	06461	61	0	
	<ul style="list-style-type: none"> Carbonitrided steel rotor protection for roses series 06460 and 06461 	0A310, 0H3S0, 0L3S1, 0M311		0,009	50	1	06466	01	0	
		08815		0,008	50	1	06466	02	0	

Type	Description	For series/item	L	Unit weight Kg	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Carbonitrided steel protective rose-casing 2 L 45 mm screws (M6) To order separately: <ul style="list-style-type: none"> -rose cap -cover plate ring 	0A310,0H350, 16,0	0,285	6	1	06480	00	0		
		0L3S1, 0M311								
		0A310,0H350, 24,5	0,385	6	1	06480	01	0		
		0L3S1, 0M311								
		0A310,0H350, 34,5	0,594	6	1	06480	02	0		
		0L3S1, 0M311								
		0A310,0H350, 16,0	0,365	30	1	06480	20	0		
		0L3S1, 0M311								
		0A310,0H350, 24,5	0,482	30	1	06480	21	0		
		0L3S1, 0M311								
0A310,0H350, 34,5	0,594	30	1	06480	22	0				
0L3S1, 0M311										
08815	16,0	0,365	6	1	06480	10	0			
0A310,0H350, 24,5	0,482	6	1	06480	11	0				
0L3S1, 0M311										
08815	34,5	0,594	6	1	06480	12	0			
	<ul style="list-style-type: none"> Carbonitrided steel protective rose-casing with quick coupling 2 screws L 45 mm 	0A310,0H350, 16,0	0,378	6	1	06485	00	0		
		0L3S1, 0M311								
		0A310,0H350, 24,5	0,482	6	1	06485	01	0		
		0L3S1, 0M311								
		0A310,0H350, 34,5	0,594	6	1	06485	02	0		
		0L3S1, 0M311								
		0A310,0H350, 16,0	0,378	30	1	06485	20	0		
		0L3S1, 0M311								
0A310,0H350, 24,5	0,482	30	1	06485	21	0				
0L3S1, 0M311										
0A310,0H350, 34,5	0,594	30	1	06485	22	0				
0L3S1, 0M311										
	<ul style="list-style-type: none"> Protective rose-casing cap AVAILABLE FINISHES: <ul style="list-style-type: none"> Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Dark anodised bronze (fin. 64) Light anodised bronze (fin. 65) satin-finished nickel-plated chrome (Fin B1) 	06480, 06485	16,0	0,025	6	1	06483	00	0	
		06480, 06485	16,0	0,025	30	1	06483	20	0	
	<ul style="list-style-type: none"> Cover plate ring for protective rose AVAILABLE FINISHES: <ul style="list-style-type: none"> Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Dark anodised bronze (fin. 64) Light anodised bronze (fin. 65) satin-finished nickel-plated chrome (fin. B1) 	06480, 06485		0,025	6	1	06483	60	0	
		06480, 06485		0,025	30	1	06483	80	0	

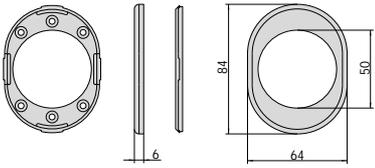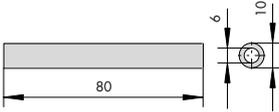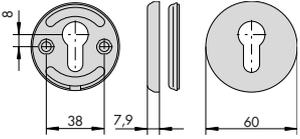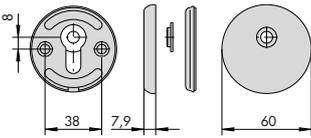
Type	Description	For series/item	L	Unit weight Kg	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Cover plate ring for protective rose 	06480, 06485		0,025	30	1	06483	61	0	
	<ul style="list-style-type: none"> • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Dark anodised bronze (fin. 64) Light anodised bronze (fin. 65) satin-finished nickel-plated chrome (fin. B1) 	06480, 06485	16,0	0,025	30	1	06483	81	0	
	<ul style="list-style-type: none"> • Carbonitrided steel rotor, polished chrome, to be combined with roses series 06475, 06476 	0A310, 0H3S0, 0L3S1, 0M311, 06470		0,016	50	1	06472	00	0	
		0A310, 0H3S0, 0L3S1, 0M311, 06470		0,016	50	1	06472	10	0	
	<ul style="list-style-type: none"> • Zinc plated 2 mm. spacer for protection roses 	06480		0,025	25	1	06472	40	0	
	<ul style="list-style-type: none"> • Pair of zinc plated anti-crush plates 	06480, 06485		0,025	25	1	06472	50	0	
	<ul style="list-style-type: none"> • Pair of zinc plated anti-crush plates 	06480, 06485		0,050	25	1	06472	51	0	
	<ul style="list-style-type: none"> • Internal rose 	06460, 06461, 06480, 06485		0,116	12	1	06473	00	0	
	<ul style="list-style-type: none"> • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Anodised dark bronze (fin. 64) Anodised light bronze (fin. 65) satin-finished nickel-plated chrome (fin. B1) 									
	<ul style="list-style-type: none"> • Internal rose for cylinder series 0A317 and 0B317 	06460, 06461, 06480, 06485		0,120	12	1	06473	10	0	
	<ul style="list-style-type: none"> • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) satin-finished nickel-plated chrome (fin. B1) 									

Type	Description	For series/item	L	Unit weight Kg	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.




- External ring for plate
- AVAILABLE FINISHES:
Polished brass (fin. 00)
Polished chrome(fin. 18)
Shotgun grey (fin. 46)
Anodised dark bronze (fin. 64)
Anodised light bronze (fin. 65)
satin-finished nickel-plated chrome (fin. B1)

1 06429 60 1 0,025 25 1 06473 50 0




- External ring for plate
- AVAILABLE FINISHES:
Polished brass (fin. 00)
Polished chrome(fin. 18)
Shotgun grey (fin. 46)
Anodised dark bronze (fin. 64)
Anodised light bronze (fin. 65)
satin-finished nickel-plated chrome (fin. B1)

1 06429 60 1 0,025 25 1 06473 51 0

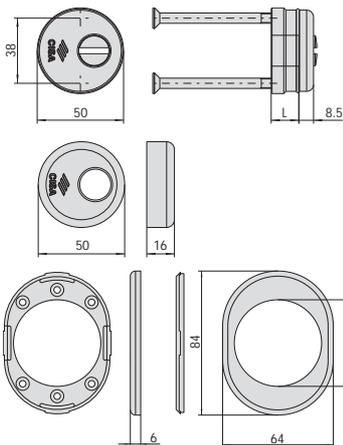


- Carbonitrided steel protective rose
- SUPPLIED AS STANDARD:
Rose body
Cap
Cover plate ring
screws M6 x 45 mm
- AVAILABLE FINISHES:
Polished brass (fin. 00)
Polished chrome-plated (fin. 18)
Gunbarrel grey (fin. 46)
Anodised dark bronze (fin. 64)
Anodised light bronze (fin. 65)
satin-finished nickel-plated chrome (fin. B1)

16,0	0,365	6	1 06490 00 0
24,5	0,482	6	1 06490 01 0
34,5	0,594	6	1 06490 02 0

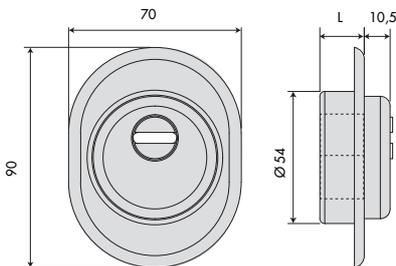


- CONE-SHAPED PROTECTIVE ROSE
- Carbonitrided steel protective rose casing
- 2 screws L. 45 mm. (M6)
- Rose cap
- Inner escutcheon
- AVAILABLE FINISHES:
Satin nickel-plated chrome (fin. B1)
Polished chrome (fin. 18)

13,0	0,285	1	1 06490 50 0
18,0	0,385	1	1 06490 51 0
22,0	0,594	1	1 06490 52 0
25,0	0,365	1	1 06490 53 0


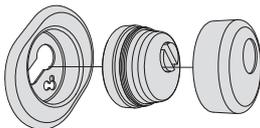


Type	Description	For series/item	 L Unit weight Pieces		ITEM			
			Type	Dim.	Hand	Fin.	Pers.	Spec.

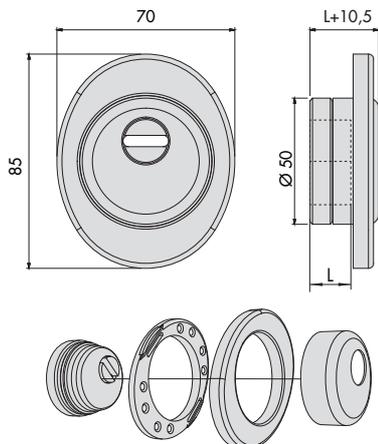

- CONE-SHAPED PROTECTIVE ROSE
- Carbonitrided steel protective rose casing
- 2 screws L. 45 mm.
- Rose cap
- Cover plate ring
- AVAILABLE FINISHES:
- Satin nickel-plated chrome (fin. B1)
- Dark anodised bronze (fin. 64)
- Polished chrome (fin. 18)

25,0 0,378 6 1 06490 10 0

Type	Description	Kg		ITEM					
		Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.	
 <ul style="list-style-type: none"> • 2 keys item 1.00100.00.1 • Key removal with open or closed lock • 1 locking point 		0,770	1	1	57410	30	1		
		0,770	1	1	57410	30	2		
		0,400	1	1	57410	35	1		
		0,400	1	1	57410	35	2		
	 <ul style="list-style-type: none"> • 2 keys item 1.00100.00.1 • Key removal with open or closed lock • Pre-set for additional locking points 		0,450	1	1	57415	30	1	
			0,930	1	1	57415	35	1	
		0,930	1	1	57415	35	2		



Technical features:

- Electric case operating voltage 12V ac.
- ZAL stainless alloy casing and long lip.
- Satin-finished stainless steel interchangeable faceplates for installation with locks having 28 and 38 mm center distances (to be ordered separately)

Supplied as standard:

- Screws for faceplate fixing

Hand:

0 = Non-handed

1 = R.H. inwards

L.H. outwards


2 = L.H. inwards

R.H. outwards

Cylinder to be ordered separately




Type	Description	Faceplate	Unit weight	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.

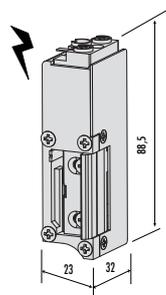

- Electric striker casing
- Voltage 12 V ac CE - current absorption 0,7A
- Hold open catch mechanism
- Hold open device

0,285	12	1	15300 00 1					
0,285	12	1	15300 00 2					

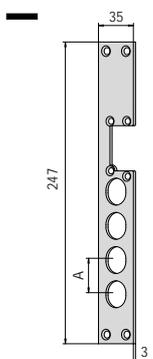

- Satin-finished stainless steel faceplate
- To install with locks with deadbolt distance A=28 mm

34	0,042	12	1	05030 00 0				
----	-------	----	---	------------	--	--	--	--

- Satin-finished stainless steel faceplate
- To install with locks with deadbolt distance A=38 mm

34	0,042	12	1	05031 00 0				
----	-------	----	---	------------	--	--	--	--

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Polished brass internal hole cover For double bit key locks 		0,029	12	1	06081	01	0	
	<ul style="list-style-type: none"> Polished brass key guide For double bit key locks 		0,041	5	1	06123	04	0	
	<ul style="list-style-type: none"> Inside aluminium escutcheon painted in metallic antique bronze colour 		0,036	12	1	06458	11	0	
	<ul style="list-style-type: none"> Nylon key guide supplied with 7 spacers For double bit key locks 		0,050	1	1	06142	01	0	
	<ul style="list-style-type: none"> Key guide with nylon flange supplied with twelve spacers 	1 57500 08 0, 1 57505 08 0, 1 57510 08 0, 1 57515 08 0	0,061	1	1	06142	02	0	
	<ul style="list-style-type: none"> Concealed cable guard with spring 	15000, 17000	0,058	6	1	06515	00	0	
	<ul style="list-style-type: none"> Nylon spacer for key guide series 06144 and 06145 		0,004	100	1	06142	51	0	
	<ul style="list-style-type: none"> Inside escutcheon with spring 		0,325	6	1	06515	15	0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Polished brass rose with key guide For double bitted locks AVAILABLE FINISHES: Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64) satin-finished nickel-plated chrome (fin. B1) 		0,105 6	1	06144	10	1
	<ul style="list-style-type: none"> Nylon key guide, including 2 supports for escutcheon and 3 spacers For double bit key locks 		0,066 6	1	06144	15	0
	<ul style="list-style-type: none"> Polished brass cover for escutcheon and key guide AVAILABLE FINISHES: Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64) satin-finished nickel-plated chrome (fin. B1) 	1 06144 10 1, 1 06144 15 0	0,030 50	1	06144	50	1
	<ul style="list-style-type: none"> Polished brass escutcheon with key guide For double bit key locks AVAILABLE FINISHES: Polished brass (fin.00) Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64) 		0,135 6	1	06145	10	0
	<ul style="list-style-type: none"> Polished brass escutcheon with key guide For double bit key locks AVAILABLE FINISHES: Polished brass (fin.00) Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64) 		0,130 6	1	06145	11	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Brand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Key guide escutcheon-nylon key complete with support for escutcheon and 3 spacers For double bitted locks 		0,135	6	1	06145	15	0	
	<ul style="list-style-type: none"> Set of brass cover for escutcheon item 1.06145.00.0 AVAILABLE FINISHES: Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64) satin-finished nickel-plated chrome (fin. B1) 	1 06145 10 0, 1 06145 15 0	0,071	6	1	06145	50	0	
	<ul style="list-style-type: none"> Nickel-plated steel flat striker For 28 mm.deadbolt locks distance. 		0,132	6	1	06220	00	0	
	<ul style="list-style-type: none"> Nickel-plated steel flat striker For 28 mm.deadbolt locks distance. 		0,250	6	1	06220	02	0	
	<ul style="list-style-type: none"> Nickel-plated steel flat striker 	1 06433 00 0, 1 06434 00 0, 1 06437 00 0	0,169	6	1	06220	03	0	
	<ul style="list-style-type: none"> Nickel-plated steel flat striker For double hole locks 		0,220	6	1	06220	05	0	
	<ul style="list-style-type: none"> Nickel-plated steel flat striker For electric locks 	15510,15515, 15530,15535, 17510,17515, 17530,17535	0,132	6	1	06220	20	0	
	<ul style="list-style-type: none"> Nickel-plated steel flat striker For panic function locks with deadbolt distance of 28 mm 	56900	0,250	6	1	06220	26	0	
	<ul style="list-style-type: none"> Nickel-plated steel flat striker For panic function locks with deadbolt distance of 38 mm 	56900	0,250	6	1	06220	27	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Nickel-plated steel flat striker For 1 deadbolt diverter 	06433	0,169	6	1	06220	28	0	
	<ul style="list-style-type: none"> Nickel-plated steel flat striker For 2 deadbolt diverter 	06433	0,169	6	1	06220	29	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	57500	0,297	6	1	06221	00	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	56500	0,300	6	1	06221	01	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	17500	0,275	6	1	06221	10	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	15500	0,295	6	1	06221	11	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	1 87515 28 0	0,297	6	1	06221	15	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	1 86515 28 0	0,297	6	1	06221	16	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 38 mm. deadbolt distance 	1 86515 38 0	0,297	6	1	06221	17	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	87665	0,297	6	1	06221	18	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	56835, 57815	0,297	6	1	06221	20	0	


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	57715, 57716, 57735, 57736	0,380	6	1	06221	50	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	56765, 56766, 56785, 56786	0,380	6	1	06221	51	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	57915, 57965	0,380	6	1	06221	52	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	B6764, B6765, B6766	0,380	6	1	06221	60	0	
	<ul style="list-style-type: none"> Nickel-plated steel faceplate 28 mm. deadbolt distance 	B7964, B7965, B7966	0,380	6	1	06221	62	0	
	<ul style="list-style-type: none"> Nylon slide 	15000, 17000	0,003	6	1	06224	50	0	
	<ul style="list-style-type: none"> Bush for latchbolt guide For electrical locks 		0,003	6	1	06224	60	0	
	<ul style="list-style-type: none"> Nickel-plated steel cover plate For electric locks with 28 mm. deadbolt distance 		0,023	6	1	06228	08	0	
	<ul style="list-style-type: none"> Nickel-plated steel cover plate For electric locks with 28 mm. deadbolt distance 		0,024	25	1	06228	28	0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Steel spring rod for floor bolt item 1.06425.00.0 	1 06425 00 0	0,221 12	1	06291	50	0
	<ul style="list-style-type: none"> Pair of zinc plated high resistant steel divertor For mortice locks 		0,128 6	1	06418	01	0
	<ul style="list-style-type: none"> Pair of zinc plated high resistant steel divertor For mortice locks 		0,047 6	1	06418	03	0
	<ul style="list-style-type: none"> Opening limiting device chain For double hole locks with opening limiting device 		0,066 6	1	06421	10	1
			0,066 6	1	06421	10	2
	<ul style="list-style-type: none"> Set of zinc plated extension bolts For rim locks pre-set for additional locking points 		1,500 1	1	06425	02	0
	<ul style="list-style-type: none"> Set of zinc plated extension bolts For mortice locks pre-set for additional locking points 		1,435 1	1	06425	03	0


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Set of zinc plated steel connecting bars • For rim locks pre-set for additional locking points 		1,300	1	1	06425	04	0	
	<ul style="list-style-type: none"> • Top and bottom extension bolts for use with rekeyable locks (lower spring rod) • For rim locks pre-set for additional locking points 		1,610	1	1	06425	05	0	
	<ul style="list-style-type: none"> • Pair of bolts for diverter deadbolt control, galvanized steel • For rim locks pre-set for additional locking points 	56900	0,540	6	1	06425	06	0	

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Zinc plated side bolt (single) • S = 3,5 mm. • For rim locks pre-set for additional locking points 		0,455	1	1	06433	00	0
	<ul style="list-style-type: none"> • Zinc plated side bolt (single) • S = 43,5 mm. • For rim locks pre-set for additional locking points 		0,510	1	1	06433	10	0
	<ul style="list-style-type: none"> • Zinc plated side bolt (double) • S = 3,5 mm. • For rim locks pre-set for additional locking points 		0,855	1	1	06433	01	0
	<ul style="list-style-type: none"> • Zinc plated side bolt (double) • S = 43,5 mm. • For rim locks pre-set for additional locking points 		0,990	1	1	06433	11	0
	<ul style="list-style-type: none"> • Zinc plated side bolt (single) • For mortice locks pre-set for additional locking points 		0,646	1	1	06434	00	0
	<ul style="list-style-type: none"> • Zinc plated side bolt (double) • For mortice locks pre-set for additional locking points 		0,900	1	1	06434	01	0
	<ul style="list-style-type: none"> • Zinc plated side bolt (single) • For rim locks pre-set for additional locking points 		0,448	1	1	06437	00	0
	<ul style="list-style-type: none"> • Zinc plated side bolt (double) • For rim locks pre-set for additional locking points 		0,789	1	1	06437	01	0


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Pair of nylon electric contacts 	15000, 17000	0,029	6	1	06510	10	0	
	<ul style="list-style-type: none"> • Battery (lead) 12V 2.3 ah • For CISA e-Evolution locks 		0,492	1	1	06740	00	0	
	<ul style="list-style-type: none"> • 40 VA 12 V AC transformer • For CISA e-Evolution locks 		0,492	1	1	07060	01	0	
	<ul style="list-style-type: none"> • Pair of handles to install with Exit lock • AVAILABLE FINISHES: Anodised bronze (fin. 00) satin-finished nickel-plated chrome (fin. B1) 	56915, 56935	0,400	1	1	07070	50	0	
	<ul style="list-style-type: none"> • Handle and fixed thumb turn to install with Exit lock • AVAILABLE FINISHES: Anodised bronze (fin. 00) satin-finished nickel-plated chrome (fin. B1) 	56916, 56917, 56936, 56937	0,400	1	1	07070	60	0	

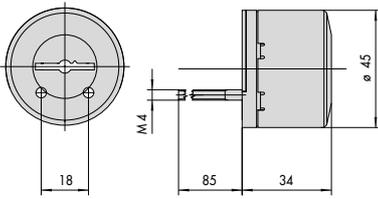

02715, 02716

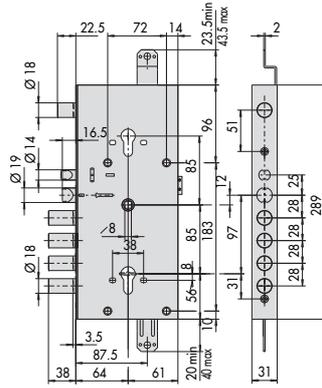

16766, 17766, 17916, 17966

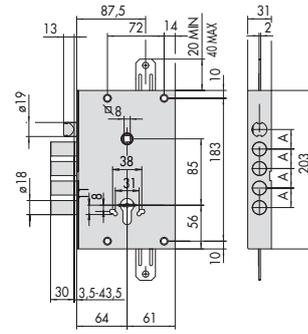


56510, 56515, 56815, 56916, 56917, 57510, 57511, 57512, 57515, 57516, 57517, 57518, 57615, 57665

A = 25 - 27 - 28 - 32 - 37,3

1


4

7

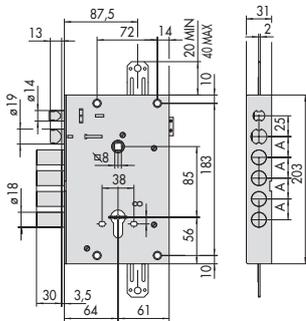


15510, 17510, 15515, 17515, 17615, 17665, E6515, E6615

A = 25 - 27 - 28 - 32 - 37,3

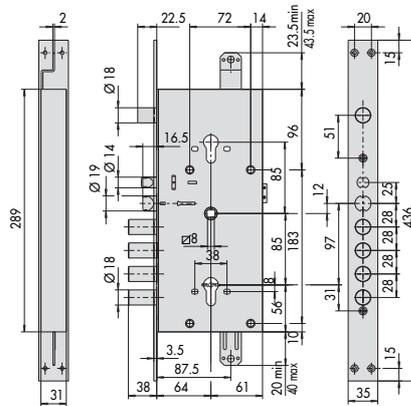

16786, 17786, 17936, 17986

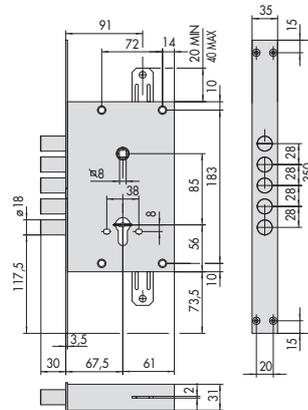


56520, 57520, 57521, 56525, 57525, 57526, 57625, 57675,


2

5

8

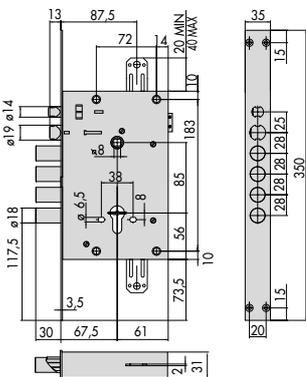


15530, 17530, 15535, 17535, 17635, 17685, E6535

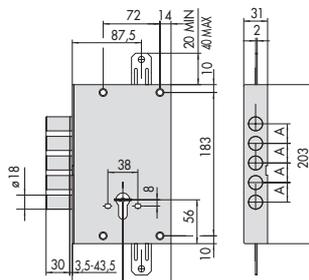

56500, 57500, 57501, 57502, 56505, 57505, 57506, 57507, 57605, 57655, 67505

A = 25 - 27 - 28 - 32 - 37,3

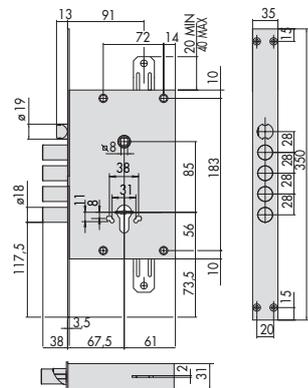

56530, 56535, 56835, 56936, 56937, 57530, 57531, 57535, 57536, 57635, 57685

3

6

9











Fire door locks and panic exit devices



Panic function mortice locks with split follower.....	436
Cylinder mortice locks.....	437
Panic function cylinder mortice locks	440
Extension bolts for additional locking points.....	443
Cylinder mortice locks.....	444
Panic function cylinder mortice locks	445
Panic exit devices with black painted case cover for panic function locks.....	447
Cisa Fast Touch series panic exit devices for panic function mortice locks	448

Cisa Fast Push series panic exit devices for panic function mortice locks	449
Cisa Prestige series panic exit devices for panic function mortice locks	450
Cisa Prestige INOX series panic exit devices for panic function mortice locks	451
Electric handles.....	452
Horizontal bars for panic exit devices.....	453
Accessories for fire door locks.....	454
Dimensional drawings	460

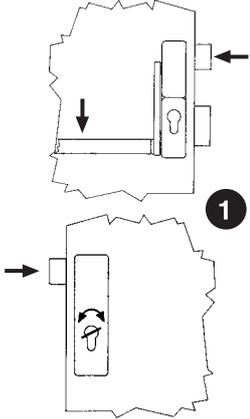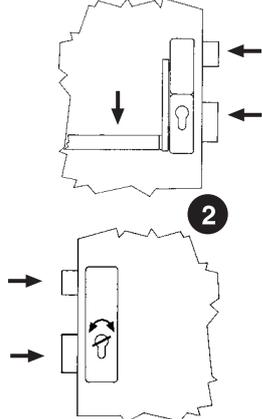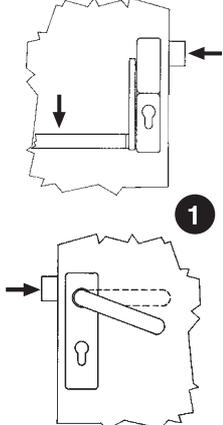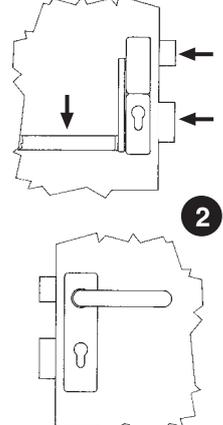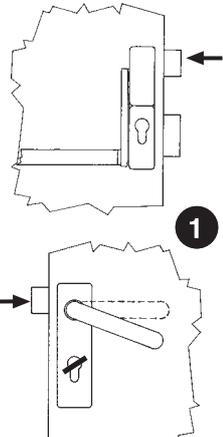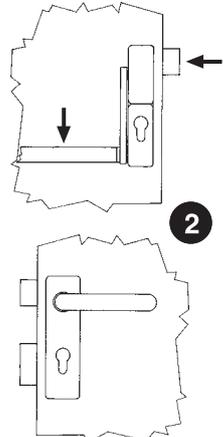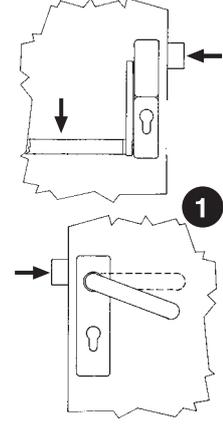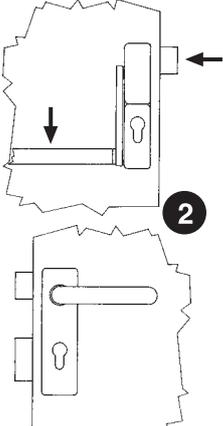

TYPE	CONTROLS	OPERATION	
<p>A</p> <p>OUTSIDE ENTRANCE BY KEY</p> <p>For doors which have to be opened with the key from the outside by authorised personnel only</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with deadbolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates latch and deadbolt. 	 <p>1 Outside entrance by key only.</p>	 <p>2</p> <p>Locking with the deadbolt, outside entrance is possible only with the use of the key.</p>
<p>B</p> <p>OUTSIDE HANDLE ACTIVATED OR DISACTIVATED</p> <p>For doors that open outwards and places where it is necessary to provide free entrance.</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with deadbolt and activate or deactivate the outside handle. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates the deadbolt and activates or deactivates the outside handle for latch operation. 	 <p>1 The outside handle is activated by rotating the key in the lock-opening direction as far as it will go (the handle remains activated when the key is removed).</p>	 <p>2</p> <p>Closing with the deadbolt deactivates the outside handle; the latter remains deactivated even after the door has been opened with the panic exit device.</p>
<p>C</p> <p>OUTSIDE HANDLE AUTOMATICALLY DISACTIVATED</p> <p>For doors that must be opened from the outside only by authorised persons.</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with deadbolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates the throw and activates the handle. 	 <p>1 The outside handle is activated by rotating the key in the lock-opening direction as far as it will go, after first withdrawing the deadbolt.</p>	 <p>2</p> <p>Removing the key automatically deactivates the outside handle.</p>
<p>D</p> <p>OUTSIDE HANDLE ALWAYS ACTIVATED</p> <p>For doors that partition throughways (e.g. corridors).</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with deadbolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates the deadbolt. The handle, with the deadbolt withdrawn, engages for latch operation. 	 <p>1 The outside handle is always activated when the deadbolt is withdrawn.</p>	 <p>2</p> <p>Entry is after using the panic exit device, always possible from the outside as long as the deadbolt is not activated by the key.</p>

CE

Technical features:

- Zinc-plated steel faceplate
- Zinc-plated steel case
- Zinc-plated steel latch
- 9 mm. through follower

On request:

- Stainless steel faceplate fin. 20

Hand:
0 = Non-handed

Cylinder to be ordered separately

Mito

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
								Type	Dim.	Hand	Fin.

ELECTRIC LOCK

- Latch only

OPERATION:

- From inside: by handle or key
- From outside: by electrically operated handle and/or key

72	24	65	0,980	1	1	13100 65 0
----	----	----	-------	---	---	-------------------

"FAIL SAFE" FUNCTION ELECTRIC LOCK

- Latch only

OPERATION:

- From inside: by handle
- From outside: the key activates or deactivates the handle and withdraws the latchbolt. The live coil keeps the handle disabled and only enables it if power supply is off.

72	24	65	0,980	1	1	13200 65 0
----	----	----	-------	---	---	-------------------

MECHANICAL LOCK

- Latch only

OPERATION:

- Latch can be operated by key or handle

72	24	65	0,690	12	1	43000 65 0
----	----	----	-------	----	---	-------------------

MECHANICAL LOCK

- Latch only
- Pre-set for additional locking points

OPERATION:

- The handle withdraws the latchbolt only when enabled by the key. When the handle is disabled, it cannot operate the latchbolt
- The key withdraws the latchbolt

1	72	24	65	0,850	12	1	43014 65 0
---	----	----	----	-------	----	---	-------------------

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




MECHANICAL LOCK

- Latchbolt and deadbolt
- Pre-set for additional locking points

OPERATION:

- The handle withdraws the latchbolt only when enabled by the key. When the handle is disabled, it cannot operate the latchbolt
- The key withdraws the latchbolt

72	24	65	1,750	6	1 43015 65 0
----	----	----	-------	---	--------------




MECHANICAL LOCK

- Deadbolt and latchbolt
- 1 15-mm throw.
- Stainless steel faceplate fin. 20

OPERATION:

- Latch can be operated by key or handle
- Deadbolt can be operated by key

1	72	24	65	0,746	12	1 43020 65 0
---	----	----	----	-------	----	--------------



MECHANICAL LOCK

- Deadbolt and latchbolt
- 1 15-mm throw.
- Pre-set for additional locking points

OPERATION:


- Latch can be operated by key or handle
- Deadbolt can be operated by key

ON REQUEST:

- Set of side latches item 1.07090.50.0
- Set of bolt extension rods item 1.07091.50.0

1	72	24	65	0,850	12	1 43024 65 0
---	----	----	----	-------	----	--------------

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.

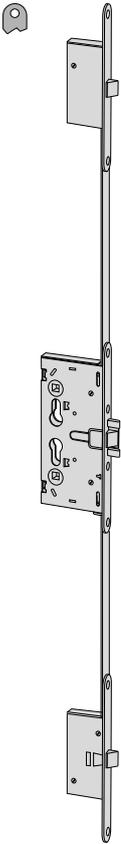


MECHANICAL LOCK

- Deadbolt and latchbolt
- 15-mm throw.
- 3 locking points

OPERATION:

- Latch can be operated by key or handle
- Deadbolt can be operated with the key

1	72	24	65	1,400	6	1	43025 65 0
---	----	----	----	-------	---	---	------------



• FOR SECONDARY LEAF OF DOUBLE DOORS

OPERATION:

- Extension bolts are operated by a lever on the faceplate
- Rods forward strike 17 mm

ON REQUEST:

- Extension bolts item 1.07088.03.0
- Automatic dogging device item 1.07089.50.0

1	24			0,360	1	1	43091 00 0
---	----	--	--	-------	---	---	------------

CE

ICIM

Technical features:

- Zinc-plated steel faceplate
- Zinc-plated steel case
- Zinc-plated steel latch
- 9 mm. split follower
- Can be combined with the panic exit devices series 59600 and 59710

Hand:
0 = Non-handed


Cylinder to be ordered separately

On request:

- Stainless steel faceplate fin. 20

Mito Panic

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.




ELECTRIC LOCK

- Latch only

OPERATION:

- From inside: by handle or panic exit device (panic function)
- From outside: by electrically operated handle and/or key

72	24	65	0,980	1	1	13110 65 0
----	----	----	-------	---	---	-------------------




ELECTRIC LOCK

- Latch only

OPERATION:

- For inward opening panic doors

72	24	65	0,980	1	1	13160 65 1
72	24	65	0,980	1	1	13160 65 2




"FAIL SAFE" FUNCTION ELECTRIC LOCK

- Latch only

OPERATION:

- From inside: by handle or panic exit device (panic function)
- From outside: the key activates or deactivates the handle and withdraws the latchbolt. The live coil keeps the handle disabled and only enables it if power supply is off.

72	24	65	0,980	1	1	13210 65 0
----	----	----	-------	---	---	-------------------



"FAIL SAFE" FUNCTION ELECTRIC LOCKS




- Latch only

OPERATION:


- For inward opening panic doors
- From outside: the key activates or deactivates the handle and withdraws the latchbolt. The live coil keeps the handle disabled and only enables it if power supply is off.

72	24	65	0,980	1	1	13260 65 1
72	24	65	0,980	1	1	13260 65 2

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.
	<p>MECHANICAL LOCK</p> <ul style="list-style-type: none"> Latch only Stainless steel faceplate fin. 20 <p>OPERATION:</p> <ul style="list-style-type: none"> From inside: by panic exit device and/or key From outside: the key activates and deactivates the handle and withdraws the latchbolt; the handle withdraws the latchbolt only if it is enabled by the key 	72	24	65	0,848	6	1	43110	65	0	
	<p>MECHANICAL LOCK</p> <ul style="list-style-type: none"> Latch only Pre-set for additional locking points <p>ON REQUEST:</p> <ul style="list-style-type: none"> Zinc-plated steel extension bolts item 1.07091.50.0 Set of zinc-plated steel side latchbolts item 1.07090.50.0 <p>OPERATION:</p> <ul style="list-style-type: none"> From inside: by panic exit device and/or key From outside: the key activates and deactivates the handle and withdraws the latchbolt; the handle withdraws the latchbolt only if it is enabled by the key 	72	24	65	0,850	6	1	43114	65	0	
	<p>MECHANICAL LOCK</p> <ul style="list-style-type: none"> Latches only 3 locking points <p>OPERATION:</p> <ul style="list-style-type: none"> From inside: by panic exit device and/or key From outside: the key activates and deactivates the handle and withdraws the latchbolts The handle withdraws the latchbolts only if it is enabled by the key. 	72	24	65	1,750	6	1	43115	65	0	
	<p>MECHANICAL LOCK</p> <ul style="list-style-type: none"> Deadbolt and latchbolt 1 15-mm throw. <p>OPERATION:</p> <ul style="list-style-type: none"> From inside: by panic exit device and/or key From outside: the key withdraws the latchbolt and the deadbolt 	1	72	24	65	0,853	6	1	43120	65	0


Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.
	<p>MECHANICAL LOCK</p> <ul style="list-style-type: none"> • Deadbolt and latchbolt • 1 15-mm throw. <p>OPERATION:</p> <ul style="list-style-type: none"> • From inside: by panic exit device and/or key • From outside: the key withdraws the latchbolt and the deadbolt, the handle withdraws the latchbolt 	1	72	24	65	0,876	6	1	43130	65	0
	<p>MECHANICAL LOCK</p> <ul style="list-style-type: none"> • Latch only • Stainless steel faceplate fin. 20 <p>OPERATION:</p> <ul style="list-style-type: none"> • For inward opening panic doors 	72	24	65	0,750	6	1	43160	65	1	
		72	24	65	0,845	6	1	43160	65	2	
	<p>FOR SECONDARY LEAF OF DOUBLE DOORS</p> <ul style="list-style-type: none"> • Latch only lock item 1.43110.65.0 or 1.43115.65.0 installed on main leaf • Rod forward stroke 17 mm <p>OPERATION:</p> <ul style="list-style-type: none"> • From inside: panic exit device <p>ON REQUEST:</p> <ul style="list-style-type: none"> • Extension bolts item 1.07088.03.0 • Automatic dogging device item 1.07089.50. 	1	24	65	0,858	1	1	43190	65	0	
		1	24	95	1,150	1	1	43190	95	0	
	<p>FOR SECONDARY LEAF OF DOUBLE DOORS</p> <ul style="list-style-type: none"> • Latch only lock item 1.43110.65.0 or 1.43115.65.0 installed on main leaf • Rod forward stroke 17 mm • Double follower for non-handed doors <p>OPERATION:</p> <ul style="list-style-type: none"> • From inside: panic exit device <p>ON REQUEST:</p> <ul style="list-style-type: none"> • Inside bolt extension rods with screw item 1.07088.03.0 • Automatic dogging device item 1.07089.50.0 	1	24	65	0,858	1	1	43191	65	0	
		1	24	95	1,000	1	1	43191	95	0	

Type	Description	For series/item	 Unit weight  Pieces	ITEM			
				Type	Dim.	Hand	Fin.



• Set of zinc plated side latches

43024, 43114 0,900 24 1 07090 50 0

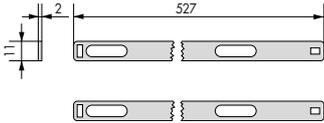

• Set of zinc plated rods

1 07090 50 0 0,230 24 1 07091 50 0



Technical features:

- Zinc-plated steel faceplate
- Zinc-plated steel case
- Nickel-plated reversible steel latch with anti-picking device
- Single throw (15 mm.) nickel-plated deadbolt
- 9 mm. through follower

Supplied as standard:

- Instruction sheet

Hand:
0 = Non-handed

Cylinder to be ordered separately



Sicur

Type	Description	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM						
							Type	Dim. Hand	Fin.	Pers. Spec.			
 <ul style="list-style-type: none"> • Deadbolt and latch • OPERATION: Outside and inside: latch and deadbolt operated by key; latch withdrawn by handle 		1	92	24	25	0,680	1	1	43520	25	0		
		1	92	24	30	0,720	1	1	43520	30	0		
		1	92	24	35	0,762	1	1	43520	35	0		
		1	92	24	40	0,805	1	1	43520	40	0		
		1	92	24	45	1,000	1	1	43520	45	0		
<ul style="list-style-type: none"> • Deadbolt and latch • OPERATION: Outside and inside: the key operates the deadbolt and activates or disactivates the handle for latch operation 		1	92	24	35	0,775	1	1	43530	35	0		
		1	92	24	40	0,805	1	1	43530	40	0		



Technical features:

- Zinc-plated steel faceplate
- Zinc-plated steel case
- Nickel-plated reversible steel latch
- Single throw (15 mm.) nickel-plated deadbolt
- 9 mm. split follower
- Can be combined with the panic exit devices series 59600 and 59711.10/11.0.00.00.FE

Hand:

0 = Non-handed

Cylinder to be ordered separately




Supplied as standard:

- Instruction sheet

Sicur Panic

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- FOR SINGLE LEAF DOORS
- Dead-locking latch and deadbolt
- A TYPE OPERATION
- Inside:
 - Panic exit device for opening
 - Key for closing with deadbolt
- Outside:
 - Key for activating latch and deadbolt

1	92	24	25	0,610	1	1	43620	25	0		
1	92	24	30	0,655	1	1	43620	30	0		
1	92	24	35	0,800	1	1	43620	35	0		
1	92	24	40	0,730	1	1	43620	40	0		
1	92	24	45	0,780	1	1	43620	45	0		

- B TYPE OPERATION
- Inside:
 - Panic exit device for opening
 - Key for closing with deadbolt and activating or disactivating external handle for latch operation
- Outside:
 - Key for closing with deadbolt and activating or disactivating external handle for latch operation

1	92	24	25	0,610	1	1	43630	25	0		
1	92	24	30	0,655	1	1	43630	30	0		
1	92	24	35	0,690	1	1	43630	35	0		
1	92	24	40	0,730	1	1	43630	40	0		
1	92	24	45	0,780	1	1	43630	45	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> • FOR DOUBLE DOORS • Panic lock series 43690 to be installed on secondary leaf • deadbolt and latch • A TYPE OPERATION • Inside: <ul style="list-style-type: none"> Panic exit device for opening Key for closing with deadbolt • Outside: <ul style="list-style-type: none"> Key for activating latch and deadbolt 	1	92	24	25	0,560	1	1	43650	25	0
		1	92	24	30	0,610	1	1	43650	30	0
		1	92	24	35	0,725	1	1	43650	35	0
		1	92	24	40	0,770	1	1	43650	40	0
		1	92	24	45	0,710	1	1	43650	45	0
	<ul style="list-style-type: none"> • B TYPE OPERATION • Inside: <ul style="list-style-type: none"> Panic exit device for opening Key for closing with deadbolt and activating or disactivating external handle for latch operation • Outside: <ul style="list-style-type: none"> Key for closing with deadbolt and activating or disactivating external handle for latch operation 	1	92	24	25	0,640	1	1	43660	25	0
		1	92	24	30	0,610	1	1	43660	30	0
		1	92	24	35	0,725	1	1	43660	35	0
		1	92	24	40	0,760	1	1	43660	40	0
		1	92	24	45	0,710	1	1	43660	45	0
	<ul style="list-style-type: none"> • C TYPE OPERATION • Replacing series 43631 • Inside: <ul style="list-style-type: none"> Panic exit device for opening Key for closing with deadbolt and activating external handle for latch operation • Outside: <ul style="list-style-type: none"> Key for closing with deadbolt and activating external handle for latch operation 	1	92	24	25	0,560	1	1	43661	25	0
		1	92	24	30	0,610	1	1	43661	30	0
		1	92	24	35	0,640	1	1	43661	35	0
	1	92	24	40	0,670	1	1	43661	40	0	
	1	92	24	45	0,710	1	1	43661	45	0	
<ul style="list-style-type: none"> • D TYPE OPERATION • Replacing series 43632 • Inside: <ul style="list-style-type: none"> Panic exit device for opening Key for closing with deadbolt • Outside: <ul style="list-style-type: none"> Key for closing with deadbolt. The handle, with deadbolt withdrawn, is activated for latch operation 	1	92	24	25	0,560	1	1	43662	25	0	
	1	92	24	30	0,610	1	1	43662	30	0	
	1	92	24	35	0,715	1	1	43662	35	0	
	1	92	24	40	0,760	1	1	43662	40	0	
	1	92	24	45	0,710	1	1	43662	45	0	
	<ul style="list-style-type: none"> • FOR SECONDARY LEAF OF A DOUBLE DOOR • Panic lock series 43650, 43660, 43661, 43662 to be installed on secondary leaf • OPERATION: • Inside:panic exit device • ON REQUEST: <ul style="list-style-type: none"> extension bolts item 1.07088.03.0 Automatic dogging device item 1.07089.50.0 Top striker item 1.06141.80.0 	28	30			0,795	1	1	43690	30	0
		28	40			0,865	1	1	43690	40	0
		28	60			1,020	1	1	43690	60	0
		28	75			1,100	1	1	43690	75	0



Technical features:

- Black painted aluminium casings or black nylon
- Internal, zinc-plated steel components, suitable for fire doors

Supplied as standard:

- Fixing screws
- Instruction sheet for assembly and maintenance
- CE and ICIM certification

Finish:

- ON REQUEST: 59615-59646 series
Painted gray (fin. 97)


Standards:

- CE mark in compliance with the DIRECTIVE 89/106/CEE issued by AENOR.
- Voluntary ICIM certification issued by third party as provided for in the UNI EN 1125 standard

Hand:

0 = Non-handed

Bar to be ordered separately



Type	Description	Spindle hole	Centre Distance	Unit weight 	Pieces 	ITEM			
						Type	Dim.	Hand	Fin.




- Black nylon casing
- May be combined with mortice locks series 43100, 43600
- pre-set for single cylinder

9 72 1,400 1 1 59616 00 0



- Black nylon casing
- May be combined with mortice locks series 43100
- pre-set for double cylinder

9 72 1,350 1 1 59616 10 0

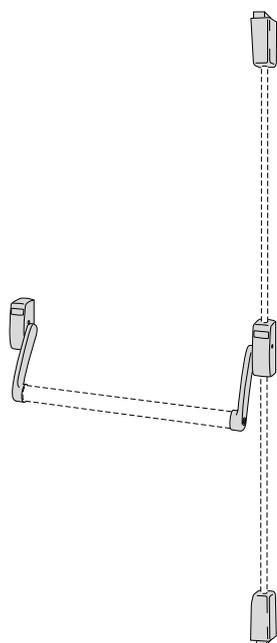

- Black nylon cover
- FOR THE SECONDARY LEAF OF A DOUBLE DOOR, where it is not possible to assemble the safety lock
- On the main door it is possible to install the panic exit devices series 59616 together with the locks series 43110 and 43114
- SUPPLIED AS STANDARD:
Striker item 1.07072.11.0
Floor striker item 1.07003.11.0
- TO BE ORDERED SEPARATELY
Pair of extension bolts item 1.07081.12.0

- 2,050 1 1 59647 00 0



FAST Touch

Technical features:

- Painted aluminum alloy/aluminum cover
- Painted steel bar, adjustable in length down to 300 mm on all models
- Galvanized steel internal components suitable for fire doors

Supplied as standard:

- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- Internal and external plates
- Version with microswitch (spec. LA)
- Fire door version (FR spec.).

Standards:

- Cover: black bar: red




• ON REQUEST

- (only item 1.59711-00/10-0):
- Cover: red bar: black (fin. 41)
- Cover: yellow bar: black (fin. 42)
- Cover: green bar: black (fin. 43)
- Cover: black bar: black (fin. 44)
- Cover: white bar: white (fin. 45)
- Cover: gray bar: gray (fin. 97)
- Carter and bar painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2)

Standards:

- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

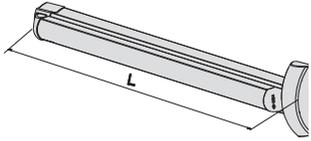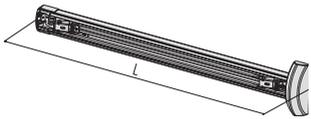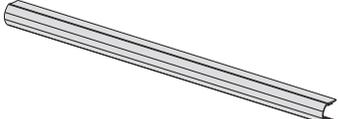Type	Description	Spindle hole	L	Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers. Spec.
 <ul style="list-style-type: none"> • Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830 and 43100 (spec. FR) • satin-finished PVD-treated stainless steel • Can be combined with panic function locks series Exitlock and Sicur Panic • satin-finished PVD-treated stainless steel 	8/9 1200 3,366 1	1 59711 00 0								
	8/9 840 2,592 1	1 59711 01 0								
	8/9 1200 3,366 1	1 59711 00 0 C2								
	8/9 1200 3,360 1	1 59711 10 0								
	8/9 840 2,592 1	1 59711 11 0								
	8/9 1200 3,366 1	1 59711 10 0 C2								
 <ul style="list-style-type: none"> • SUPPLIED WITHOUT PUSH BAR VERSION • Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830 and 43100 (spec. FR) • Can be combined with panic function locks series Exitlock and Sicur Panic 	8/9 1200 2,366 1	1 59711 00 0 00 SB								
	8/9 1200 2,360 1	1 59711 10 0 00 SB								
 <ul style="list-style-type: none"> • Bar • May be combined with panic exit devices series 1.59711.00.0.00.SB - 1.59711.10.0.00.SB • STANDARD FINISHES painted red • BAR COLOR OPTIONS: satin-finished anodised aluminium (fin. 62) Anodised bronze (fin. 64) Brass-plated (fin. A1) Matt black (fin. 00) Red (fin. 41) Yellow (fin. 42) Green (fin. 43) White (fin. 45) Grey (fin. 97) 	1,000 1	1 06196 43 0								



FAST Push

Technical features:

- Painted aluminum alloy/aluminum cover (59607 series)
- Galvanized steel internal components suitable for fire doors

Supplied as standard:

- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- Internal and external plates
- Version with microswitch
- Fire door version (FR spec.).

Finishes:

- STANDARD:
 - Painted black
- ON REQUEST:
 - Version 59607**
 - Painted red (fin. 41)
 - Painted yellow (fin. 42)
 - Painted green (fin. 43)
 - Painted white (fin. 45)
 - Painted gray (fin. 97)
 - PVD treatment: satin-finished stainless steel (fin. C2)
 - Painted steel grey (fin. B9)
 - Version 59617.00/12**
 - Painted white (fin. 45)
 - Painted gray (fin. 97)



Standards:

- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

Bar to be ordered separately

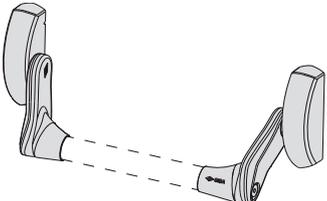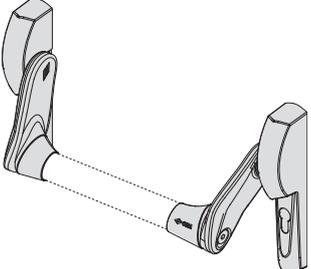

Type	Description	Spindle hole	L	Unit weight	Pieces	ITEM			
						Type	Dim.	Hand	Fin.
 <ul style="list-style-type: none"> • Can be combined with panic function locks • satin-finished PVD-treated stainless steel 	8/9	1,900	1	1	59607	10	0		
	8/9	1,650	1	1	59607	10	0	C2	
 <ul style="list-style-type: none"> • Black nylon casing • Can be combined with panic function locks 	8/9	72	1,350	1	1	59617	00	0	
	8/9	92	1,350	1	1	59617	12	0	

N.B. To install a bar on a double-leaf door, use the 59016+07063.61 series (PERS. FR.)



Technical features:

- Steel case cover, painted black

Supplied as standard:

- Fixing screws
- Instruction sheet
- ICIM and CE Certification

Finishes:

- **STANDARD:**
 - painted black
- **ON REQUEST:**
 - painted red (fin. 41)
 - painted yellow (fin. 42)
 - painted green (fin. 43)
 - painted white (fin. 45)
 - painted grey (fin. 97)

Standards:

- CE mark in compliance with the DIRECTIVE 89/106/CEE issued by AENOR.
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard

Hand:


0 = Non-handed

Bar to be ordered separately



series 07007

CISA Prestige

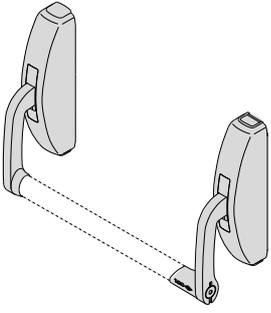Type	Description	Kg	Box	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	 <ul style="list-style-type: none"> • May be combined with panic function mortice locks series 43100, 43200, 43600 and heavy duty mortice locks series 52760, 52761, 52840, 52842, 52844, 52860, 52862, 52864 (see locks for wooden doors) • For assembly with fire resistant locks specify Spec. FR in your order • Use inside plates item 1.07076.65.0 and 1.07066.66.0 to mount the panic exit device with matching lock 	2,500	1	1	59321	10	0	



Technical features:

- Stainless steel case cover

Hand:

0 = Non-handed

Supplied as standard:

- Fixing screws
- Instruction sheet
- ICIM and CE Certification

Bar to be ordered separately




Standards:

- CE mark in compliance with the DIRECTIVE 89/106/CEE issued by AENOR.
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard



CISA Prestige

Type	Description	Unit weight 	Pieces 	ITEM			
				Type	Dim. Hand	Fin.	Pers. Spec.

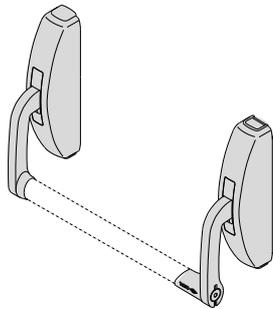

- May be combined with panic function mortice locks series 43100, 43200, 43600 and heavy duty mortice locks series 52760, 52761, 52840, 52842, 52844, 52860, 52862, 52864 (see locks for wooden doors)
- For assembly with fire resistant locks specify Spec. FR in your order
- For use inside plates item 1.07076.65.0 and 1.07066.66.0 to mount the panic exit device with matching lock

2,650 1 1 59371 10 0



Technical features:

- Non-handed handle.
- Idle handle under no power input conditions.
- Key operated mechanical emergency system: the key will operate the handle.
By removing the key the handle will be deactivated.
- Wiring system with connector for complete connection insulation.
- LED integral with handle body for door status visual indication.
- Nickel-plated steel case.
- Painted aluminum alloy cover.
- Electric hold-open device available.
- Power input through supplied Booster device.
- Rated voltage 12/24 V ac/dc.
- Operating voltage min. 5 V, max 28 V.

Supplied as standard:

- 8/9 mm square spindle.

On request:

- European profile cylinder.
- Timer item 1.07022.20.0.


Finishes:

- Black painted (RAL 9005).
- Grey painted (RAL 9006).

Hand:

0 = Non-handed

Type	Description	Facaplate	Unit weight 	Pieces 	ITEM				
					Type	Dim.	Hand	Fin.	Pers.

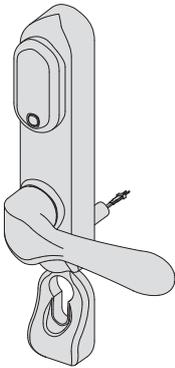


- Electrically enabled handle
- Can be installed with locks series 43100
- Handle to cylinder distance 72 mm
- **STANDARD SUPPLY:**
Connecting cable
fixing screws
- **ON REQUEST:**
Timer device 07022.20.0

1,150 1 1 07074 70 0

- Electrically enabled handle (A function only)
- Can be installed with locks series 43225, 43250, 43650, 43670, 43725, 43825
- Handle to cylinder distance 92 mm
- **STANDARD SUPPLY:**
Connecting cable
Fixing screws
- **ON REQUEST:**
Timer device 07022.20.0


1,150 1 1 07074 71 0



- Multiple scale timer


0,100 1 1 07022 20 0

Type	Description	L	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.









- Red painted steel oval shaped bar
- AVAILABLE FINISHES (extra price):
 - yellow painted (fin. 42)
 - green painted (fin. 43)
 - black painted (fin. 44)
 - white painted (fin. 45)
 - grey painted (fin. 97)
 - painted steel grey (fin. B9) (Only versions .13 and .14)

900	0,800	1	1 07007 13 0				
1200	1,054	1	1 07007 14 0				
1500	1,440	1	1 07007 15 0				




- Stainless steel oval shaped horizontal bar

900	0,800	1	1 07007 60 0				
1200	1,070	1	1 07007 61 0				
1500	1,400	1	1 07007 62 0				

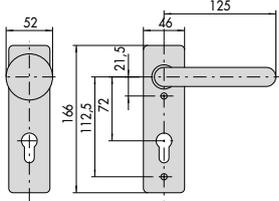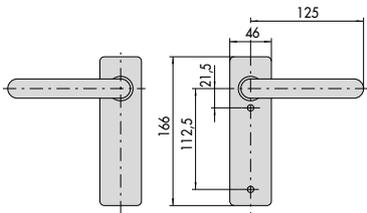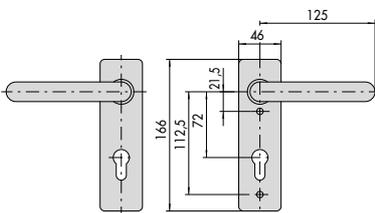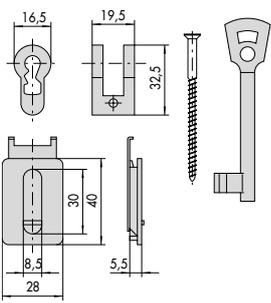
Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Set of plates with cylinder hole 	43000, 43020	0,200	6	1	07070	12	0
	<ul style="list-style-type: none"> • Set of plates with fixed handle knob and cylinder hole 	43000, 43020, 43025	0,600	6	1	07070	14	0
	<ul style="list-style-type: none"> • Set of plates with handles 	43000, 43020, 43025	0,410	6	1	07070	15	0
	<ul style="list-style-type: none"> • Set of plates with handles and cylinder hole 	43000, 43020, 43025	0,626	6	1	07070	16	0
	<ul style="list-style-type: none"> • Cylinder adaptor for bit keys (patent type) • SUPPLIED AS STANDARD: Bitted key Fixing screws 2 nylon escutcheons with plug, to be combined with handles series 1.07070.12/14/16 	43000, 43020, 43025	0,066	6	1	07071	10	0
	<ul style="list-style-type: none"> • Galvanized steel striker 	43000, 43100	0,150	20	1	07073	20	0

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.




- Galvanized steel striker

43000, 43100 0,117 20 1 07073 21 0




- Outside plate for reinforced assembly
- To be combined with panic exit devices series 59600 and 59710 with distance 72 mm

43110, 43115, 43120, 43130 0,204 6 1 07076 11 0




- Outside plate with fixed knob
- To be combined with panic exit devices series 59600 and 59710 with distance 72 mm

43110, 43115, 43120, 43130 0,160 6 1 07076 13 0




- Outside plate with fixed knob and cylinder hole
- To be combined with panic exit devices series 59600 and 59710 with distance 72 mm

43110, 43115, 43120, 43130 0,264 6 1 07076 14 0



- Outside plate with handle
- To be combined with panic exit devices series 59600 and 59710 with distance 72 mm

43110, 43115, 43120, 43130 0,250 6 1 07076 15 0



- Outside plate with handle and cylinder hole
- To be combined with panic exit devices series 59600 and 59710 with distance 72 mm


43110, 43115, 43120, 43130 0,400 6 1 07076 16 0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Black painted inside plate • Can be installed with panic exit devices • To be combined with European profile cylinder protective roses on armoured doors • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) 		0,106	6	1	07076	70	0	
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 		0,106	6	1	07076	70	0	C2
	<ul style="list-style-type: none"> • Black painted inside plate • Can be installed with mortice version panic exit devices • To be combined with European profile cylinder protective roses on armoured doors • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) 		0,106	6	1	07076	71	0	
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 		0,106	6	1	07076	71	0	C2
	<ul style="list-style-type: none"> • Black painted steel extension bolts • For use with: Panic exit devices series 59647 	1 07063 00 0, 1 07063 10 1, 1 07063 10 2	1,130	1	1	07081	12	0	
	<ul style="list-style-type: none"> • Black painted inside plate • May be assembly with locks 72 mm centre distance 	59321, 59371	0,100	1	1	07076	65	0	

Type	Description	For series/item	Unit weight Pieces	ITEM		
				Type	Dim.	Hand
	<ul style="list-style-type: none"> • Black painted inside plate • May be assembly with locks 92 mm centre distance 	59321, 59371	0,250	1	1	07076 66 0
	<ul style="list-style-type: none"> • Steel split spindle 		0,060	6	1	07083 50 0
	<ul style="list-style-type: none"> • Steel split spindle 		0,060	6	1	07083 51 0
	<ul style="list-style-type: none"> • Steel split spindle 		0,060	6	1	07083 52 0
	<ul style="list-style-type: none"> • Steel split spindle 		0,060	6	1	07083 53 0
	<ul style="list-style-type: none"> • Steel spindle 		0,030	6	1	07083 70 0
	<ul style="list-style-type: none"> • Steel spindle 		0,038	1	1	07085 75 0
	<ul style="list-style-type: none"> • Steel spindle 		0,060	1	1	07085 76 0
	<ul style="list-style-type: none"> • Automatic dogging device, steel 	43090, 43190, 43690	0,050	3	1	07089 50 0


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Zinc plated extension bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2) 	16325, 17358, 46300, 46302, 46305, 46307, 46320, 46322, 46325, 46327, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336, 57358, 57378	0,600	12	1	07088	03	0	
	<ul style="list-style-type: none"> • Open door indicator 	07074	0,005	1	1	07126	01	0	
	<ul style="list-style-type: none"> • 3 mm metal spacer for use with FAST TOUCH panic exit devices, mortice version 		0,200	1	1	07126	51	0	
	<ul style="list-style-type: none"> • Black painted outside plate • Can be installed with Fast Touch panic exit devices series 59711 • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) L=72 (dim. 61) L=85 (dim. 62) L=92 (dim. 63) 		0,110	6	1	07176	61	0	
			0,110	6	1	07176	62	0	
			0,110	6	1	07176	63	0	
			0,110	6	1	07176	61	0	C2
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 		0,110	6	1	07176	61	0	
			0,110	6	1	07176	62	0	
			0,110	6	1	07176	63	0	
			0,110	6	1	07176	61	0	C2
	<ul style="list-style-type: none"> • Black painted outside plate • Can be installed with Fast Touch panic exit devices series 59711 • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) 		0,110	6	1	07176	66	0	
			0,110	6	1	07176	66	0	C2

Type	Description	For series/item	 Unit weight	 Pieces	ITEM			
					Type	Dim.	Hand	Fin.




- Booster module:
- Voltage adaptor for voltages other than 12 V AC
24 V AC - 24 V DC and absorption reduction


13000, 13100,	0,850	1	1 07022 00 0
13200, 13210			

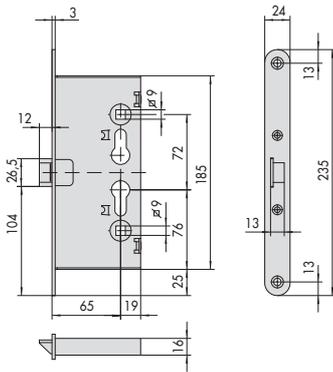

1.13100.65, 1.13110.65, 1.13160.65,
1.13200.65, 1.13210.65, 1.13260.65,
1.43000.65, 1.43014.65,
1.43110.65, 1.43114.65, 1.43160.65

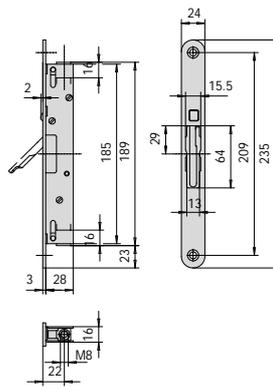

1.43091.00.0

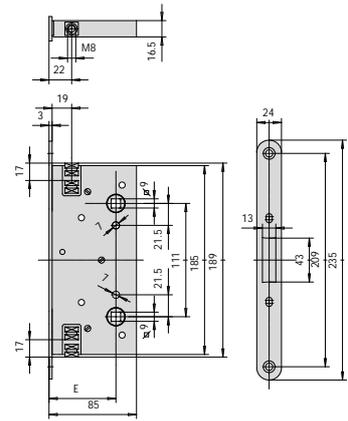


43191
E = 65 - 95


1

4


7

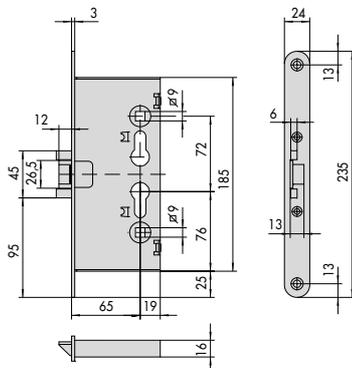

1.43020.65, 1.43024.65, 1.43120.65, 1.43130.65,

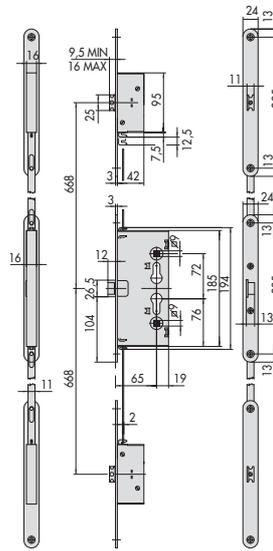

1.43015.65, 1.43115.65

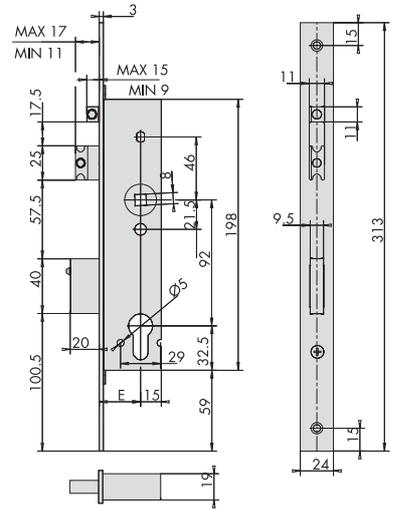


43225, 43235, 43236
E = 30-35-40-45


2

5

8

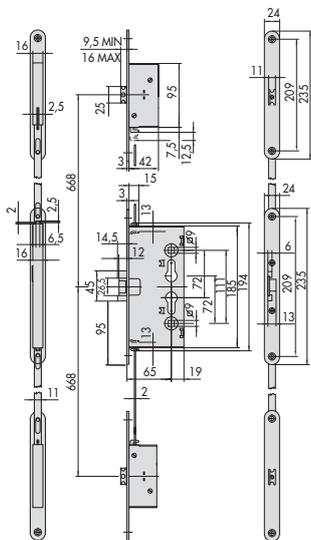



1.43025.65

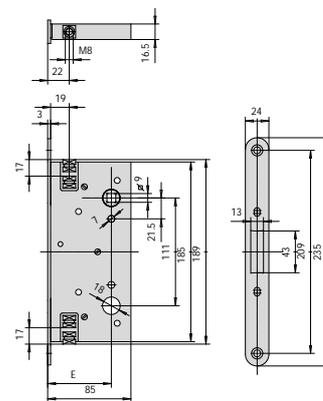


43190
E = 65 - 95

3


6

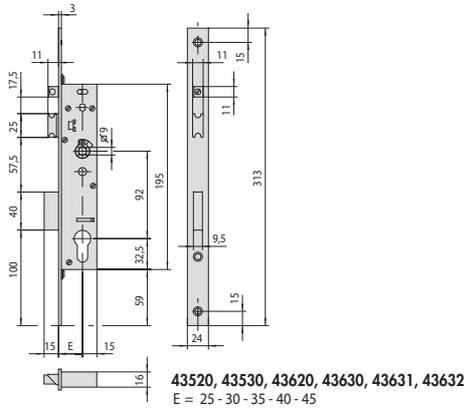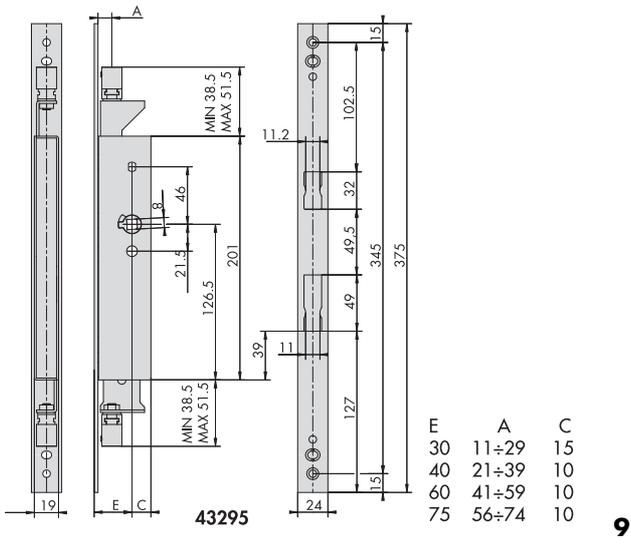


10

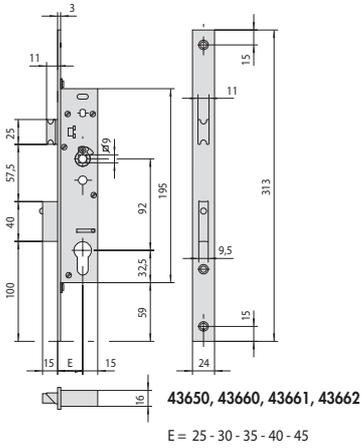


11

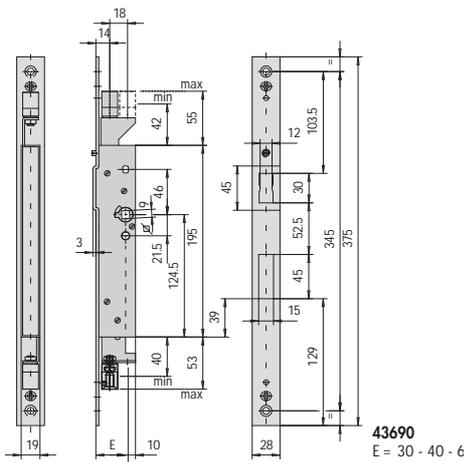

12

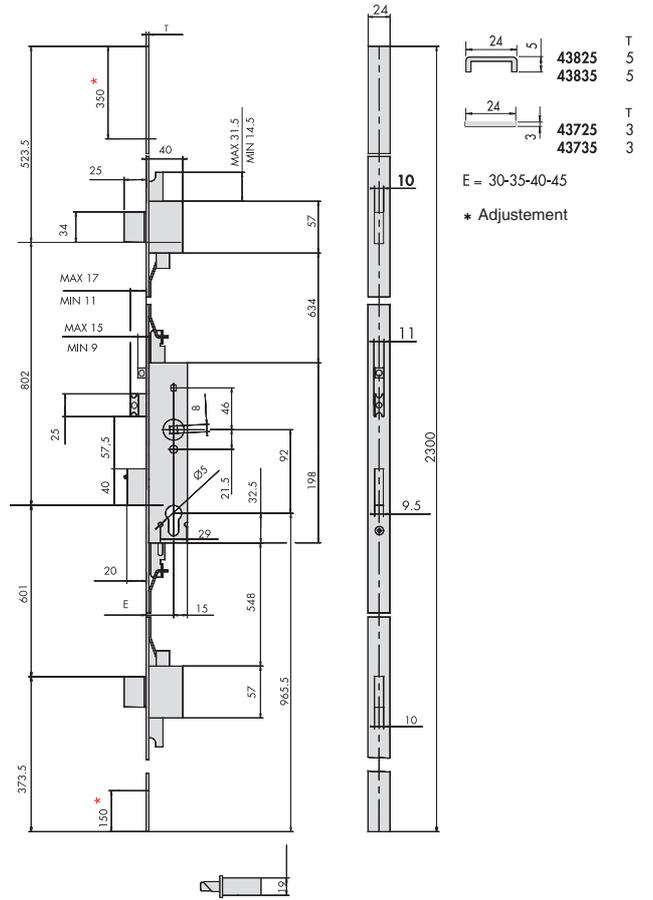

13

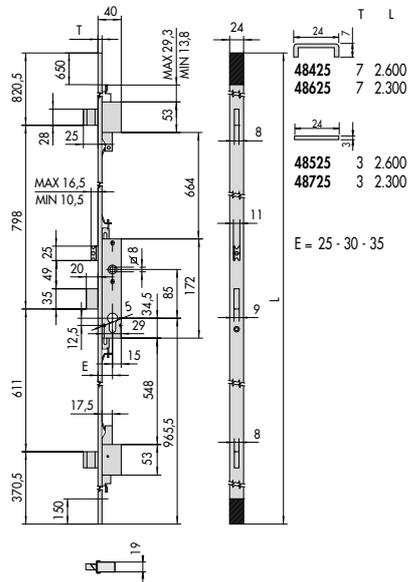

14



Locks and panic exit devices



Panic exit devices, rim version	464	Panic exit devices, mortice version	493
Cisa eFASTpanic exit devices	465	Sikurexit system instructions	494
CISA FAST TOUCH series panic exit devices	466	Panic function mortice locks with split follower	506
CISA FAST PUSH series panic exit devices	468	Sikurexit system certified products itemized list	507
CISA FAST PUSH-PAD series panic exit devices	469	Sikurexit series panic function mortice locks	508
Kit for additional locking points for Cisa FAST panic exit devices	470	Adjustable metal strikers	512
CISA Prestige series panic exit devices	473	Panic function cylinder mortice locks	514
CISA Prestige inox series panic exit devices	474	Exitlock panic function rim locks	515
Kits for additional locking points for CISA Prestige panic exit devices	475	exitlock panic function MORTICE locks	516
Kits for additional locking points for CISA Prestige inox panic exit devices	477	Heavy Duty cylinder mortice locks	517
Horizontal bars for panic exit devices	479	Cylinder mortice locks	519
Outside operation devices for panic exit devices FAST and Prestige	480	Cisa FAST TOUCH series panic exit devices for panic function mortice locks	520
Electric handles	482	Cisa FAST PUSH series panic exit devices for panic function mortice locks	521
Electric strikers for panic exit devices	483	Electric handles	522
Kit glass for assembling panic exit devices on glazed doors ..	484	Accessories for panic exit devices	523
Cisa Polaris	486	Dimensional drawings	527
Accessories for panic exit devices	487	Installation of panic exit devices for single doors	531
		Installation of panic exit devices for double doors	532





eFAST

**SOLUTIONS FOR
EMERGENCY EXITS**

CISA POLARIS



The system with LED lights which can be installed on FAST Touch and eFAST panic exit devices.

Finding an emergency exit when visibility is low (if power fails or there is smoke) becomes easy.






eFAST

- Technical features:**
- Aluminium/aluminium alloy cover
 - Extruded aluminium bar, adjustable in length down to 600 mm for all versions
- Operation:**
- Latchbolt is withdrawn by motor allowing the door to be opened.
 - Timed latch withdrawal from 3 to 30 seconds: By pushing the bar the latchbolt is withdrawn allowing the door to be opened.
- Supplied as standard:**
- Special strikes
 - Fixing screws
 - Certificates of compliance
 - Installation and maintenance instructions

- On request:**
- Outside access devices
 - Extension bolts
 - Fire door version with steel latchbolt (Spec. FR)
- Finishes:**
- STANDARD: Cover: black bar: red
 - ON REQUEST (only item 1.59811-10-0): Cover: gray bar: gray (fin. 97) Carter and bar painted steel grey (fin. B9) PVD treatment: satin-finished stainless steel (fin. C2)


- Standards:**
- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
 - Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Type	Description	For series/item	Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.

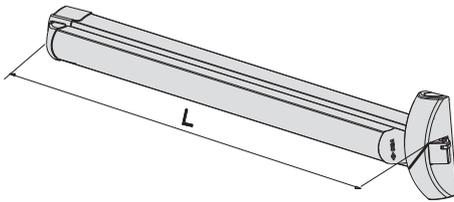


- Motorised modular panic exit device
- Supplied as standard
- strikes item 1.07071.20.0
- ON REQUEST
- Strike item 1.07072.21.0
- Outside access devices item 1.07078.36/38/68/69
- Only use outside access device item 1.07078.35.0 if the panic exit device is set to operate with one side locking point

1300	5,000	1	1 59851 09 0
1200	4,000	1	1 59851 10 0
840	3,500	1	1 59851 11 0

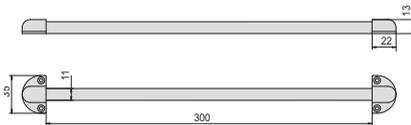


- Outside escutcheon with spring

0,100	10	1 06515 20 0
-------	----	--------------

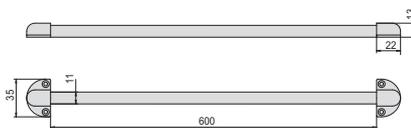

- Outside escutcheon with spring

0,100	10	1 06515 21 0
-------	----	--------------



- Keypad
- Glossy black
- satin-finished nickel-plated chrome (fin. B1)

0,500	1	1 06525 77 0
0,500	1	1 06525 77 0 B1



Technical features:

- Painted aluminum alloy/aluminum cover
- Painted steel bar, adjustable in length down to 300 mm on all models
- Chrome aluminum alloy self-locking latchbolt

Supplied as standard:

- Special strikers
- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- External drives
- Extension bolts
- Version with microswitch (spec. LA)
- Version with hold open device (spec FG).
- Fire door version with steel latchbolt (FR spec.).

Finishes:

- STANDARD: Cover: black bar: red

ON REQUEST (only item 1.59811-10-0):

- Cover: red bar: black (fin. 41)
- Cover: yellow bar: black (fin. 42)
- Cover: green bar: black (fin. 43)
- Cover: black bar: black (fin. 44)
- Cover: white bar: white (fin. 45)
- Cover: gray bar: gray (fin. 97)
- Carter and bar painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2)



Standards:

- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125


Hand:

0 = Non-handed

FAST Touch

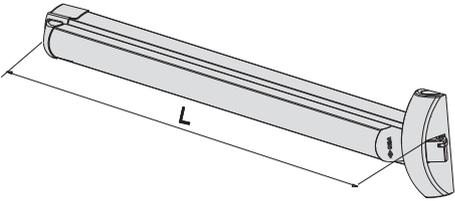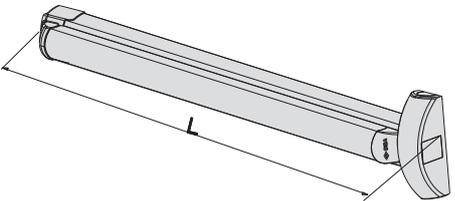
Type	Description	L	Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Dead-locking lateral latch bolt	1200	3,700	1	1	59801	10	0	
	• SUPPLIED AS STANDARD: Striker item 1.07072.20.0	840	2,684	1	1	59801	11	0	
	• ON REQUEST: Striker item 1.07072.21.0 outside operation devices item 1.07078.35/36/38/68/69								
	• MODULAR VERSION	1300	3,760	1	1	59811	09	0	
	• Dead-locking lateral latch bolt with override option	1200	3,472	1	1	59811	10	0	
	• Can be combined with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom deadbolts item 1.07063.71.0	840	3,000	1	1	59811	11	0	
<ul style="list-style-type: none"> • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.36/38/68/69 									
	• satin-finished PVD-treated stainless steel	1200	3,472	1	1	59811	10	0	C2
		840	2,684	1	1	59811	11	0	C2

Type	Description	L	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.

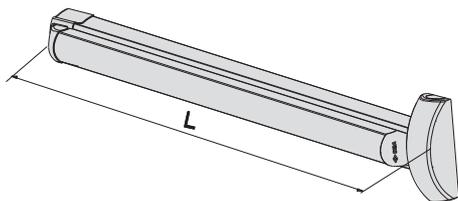


- MODULAR VERSION WITHOUT CENTRAL latch bolt
- Can be used with:
 - Pair of top/bottom latch bolts item 1.07063.61.0
 - Pair of lateral latch bolts item 1.07063.51.0
 - Pair of top/lateral latch bolts item 1.07063.66.1/2
 - Pair of top/bottom deadbolts item 1.07063.71.0
- ON REQUEST:
 - Striker item 1.07072.21.0
 - Outside operation devices item 1.07078.36/38/68/69

1200	3,500	1	1 59816 10 0
840	3,000	1	1 59816 11 0

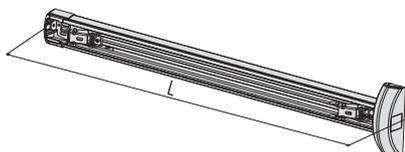

- MODULAR VERSION WITHOUT BAR
- Can be used with:
 - Pair of top/bottom latch bolts item 1.07063.61.0
 - Pair of lateral latch bolts item 1.07063.51.0
 - Pair of top/lateral latch bolts item 1.07063.66.1/2
 - Pair of top/bottom deadbolts item 1.07063.71.0
- ON REQUEST:
 - Striker item 1.07072.21.0
 - Outside operation devices item 1.07078.36/38/68/69

1200	2,472	1	1 59811 10 0 00 SB
------	-------	---	--------------------

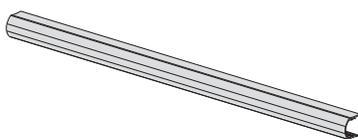

- Bar
- May be combined with panic exit devices series 1.59811.10.0.00.00.SB
- BAR COLOR OPTIONS:
 - satin-finished anodised aluminium (fin. 62)
 - Anodised bronze (fin. 64)
 - Brass-plated (fin. A1)
 - Red (fin. 41)
 - Yellow (fin. 42)
 - Green (fin. 43)
 - White (fin. 45)
 - Grey (fin. 97)
 - Steel grey (B9)

1,000	1	1 06196 43 0
-------	---	--------------



FAST Push

Technical features:

- Painted aluminum alloy/aluminum cover
- Chrome aluminum alloy self-locking latchbolt.

Supplied as standard:

- Special strikers
- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- External drives
- Extension bolts
- Microswitch
- Hold open device
- Fire door version with steel latchbolt (FR spec.).

Finishes:

- STANDARD:
 - Painted black
- ON REQUEST (only item 1.59011.10.0):
 - Painted red (fin. 41)
 - Painted yellow (fin. 42)
 - Painted green (fin. 43)
 - Painted white (fin. 45)
 - Painted gray (fin. 97)
 - Painted steel grey (fin. B9)
 - PVD treatment: satin-finished stainless steel (fin. C2)


Standards:

- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed


Bar to be ordered separately
 series 07007

Type	Description	Kg	Box	ITEM				
				Type	Dim.	Hand	Fin.	Pers.

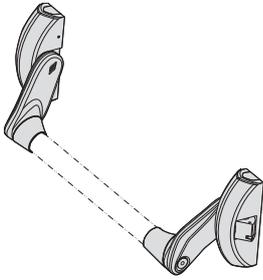

- Dead-locking lateral latch bolt
- SUPPLIED AS STANDARD:
Striker item 1.07072.20.0
- ON REQUEST:
Striker item 1.07072.21.0 outside operation devices
item 1.07078.35/36/38/68/69


2,150 1 1 59001 10 0

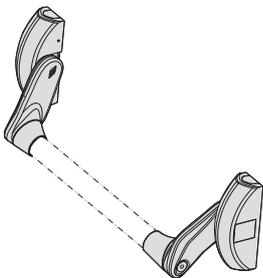

- MODULAR VERSION
- Dead-locking lateral latch bolt with override option
- SUPPLIED AS STANDARD:
Striker item 1.07072.20.0
- Can be combined with:
Pair of top/bottom latch bolts item 1.07063.61.0
Pair of lateral latch bolts item 1.07063.51.0
Pair of top/lateral latch bolts item 1.07063.66.1/2
Pair of top/bottom deadbolts item 1.07063.71.0
- ON REQUEST:
Striker item 1.07072.21.0
Outside operation devices item 1.07078.36/38/68/69
- satin-finished PVD-treated stainless steel

2,200 1 1 59011 10 0

2,266 1 1 59011 10 0 C2

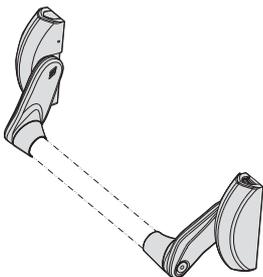

- MODULAR VERSION WITHOUT CENTRAL latch bolt
- Can be used with:
Pair of top/bottom latch bolts item 1.07063.61.0
Pair of lateral latch bolts item 1.07063.51.0
Pair of top/lateral latch bolts item 1.07063.66.1/2
Pair of top/bottom deadbolts item 1.07063.71.0
- ON REQUEST:
Striker item 1.07072.21.0
Outside operation devices item 1.07078.36/38/68/69

2,050 1 1 59016 10 0



FAST Push-pad

Technical features:

- Painted aluminum alloy/aluminum cover
- Chrome aluminum alloy latchbolt

Supplied as standard:

- Special strikers
- Fixing screws
- Installation and maintenance Instructions

On request:

- External drives
- Extension bolts
- Version with hold open device.
- Fire door version with steel latchbolts (FR spec.).

Finishes:

- STANDARD:
Painted black

• ON REQUEST (only item 1.59061.10.0):

- Painted red (fin. 41)
- Painted yellow (fin. 42)
- Painted green (fin. 43)
- Painted white (fin. 45)
- Painted gray (fin. 97)
- Carter and bar painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2) item 1.59061.10.0

Hand:

0 = Non-handed

Standards:

- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 179

Type	Description	Kg	Pieces	ITEM			
				Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> • Dead-locking lateral latch bolt • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • ON REQUEST: Striker item 1.07072.21.0 outside operation devices item 1.07078.35/36/38/68/69 	0,900	1	1	59051	10	0
	<ul style="list-style-type: none"> • MODULAR VERSION • Dead-locking lateral latch bolt with override option • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • Can be combined with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom deadbolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.36/38/68/69 	1,020	1	1	59061	10	0
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 	0,860	1	1	59061	10	0 C2
	<ul style="list-style-type: none"> • MODULAR VERSION WITHOUT CENTRAL latch bolt • Can be used with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom deadbolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.36/38/68/69 	0,860	1	1	59066	10	0







Technical features:

- Painted aluminum alloy/aluminum cover
- Chrome aluminum alloy latchbolt
- Can be combined with the panic exit devices series FAST

Supplied as standard:

- Special strikers
- Fixing screws
- Installation and maintenance Instructions

On request:

- Extension bolts
- Fire door version with steel latchbolts (FR spec.).

Finishes:


- STANDARD: Painted black
- ON REQUEST: Painted red (fin. 41)
Painted yellow (fin. 42)
Painted green (fin. 43)
Painted white (fin. 45)
Painted gray (fin. 97)
Satin-finished stainless steel treatment (fin. C2)

Standards:

- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

Type	Description	For series/item	Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.

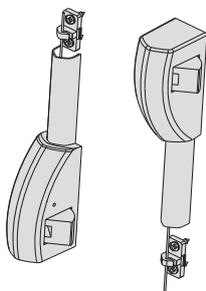

- Pair of latch bolts for lateral locking point
- SUPPLIED AS STANDARD:
 - strikers item 1.07072.20
 - 2 flexible cables
 - 2 cable covers
 - 2 connecting plates
 - 2 cable feedthrough hooks
- ON REQUEST
 - Striker item 1.07072.21.0


59011, 59016, 2,000 1
59061, 59065,
59811, 59816

1	07063	51	0		
---	-------	----	---	--	--

- satin-finished PVD-treated stainless steel

59011, 59016, 2,100 1
59061, 59065,
59811, 59816

1	07063	51	0	C2	
---	-------	----	---	----	--

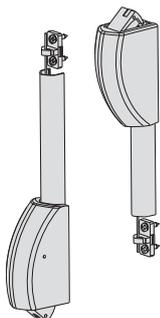

- Pair of dead-locking latch bolts for top/bottom locking points
- SUPPLIED AS STANDARD:
 - Top strikers item 1.07072.20.0
 - Floor striker item 1.07072.27.0
 - 2 flexible cables
 - 2 cable covers
 - 2 connecting plates
 - 2 cable feedthrough hooks
- ON REQUEST
 - Striker item 1.07072.21.0




59011, 59016, 1,950 1
59061, 59065,
59811, 59816



1	07063	61	0		
---	-------	----	---	--	--

- satin-finished PVD-treated stainless steel

59011, 59016, 2,100 1
59061, 59065,
59811, 59816

1	07063	61	0	C2	
---	-------	----	---	----	--

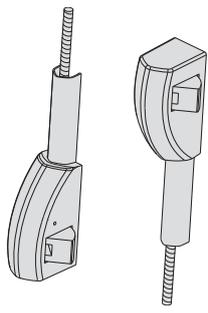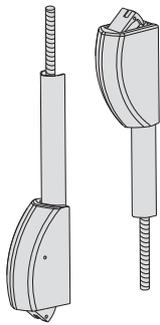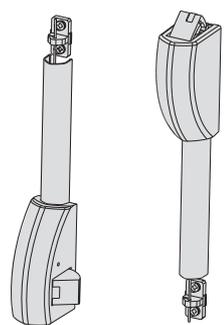Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Dead-locking latchbolt set for lateral locking point • SUPPLIED AS STANDARD: Strikes item 1.07072.20 • 2 threaded rods • 2 bolt covers • 2 connecting plates • 2 bolt guide hooks • ON REQUEST Strike item 1.07072.21.0 	59011, 59016, 59061, 59065, 59811, 59816	2,000	1	1 07063 53 0			
		59011, 59016, 59061, 59065, 59811, 59816	2,100	1	1 07063 53 0 C2			
	<ul style="list-style-type: none"> • Dead-locking latchbolt set for top/bottom locking points • SUPPLIED AS STANDARD: Top strikes item 1.07072.20.0 Floor strike item 1.07072.27.0 2 threaded bolt extension rods 2 bolt extension rod cover 2 connecting plates 2 rod guide hooks • ON REQUEST Strike item 1.07072.21.0 	59011, 59016, 59061, 59065, 59811, 59816	1,950	1	1 07063 63 0			
		59011, 59016, 59061, 59065, 59811, 59816	2,100	1	1 07063 63 0 C2			
	<ul style="list-style-type: none"> • Pair of latch bolts for top dead-locking locking point and bottom lateral locking point • SUPPLIED AS STANDARD: striker item 1.07072.20 • 2 flexible cables • 2 cable covers • 2 connecting plates • 2 cable feedthrough hooks • ON REQUEST Striker item 1.07072.21.0 	59011, 59016, 59061, 59065, 59811, 59816	1,950	1	1 07063 66 1			
		59011, 59016, 59061, 59065, 59811, 59816	1,950	1	1 07063 66 2			
		59011, 59016, 59061, 59065, 59811, 59816	1,950	1	1 07063 66 1 C2			
		59011, 59016, 59061, 59065, 59811, 59816	1,950	1	1 07063 66 2 C2			

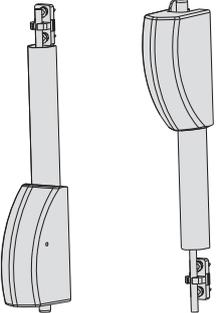Type	Description	For series/item	Unit weight Kg	Pieces	ITEM					
					Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Pair of deadbolts for top/bottom locking points for swinging doors • SUPPLIED AS STANDARD: Top strikers item 1.07072.25.0 and item 1.07072.26.0 Floor striker item 1.07072.25.0 2 threaded bolts 2 bolt covers 2 bolt guide hooks 2 connecting plates 	59011, 59016, 59061, 59065, 59811, 59816	2,100	1	1	07063	71	0		
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 	59011, 59016, 59061, 59065, 59811, 59816	1,000	1	1	07063	71	0	C2	
	<ul style="list-style-type: none"> • Additional lateral latch bolt • SUPPLIED AS STANDARD: Strikers item 1.07072.20.0 	1 07063 51 0	0,600	1	1	07063	26	1		
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 	1 07063 51 0	0,600	1	1	07063	26	2	C2	
	<ul style="list-style-type: none"> • Top extension bolt kit complete with: Flexible cable Cable cover Cable feedthrough hook 	1 07063 51 0, 1 07063 61 0, 1 07063 66 1	0,500	1	1	07064	51	0		
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 		0,384	1	1	07064	51	0	C2	
	<ul style="list-style-type: none"> • Top extension bolt kit complete with: Threaded bolt Bolt cover Bolt guide hook 	1 07063 71 0 1 07063 53 0 1 07063 63 0	0,384	1	1	07064	71	0		
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 		0,384	1	1	07064	71	0	C2	



Technical features:

- Steel case cover, painted black
- Chrome-plated aluminium alloy self-locking latch

Supplied as standard:

- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:

- Microswitch
- Hold-open device
- Fire resistant version with steel latch (spec. FR)

Finishes:

- STANDARD:
 - painted black
- ON REQUEST:
 - painted red (fin. 41)
 - painted yellow (fin. 42)
 - painted green (fin. 43)
 - painted white (fin. 45)
 - painted grey (fin. 97)

Hand:
0 = Non-handed

Bar to be ordered separately




series 07007

Standards:

- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard


CISA Prestige

Type	Description	Kg	Pieces	ITEM			
				Type	Dim.	Hand	Fin.

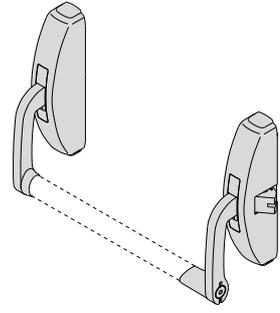


- Lateral latch-bolt
- SUPPLIED AS STANDARD:
Strikers item 1.07072.20.0
- ON REQUEST:
Outside operation devices item 1.07078.65/68/69

2,850 1 1 59301 10 0

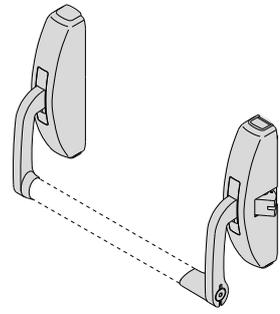

- MODULAR VERSION
- Lateral latch-bolt which can be deactivated
- SUPPLIED AS STANDARD:
Strikers item 1.07072.20.0
- Can be used with:
 - Pair of top/bottom latch-bolts item 1.07063.30.0
 - Pair of lateral latch-bolts item 1.07063.20.0
 - Pair of top/lateral latch-bolts item 1.07063.35.1/2
 - Pair of top/bottom deadbolts item 1.07063.40.0
- ON REQUEST:
Outside operation device item 1.07078.68/69

2,846 1 1 59311 10 0

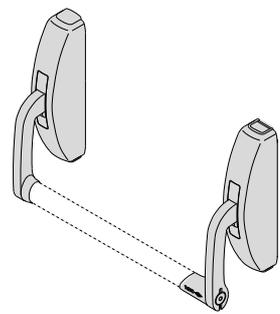

- MODULAR VERSION
- Can be used with:
 - Pair of top/bottom latch-bolts item 1.07063.30.0
 - Pair of lateral latch-bolts item 1.07063.20.0
 - Pair of top/lateral latch-bolts item 1.07063.35.1/2
 - Pair of top/bottom deadbolts item 1.07063.40.0
- ON REQUEST:
Outside operation device item 1.07078.68/69

2,666 1 1 59316 10 0



Technical features:

- Stainless steel case cover
- Chrome-plated aluminium alloy self-locking latch with PVD coating.

Supplied as standard:

- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:

- Microswitch version (spec. LA)
- Hold-open device version (spec. FG)
- Fire door version with steel latchbolt with PVD coating (spec. FR)

Standards:

- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard

Hand:


0 = Non-handed

Bar to be ordered separately




CISA Prestige Inox

Type	Description	Kg	Box	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.

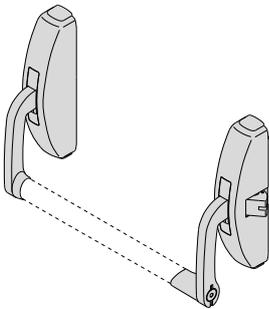


- Lateral latchbolt
- SUPPLIED AS STANDARD:
Strikers item 1.07072.70.0
- ON REQUEST:
Outside operation devices item 1.07078.65/68/69.0.C2

2,864 1 1 59351 10 0

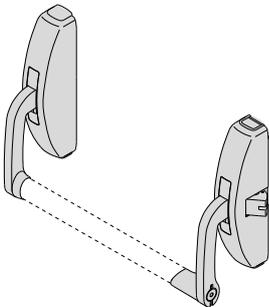

- MODULAR VERSION
- Lateral latchbolt which can be disconnected
- SUPPLIED AS STANDARD:
Strikers item 1.07072.70.0
- Can be used with:
Pair of top/bottom latchbolts item 1.07063.31.0
Pair of lateral latchbolts item 1.07063.21.0
Pair of top/lateral latchbolts item 1.07063.36.1/2
Pair of top/bottom deadbolts item 1.07063.41.0
- ON REQUEST:
Outside operation device 1.07078.68/69.0.C2

3,002 1 1 59361 10 0

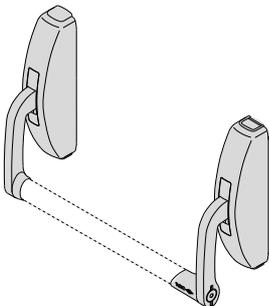

- MODULAR VERSION
- Can be used with:
Pair of top/bottom latchbolts item 1.07063.31.0
Pair of lateral latchbolts item 1.07063.21.02
Pair of top/lateral latchbolts item 1.07063.36.1/2
Pair of top/bottom deadbolts item 1.07063.41.0
- ON REQUEST:
Outside operation device 1.07078.68/69.0.C2

2,700 1 1 59366 10 0

Technical features:

- Steel case cover, painted black
- Chrome-plated aluminium alloy latch bolt and deadbolt

Supplied as standard:

- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:

- Fire resistant version with steel latch (spec. FR) item 1.07063.20/30/35.0

Finishes:

- STANDARD:
 - painted black
- ON REQUEST:
 - painted red (fin. 41)
 - painted yellow (fin. 42)
 - painted green (fin. 43)
 - painted white (fin. 45)
 - painted grey (fin. 97)

Hand:


0 = Non-handed

1 = R.L. outwards

2 = L.H. outwards


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Pair of latch-bolts for lateral locking points • SUPPLIED AS STANDARD: 2 strikers item 1.07072.20.0 • ON REQUEST: Rods item 1.07081.06.0 	59311, 59316	1,062	1	1	07063	20	0	
	<ul style="list-style-type: none"> • Pair of dead-locking latch-bolts for top/bottom locking points • SUPPLIED AS STANDARD: upper strikers item 1.07072.20.0 Floor striker item 1.07072.28.0 • ON REQUEST: Rods item 1.07081.06.0 	59311, 59316	1,000	1	1	07063	30	0	
	<ul style="list-style-type: none"> • Pair of latch-bolts for upper dead-locking and bottom lateral locking points • SUPPLIED AS STANDARD: strikers item 1.07072.20.0 • ON REQUEST: Rods item 1.07081.06.0 	59311, 59316	1,000	1	1	07063	35	1	
	<ul style="list-style-type: none"> • Pair of latch-bolts for top/bottom locking points for swinging doors • SUPPLIED AS STANDARD: Upper strikers item 1.07072.25.0 and 1.07072.26.0 Floor striker item 1.07072.25.0 • ON REQUEST: Rods item 1.07081.06.0 	59311, 59316	1,000	1	1	07063	40	0	
	<ul style="list-style-type: none"> • Additional lateral latch-bolt • SUPPLIED AS STANDARD: Strikers item 1.07072.20.0 and 1.07072.21.0 	59311, 59316	0,300	1	1	07063	15	1	
			0,300	1	1	07063	15	2	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.

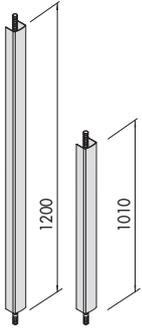

- Black painted set of extension bolts
- Black painted case cover
- To be used with latch-bolts item 1.07063.20/30/35/40.0

59311, 59316 1,220 1 **1 07081 06 0**



- Black painted top extension bolt set
- Black painted case cover

07063 0,652 1 **1 07064 60 0**



Technical features:

- Stainless steel case cover
- Chrome-plated aluminium alloy latch bolt and deadbolt with PVD coating.

Supplied as standard:

- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:





- Fire resistant version with steel latch (spec. FR)

Hand:


0 = Non-handed

1 = R.H. inwards

2 = L.H. inwards


Type	Description	For series/item	Unit weight 	Pieces 	ITEM					
					Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Pair of latch-bolts for lateral locking points • SUPPLIED AS STANDARD: 2 strikers item 1.07072.70.0 • ON REQUEST: Rods item 1.07081.61.0 	59361, 59366	1,220	1	1	07063	21	0		
	<ul style="list-style-type: none"> • Pair of dead-locking latch-bolts for top/bottom locking points • SUPPLIED AS STANDARD: upper strikers item 1.07072.70.0 Floor striker item 1.07072.78.0 • ON REQUEST: Rods item 1.07081.61.0 	59361, 59366	1,080	1	1	07063	31	0		
	<ul style="list-style-type: none"> • Pair of latch-bolts for upper dead-locking and bottom lateral locking points • SUPPLIED AS STANDARD: 2 strikers item 1.07072.70.0 • ON REQUEST: Rods item 1.07081.61.0 	59361, 59366	1,000	1	1	07063	36	1		
	<ul style="list-style-type: none"> • Pair of latch-bolts for top/bottom locking points for swinging doors • SUPPLIED AS STANDARD: Upper strikers item 1.07072.75.0 and 1.07072.76.0 Floor striker item 1.07072.75.0 • ON REQUEST: Rods item 1.07081.61.0 	59361, 59366	1,000	1	1	07063	41	0		

Type	Description	For series/item	 Unit weight	 Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.

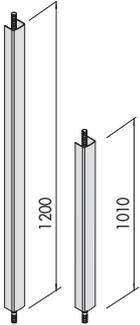

- Stainless steel extension bolts
- Stainless steel case cover
- To be used with latch-bolts item 1.07063.21/31/36/41.0


59361, 59366 1,196 1 **1 07081 61 0**



- Stainless steel top extension bolt set
- Stainless steel case cover


07063 0,500 1 **1 07064 61 0**

Type	Description	L	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.



- Red painted steel oval shaped bar
- AVAILABLE FINISHES (extra price):
 - yellow painted (fin. 42)
 - green painted (fin. 43)
 - black painted (fin. 44)
 - white painted (fin. 45)
 - grey painted (fin. 97)
 - painted steel grey (fin. B9)

900	0,800	1	1 07007 13 0				
1200	1,054	1	1 07007 14 0				
1500	1,440	1	1 07007 15 0				



- Stainless steel oval shaped horizontal bar

900	0,800	1	1 07007 60 0				
1200	1,070	1	1 07007 61 0				
1500	1,400	1	1 07007 62 0				

Technical features:

- Aluminium plate




Supplied as standard:

- Cylinders with 3 keys (where these are provided for)
- Fixing screws
- Instruction sheet

On request:

- Microswitch, only for item 107078.68/69
- For cylinder replacement, use 30/10 single cylinders

Hand:
0 = Non-handed

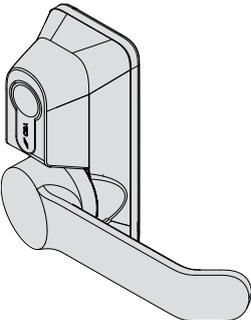Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Fixed knob, centre distance 43 mm • The key operates the latchbolt • Nickel-plated cylinder • Only for 1-locking point panic exit devices • FINISHES ON REQUEST painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97) 	59001, 59051, 59801	0,600	1	1	07078	35	0	
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 		0,600	1	1	07078	35	0 C2	
	<ul style="list-style-type: none"> • Fixed knob, centre distance 90 mm • The key operates the latchbolt • Nickel-plated cylinder • Only for 1-locking point panic exit devices • FINISHES ON REQUEST painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97) 	59301	0,600	1	1	07078	65	0	
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 		0,600	1	1	07078	65	0 C2	
	<ul style="list-style-type: none"> • Plate with low profile handle • The handle is deactivated with the key • Nickel-plated cylinder • Non-removable key setting (optional) • FINISHES ON REQUEST: painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97) 	59001, 59011, 59016, 59051, 59061, 59066, 59801, 59811, 59816	0,600	1	1	07078	36	0	
	<ul style="list-style-type: none"> • Version without cylinder 		1,308	1	1	07078	36	0 00 SH	

Type	Description	For series/item	Unit weight 	Pieces 	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Black painted plate with handle Handle deactivated by key Nickel-plated cylinder Non-removable key setting (optional) FINISHES ON REQUEST: painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97) 	59001, 59011, 59016, 59051, 59061, 59066, 59801, 59811, 59816	0,600	1	1	07078	38	0	
	<ul style="list-style-type: none"> Version without cylinder 		0,500	1	1	07078	38	0	00 SH
	<ul style="list-style-type: none"> Black painted plate with handle Handle deactivated by key Nickel-plated cylinder Non-removable key setting (optional) FINISHES ON REQUEST: painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97) 	59001, 59011, 59016, 59051, 59061, 59066, 59301, 59311, 59316, 59801, 59811, 59816	0,900	1	1	07078	68	0	
	<ul style="list-style-type: none"> Version without cylinder 		1,200	1	1	07078	68	0	00 SH
	<ul style="list-style-type: none"> Black painted knob Knob disabled with the key Nickel-plated cylinder Non-removable key setting (optional) FINISHES ON REQUEST: painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97) 	59001, 59011, 59016, 59051, 59061, 59066, 59301, 59311, 59316, 59801, 59816	0,800	1	1	07078	69	0	
	<ul style="list-style-type: none"> Version without cylinder 		0,850	1	1	07078	69	0	00 SH
	<ul style="list-style-type: none"> Follower and adaptor for cylinder only installation 		0,000	1	1	06198	70	0	
	<ul style="list-style-type: none"> Additional locking point kit for versions 1.07078.36/38 for doors 80 mm to 130 mm For versions 1.07078.68/69 for doors 100 mm to 130 mm 		0,099	1	1	06316	04	0	



Technical features:

- Non-handed handle.
- Idle handle under no power input conditions.
- Key operated mechanical emergency system: the key will operate the handle. By removing the key the handle will be deactivated.
- Wiring system with connector for complete connection insulation.
- LED integral with handle body for door status visual indication.
- Nickel-plated steel case.
- Painted aluminum alloy cover.
- Electric hold-open device available.
- Powered through booster device
- Rated voltage 12/24 V ac/dc.
- Operating voltage min. 5 V, max 28 V.

Supplied as standard:

- Cylinder item 1.06304.02.0.12.
- Booster module item 1.07022.01.0.
- 8/9 mm square spindle.


On request:

- Timer item 1.07022.20.0

Finishes:

- Black painted (RAL 9005).
- Grey painted (RAL 9006).

Type	Description	Facaplate	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.

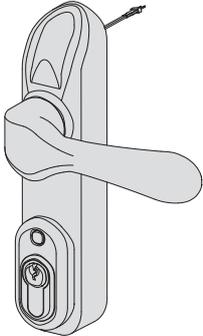

- Electrically enabled handle
- Can be installed with panic exit devices series FAST and Cisa Prestige
- Painted Black
- STD SUPPLY:
Booster device 1.07022.01.0
Connecting cable
fixing screws
- ON REQUEST:
Timer device 1.07022.20.0

1,200 1 1 07074 80 0



Technical features:

- To be coupled with panic exit devices with side latch
- Rated voltage :
 - 12 V ac CE
 - 12 and 24 V dc CE
- Zinc-plated steel case
- Lacquered aluminium alloy casing
- Chrome-plated aluminium alloy striker

Supplied as standard:

- Nylon spacers item 1.7089.02.0 (black standard)
- Fixing screws
- Instruction sheet


Finishes:

- STANDARD:
 - black case casing
- ON REQUEST:
 - stainless steel grey (fin. B9)
 - white case cover (fin. 45)
 - grey case cover (fin. 97)
- satin-finished stainless steel (fin. C2)

Hand:

0 = Non-handed

Type	Description	Facaplate	Unit weight	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.

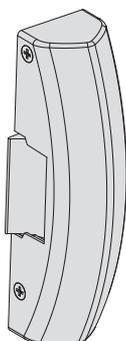

- Without hold-open catch mechanism
- 12 V ac CE - Current absorption 0,25A

0,500 1 1 07083 05 0

- Without hold-open catch mechanism
- 12 V dc CE - Current absorption 0,2A

0,500 1 1 07083 06 0

- Without hold-open catch mechanism
- 24 V dc CE - Current absorption 0,15A

0,500 1 1 07083 07 0

- Without hold-open catch mechanism
- 1 microswitch
- 12 V ac CE - Current absorption 0,25A

0,500 1 1 07083 80 0

- Without hold-open catch mechanism
- 1 microswitch
- 12 V dc CE - Current absorption 0,2A

0,650 1 1 07083 81 0

- Without hold-open catch mechanism
- 1 microswitch
- 24 V dc CE - Current absorption 0,15A

0,500 1 1 07083 82 0

- With hold-open catch mechanism
- 12 V ac CE - Current absorption 0,25A




0,628 1 1 07083 90 0

- With live coils
- 12 V dc - Current absorption 0,2A

0,634 1 1 07083 40 0

- With live coils
- 24 V dc - Current absorption 0,15A

0,500 1 1 07083 41 0

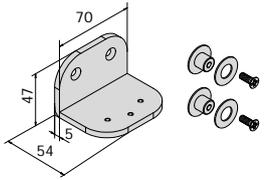Type	Description	Unit weight Kg	Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Glass Kit for lateral striker • For FAST and Cisa Prestige panic exit devices • Painted black 	0,100	1	1	07091	01	0
	<ul style="list-style-type: none"> • Glass Kit for additional locking points For FAST and Cisa Prestige panic exit devices • satin-finished PVD-treated stainless steel 	0,100	1	1	07091	01	0 C2
	<ul style="list-style-type: none"> • Glass Kit for top striker latch bolt version • For FAST and Cisa Prestige panic exit devices additional locking points • Painted black 	0,100	1	1	07091	02	0
	<ul style="list-style-type: none"> • Glass kit for top striker latch bolt version • For additional locking points for FAST and Cisa Prestige panic exit devices • satin-finished PVD-treated stainless steel 	0,100	1	1	07091	02	0 C2
	<ul style="list-style-type: none"> • Glass Kit for top striker deadbolt version • For FAST and Cisa Prestige panic exit devices additional locking points • Painted black 	0,100	1	1	07091	03	0



Technical features:

- Painted steel bar
- ABS inserts
- Can be shortened up to mm 600 (for Fast Touch) and mm 720 (for eFast)
- LED (120 lumen)
- Bar for FAST Touch rim and mortice panic exit devices and eFAST panic exit devices with LED lights powered by a special 12 V AC transformer.
- Two possible functions: emergency (the lights come on when power fails) and light (the lights are controlled by a switch).

Supplied as standard:


- Steel bar
- LED lights
- Wiring

Finishes:

- Black Fin. 00
- Red Fin. 41
- White RAL 9010 Fin. 45
- Grey Fin. 97
- Green Fin. 43
- Yellow Fin. 42)
- Stainless steel grey Fin. B9
- PVD stainless steel Fin. C2

Polaris

Type	Description	For series/item	Kg	Box	ITEM				
					Type	Dim.	Hand	Fin.	Pers.

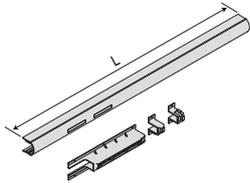

- Polaris kit containing bar, LEDs and wiring components.
- To activate the emergency or light function, CISA Polaris must be connected to a special transformer (not supplied) with the characteristics indicated on the instruction sheet.


1,000	1	1 06196 60 0
-------	---	--------------

Type	Description	For series/item	Unit weight 	Pieces 	ITEM				
					Type	Dim.	Hand	Fin.	Peris.
	<ul style="list-style-type: none"> Microswitch to be used with outside access devices for 1.07078.68/69 version 		0,020	1	1	06195	10	0	
	<ul style="list-style-type: none"> Microswitch to be used with FAST Touch panic exit devices, rim and mortice versions 	59811	0,020	1	1	06195	05	0	
	<ul style="list-style-type: none"> Microswitch to be used with FAST Push panic exit devices, rim version 	59011	0,020	1	1	06195	06	0	
	<ul style="list-style-type: none"> Microswitch to be used with panic exit devices 59607, 59616, 59617 		0,020	1	1	06195	09	0	
	<ul style="list-style-type: none"> Microswitch to be used with panic exit devices series CISA PRESTIGE 		0,036	1	1	06195	07	0	
	<ul style="list-style-type: none"> Hold-open device 	59301, 59311, 59316, 59351, 59361, 59366	0,080	1	1	1	07065	52	0
	<ul style="list-style-type: none"> Top and lateral striker with spacers Black painted steel 2x1.5 mm spacer 	59646	0,060	6	1	07072	11	0	
	<ul style="list-style-type: none"> Lateral striker for metal sections Black painted alloy 	07063, 59001, 59801	0,090	6	1	07072	14	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM													
					Type	Dim.	Hand	Fin.	Pers.	Spec.								
	<ul style="list-style-type: none"> • Black painted striker, complete with spacers • Black painted steel 	1 07063 20 0,	0,160	1	1	07072 20 0												
		1 07063 30 0,																
1 07063 35 1,																		
1 07063 35 2,																		
1 07063 51 0,																		
1 07063 61 0,																		
1 07063 66 1,																		
1 07063 66 2,																		
59001, 59016,																		
59311, 59316,																		
59801, 59816																		
	<ul style="list-style-type: none"> • Top lateral striker complete with spacers • Stainless steel • For stainless steel and C2 finish panic exit devices 	1 07063 20 0,									0,080	1	1	07072 70 0				
		1 07063 30 0,																
1 07063 35 1,																		
1 07063 35 2,																		
1 07063 51 0,																		
1 07063 61 0,																		
1 07063 66 1,																		
1 07063 66 2,																		
59001, 59016,																		
59311, 59316,																		
59801, 59816																		
	<ul style="list-style-type: none"> • Lateral and top angle striker complete with spacers • Stainless steel • For stainless steel and C2 finish panic exit devices 	1 07063 20 0,	0,186	1	1	07072 71 0												
		1 07063 30 0,																
1 07063 35 1,																		
1 07063 35 2,																		
1 07063 51 0,																		
1 07063 61 0,																		
1 07063 66 1,																		
1 07063 66 2,																		
59001, 59016,																		
59311, 59316,																		
59801, 59816																		
	<ul style="list-style-type: none"> • Top/bottom striker • Black painted steel 	1 07063 40 0,									0,080	1	1	07072 25 0				
		1 07063 71 0																
	<ul style="list-style-type: none"> • Black painted striker, complete with spacers • Black painted steel 	1 07063 40 0,	0,080	1	1	07072 26 0												
		1 07063 71 0																


Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Peris. Spec.
	<ul style="list-style-type: none"> • Black painted steel floor striker, complete with spacers • Black painted steel 	1 07063 30 0, 1 07063 61 0	0,080	1	1 07072 27 0			
	<ul style="list-style-type: none"> • Top lateral striker complete with spacers • Stainless steel • For stainless steel and C2 finish panic exit devices 	1 07063 31 0, 1 07063 61 0	0,080	1	1 07072 77 0			
	<ul style="list-style-type: none"> • Black painted steel floor striker, complete with spacers • Black painted steel 	1 07063 30 0, 1 07063 61 0	0,126	1	1 07072 28 0			
	<ul style="list-style-type: none"> • Floor striker complete with spacers • Stainless steel • For stainless steel and C2 finish panic exit devices 	1 07063 31 0, 1 07063 61 0	0,124	1	1 07072 78 0			
	<ul style="list-style-type: none"> • Lateral and top strike for PVC door frames • Black nylon 	59300,59315, 59318	0,020	6	1 07072 30 0			
 	<ul style="list-style-type: none"> • Adjustable striker for ALUMINIUM DOORS • ADJUSTMENTS: Coplanarity compensation from -8mm to +4mm • STANDARD SUPPLY Fixing screws • FINISHES: Standard painted black • ON REQUEST: painted WHITE (fin.45) painted GREY (fin.97) 		0,141	6	1 07072 31 0			
	<ul style="list-style-type: none"> • Adjustable striker FOR INDUSTRIAL DOORS • ADJUSTMENTS: Clearance compensation between door wing and frame up to 25 mm Coplanarity compensation from -4 mm to + 7mm • STANDARD SUPPLY Fixing screws • FINISHES: Standard painted black • ON REQUEST: painted WHITE (fin.45) painted GREY (fin.97) 		0,080	6	1 07072 32 0			

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.

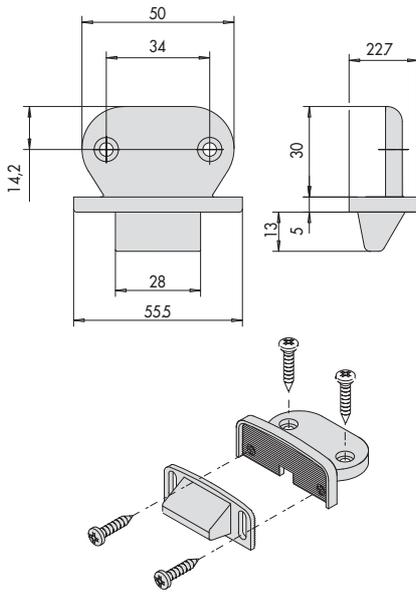


- Adjustable striker for WOOD AND PVC DOORS
- ADJUSTMENTS:
Possible projecting installation on profiles with overlapping sections of 14 mm to 24 mm
- STANDARD SUPPLY
Fixing screws
- FINISHES:
Standard painted black
- ON REQUEST:
painted WHITE (fin.45)
painted GREY (fin.97)

0,080 6 1 07072 33 0

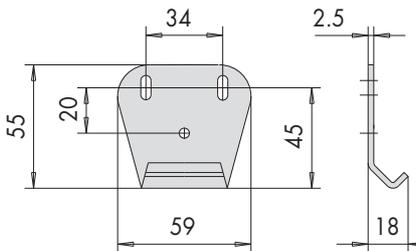

- Lateral and top striker for PVC doors
- Black painted steel

0,080 1 1 07072 34 0

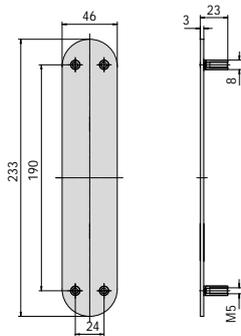


- Outside plate
- Black painted steel

59301,59311, 0,200 1 1 07077 14 0
59316

- Outside plate
- satin-finished treated stainless steel

59351,59361, 0,200 1 1 07077 14 0 C2
59366

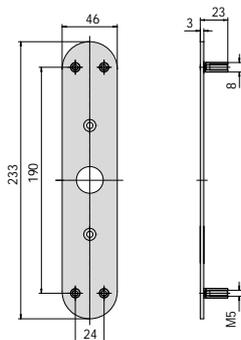



- Outside plate
- Black painted steel

59301,59311, 0,200 1 1 07077 15 0
59316

- Outside plate
- satin-finished treated stainless steel

59351,59361, 0,200 1 1 07077 15 0 C2
59366

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Per.s.
	<ul style="list-style-type: none"> • Closing selector for double doors with door closer • Chrome-plated steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM 		0,808	1	1	07084	10	0
	<ul style="list-style-type: none"> • Closing selector for double doors with door closer • Stainless steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM • Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1158 standard 		0,720	1	1	07084	20	0
	<ul style="list-style-type: none"> • Adjustable closing selector for double doors with door closer • Chrome-plated steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM 		0,825	1	1	07084	11	0
	<ul style="list-style-type: none"> • Adjustable closing selector for double doors with door closer • Stainless steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM • Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1158 standard 		0,702	1	1	07084	21	0
	<ul style="list-style-type: none"> • Spacer 2 mm. • Black nylon 	1 07083 05 0, 1 07083 06 0, 1 07083 07 0, 1 07083 40 0 1 07083 41 0 1 07083 80 0, 1 07083 81 0, 1 07083 82 0, 1 07083 90 0	0,020	1	1	07089	12	0
	<ul style="list-style-type: none"> • Adapteur for round cylinder • For Cisa Prestige series panic exit devices 	59301, 59311, 59351, 59361	0,030	1	1	07165	21	0
	<ul style="list-style-type: none"> • Hold-open device for use with FAST Touch panic exit devices • painted GREY (fin. 97) • painted WHITE (fin. 45) 	59801, 59811, 59816	0,054	1	1	07165	50	0

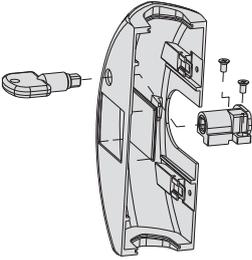Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Hold-open device for use with FAST Push panic exit devices <ul style="list-style-type: none"> Painted WHITE (fin. 45) Painted GREY (fin. 97) Painted STEEL GREY (B9) 	59001, 59011, 59016	0,178	1	1	07165	51	0	
	<ul style="list-style-type: none"> Satin-finished treated stainless steel 			0,178	1	1	07165	51	0
	<ul style="list-style-type: none"> Cover removal tool For all FAST PUSH and FAST TOUCH series 		0,000	1	1	06198	75	0	



Panic exit devices,
mortice version



All round security

CISA panic exit device installation in combination with SikurExit, the multipoint, panic function lock for aluminum doors, with Exitlock, the panic function lock for armored doors, and with other panic function locks available from the CISA range ensures the greatest anti-burglary protection in heavy human traffic buildings, allowing at the same time quick exit from the building in case of danger.

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles	Single leaf door						
	Manufacturer	Series	Lock	Striker	Profile guard	Striker for diverter (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56		43725-35-0	06463-14-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT		43725-30-0	06463-14-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta		43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.		43725-35-0	06463-32-0		06465-22-0	0A310-27-0
	EXPORT 51 TT Porta		43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EXPORT 68 TT Fin.		43725-35-0	06463-32-0		06465-22-0	0A310-41-0
	EXPORT 68 TT Porta		43825-30-0	06463-14-0		06465-04-0	0A310-17-0
AL-SISTEM	SICURBLIN 65		43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	PLANET 50 TT		43725-40-0	06463-32-0		06465-22-0	0A310-27-0
	PLANET 62 TT		43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT		43825-35-0	06463-14-0		06465-04-0	0A310-31-0
ALLUSISTEMI	PLANET 72 HT		43725-40-0	06463-32-0		06465-22-0	0A310-24-0
	CX 600 (camera europea)		43725-40-0	06463-32-0		06465-22-0	0A310-33-0
ALU-K	CX 700 (camera europea)		43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	ALU-K 56 ID		43825-35-0	06461-35-0		06461-39-0	0A310-12-0
	ALU-K 63 ID		43825-35-0	06461-35-0		06461-39-0	0A310-27-0
	ALU-K 67 ID		43825-35-0	06461-35-0		06461-39-0	0A310-17-0
EKONAL	ALU-K 70 ID		43825-35-0	06461-35-0		06461-39-0	0A310-33-0
	E 65		43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 65 con riporto		43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 75		43725-35-0	06461-30-0		06461-34-0	0A310-20-0
FORSTER	E 75 con riporto		43725-35-0	06461-30-0		06461-34-0	0A310-20-0
	PRESTO 50		43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	THERM TUR		43825-40-0	06461-07-0		06461-12-0	0A310-18-0
	UNICO		43825-35-0	06461-17-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta		43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta		43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.		43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta		43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta		43825-35-0	06461-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	EUROLINE NS72 TT Porta		43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	NEW-TEC 50 Porta		43825-30-0	06463-14-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.		43725-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.		43725-35-0	06463-31-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.		43725-40-0	06463-31-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.		43725-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta		43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta		43825-30-0	06463-14-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS		43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62		43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta		43825-30-0	06461-35-0		06461-39-0	0A310-17-0
IND INVEST	DOMAL TOP TB 65		43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 500		43725-35-0	06463-32-0		06465-22-0	0A310-27-0
	GOLD 500 Porta		43825-30-0	06463-14-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.		43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto		43725-30-0	06463-14-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT		43725-40-0	06463-32-0		06465-22-0	0A310-41-0
JANSEN	PLATHINA 69 TT PORTA		43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT		43725-35-0	06461-30-0		06461-34-0	0A310-18-0
	Serie 50 ECONOMY		43825-35-0	06461-07-0		06461-12-0	0A310-07-0
	Serie 60		43825-35-0	06461-07-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT		43825-35-0	06461-07-0		06461-12-0	0A310-13-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)

Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.

Square spindle, 8 mm item 07206-00-0 (1 pc)

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles		Single leaf door				
Manufacturer	Series	Lock	Striker	Profile guard	Striker for diverter (2 pcs)	Cylinder Fin. 12
MERCURI	MERCURY 500 TT	43725-35-0	06463-32-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
METRA	NC 50 l Linea base	43825-35-0	06461-35-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43825-35-0	06461-35-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43825-35-0	06461-35-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43825-35-0	06461-35-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43825-30-0	06463-14-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	BASIC 65	43825-40-0	06461-30-0		06461-34-0	0A310-13-0
	TERMICH 65	43825-40-0	06461-30-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43825-35-0	06461-35-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43825-35-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
PONZIO	EKIP MAAS.STH 76 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
	WINDSTOP 55 TT	43725-40-0	06463-32-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
PREDIERI	WINDSTOP 73 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	PR 58 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	PR 75 TT	43725-40-0	06463-31-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
SAPA (ex Alcoa)	EKU DOOR 74 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-20-0
	ALFIL 54 TT	43725-35-0	06461-30-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43725-35-0	06463-17-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43725-35-0	06463-31-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43725-40-0	06463-31-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43825-30-0	06461-35-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43825-30-0	06461-35-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43825-30-0	06463-14-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
Tekno WIN 70 TT Porta (ex F60 TT)	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0	
SCHUCO	ADS 50 (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43825-35-0	06461-35-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43825-40-0	06461-35-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43825-40-0	06461-35-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43825-35-0	06461-35-0		06461-39-0	0A310-13-0
TO.MA	ATLANTIS 55 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43725-35-0	06463-32-0		06465-22-0	0A310-33-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)

Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.

Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles	Double leaf door						
	Manufacturer	Series	Lock	Lock	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56		43725-35-0	43295-40-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT		43725-30-0	43295-30-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta		43825-30-0	43295-40-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.		43725-35-0	43295-60-0		06465-22-0	0A300-27-0
	EXPORT 51 TT Porta		43825-30-0	43295-30-0		06465-04-0	0A300-09-0
	EXPORT 68 TT Fin.		43725-35-0	43295-60-0		06465-22-0	0A300-41-0
	EXPORT 68 TT Porta		43825-30-0	43295-30-0		06465-04-0	0A300-17-0
	SICURBLIN 65		43825-30-0	43295-40-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT		43725-40-0	43295-60-0		06465-22-0	0A310-27-0
	PLANET 62 TT		43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT		43825-35-0	43295-60-0		06465-04-0	0A310-31-0
	PLANET 72 HT		43725-40-0	43295-60-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)		43725-40-0	43295-60-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)		43725-40-0	43295-60-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID		43825-35-0	43295-40-0		06461-39-0	0A310-12-0
	ALU-K 63 ID		43825-35-0	43295-40-0		06461-39-0	0A310-27-0
	ALU-K 67 ID		43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	ALU-K 70 ID		43825-35-0	43295-40-0		06461-39-0	0A310-33-0
EKONAL	E 65		43725-35-0	43295-40-0		06461-34-0	0A310-17-0
	E 65 con riporto		43725-35-0	43295-60-0		06461-34-0	0A310-17-0
	E 75		43725-35-0	43295-40-0		06461-34-0	0A310-20-0
	E 75 con riporto		43725-35-0	43295-60-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50		43825-40-0	43295-40-0		06461-12-0	0A310-07-0
	THERM TUR		43825-40-0	43295-40-0		06461-12-0	0A310-18-0
	UNICO		43825-35-0	43295-40-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta		43825-40-0	43295-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta		43825-35-0	43295-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.		43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta		43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta		43825-35-0	43295-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta		43825-35-0	43295-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta		43825-30-0	43295-30-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.		43725-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.		43725-35-0	43295-60-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.		43725-40-0	43295-75-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.		43725-35-0	43295-60-0		06465-21-0	0A310-17-0
NEW-TEC 68 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0	
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta		43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta		43825-30-0	43295-40-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS		43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62		43725-35-0	43295-40-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta		43825-30-0	43295-40-0		06461-39-0	0A310-17-0
	DOMAL TOP TB 65		43725-40-0	43295-60-0		06465-22-0	0A310-20-0
IND INVEST	GOLD 500		43725-35-0	43295-60-0		06465-22-0	0A310-27-0
	GOLD 500 Porta		43825-30-0	43295-30-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta		43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.		43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto		43725-30-0	43295-60-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT		43725-40-0	43295-75-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
VIP DOOR 69 TT		43725-35-0	43295-40-0		06461-34-0	0A310-18-0	
JANSEN	Serie 50 ECONOMY		43825-35-0	43295-40-0		06461-12-0	0A310-07-0
	Serie 60		43825-35-0	43295-40-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT		43825-35-0	43295-30-0		06461-12-0	0A310-13-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)

Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.

Bolts item 07088.-03.-0 (1 pc)

Automatic extension bolt closure restoring item 07089-52-0 (1 pc)

Manual extension bolt closure restoring item 06141-80-0 (1 pc)

Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles	Double leaf door					
Manufacturer	Series	Lock	Lock	Profile guard	Striker for diverter (2 pcs)	Cylinder Fin. 12
MERCURI	MERCURY 500 TT	43725-35-0	43295-75-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43725-40-0	43295-75-0		06465-22-0	0A310-41-0
METRA	NC 50 l Linea base	43825-35-0	43295-40-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43825-35-0	43295-40-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43825-35-0	43295-30-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43825-35-0	43295-30-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43825-30-0	43295-60-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43825-40-0	43295-40-0		06461-34-0	0A310-07-0
	BASIC 65	43825-40-0	43295-40-0		06461-34-0	0A310-13-0
	TERMICH 65	43825-40-0	43295-40-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43825-40-0	43295-40-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43825-35-0	43295-40-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43825-35-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
PONZIO	EKIP MAAS.STH 76 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	WINDSTOP 55 TT	43725-40-0	43295-40-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43725-40-0	43295-60-0		06465-22-0	0A310-41-0
PREDIERI	WINDSTOP 73 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	PR 58 Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	PR 75 TT	43725-40-0	43295-75-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43725-35-0	43295-60-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
SAPA (ex Alcoa)	EKU DOOR 74 TT Porta	43825-30-0	43295-40-0		06465-04-0	0A310-20-0
	ALFIL 54 TT	43725-35-0	43295-60-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43725-35-0	43295-75-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43725-35-0	43295-75-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43725-40-0	43295-75-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43825-30-0	43295-60-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43825-30-0	43295-60-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43825-30-0	43295-40-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
Tekno WIN 70 TT Porta (ex F60 TT)	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0	
SCHUCO	ADS 50 (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43825-35-0	43295-30-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43825-40-0	43295-30-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43825-40-0	43295-30-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43825-35-0	43295-30-0		06461-39-0	0A300-13-0
TO.MA	ATLANTIS 55 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43825-30-0	43295-60-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43725-35-0	43295-60-0		06465-22-0	0A310-33-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)

Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.

Bolts item 07088.-03.-0 (1 pc)

Automatic extension bolt closure restoring item 07089-52-0 (1 pc)

Manual extension bolt closure restoring item 06141-80-0 (1 pc)

Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles		Single leaf door				
Manufacturer	Series	Lock	Striker	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43735-35-0	06463-14-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43735-30-0	06463-14-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43735-35-0	06463-32-0		06465-22-0	0A310-27-0
	EXPORT 51 TT Porta	43835-30-0	06463-14-0		06465-04-0	0A310-09-0
	EXPORT 68 TT Fin.	43735-35-0	06463-32-0		06465-22-0	0A310-41-0
	EXPORT 68 TT Porta	43835-30-0	06463-14-0		06465-04-0	0A310-17-0
AL-SISTEM	SICURBLIN 65	43835-30-0	06463-14-0		06465-04-0	0A310-13-0
	PLANET 50 TT	43735-40-0	06463-32-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43735-40-0	06463-32-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43835-35-0	06463-14-0		06465-04-0	0A310-31-0
ALLUSISTEMI	PLANET 72 HT	43735-40-0	06463-32-0		06465-22-0	0A310-24-0
	CX 600 (camera europea)	43735-40-0	06463-32-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)	43735-40-0	06463-32-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID	43835-35-0	06461-35-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43835-35-0	06461-35-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43835-35-0	06461-35-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43835-35-0	06461-35-0		06461-39-0	0A310-33-0
EKONAL	E 65	43735-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 65 con riporto	43735-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 75	43735-35-0	06461-30-0		06461-34-0	0A310-20-0
	E 75 con riporto	43735-35-0	06461-30-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50	43835-40-0	06461-07-0		06461-12-0	0A310-07-0
	THERM TUR	43835-40-0	06461-07-0		06461-12-0	0A310-18-0
	UNICO	43835-35-0	06461-17-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43835-40-0	06461-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43835-35-0	06461-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43735-40-0	06463-31-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43835-35-0	06461-35-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43835-35-0	06461-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	EUROLINE NS72 TT Porta	43835-35-0	06461-30-0		06461-34-0	0A310-33-0
	NEW-TEC 50 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43735-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43735-35-0	06463-31-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43735-40-0	06463-31-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	NEW-TEC 68 TT Sorm.	43735-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	DOMAL STOPPER PG 52 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43835-30-0	06463-14-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43735-35-0	06463-32-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43835-30-0	06461-35-0		06461-39-0	0A310-17-0
IND INVEST	DOMAL TOP TB 65	43735-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 500	43735-35-0	06463-32-0		06465-22-0	0A310-27-0
	GOLD 500 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43735-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto	43735-30-0	06463-14-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43735-40-0	06463-32-0		06465-22-0	0A310-41-0
JANSEN	PLATHINA 69 TT PORTA	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43735-35-0	06461-30-0		06461-34-0	0A310-18-0
	Serie 50 ECONOMY	43835-35-0	06461-07-0		06461-12-0	0A310-07-0
MERCURI	Serie 60	43835-35-0	06461-07-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT	43835-35-0	06461-07-0		06461-12-0	0A310-13-0
MERCURI	MERCURY 500 TT	43735-35-0	06463-32-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43735-40-0	06463-32-0		06465-22-0	0A310-41-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)

Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.

External handle item 07070.-66-0-81 (1 pc)

Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles		Single leaf door				
Manufacturer	Series	Lock	Striker	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
METRA	NC 50 I Linea base	43835-35-0	06461-35-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43835-35-0	06461-35-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43835-35-0	06461-35-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43835-35-0	06461-35-0		06461-39-0	0A310-33-0
	AELLE 80 STH SUPERBLINDO	43835-35-0 43835-30-0	06461-35-0 06463-14-0		06461-39-0 06465-04-0	0A310-30-0 0A310-20-0
MOGS	BASIC 50	43835-40-0	06461-30-0		06461-34-0	0A310-07-0
	BASIC 65	43835-40-0	06461-30-0		06461-34-0	0A310-13-0
	TERMICH 65	43835-40-0	06461-30-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43835-40-0	06461-07-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43835-35-0	06461-35-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43835-35-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta EKIP MAAS.STH 76 Porta	43835-30-0 43835-30-0	06463-14-0 06463-14-0	06141-79-0 06141-79-0	06465-04-0 06465-04-0	0A310-33-0 0A310-20-0
PONZIO	WINDSTOP 55 TT	43735-40-0	06463-32-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43735-40-0	06463-32-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43735-40-0	06463-31-0		06465-21-0	0A310-17-0
	PR 75 TT	43735-40-0	06463-31-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43735-35-0	06463-32-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43735-40-0	06463-32-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU DOOR 74 TT Porta	43835-30-0	06463-14-0		06465-04-0	0A310-20-0
SAPA (ex Alcoa)	ALFIL 54 TT	43735-35-0	06461-30-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43735-35-0	06463-17-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43735-35-0	06463-31-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43735-40-0	06463-31-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43735-40-0	06463-31-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43835-30-0	06461-35-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43835-30-0	06461-35-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43835-30-0	06463-14-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43835-35-0	06461-35-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43835-40-0	06461-35-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43835-40-0	06461-35-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43835-35-0	06461-35-0		06461-39-0	0A310-13-0
TO.MA	ATLANTIS 55 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43735-35-0	06463-32-0		06465-22-0	0A310-33-0

Shared components:

- Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)
- Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.
- External handle item 07070-66-0-81 (1 pc)
- Square spindle, 8 mm item 07206-00-0 (1 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles		Double leaf door				
Manufacturer	Series	Lock	Lock	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43735-35-0	43295-40-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43735-30-0	43295-30-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43835-30-0	43295-40-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43735-35-0	43295-60-0		06465-22-0	0A300-27-0
	EXPORT 51 TT Porta	43835-30-0	43295-30-0		06465-04-0	0A300-09-0
	EXPORT 68 TT Fin.	43735-35-0	43295-60-0		06465-22-0	0A300-41-0
	EXPORT 68 TT Porta	43835-30-0	43295-30-0		06465-04-0	0A300-17-0
	SICURBLIN 65	43835-30-0	43295-40-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT	43735-40-0	43295-60-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43735-40-0	43295-60-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43835-35-0	43295-60-0		06465-04-0	0A310-31-0
	PLANET 72 HT	43735-40-0	43295-60-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)	43735-40-0	43295-60-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)	43735-40-0	43295-60-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID	43835-35-0	43295-40-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43835-35-0	43295-40-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43835-35-0	43295-40-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43835-35-0	43295-40-0		06461-39-0	0A310-33-0
EKONAL	E 65	43735-35-0	43295-40-0		06461-34-0	0A310-17-0
	E 65 con riporto	43735-35-0	43295-60-0		06461-34-0	0A310-17-0
	E 75	43735-35-0	43295-40-0		06461-34-0	0A310-20-0
	E 75 con riporto	43735-35-0	43295-60-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50	43835-40-0	43295-40-0		06461-12-0	0A310-07-0
	THERM TUR	43835-40-0	43295-40-0		06461-12-0	0A310-18-0
	UNICO	43835-35-0	43295-40-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43835-40-0	43295-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43835-35-0	43295-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43735-40-0	43295-75-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43835-35-0	43295-40-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43835-35-0	43295-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	EUROLINE NS72 TT Porta	43835-35-0	43295-30-0		06461-34-0	0A310-33-0
	NEW-TEC 50 Porta	43835-30-0	43295-30-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43735-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43735-35-0	43295-60-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43735-40-0	43295-75-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	NEW-TEC 68 TT Sorm.	43735-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	DOMAL STOPPER PG 52 Porta	43835-30-0	43295-30-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43835-30-0	43295-40-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43835-30-0	43295-40-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43735-35-0	43295-40-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43835-30-0	43295-40-0		06461-39-0	0A310-17-0
IND INVEST	DOMAL TOP TB 65	43735-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 500	43735-35-0	43295-60-0		06465-22-0	0A310-27-0
	GOLD 500 Porta	43835-30-0	43295-30-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43735-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto	43735-30-0	43295-60-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43735-40-0	43295-75-0		06465-22-0	0A310-41-0
JANSEN	PLATHINA 69 TT PORTA	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43735-35-0	43295-40-0		06461-34-0	0A310-18-0
	Serie JANISOL 60 TT	43835-35-0	43295-30-0		06461-12-0	0A310-13-0
	Serie 50 ECONOMY	43835-35-0	43295-40-0		06461-12-0	0A310-07-0

Shared components:

- Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
- Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
- Bolts item 07088.-03.-0 (1 pc)
- Automatic extension bolt closure restoring item 07089-52-0 (1 pc)
- Manual extension bolt closure restoring item 06141-80-0 (1 pc)
- External handle item 07070.-66-0-81 (1 pc)
- Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles		Double leaf door				
Manufacturer	Series	Lock	Lock	Profile guard	Striker for diverter (2 pcs)	Cylinder Fin. 12
JANSEN	Serie 60	43835-35-0	43295-40-0		06461-12-0	0A310-13-0
MERCURI	MERCURY 500 TT	43735-35-0	43295-75-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43735-40-0	43295-75-0		06465-22-0	0A310-41-0
METRA	NC 50 I Linea base	43835-35-0	43295-40-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43835-35-0	43295-40-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43835-35-0	43295-40-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43835-35-0	43295-30-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43835-35-0	43295-30-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43835-30-0	43295-60-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43835-40-0	43295-40-0		06461-34-0	0A310-07-0
	BASIC 65	43835-40-0	43295-40-0		06461-34-0	0A310-13-0
	TERMICH 65	43835-40-0	43295-40-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43835-40-0	43295-40-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43835-35-0	43295-40-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43835-35-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43835-30-0	43295-40-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT	43735-40-0	43295-40-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43835-30-0	43295-40-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43735-40-0	43295-60-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43735-40-0	43295-75-0		06465-21-0	0A310-17-0
	PR 75 TT	43735-40-0	43295-75-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43835-30-0	43295-30-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43735-35-0	43295-60-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43735-40-0	43295-60-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EKU DOOR 74 TT Porta	43835-30-0	43295-40-0		06465-04-0	0A310-20-0
SAPA (ex Alcoa)	ALFIL 54 TT	43735-35-0	43295-60-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43735-35-0	43295-75-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43735-35-0	43295-75-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43735-40-0	43295-75-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43735-40-0	43295-75-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43835-30-0	43295-60-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43835-30-0	43295-60-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43835-30-0	43295-40-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43835-35-0	43295-30-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43835-40-0	43295-30-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43835-40-0	43295-30-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43835-35-0	43295-30-0		06461-39-0	0A300-13-0
TO.MA	ATLANTIS 55 TT Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43835-30-0	43295-60-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43735-35-0	43295-60-0		06465-22-0	0A310-33-0

Shared components:

- Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
- Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
- Bolts item 07088.-03.-0 (1 pc)
- Automatic extension bolt closure restoring item 07089-52-0 (1 pc)
- Manual extension bolt closure restoring item 06141-80-0 (1 pc)
- External handle item 07070.-66-0-81 (1 pc)
- Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

Profiles	Single leaf door					
Manufacturer	Series	Lock	Striker	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43725-35-0	06463-14-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43725-30-0	06463-14-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43725-35-0	06463-32-0		06465-22-0	0A310-27-0
	EXPORT 51 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EXPORT 68 TT Fin.	43725-35-0	06463-32-0		06465-22-0	0A310-41-0
	EXPORT 68 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-17-0
	SICURBLIN 65	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT	43725-40-0	06463-32-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43825-35-0	06463-14-0		06465-04-0	0A310-31-0
	PLANET 72 HT	43725-40-0	06463-32-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)	43725-40-0	06463-32-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID	43825-35-0	06461-35-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43825-35-0	06461-35-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43825-35-0	06461-35-0		06461-39-0	0A310-33-0
EKONAL	E 65	43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 65 con riporto	43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 75	43725-35-0	06461-30-0		06461-34-0	0A310-20-0
	E 75 con riporto	43725-35-0	06461-30-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50	43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	THERM TUR	43825-40-0	06461-07-0		06461-12-0	0A310-18-0
	UNICO	43825-35-0	06461-17-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43725-40-0	06463-31-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43825-30-0	06461-35-0		06461-39-0	0A310-17-0
	DOMAL TOP TB 65	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 500	43725-35-0	06463-32-0		06465-22-0	0A310-27-0
IND INVEST	GOLD 500 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto	43725-30-0	06463-14-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43725-35-0	06461-30-0		06461-34-0	0A310-18-0
JANSEN	Serie 50 ECONOMY	43825-35-0	06461-07-0		06461-12-0	0A310-07-0
	Serie 60	43825-35-0	06461-07-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT	43825-35-0	06461-07-0		06461-12-0	0A310-13-0
MERCURI	MERCURY 500 TT	43725-35-0	06463-32-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)

Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.

External handle item 07070.-66-0-81 (1 pc)

Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

Profiles		Single leaf door				
Manufacturer	Series	Lock	Striker	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
METRA	NC 50 I Linea base	43825-35-0	06461-35-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43825-35-0	06461-35-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43825-35-0	06461-35-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43825-35-0	06461-35-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43825-30-0	06463-14-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	BASIC 65	43825-40-0	06461-30-0		06461-34-0	0A310-13-0
	TERMICH 65	43825-40-0	06461-30-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43825-35-0	06461-35-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43825-35-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT	43725-40-0	06463-32-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	PR 75 TT	43725-40-0	06463-31-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
EKU DOOR 74 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-20-0	
SAPA (ex Alcoa)	ALFIL 54 TT	43725-35-0	06461-30-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43725-35-0	06463-17-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43725-35-0	06463-31-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43725-40-0	06463-31-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43825-30-0	06461-35-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43825-30-0	06461-35-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43825-30-0	06463-14-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43825-35-0	06461-35-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43825-40-0	06461-35-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43825-40-0	06461-35-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43825-35-0	06461-35-0		06461-39-0	0A310-13-0
TO.MA	ATLANTIS 55 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43725-35-0	06463-32-0		06465-22-0	0A310-33-0

Shared components:

- Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)
- Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.
- External handle item 07070-66-0-81 (1 pc)
- Square spindle, 8 mm item 07206-00-0 (1 pc)

FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

Profiles	Double leaf door						
	Manufacturer	Series	Lock	Lock	Profile guard	Striker for diverter (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56		43725-35-0	43295-40-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT		43725-30-0	43295-30-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta		43825-30-0	43295-40-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.		43725-35-0	43295-60-0		06465-22-0	0A300-27-0
	EXPORT 51 TT Porta		43825-30-0	43295-30-0		06465-04-0	0A300-09-0
	EXPORT 68 TT Fin.		43725-35-0	43295-60-0		06465-22-0	0A300-41-0
	EXPORT 68 TT Porta		43825-30-0	43295-30-0		06465-04-0	0A300-17-0
	SICURBLIN 65		43825-30-0	43295-40-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT		43725-40-0	43295-60-0		06465-22-0	0A310-27-0
	PLANET 62 TT		43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT		43825-35-0	43295-60-0		06465-04-0	0A310-31-0
	PLANET 72 HT		43725-40-0	43295-60-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)		43725-40-0	43295-60-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)		43725-40-0	43295-60-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID		43825-35-0	43295-40-0		06461-39-0	0A310-12-0
	ALU-K 63 ID		43825-35-0	43295-40-0		06461-39-0	0A310-27-0
	ALU-K 67 ID		43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	ALU-K 70 ID		43825-35-0	43295-40-0		06461-39-0	0A310-33-0
EKONAL	E 65		43725-35-0	43295-40-0		06461-34-0	0A310-17-0
	E 65 con riporto		43725-35-0	43295-60-0		06461-34-0	0A310-17-0
	E 75		43725-35-0	43295-40-0		06461-34-0	0A310-20-0
	E 75 con riporto		43725-35-0	43295-60-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50		43825-40-0	43295-40-0		06461-12-0	0A310-07-0
	THERM TUR		43825-40-0	43295-40-0		06461-12-0	0A310-18-0
	UNICO		43825-35-0	43295-40-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta		43825-40-0	43295-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta		43825-35-0	43295-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.		43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta		43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta		43825-35-0	43295-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta		43825-35-0	43295-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta		43825-30-0	43295-30-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.		43725-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.		43725-35-0	43295-60-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.		43725-40-0	43295-75-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.		43725-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta		43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta		43825-30-0	43295-40-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS		43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62		43725-35-0	43295-40-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta		43825-30-0	43295-40-0		06461-39-0	0A310-17-0
	DOMAL TOP TB 65		43725-40-0	43295-60-0		06465-22-0	0A310-20-0
IND INVEST	GOLD 500		43725-35-0	43295-60-0		06465-22-0	0A310-27-0
	GOLD 500 Porta		43825-30-0	43295-30-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta		43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.		43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto		43725-30-0	43295-60-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT		43725-40-0	43295-75-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA		43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
VIP DOOR 69 TT		43725-35-0	43295-40-0		06461-34-0	0A310-18-0	
JANSEN	Serie 50 ECONOMY		43825-35-0	43295-40-0		06461-12-0	0A310-07-0
	Serie 60		43825-35-0	43295-40-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT		43825-35-0	43295-30-0		06461-12-0	0A310-13-0

Shared components:

Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)

Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.

Bolts item 07088.-03.-0 (1 pc)

Automatic extension bolt closure restoring item 07089-52-0 (1 pc)

Manual extension bolt closure restoring item 06141-80-0 (1 pc)

External handle item 07070.-66-0-81 (1 pc)









Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

Profiles	Double leaf door					
Manufacturer	Series	Lock	Lock	Profile guard	Striker for diverter (2 pcs)	Cylinder Fin. 12
MERCURI	MERCURY 500 TT	43725-35-0	43295-75-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43725-40-0	43295-75-0		06465-22-0	0A310-41-0
METRA	NC 50 l Linea base	43825-35-0	43295-40-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43825-35-0	43295-40-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43825-35-0	43295-30-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43825-35-0	43295-30-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43825-30-0	43295-60-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43825-40-0	43295-40-0		06461-34-0	0A310-07-0
	BASIC 65	43825-40-0	43295-40-0		06461-34-0	0A310-13-0
	TERMICH 65	43825-40-0	43295-40-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43825-40-0	43295-40-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43825-35-0	43295-40-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43825-35-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
PONZIO	EKIP MAAS.STH 76 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	WINDSTOP 55 TT	43725-40-0	43295-40-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43725-40-0	43295-60-0		06465-22-0	0A310-41-0
PREDIERI	WINDSTOP 73 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	PR 58 Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	PR 75 TT	43725-40-0	43295-75-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43725-35-0	43295-60-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EKU DOOR 74 TT Porta	43825-30-0	43295-40-0		06465-04-0	0A310-20-0
SAPA (ex Alcoa)	ALFIL 54 TT	43725-35-0	43295-60-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43725-35-0	43295-75-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43725-35-0	43295-75-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43725-40-0	43295-75-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43825-30-0	43295-60-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43825-30-0	43295-60-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43825-30-0	43295-40-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43825-35-0	43295-30-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43825-40-0	43295-30-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43825-40-0	43295-30-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43825-35-0	43295-30-0		06461-39-0	0A300-13-0
TO.MA	ATLANTIS 55 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43825-30-0	43295-60-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43725-35-0	43295-60-0		06465-22-0	0A310-33-0



Shared components:

- Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
- Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
- Bolts item 07088.-03.-0 (1 pc)
- Automatic extension bolt closure restoring item 07089-52-0 (1 pc)
- Manual extension bolt closure restoring item 06141-80-0 (1 pc)
- External handle item 07070.-66-0-81 (1 pc)
- Square spindle, 8 mm item 07206.-00.-0 (2 pc)

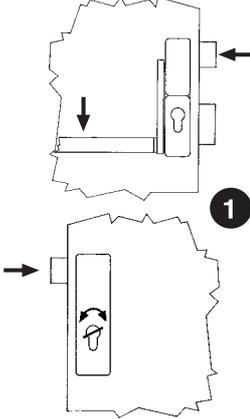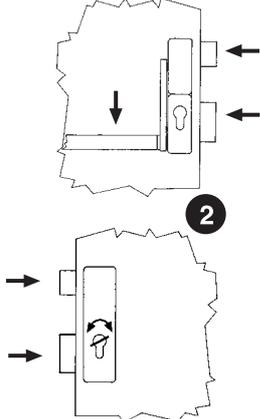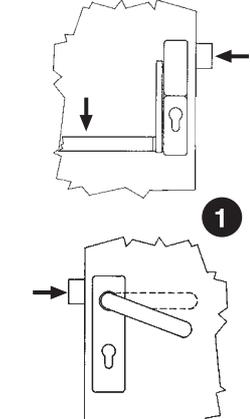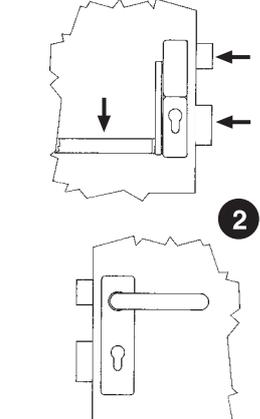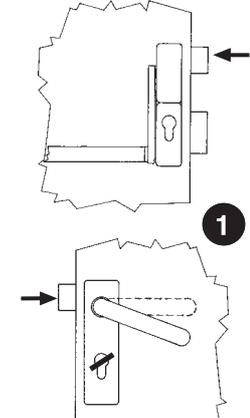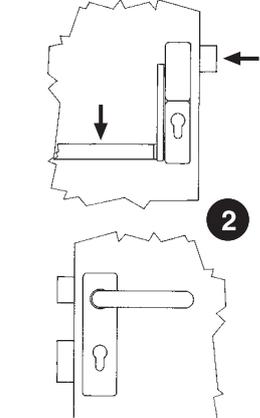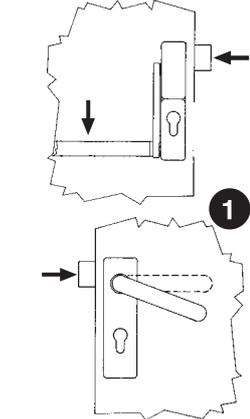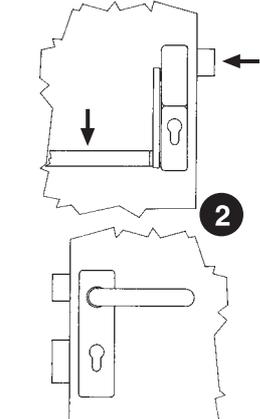TYPE	CONTROLS	OPERATION	
<p>A</p> <p>OUTSIDE ENTRANCE BY KEY</p> <p>For doors which have to be opened with the key from the outside by authorised personnel only</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with deadbolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates latch and deadbolt. 	 <p>1 Outside entrance by key only.</p>	 <p>2</p> <p>Locking with the deadbolt, outside entrance is possible only with the use of the key.</p>
<p>B</p> <p>OUTSIDE HANDLE ACTIVATED OR DISACTIVATED</p> <p>For doors that open outwards and places where it is necessary to provide free entrance.</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with deadbolt and activate or deactivate the outside handle. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates the deadbolt and activates or deactivates the outside handle for latch operation. 	 <p>1</p> <p>The outside handle is activated by rotating the key in the lock-opening direction as far as it will go (the handle remains activated when the key is removed).</p>	 <p>2</p> <p>Closing with the deadbolt deactivates the outside handle; the latter remains deactivated even after the door has been opened with the panic exit device.</p>
<p>C</p> <p>OUTSIDE HANDLE AUTOMATICALLY DISACTIVATED</p> <p>For doors that must be opened from the outside only by authorised persons.</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with deadbolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates the throw and activates the handle. 	 <p>1</p> <p>The outside handle is activated by rotating the key in the lock-opening direction as far as it will go, after first withdrawing the deadbolt.</p>	 <p>2</p> <p>Removing the key automatically deactivates the outside handle.</p>
<p>D</p> <p>OUTSIDE HANDLE ALWAYS ACTIVATED</p> <p>For doors that partition throughways (e.g. corridors).</p>	<p>INSIDE</p> <ul style="list-style-type: none"> -Panic exit device to open. -Key to close with deadbolt. <p>OUTSIDE</p> <ul style="list-style-type: none"> -The key operates the deadbolt. The handle, with the deadbolt withdrawn, engages for latch operation. 	 <p>1</p> <p>The outside handle is always activated when the deadbolt is withdrawn.</p>	 <p>2</p> <p>Entry is after using the panic exit device, always possible from the outside as long as the deadbolt is not activated by the key.</p>

Single leaf door

Double leaf door

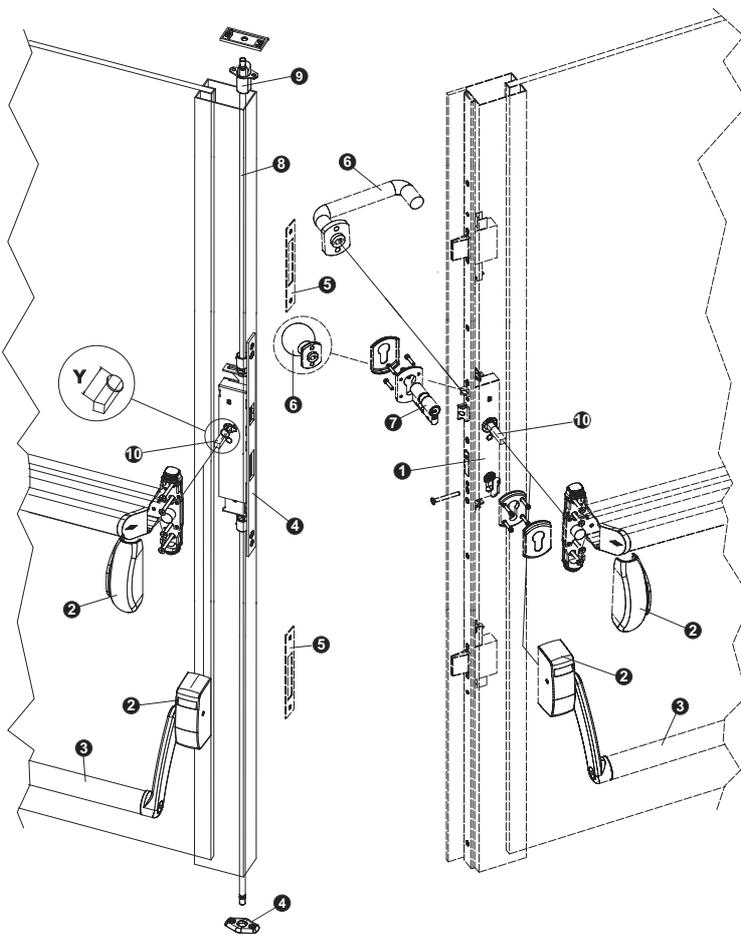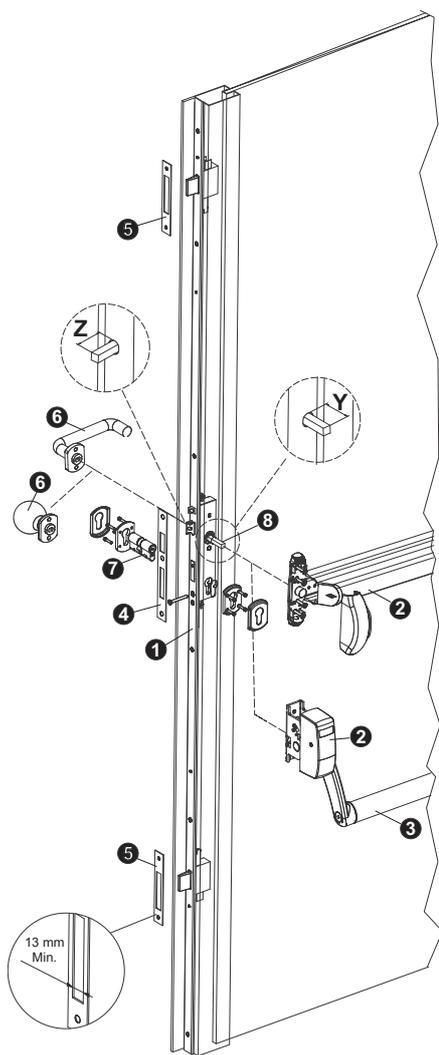

Single leaf door

1	2 EN1125	3	4	5	6	7	8
43725-XX-0	A	07007-XX-0	06463-14-0	06465-04-0	07070-56-0-B1	CISA	07206-00-0
43825-XX-0	B		06463-16-0	06465-06-0			
43735-XX-0	D		06463-17-0	06465-07-0			
43835-XX-0	A		06463-31-0	06465-21-0			
43725-XX-0	B	07007-XX-0	06463-32-0	06465-22-0	07070-66-0-B1	DIN	07206-00-0
43825-XX-0	D		06463-33-0	06465-23-0			
43725-XX-0	A		06463-34-0	06465-24-0			
43825-XX-0	B		06463-35-0	06465-25-0			
43735-XX-0	A	07007-XX-0	06461-07-0	06461-12-0	07070-66-0-B1	DIN	07206-00-0
43835-XX-0	B		06461-17-0	06461-22-0			
43725-XX-0	D		06461-30-0	06461-34-0			
43825-XX-0	A		06461-35-0	06461-39-0			

Double leaf door

1	2 EN1125	3	4	5	6	7	8	9	10
43725-XX-0	A	07007-XX-0	43295-XX-0	06465-04-0	07070-56-0-B1	CISA	07088-03-0	07089-52-0	07206-00-0
43825-XX-0	B			06465-06-0					
43735-XX-0	D			06465-07-0					
43835-XX-0	A			06465-21-0					
43725-XX-0	B	07007-XX-0	43295-XX-0	06465-22-0	07070-66-0-B1	DIN	07088-03-0	06141-80-0	07206-00-0
43825-XX-0	D			06465-23-0					
43725-XX-0	A			06465-24-0					
43825-XX-0	B			06465-25-0					
43735-XX-0	A	07007-XX-0	43295-XX-0	06461-12-0	07070-66-0-B1	DIN	07088-03-0	06141-80-0	07206-00-0
43835-XX-0	B			06461-22-0					
43725-XX-0	D			06461-34-0					
43825-XX-0	A			06461-39-0					

The Sikurexit system certification is only valid if the components contained in this itemized list are installed (certified system) - applicable standards EN1125 and EN179.

The system certification will no longer be valid if even just one unlisted component is installed:

- Only for the external drives and square spindle: the standard EN1125 is not binding in terms of listed component installation.

- Only for the square spindle: standard EN179 is not binding in terms of listed component installation.



Technical features:

- Steel case with zinc coating
- Top/bottom-adjustable stainless steel faceplate
- Adjustable nickel-plated anti-picking latchbolt and bolt
- Nickel-plated deadbolt
- Square spindle, 8 mm
- DIN holes for handle plate installation

On request:

- European profile cylinder
- Adjustable metal striker
- Cylinder protective rose item 1.06460-05-0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-00/01
- For emergency exit (UNI EN 179)
- Handle item 1.07070.66.0.B1

- Safety lock series 43295 for double leaf doors
- Electric handle item 1.07074-71-0 (A function only)
- Rose item 1.06473-20/30-0-B1
- Square spindle, 8 mm item 1.07206-00.-0 (L=100 mm)
- Electric strikers series 15100, 15200

Standards:

- UNI EN 179
- UNI EN 1129
- pr EN 15685:14
- Suitable for doors certified to EN 1627:2011 up to WK/RC 4 resistance class
- EN 12209:16 (1 locking point)
- prEN15685:14 (3 locking point)

Hand:
0 = Non-handed

Cylinder to be ordered separately



SikurExit

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
										Type	Dim.	Hand	Fin.



- FOR 1- AND 2-LEAF DOORS
- Stainless steel adjustable flat faceplate, 24x3 mm - height 2,300 mm
 - top adjustment 350 mm
 - bottom adjustment 150 mm
- Adjustable latch bolt (11 to 17 mm) with antipicking system
- 3 lateral deadbolts
- Hold-open device in the version 43725
- Pair of nylon roses item 1.06012-01-0
- Lock, rose and cylinder fixing screws
- Plug for closing the deadbolt hole on 1-leaf door
- Instruction sheet
- 3 certificates

• FUNCTION TYPE A

- Inside:
 - Panic exit device to open
 - Key to close with the deadbolt
- Outside:
 - Key to operate the latch and the deadbolt

• FUNCTION TYPE D

- Inside:
 - Panic exit device to open
 - key to close with the deadbolt
- Outside:
 - Key to close with the deadbolt
 - The handle can operate the latch bolt, with the deadbolt withdrawn

• FUNCTION TYPE B

- Inside:
 - Panic exit device to open
 - Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt
- Outside:
 - Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt

8	3	2	92	24	30	3,440	1	1	43725 30 0
8	3	2	92	24	35	3,440	1	1	43725 35 0
8	3	2	92	24	40	3,440	1	1	43725 40 0
8	3	2	92	24	45	3,440	1	1	43725 45 0

8	3	2	92	24	30	3,440	1	1	43735 30 0
8	3	2	92	24	35	3,440	1	1	43735 35 0
8	3	2	92	24	40	3,440	1	1	43735 40 0
8	3	2	92	24	45	3,440	1	1	43735 45 0

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
										Type	Dim.	Hand	Fin.



- FOR 1- AND 2-LEAF DOORS
- Stainless steel adjustable flat faceplate, 24x5 mm - height 2,300 mm
 - top adjustment 350 mm
 - bottom adjustment 150 mm
- Adjustable latch bolt (11 to 17 mm) with antipicking system
- 3 lateral deadbolts
- Hold-open device in the version 43825
- Pair of nylon roses item 1.06012-01-0
- Lock, rose and cylinder fixing screws
- Plug for closing the deadbolt hole on 1-leaf door
- Instruction sheet
- 3 certificates

• FUNCTION TYPE A

- Inside:
 - Panic exit device to open
 - Key to close with the deadbolt
- Outside:
 - Key to operate the latch and the deadbolt

FUNCTION TYPE D

- Inside:
 - Panic exit device to open
 - key to close with the deadbolt
- Outside:
 - Key to close with the deadbolt
 - The handle can operate the latch bolt, with the deadbolt withdrawn

• FUNCTION TYPE B

- Inside:
 - Panic exit device to open
 - Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt
- Outside:
 - Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt

8	3	2	92	24	30	3,440	1	1	43825 30 0
8	3	2	92	24	35	3,440	1	1	43825 35 0
8	3	2	92	24	40	3,440	1	1	43825 40 0
8	3	2	92	24	45	3,440	1	1	43825 45 0

8	3	2	92	24	30	3,440	1	1	43835 30 0
8	3	2	92	24	35	3,440	1	1	43835 35 0
8	3	2	92	24	40	3,440	1	1	43835 40 0
8	3	2	92	24	45	3,440	1	1	43835 45 0

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
										Type	Dim.	Hand	Fin.



- FOR 1- AND 2-LEAF DOORS
- Stainless steel flat faceplate 24x3 mm
- Adjustable latch bolt (11 to 17 mm) with antipicking system
- 1 lateral deadbolts
- Pair of nylon roses item 1.06012-01-0
- 8 mm nylon spacers (2 3 mm pcs and 1 2 mm pc)
- Fixing screws for lock, roses and cylinder
- Plug for closing the deadbolt hole on 1-leaf door
- Instruction sheet
- 3 certificates

FUNCTION TYPE A

- Inside:
Panic exit device to open
Key to close with the deadbolt
- Outside:
Key to operate the latch and the deadbolt

FUNCTION TYPE D

- Inside:
Panic exit device to open
key to close with the deadbolt
- Outside:
- Key to close with the deadbolt
-The handle can operate the latch bolt, with the deadbolt withdrawn

FUNCTION TYPE B


- Inside:
Panic exit device to open
Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt
- Outside:
Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt

FUNCTION TYPE C

- 30/40/45 backsets are replaced by series 43661
- Inside:
Panic exit device to open
Key to close with the deadbolt and enable/disable the outside handle to operate the latch
- Outside:
- Key to close with the deadbolt and enable/disable the outside handle to operate the latch
- The handle is always enabled while the key is in the hole, the handle is disabled when the key is removed

8	1	2	92	24	30	0,770	1	1 43225 30 0
8	1	2	92	24	35	0,800	1	1 43225 35 0
8	1	2	92	24	40	0,830	1	1 43225 40 0
8	1	2	92	24	45	0,860	1	1 43225 45 0
<hr/>								
8	1	2	92	24	30	0,770	1	1 43235 30 0
8	1	2	92	24	35	0,800	1	1 43235 35 0
8	1	2	92	24	40	0,830	1	1 43235 40 0
8	1	2	92	24	45	0,860	1	1 43235 45 0
<hr/>								
8	1	2	92	24	35	0,800	1	1 43236 35 0

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM					
										Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • SECONDARY DOOR SAFETY LOCK FOR USE WITH PANIC FUNCTION MULTIPPOINT LOCKS 	8	2		92	24	30	0,875	1	1	43295	30	0		
		8	2		92	24	40	0,940	1	1	43295	40	0		
	<ul style="list-style-type: none"> • A lock series 43725/43735/43835/43225/43235/43236 is installed on the primary door 	8	2		92	24	60	1,100	1	1	43295	60	0		
	<ul style="list-style-type: none"> • Stainless steel faceplate 24x3 • Extension bolt connector adjustable by 20 mm in the horizontal direction • Deadbolt feeler pin adjustable by 5.5 mm • Automatic or manual extension bolt closing • No. 1 5 mm nylon spacer for profiles type "R" and no. 2 3mm nylon spacers for "DOOR" type profiles • Teflon-coated floor striker item 1.06142.85.0 • Safety lock fixing screws • Instruction sheet • FUNCTIONS • Inside: <ul style="list-style-type: none"> - With panic exit device • Outside: <ul style="list-style-type: none"> - No operation • ON REQUEST: <ul style="list-style-type: none"> - Threaded internal extension bolts item 1.07088-03-0 • Fast Push panic exit devices series 59607 + bar series 07007 or Fast Touch panic exit devices item 1.59711.00/01-0 • Automatic device for extension bolt closure restoring item 1.07089.52-0 complete with spacers item 1.06141-81-0 (1 2 mm spacer and 1 2.5 mm spacer) and with top nylon striker item 1.06141-80-0 • Square spindle 8 mm item 1.7206.00.0 (L=100 mm) • Kit of spacers for safety lock item 1.06141-88-0 	8	2		92	24	75	1,100	1	1	43295	75	0		



Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 		0,180	12	1	06463	16	0	
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 		0,170	12	1	06463	17	0	
	<ul style="list-style-type: none"> • Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. • ON REQUEST: nickel-plated (fin. 12) 		0,230	12	1	06463	31	0	
	<ul style="list-style-type: none"> • REPLACES ITEM 1.06463.18.0 • Lateral adjustment 4 mm • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0 		0,145	12	1	06463	32	0	
	<ul style="list-style-type: none"> • REPLACING ITEM 1.06463.14.0 • Lateral adjustment 2.5 mm • 4.5 to 10 mm adjustable thickness. • For roller locks, use nylon insert item 1.06141.70.0 	19000, 49000, 43200, 43700, 43800	0,158	12	1	06463	34	0	
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 		0,122	12	1	06465	06	0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0 		0,117 12				1 06465 07 0
	<ul style="list-style-type: none"> • Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. • ON REQUEST: nickel-plated (fin. 12) 		0,140 12				1 06465 21 0
	<ul style="list-style-type: none"> • REPLACES ITEM 1.06465.02.0 • Lateral adjustment 4 mm • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0 		0,112 12				1 06465 22 0
	<ul style="list-style-type: none"> • REPLACING ITEM 1.06463.04.0 • Lateral adjustment 2.5 mm • 4.5 to 10 mm adjustable thickness. • For roller locks, use nylon insert item 1.06141.70.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 17300, 56300, 57300, 43700, 43800	0,125 12				1 06465 24 0
	<ul style="list-style-type: none"> • AS ABOVE • Stainless steel 		0,112 12				1 06465 25 0



Technical features:

- Steel case with zinc coating
- Stainless steel faceplate
- Latchbolt, nickel-plated steel
- Reversible latch/bolt
- Square spindle, 8 mm
- CE 12V AC voltage
- Absorbed current 3.1 A

Supplied as standard:

- Set of faceplate spacers item 1.06141.65.0
- Fixing screws lock and cylinder
- Instruction sheet

On request:

- Special striker plates (see Vademecum)
- Cylinder protective rose item 1.06460.00.0
- Mechanical control button item 1.06110.15.0
- Safety lock series 43295 for double leaf doors

Standards:

- UNI EN 179
- UNI EN 1125
- EN 12209:16 and EN 14846:08

Hand:
0 = Non-handed

Cylinder to be ordered separately
OE300
(ASIX) series



Type	Description	Fin.	Spindle hole	Locking joints	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
											Type	Dim.	Hand	Fin.



- For panic doors
- 10.5 to 16.5 mm adjustable latch and deadbolt
- Pair of nylon roses item 1.06012.01.0
- Use with panic exit devices in compliance with EN 1125:
 - 59607.10.0
 - 59711.00/01.0
- Use with handle in compliance with EN 179:
 - 07070.66.0.B1

-	85	22	25	0,764	1	1	16605 25 0							
-	85	22	30	0,788	1	1	16605 30 0							
-	85	22	35	0,833	1	1	16605 35 0							



Technical features:

- Steel case and cover.
- Nickel-plated steel deadbolts.
- Nickel-plated steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:

- Striker plate series 06220.

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric strikers series 15300

• For additional locking points

- Divertor item series 06433.00/01/11
- Pair of bolts item 06425.06.0
- Striker plates item 06220.28/29.0

• For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-10/11

- For emergency exits (UNI EN 179) Handle item 1.07070.50.0
- Pair of handles item 1.07070.60.0

Finishes:

- Zinc aluminum.

Standards:

- UNI EN 179
- UNI EN 1125
- UNI EN 12209

Hand:


0 = Non-handed

Cylinder to be ordered separately



Exitlock

Type	Description	DEAD-BOLTS								ITEM			
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand



- Deadbolt and latch
- pre-set for additional locking points

• FUNCTION TYPE A

- Inside:
The panic exit device and/or the handle to open
The key to close with the deadbolt
- Outside:
The key to close with the deadbolt.

4	3,5	27	2	85	64	2,650	1	1 56917 27 0
4	3,5	28	2	85	64	2,650	1	1 56917 28 0
3	3,5	38	2	85	64	2,650	1	1 56917 38 0
4	3,5	27	2	85	64	2,550	5	1 56917 47 0
4	3,5	28	2	85	64	2,550	5	1 56917 48 0
3	3,5	38	2	85	64	2,550	5	1 56917 58 0

• FUNCTION TYPE D

- Inside:
The panic exit device and/or the handle to open
The key to close with the deadbolt
- Outside:
The key to close with the deadbolt. When the deadbolt is withdrawn, the handle is activated and can operate the latch

• FUNCTION TYPE B

- Inside:
Panic exit device and/or handle to open
Key to close with deadbolt and enable or disable the outside handle when latch is operated
- Outside:
Key to close with deadbolt and enable or disable the outside handle when latch is operated

4	3,5	27	2	85	64	2,650	1	1 56916 27 0
4	3,5	28	2	85	64	2,650	1	1 56916 28 0
3	3,5	38	2	85	64	2,650	1	1 56916 38 0
4	3,5	27	2	85	64	2,550	5	1 56916 47 0
4	3,5	28	2	85	64	2,550	5	1 56916 48 0
3	3,5	38	2	85	64	2,550	5	1 56916 58 0



Technical features:

- Steel case and cover.
- Nickel-plated steel faceplate
- Nickel-plated steel deadbolts.
- Nickel-plated steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:

- Striker plate series 06220.

On request:

- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric strikerst series 15300

- For additional locking points
Divertor item series 06433.00/01/11
Pair of bolts item 06425.06.0
Striker plates item 06221.28/29.0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-10/11
- For emergency exits (UNI EN 179)
Handle item 1.07070.50.0
Pair of handles item 1.07070.60.0

Finishes:

- Zinc aluminum.

Standards:

- UNI EN 179
- UNI EN 1125
- UNI EN 12209


Hand:
0 = Non-handed

Cylinder to be ordered separately



Exitlock

Type	Description	DEADBOLTS								ITEM				
		No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	Type	Dim.	Hand	Fin.

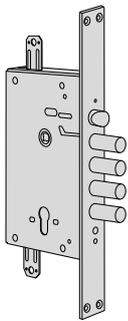

- Deadbolt and latch
- Pre-setting for additional locking points

• FUNCTION TYPE A

- Inside:
The panic exit device and/or the handle to open
The key to close with the deadbolt
- Outside:
The key to close with the deadbolt.

4	28	2	85	35	67	2,800	1	1	56937	28	0
4	28	2	85	35	67	2,650	5	1	56937	48	0

• FUNCTION TYPE D

- Inside:
The panic exit device and/or the handle to open
The key to close with the deadbolt
- Outside:
The key to close with the deadbolt. When the deadbolt is withdrawn, the handle is activated and can operate the latch

• FUNCTION TYPE B

- Inside:
Panic exit device and/or handle to open
Key to close with deadbolt and enable or disable the outside handle when latch is operated
- Outside:
Key to close with deadbolt and enable or disable the outside handle when latch is operated

4	28	2	85	35	67	2,800	1	1	56936	28	0
4	28	2	85	35	67	2,650	5	1	56936	48	0

Technical features:

- Laquered polished brass removable faceplate and striker
- Zinc-plated steel case
- Reversible, nickel-plated silent action latch
- Nickel-plated bolt for latch dead-locking (if provided)
- Nickel-plated cut-resistant deadbolt, with a 25 mm. protrusion
- Anti-corrosion galvanised internal components

Supplied as standard:

- Striker
- Fixing screws
- Instruction sheet

On request:

- Satin stainless steel faceplate and striker

- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-00/01
- For emergency exit (UNI EN 179)
- Handle series 30200

Standards:

- Locks with satin stainless steel faceplate and striker (finish 20), are certified fire-resistant by the American Underwrite Laboratories (UL LISTED R 14945(N))
- CE mark in compliance with the directive 89/106/CEE, only for item with (fin. 20)
- Standard reference:
- UNI EN 179
- UNI EN 1125
- UNI EN 12209

Hand:
0 = Non-handed

Cylinder to be ordered separately

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.

- FUNCTION TYPE B:
- Latch only with antipicking device
- Split square spindle
- Reversible panic function
- The outside handle can be deactivated with the key
- Outside: the latch can be operated with the handle, the key activates/disactivates the handle
- Inside: the latch can be operated with the handle or the panic exit device, the key activates/disactivates the outside handle
- Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains deactivated after the door is closed (in stand-by)






85	22	60	0,900	1	1 52760 60 0
85	22	70	0,950	1	1 52760 70 0
85	22	90	1,050	1	1 52760 90 0

- FUNCTION TYPE B:
- Latch only with antipicking device
- Split square spindle
- Reversible panic function
- The outside handle can be deactivated with the key
- Outside: the latch can be operated with the handle, the key activates/disactivates the handle
- Inside: the latch can be operated with the handle or panic exit device, the key activates/disactivates the outside handle
- Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains deactivated after the door is closed (in stand-by)

85	22	60	0,900	1	1 52761 60 0
85	22	70	0,950	1	1 52761 70 0
85	22	80	1,000	1	1 52761 80 0
85	22	90	1,050	1	1 52761 90 0

- FUNCTION TYPE A:
- Through square spindle
- The deadbolt is automatically released when closing the the door
- Outside: latch and deadbolt are operated only with the key
- Inside: latch and deadbolt are operated with the key, the handle or the panic exit device

1	85	22	60	0,950	1	1 52840 60 0
1	85	22	70	1,000	1	1 52840 70 0
1	85	22	80	1,050	1	1 52840 80 0
1	85	22	90	1,100	1	1 52840 90 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
 <ul style="list-style-type: none"> • FUNCTION TYPE A: • Through square spindle • The deadbolt is automatically released when closing the door • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52860	60	0		
	1	85	22	70	1,000	1	1	52860	70	0		
	1	85	22	80	1,050	1	1	52860	80	0		
	1	85	22	90	1,100	1	1	52860	90	0		
 <ul style="list-style-type: none"> • FUNCTION TYPE A: • Latch and deadbolt with antipicking device • Through square spindle • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52842	60	0		
	1	85	22	70	1,000	1	1	52842	70	0		
	1	85	22	80	1,050	1	1	52842	80	0		
	1	85	22	90	1,100	1	1	52842	90	0		
 <ul style="list-style-type: none"> • FUNCTION TYPE A: • Latch and deadbolt with antipicking device • Through square spindle • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device 	1	85	22	60	0,950	1	1	52862	60	0		
	1	85	22	70	1,000	1	1	52862	70	0		
	1	85	22	80	1,050	1	1	52862	80	0		
	1	85	22	90	1,100	1	1	52862	90	0		
 <ul style="list-style-type: none"> • FUNCTION TYPE D: • Split square spindle • Reversible panic function • Outside: the latch can be operated with the handle • Inside: latch and deadbolt are operated with the handle or the panic exit device • The key operates only the deadbolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the deadbolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open) 	1	85	22	60	0,950	1	1	52844	60	0		
	1	85	22	70	1,000	1	1	52844	70	0		
	1	85	22	80	1,050	1	1	52844	80	0		
	1	85	22	90	1,100	1	1	52844	90	0		
 <ul style="list-style-type: none"> • FUNCTION TYPE D: • Split square spindle • Reversible panic function • Outside: the latch can be operated with the handle • Inside: latch and deadbolt are operated with the handle or the panic exit device • The key operates only the deadbolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the deadbolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open) 	1	85	22	60	0,950	1	1	52864	60	0		
	1	85	22	70	1,000	1	1	52864	70	0		
	1	85	22	80	1,050	1	1	52864	80	0		
	1	85	22	90	1,100	1	1	52864	90	0		



Technical features:

- Satin lacquered brass faceplate and striker
- Semi-matt black lacquered steel case
- Reversible, nickel-plated latch
- Nickel-plated, antipicking bolt (if provided)
- Nickel-plated deadbolt
- Can be fitted with: escutcheons, roses, handle plates and through screws
- Through-spindle

Supplied as standard:

- Striker
- Striker and cylinder fixing screws

On request:

- Satin lacquered chrome-plated finish (fin. 18)
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-00/01
- For emergency exit (UNI EN 179) Handle series 30200

Standards:


- Standard reference
UNI EN 179
UNI EN 1129
UNI EN 12209

Hand:
0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.



- FUNCTION TYPE A:
- Deadbolt and dead-locking latch
- SUPPLIED AS STANDARD:
striker item 1.06106.01.0
- ON REQUEST:
Faceplate 18x240 (spec. AG)
Without antipicking bolt (suffix AF)

1	85	22	40	0,720	1	1 52810 40 1				
1	85	22	40	0,720	1	1 52810 40 2				
1	85	22	45	0,760	1	1 52810 45 0				
1	85	22	50	0,780	1	1 52810 50 0				
1	85	22	60	0,840	1	1 52810 60 0				
1	85	22	70	0,920	1	1 52810 70 0				



- FUNCTION TYPE A:
- Deadbolt and dead-locking latch
- SUPPLIED AS STANDARD:
striker item 1.06106.05.0
- ON REQUEST:
Faceplate 18x240 (spec. AG)
Without antipicking bolt (suffix AF)

1	85	22	40	0,720	1	1 52830 40 1				
1	85	22	40	0,720	1	1 52830 40 2				
1	85	22	45	0,760	1	1 52830 45 0				
1	85	22	50	0,780	1	1 52830 50 0				
1	85	22	60	0,840	1	1 52830 60 0				
1	85	22	70	0,920	1	1 52830 70 0				



FAST Touch

Technical features:

- Painted aluminum alloy/aluminum cover
- Painted steel bar, adjustable in length down to 300 mm on all models
- Galvanized steel internal components suitable for fire doors

Supplied as standard:

- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- Internal and external plates
- Version with microswitch (spec. LA)
- Fire door version (FR spec.).

Standards:

- Cover: black bar: red




ON REQUEST (only item 1.59711-00/10-0):

- Cover: red bar: black (fin. 41)
- Cover: yellow bar: black (fin. 42)
- Cover: green bar: black (fin. 43)
- Cover: black bar: black (fin. 44)
- Cover: white bar: white (fin. 45)
- Cover: gray bar: gray (fin. 97)
- Carter and bar painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2)

Hand:
0 = Non-handed

Standards:

- CE marking in compliance with the Construction Products Regulation 303/2011 issued by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

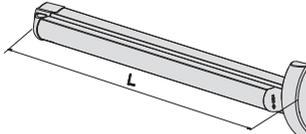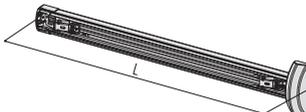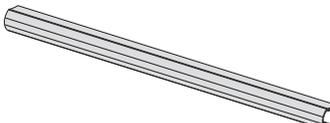Type	Description	Spindle hole	L	Unit weight	Pieces	ITEM					
						Type	Dim.	Hand	Fin.	Pers. Spec.	
 <ul style="list-style-type: none"> • Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830 • satin-finished PVD-treated stainless steel • Can be combined with panic function locks series Exitlock and Sicur Panic • satin-finished PVD-treated stainless steel 		8/9	1200	3,366	1	1	59711	00	0		
		8/9	840	2,592	1	1	59711	01	0		
		8/9	1200	3,366	1	1	59711	00	0	C2	
		8/9	1200	3,360	1	1	59711	10	0		
		8/9	840	2,592	1	1	59711	11	0		
		8/9	1200	3,366	1	1	59711	10	0	C2	
 <ul style="list-style-type: none"> • SUPPLIED WITHOUT PUSH BAR VERSION • Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830 • Can be combined with panic function locks series Exitlock and Sicur Panic 		8/9	1200	2,366	1	1	59711	00	0	00	SB
		8/9	1200	2,360	1	1	59711	10	0	00	SB
 <ul style="list-style-type: none"> • Bar • May be combined with panic exit devices series 1.59711.00.0.00.SB - 1.59711.10.0.00.SB • BAR COLOR OPTIONS: satin-finished anodised aluminium (fin. 62) Anodised bronze (fin. 64) Brass-plated (fin. A1) Matt black (fin. 00) Red (fin. 41) Yellow (fin. 42) Green (fin. 43) White (fin. 45) Grey (fin. 97) 				1,000	1	1	06196	43	0		



FAST Push

Technical features:

- Painted aluminum alloy/aluminum cover (59607 serie)
- Galvanized steel internal components suitable for fire doors

Supplied as standard:

- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:

- Internal and external plates
- Version with microswitch (spec. LA)
- Fire door version (FR spec.).

Finishes:

- STANDARD: Painted black

ON REQUEST:

- Painted red (fin. 41)
- Painted yellow (fin. 42)
- Painted green (fin. 43)
- Painted white (fin. 45)
- Painted gray (fin. 97)
- Painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2)


Hand:
0 = Non-handed

Bar to be ordered separately
 series 07007

Standards:


- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Type	Description	Spindle hole	L	Unit weight 	Pieces 	ITEM			
						Type	Dim.	Hand	Fin.

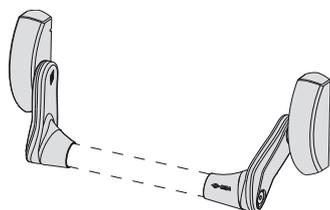

- Can be combined with panic function locks
- satin-finished PVD-treated stainless steel

8/9	1,900	1	1 59607 10 0
8/9	1,650	1	1 59607 10 0 C2

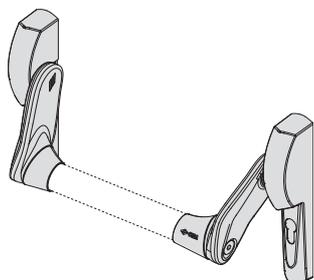


- Black nylon casing
- Can be combined with panic function locks centre distance 92
- Can be combined with panic function locks centre distance 72

8/9	1,820	1	1 59617 12 0
8/9	1,820	1	1 59617 00 0



- Red painted steel oval shaped bar
- AVAILABLE FINISHES (extra price):
yellow painted (fin. 42)
green painted (fin. 43)
black painted (fin. 44)
white painted (fin. 45)
grey painted (fin. 97)
painted steel grey (fin. B9 only version .13 e .14)

900	0,800	1	1 07007 13 0
1200	1,054	1	1 07007 14 0
1500	1,440	1	1 07007 15 0



- Stainless steel oval shaped horizontal bar

900	0,800	1	1 07007 60 0
1200	1,070	1	1 07007 61 0
1500	1,400	1	1 07007 62 0



Technical features:

- Non-handed handle.
- Idle handle under no power input conditions.
- Key operated mechanical emergency system: the key will operate the handle.
By removing the key the handle will be deactivated.
- Wiring system with connector for complete connection insulation.
- LED integral with handle body for door status visual indication.
- Nickel-plated steel case.
- Painted aluminum alloy cover.
- Electric hold-open device available.
- Power input through supplied Booster device.
- Rated voltage 12/24 V ac/dc.
- Operating voltage min. 5 V, max 28 V.

Supplied as standard:

- 8/9 mm square spindle.

On request:

- European profile cylinder.
- Timer item 1.07022.20.0.


Finishes:

- Black painted (RAL 9005).
- Grey painted (RAL 9006).

Hand:


0 = Non-handed

Type	Description	Facaplate	Unit weight	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.

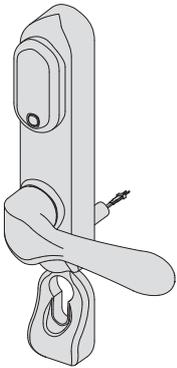

- Electrically enabled handle (A function only)
- Can be installed with locks series 43225, 43250, 43725, 43825, 52840, 52860, 52842, 52862, 52810, 52830, 56917, 56937
- Handle to cylinder distance 92 mm
- STANDARD SUPPLY:
Connecting cable
Fixing screws
- ON REQUEST:
Timer device 07022.20.0

1,150 1 1 07074 71 0



- Multiple scale timer


0,100 1 1 07022 20 0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Nylon cover for thermal cut profiles • For outward opening doors 	1 06141 40 0, 1 06285 36 0, 1 06463 24 0, 1 06463 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 24 0, 1 06465 25 0,	0,019	25	1 06141 79 0			
	<ul style="list-style-type: none"> • Upper striker for extension bolt • Black nylon 	1 07089 52 0	0,022	25	1 06141 80 0			
	<ul style="list-style-type: none"> • Nylon faceplate spacer 	43295	0,020	12	1 06141 88 0			
	<ul style="list-style-type: none"> • Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height from 3 to 7.5 mm) 	1 06463 24 0, 1 06463 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 24 0, 1 06465 25 0	0,019	25	1 06141 89 0			
	<ul style="list-style-type: none"> • Pair of floor strikers 		0,060	12	1 06142 85 0			
	<ul style="list-style-type: none"> • Stainless steel flat striker 24 x 1.5 mm. 		0,053	12	1 06461 07 0			


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Stainless steel flat striker 24 x 1.5 mm. 		0,034	12	1	06461	12	0
	<ul style="list-style-type: none"> Stainless steel flat striker 36x2 mm for FORSTER "UNICO" 		0,080	12	1	06461	17	0
	<ul style="list-style-type: none"> Stainless steel flat striker 36x2 mm for FORSTER "UNICO" 		0,046	12	1	06461	22	0
	<ul style="list-style-type: none"> Stainless steel flat striker 24 x 3 mm 		0,093	12	1	06461	30	0
	<ul style="list-style-type: none"> Stainless steel flat striker 24 x 3 mm 		0,065	12	1	06461	34	0
	<ul style="list-style-type: none"> Stainless steel U-shaped striker 24 x 6 mm. 		0,098	12	1	06461	35	0
	<ul style="list-style-type: none"> Stainless steel U-shaped striker 24 x 6 mm. 		0,065	12	1	06461	39	0
	<ul style="list-style-type: none"> Thumb turn to install with SikurExit Finishes: nickel-plated, chrome-plated and satin-finished For EN 179:2008 the handle item 1.07070.66.0.B1 should also be ordered 	43225, 43235, 43236, 43295, 43725, 43735, 43825, 43835	0,200	1	1	07070	56	0 B1
	<ul style="list-style-type: none"> Handle to install with SikurExit Finishes: nickel-plated, chrome-plated and satin-finished For EN 179:2008 2 pieces should be ordered 	43225, 43235, 43236, 43295, 43725, 43735, 43825, 43835	0,400	1	1	07070	66	0 B1

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Peris. Spec.
	<ul style="list-style-type: none"> • Pair of handles to install with Exit lock • AVAILABLE FINISHES: Anodised bronze (fin. 00) satin-finished nickel-plated chrome (fin. B1) 	56915, 56935	0,400	1	1	07070	50	0
	<ul style="list-style-type: none"> • Handle and fixed thumb turn to install with Exit lock • AVAILABLE FINISHES: Anodised bronze (fin. 00) satin-finished nickel-plated chrome (fin. B1) 	56916, 56917, 56936, 56937	0,400	1	1	07070	60	0
	<ul style="list-style-type: none"> • Black painted inside plate • Can be installed with panic exit devices • To be combined with European profile cylinder protective roses on armoured doors • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fing. 45) painted grey (fin. 97) 		0,106	6	1	07076	70	0
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 		0,106	6	1	07076	70	0 C2
	<ul style="list-style-type: none"> • Black painted inside plate • Can be installed with mortice version panic exit devices • To be combined with European profile cylinder protective roses on armoured doors • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fing. 45) painted grey (fin. 97) 		0,106	6	1	07076	71	0
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 		0,106	6	1	07076	71	0 C2
	<ul style="list-style-type: none"> • Steel split splindle 		0,100	1	1	07085	77	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM					
					Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Zinc plated extension bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2) 		0,600	12	1	07088	03	0		
	<ul style="list-style-type: none"> • Steel dogging device, complete with: Spacers item 1.06141.81.0 Upper striker item 1.06141.80.0 	43295	0,060	1	1	07089	52	0		
	<ul style="list-style-type: none"> • Black painted outside plate • Can be installed with Fast Touch panic exit devices series 59711 • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) L=72 (dim. 61) L=85 (dim. 62) L=92 (dim. 63) 		0,110	6	1	07176	61	0		
			0,110	6	1	07176	62	0		
			0,110	6	1	07176	63	0		
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 		0,110	6	1	07176	61	0	C2	
			0,110	6	1	07176	62	0	C2	
			0,110	6	1	07176	63	0	C2	
	<ul style="list-style-type: none"> • Black painted outside plate • Can be installed with Fast Touch panic exit devices series 59711 • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) 		0,110	6	1	07176	66	0		
	<ul style="list-style-type: none"> • satin-finished PVD-treated stainless steel 		0,110	6	1	07176	66	0	C2	
	<ul style="list-style-type: none"> • Steel split spindle 		0,050	6	1	07206	00	0		

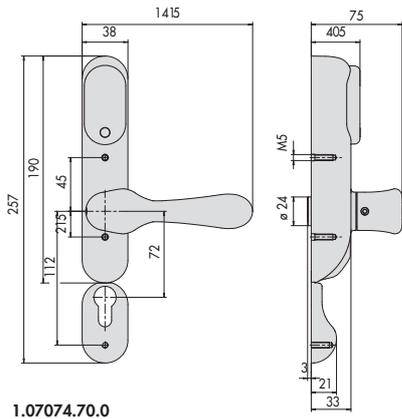


1.07074.70.0

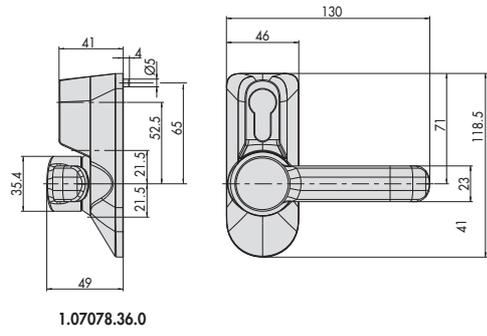


1.07078.36.0

1

4

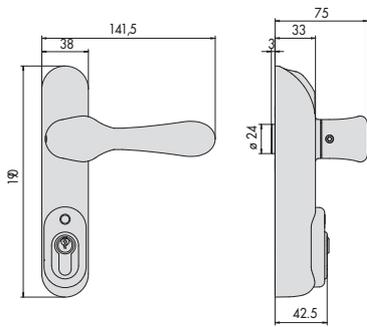


1.07074.80.0

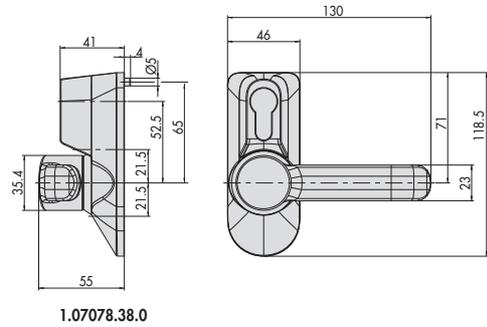


1.07078.38.0

2

5

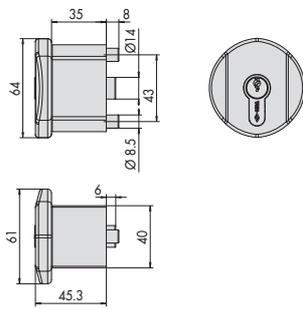


1.07078.35.0

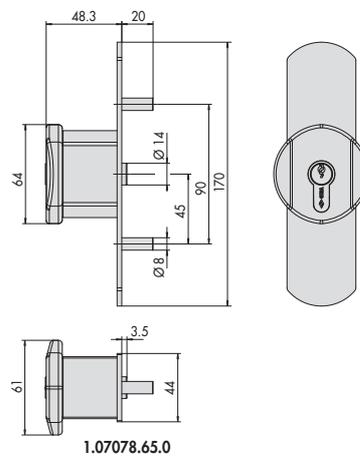


1.07078.65.0

3

6

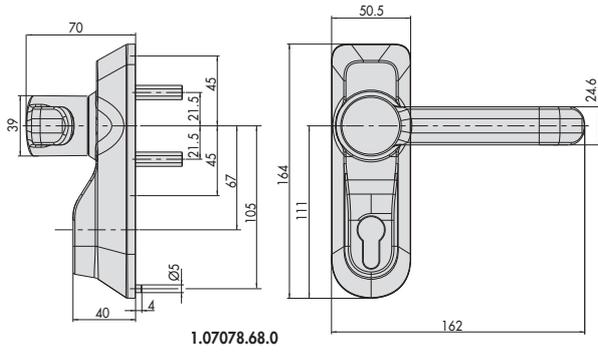


1.07078.68.0

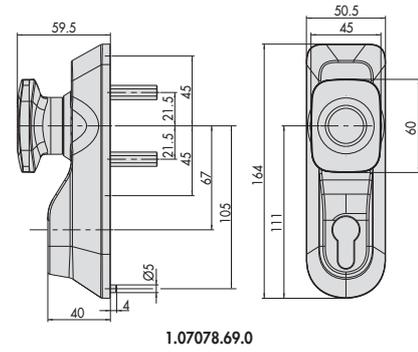

1.07078.69.0


8

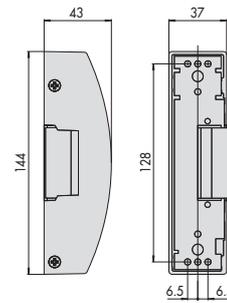


1.07083.05/06/07/40/41/80/81/82/90

9

7

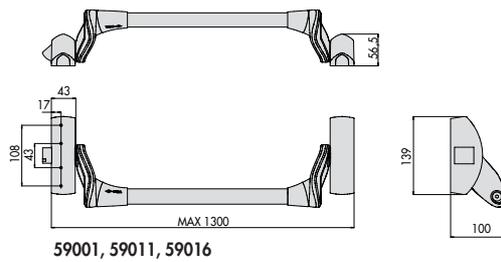

59001, 59011, 59016

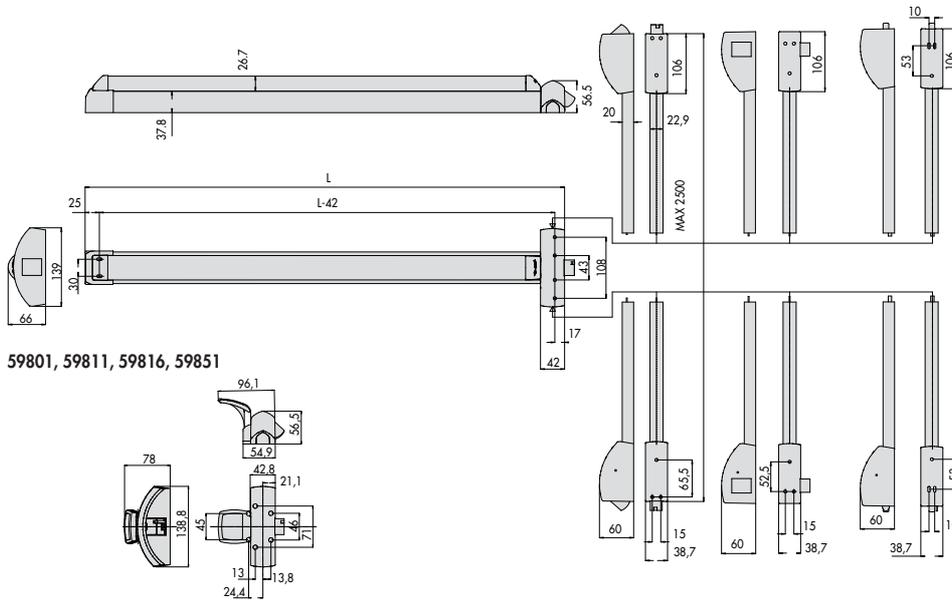


59801, 59811, 59816, 59851

59051, 59091, 59066


07063.26/35/36/37

10

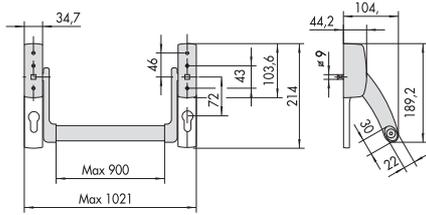


59616

13

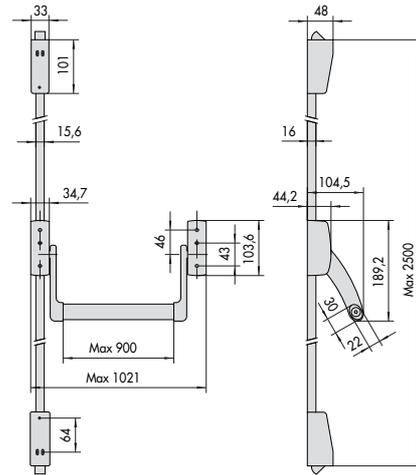


59647

15

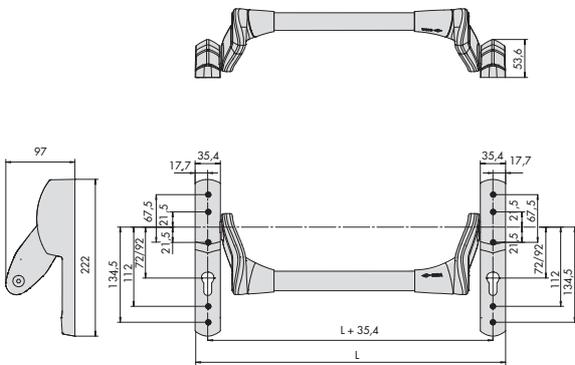


59607 - 59617

14

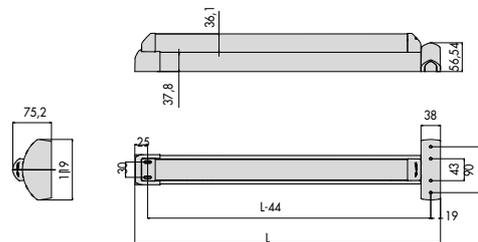

59711

16

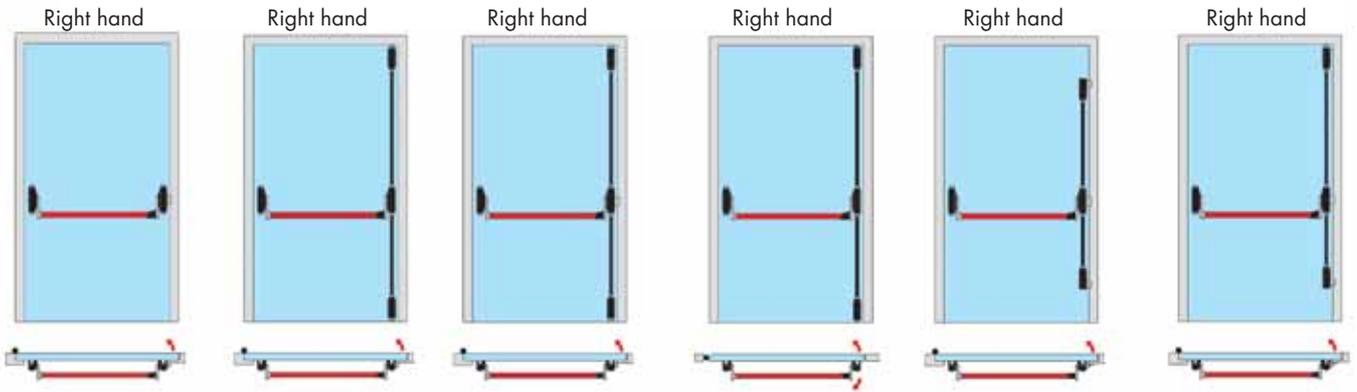

Series CISA PRESTIGE

59301
59351

Series FAST PUSH

59001
59011

Series FAST TOUCH

59801
59811

Series eFAST

59851

Series CISA PRESTIGE

59311+1-07063-30-0
59316+1-07063-30-0
59351+1-07063-31-0
59366+1-07063-31-0

Series FAST PUSH

59016+1-07063-61-0
59011+1-07063-61-0

Series FAST TOUCH

59816+1-07063-61-0
59811+1-07063-61-0

Series CISA PRESTIGE

59311+1-07063-30-0
59351+1-07063-31-0

Series FAST PUSH

59011+1-07063-61-0

Series FAST TOUCH

59816+1-07063-61-0

Series eFAST

59851+1-07063-61-0

Series CISA PRESTIGE

59316+1-07063-40-0
59366+1-07063-41-0

Series FAST PUSH

59016+1-07063-71-0

Series FAST TOUCH

59816+1-07063-71-0

Series CISA PRESTIGE

59311+1-07063-20-0
59316+1-07063-20-0
59351+1-07063-21-0
59366+1-07063-21-0

Series FAST PUSH

59011+1-07063-51-0
59016+1-07063-51-0

Series FAST TOUCH

59811+1-07063-51-0
59816+1-07063-51-0

Series eFAST

59851+1-07063-51-0

Series CISA PRESTIGE


59311+1-07063-35-1
59316+1-07063-35-1
59351+1-07063-36-1
59366+1-07063-36-1

Series FAST PUSH

59011+1-07063-66-1
59016+1-07063-66-1

Series FAST TOUCH

59811+1-07063-66-1
59816+1-07063-66-1

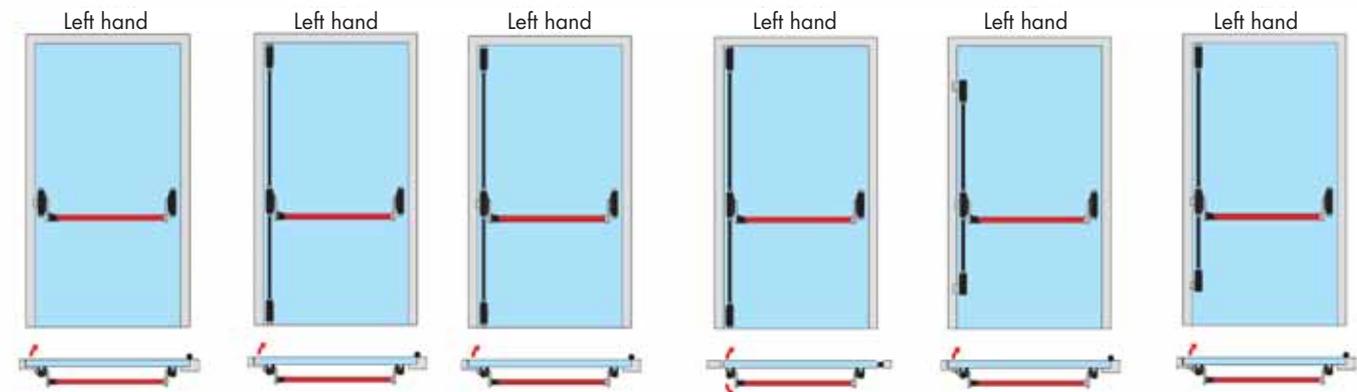

Series CISA PRESTIGE

59301
59351

Series FAST PUSH

59001
59011

Series FAST TOUCH

59801
59811

Series eFAST

59851

Series CISA PRESTIGE

59311+1-07063-30-0
59316+1-07063-30-0
59351+1-07063-31-0
59366+1-07063-31-0

Series FAST PUSH

59016+1-07063-61-0
59011+1-07063-61-0

Series FAST TOUCH

59816+1-07063-61-0
59811+1-07063-61-0

Series CISA PRESTIGE

59311+1-07063-30-0
59351+1-07063-31-0

Series FAST PUSH

59011+1-07063-61-0

Series FAST TOUCH

59816+1-07063-61-0

Series eFAST

59851+1-07063-61-0

Series CISA PRESTIGE

59316+1-07063-40-0
59366+1-07063-41-0

Series FAST PUSH

59016+1-07063-71-0

Series FAST TOUCH

59816+1-07063-71-0

Series CISA PRESTIGE

59311+1-07063-20-0
59316+1-07063-20-0
59351+1-07063-21-0
59366+1-07063-21-0

Series FAST PUSH

59011+1-07063-51-0
59016+1-07063-51-0

Series FAST TOUCH

59811+1-07063-51-0
59816+1-07063-51-0

Series eFAST

59851+1-07063-51-0

Series CISA PRESTIGE


59311+1-07063-35-2
59316+1-07063-35-2
59351+1-07063-36-2
59366+1-07063-36-2

Series FAST PUSH

59011+1-07063-66-2
59016+1-07063-66-2

Series FAST TOUCH


59811+1-07063-66-2
59816+1-07063-66-2

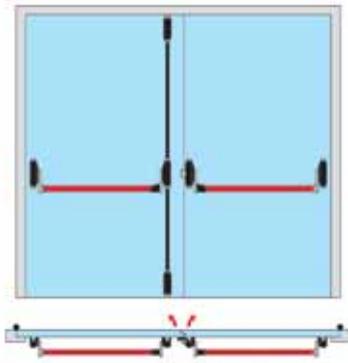

Series CISA PRESTIGE
 59301 + 1-07063-30-0 + 59316
 59311 + 1-07063-30-0 + 59311
 59351 + 1-07063-31-0 + 59366
 59361 + 1-07063-31-0 + 59361

Series FAST PUSH
 59016 + 1-07063-61-0 + 59001
 59011 + 1-07063-61-0 + 59011


Series FAST TOUCH
 59816 + 1-07063-61-0 + 59801
 59811 + 1-07063-61-0 + 59816

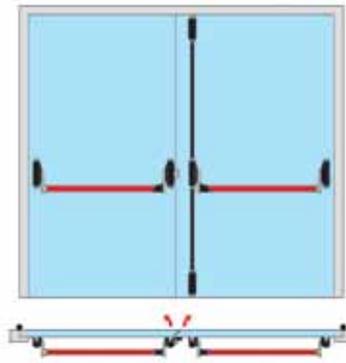

Series CISA PRESTIGE
 59301 + 1-07063-30-0 + 59316
 59311 + 1-07063-30-0 + 59311
 59351 + 1-07063-31-0 + 59366
 59361 + 1-07063-31-0 + 59361

Series FAST PUSH
 59001 + 1-07063-61-0 + 59016
 59011 + 1-07063-61-0 + 59011


Series FAST TOUCH
 59801 + 1-07063-61-0 + 59816
 59811 + 1-07063-60-0 + 59816

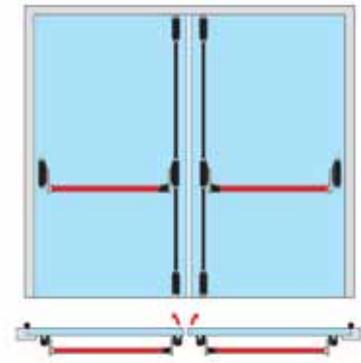

Series CISA PRESTIGE
 59311+1-07063-30-0+59301+1-07063-30-0
 59316+1-07063-30-0+59316+1-07063-30-0
 59351+1-07063-31-0+59351+1-07063-31-0
 59366+1-07063-31-0+59366+1-07063-31-0

Series FAST PUSH
 59011+1-07063-61-0+59001+1-07063-61-0
 59016+1-07063-61-0+59016+1-07063-61-0


Series FAST TOUCH
 59811+1-07063-61-0+59811+1-07063-61-0
 59816+1-07063-61-0+59816+1-07063-61-0

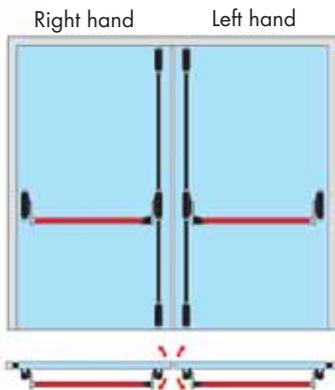

Series CISA PRESTIGE
 59311+1-07063-40-0+59301+1-07063-40-0
 59361+1-07063-41-0+59366+1-07063-41-0

Series FAST PUSH
 59011+1-07063-71-0+59001+1-07063-71-0
 59016+1-07063-71-0+59016+1-07063-71-0


Series FAST TOUCH
 59811+1-07063-61-0+59811+1-07063-61-0
 59816+1-07063-61-0+59816+1-07063-61-0

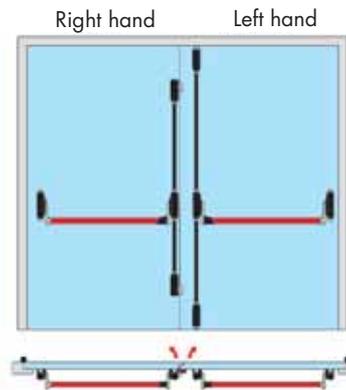

Series CISA PRESTIGE
 59311+1-07063-30-0+59316+1-07063-20-0
 59351+1-07063-31-0+59366+1-07063-21-0

Series FAST PUSH
 59011+1-07063-51-0+59016+1-07063-61-0

Series FAST TOUCH
 59811+1-07063-51-0+59816+1-07063-61-0

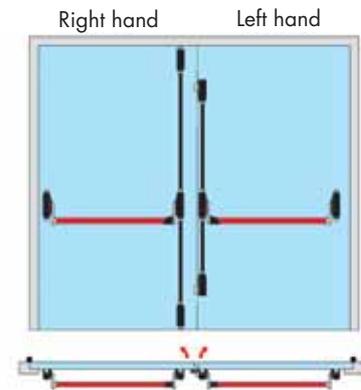

Series CISA PRESTIGE
 59316+1-07063-30-0+59311+1-07063-20-0
 59366+1-07063-31-0+59361+1-07063-21-0

Series FAST PUSH
 59016+1-07063-61-0+59011+1-07063-51-0

Series FAST TOUCH
 59816+1-07063-51-0+59811+1-07063-61-0

NOTE:

Standard version CISA Panic exit devices can be installed on doors 70 mm max thickness, 2500 mm max height, 1300 mm max width.
 On request they are also available for larger size doors.



Door closers



Door closers D5200 series	535	Accessories for door closers Smart Plus and Professional Plus series	542
Cam action door closers D6200 series	536	Door closers 601/T series	545
Door closers D7200 series	537	Accessories for door closers 601 series.....	546
Cam action door closers D8200 series	538	Gate closer	547
Door closer PROFESSIONAL PLUS series	539	Dimensional drawings	549
Door closers SMART PLUS series	541		





Door closers D5200 series



CISA D5200 series asymmetric rack and pinion door closers - easy opening and a compact design

Easy opening, reliable closing

In contrast to conventional door closers, asymmetric rack and pinion technology ensures maximum opening efficiency. The initial opening power decreases rapidly, allowing even children and the elderly to open the door easily.

The CISA D5200 series is CE marked to EN1154 and fire tested to EN1634 – 1 with a 2-hour fire rating on wooden doors (installation with plate 1.07153.15.0 mandatory).





Technical features:

- Steel sliding arm with or without hold open device
- Adjustment valve with thermostatic device.

Operation:

- Adjustable closing speed and end stroke
- Adjustable strength
- Backcheck (opening brake)

Supplied as standard:

- Screws
- Adhesive templates

On request:

- Mounting plates
- Replacement arm with or without hold open

Finishes:

- SUPPLIED AS STANDARD:

- Aluminum (fin. 97)

- FINISH OPTIONS:

- Black (fin. 44)

- White (fin. 45)

- Brown (fin. 88)

Standards:

- CE marking in compliance with EN 1154 standard

D5200

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight	Pieces	ITEM					
							Type	Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • For inward/outward opening doors • Without hold open 	1÷4	1100	80	2,200	1	1	D5200	03	0	97	
	<ul style="list-style-type: none"> • For inward/outward opening doors • With hold open 	1÷4	1100	80	2,304	1	1	D5210	03	0	97	
	• Slide track without hold open item D5200				0,600	1	1	07157	10	0	97	
	• Slide track with hold open item D5210				0,700	1	1	07157	11	0	97	
	• Mounting plate item D5200 for installation on fire doors				0,300	1	1	07153	15	0	97	



Technical features:

- Steel sliding arm with or without hold open device
- Cam operated.
- Adjustment valve with thermostatic device.

Operation:

- Adjustable closing speed and end stroke
- Adjustable strength
- Backcheck (opening brake)

Supplied as standard:

- Screws
- Adhesive templates


Finishes:

- SUPPLIED AS STANDARD:
 - Aluminum (fin. 97)
- FINISH OPTIONS:
 - Black (fin. 44)
 - White (fin. 45)
 - Champagne (fin. 87)
 - Brown (fin. 88)
 - Matt black (fin. 90)

Standards:

- CE marking in compliance with EN 1154 standard

D6200

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight	Pieces	ITEM				
							Type	Dim.	Hand	Pers. Spec.	
 	<ul style="list-style-type: none"> • For inward opening doors (door closer body installed on the door leaf and arm on the door frame) • Standard track arm 	2÷4	1100	80	2,300	1	1	D6200	03	0	97
	<ul style="list-style-type: none"> • For outward opening doors (door closer body installed on the door leaf and arm installed on the frame) • Standard track arm 	2÷4	1100	80	2,300	1	1	D6210	03	0	97
	<ul style="list-style-type: none"> • Hold open unit for D6200 series 	-	-	-	-	1	1	07209	02	0	



Technical features:

- Cast iron pressed body
- Steel slider arm with or without stop
- Cam-controlled operation
- Adjustment valves with thermostatic device.

Operation:

- Closing rate
- End stroke
- Closure delay
- Opening brake
- Actuating force
- Stop position

Supplied as standard:

- Pre-assembly plate
- Screws
- Adhesive templates



Finishes:

- STANDARD:
 - Aluminum (fin. 97)
- FINISHING OPTIONS:
 - Black (fin. 44)
 - White (fin. 45)
 - Champagne (fin. 87)
 - Dark brown (fin. 88)
 - Dark bronze (fin. 99)
 - Satin-finished stainless steel (fin. C2)

Standards:

- CE mark according to the EN 1154 standard

D7200

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight Kg	Pieces	ITEM						
							Type	Dim.	Hand	Fin.	Pers.	Spec.	
 	<ul style="list-style-type: none"> • For inward opening doors (door closer body installed on the door leaf and arm on the door frame) • Standard track arm 	2÷5	1250	100	6,000	1	1	D7200	04	0	97		
	<ul style="list-style-type: none"> • For outward opening doors (door closer body installed on the door arm installed on the frame) • Standard track arm 	2÷5	1250	100	6,000	1	1	D7210	04	0	97		
	<ul style="list-style-type: none"> • Hold open unit for D7200 series door closers 	5	1250	100	6,000	1	1	07210	00	0			



Technical features:

- Cast iron pressed body
- Steel slider arm with or without stop
- Cam-controlled operation
- Adjustment valves with thermostatic device.

Operation:

- Adjustable closing speed and end stroke
- Adjustable strength

Supplied as standard:

- Screws
- Adhesive templates



Finishes:

- STANDARD:
- Aluminum (fin. 97)

Standards:

- CE mark according to the EN 1154 standard

D8200

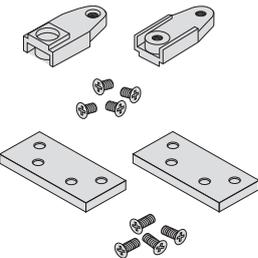Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight 	Pieces 	ITEM						
							Type	Dim.	Hand	Fin.	Pers.	Spec.	
 CE 	<ul style="list-style-type: none"> • For inward opening doors (door closer body mounted on the door leaf; slide track mounted on the door frame) • Without hold open device 	2÷4	1100	80	1,900	1	1	D8200	03	0	97		
	<ul style="list-style-type: none"> • Hold open device for D8200 series 	-	-	-	-	1	1	07209	00	0			
	<ul style="list-style-type: none"> • Hold-open device 	-	-	-	-	1	1	07209	01	0			
	<ul style="list-style-type: none"> • Protection kit for installation on fire doors 	-	-	-	-	1	1	07209	21	0			
	<ul style="list-style-type: none"> • Mounting kit for aluminium door frames 	-	-	-	-	1	1	07209	25	0			
	<ul style="list-style-type: none"> • Replacement arm for item D8200 	-	-	-	-	1	1	07209	20	0	97		



Technical features:

- Adjustable steel arm with hold open device
- Solid aluminium body with slide-on cover

Operation:

- Closing strength:
- multiple strength version with adjustable position of body and arm hinge mechanism (C15 model)
- Adjustable strength version: adjusted via the screw on the body side (C16 and C21 models)
- Closing strength and end stroke adjustment valves for easier access. Valves protection cover to avoid any unauthorised adjustment
- Adjustable closing strength from 180° to 15° via the valve (closing)
- Adjustment of the end stroke from 15° to

0° via the valve (latch)

- Adjustable backcheck (opening brake) to reduce the risk of damaging the door and the adjacent walls
- Adjustment of stop position up to 130° (function not suitable for fire doors)

Supplied as standard:

- Fixing screws
- Template and installation instructions

Finishes:


- SUPPLIED AS STANDARD:
 - Grey (fin. 97)
- FINISH OPTIONS:
 - Black (fin. 44)
 - White (fin. 45)
 - Champagne (fin. 87)
 - Brown (fin. 88)
 - Matt black (fin. 90)

Standards:

- CE marking in accordance with (UE) no. 305/2011 regulation

Professional Plus 2

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight Kg	Pieces	ITEM				
							Type	Dim. Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • MULTISTRENGTH • Arm without hold open device 	2÷4	850÷1100	40÷80	2,300	1	1	C1510	03	0	97
	<ul style="list-style-type: none"> • MULTISTRENGTH • With hold open device on arm 	2÷4	850÷1100	40÷80	2,300	1	1	C1511	03	0	97
	<ul style="list-style-type: none"> • ADJUSTABLE STRENGTH • Without hold-open • Backcheck (opening brake) 	2÷4	850÷1100	40÷80	3,100	1	1	C1610	03	0	97
	<ul style="list-style-type: none"> • ADJUSTABLE STRENGTH • Arm with hold-open • Backcheck (opening brake) 	2÷4	850÷1100	40÷80	3,100	1	1	C1611	03	0	97
	<ul style="list-style-type: none"> • ADJUSTABLE STRENGTH • Without hold-open • Backcheck (opening brake) 	2÷6	850÷1260	40÷120	3,500	1	1	C1610	05	0	97
	<ul style="list-style-type: none"> • ADJUSTABLE STRENGTH • Arm with hold-open • Backcheck (opening brake) 	2÷6	850÷1250	40÷120	3,500	1	1	C1611	05	0	97

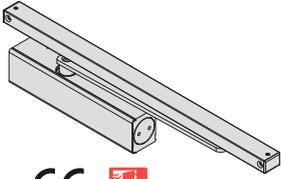Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
 <p>CE </p>	<ul style="list-style-type: none"> • Slide track • Arm with hold-open 	3	950	60	2,600	1	1	C2010	03	0 97	
 <p>CE </p>	<ul style="list-style-type: none"> • ADJUSTABLE STRENGTH VERSION • Slide track • Without hold-open • Backcheck (opening brake) 	2÷4	850÷1100	40÷80	3,700	1	1	C2110	03	0 97	



Smart Plus 2

Technical features:

- Steel arm with hold-open device.
- Solid body in die-cast aluminium alloy
- Rack-and-pinion mechanism in hardened steel for smooth, efficient operation
- Removable ABS cover

Operation:

- Multi-strength version with adjustable position of body and arm hinge mechanism, strength 2 and 3 (ENn54), strength 3 (CE)
- Independent closing speed and end stroke adjustment valves.
- Closing strength adjustable from 180° to 15° via the valve (1).
- End stroke adjustable from 15° to 0° via the valve (2).
- Adjustment of stop position up to 130° (function not suitable for fire doors)

Supplied as standard:

- Fixing screws
- Template and installation instructions


Finishes:

- Standard
 - Aluminium (fin. 97)
- Finish options
 - Champagne (fin. 87)
 - Brown (fin. 88)
 - Black (fin. 44)
 - Matt black (fin. 90)
 - White (fin. 45)

Standards:


- CE marking in accordance with
- (UE) no. 305/2011 regulation

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight 	Pieces 	ITEM			
							Type	Dim. Hand	Fin.	Pers. Spec.

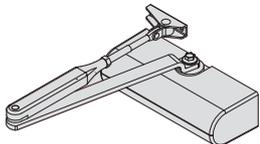








- MULTISTRENGTH
- Arm without hold open device
- CE mark according to Directive 89/106/CEE

3 950 60 1,800 1 1 C1415 03 0 97





- MULTISTRENGTH
- With hold open device on arm

2÷4 850÷1100 40-80 1,800 1 1 C1416 03 0 97

Type	Description	Unit weight Kg	Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<p>The required finish must always be specified in the order (where necessary)</p> <ul style="list-style-type: none"> • Finishes available: <ul style="list-style-type: none"> - Champagne colour (fin. 87) - Dark brown colour (fin. 88) - Aluminium colour (fin. 97) - Black colour (fin. 44) - Matt black colour (fin. 90) - Dark bronze colour (fin. 99) - White colour (fin. 45) 						
	• Steel angle backplate parallel arm steel angle backplate for C1415 and C1416 series	0,230	1	1	07141	01	0 97
	• Steel backplate door closers steel plate for C1510 03 and C1511 03 series			1	1	07142	01 0 97
	• Steel backplate door closers steel plate for C1510 03 and C1511 03 series			1	1	07153	02 0 97
	• Steel backplate door closers steel plate for C1610 03 and C1611 03 series			1	1	07153	03 0 97
	• Steel backplate door closers steel plate for C1610 03 and C1611 03 series			1	1	07153	04 0 97
	• Steel backplate door closers steel plate for C1610 05 and C1611 05 series			1	1	07153	05 0 97
	• Steel backplate door closers steel plate for C1610 05 and C1611 05 series			1	1	07153	06 0 97

Type	Description	Unit weight Pieces	ITEM			
			Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> • Steel sliding arm without hold-open device • For Smart Plus 2 door closers 	0,460 1	1	07155	10 0 12	
	<ul style="list-style-type: none"> • Steel sliding arm with hold-open device • For Smart Plus 2 door closers 	0,460 1	1	07155	11 0 97	
	<ul style="list-style-type: none"> • Steel sliding arm without hold-open device • For Smart Plus 2 Closing Force 3 door closers 	0,460 1	1	07155	12 0 97	
	<ul style="list-style-type: none"> • Steel sliding arm without hold-open device • For Smart Plus 2 Closing Force 5 door closers 	0,460 1	1	07155	14 0 97	
	<ul style="list-style-type: none"> • Steel sliding arm with hold-open device • For Smart Plus 2 Closing Force 3 door closers 	0,900 1	1	07155	13 0 97	
	<ul style="list-style-type: none"> • Steel sliding arm with hold-open device • For Smart Plus 2 Closing Force 5 door closers 	0,900 1	1	07155	15 0 97	
	<ul style="list-style-type: none"> • Steel sliding arm with aluminium slide track • For Professional Plus 2 door closers, C2010 series 	0,700 1	1	07155	20 0 97	

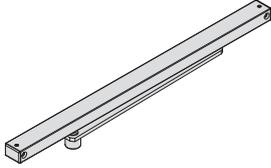Type	Description	Unit weight Kg	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Steel sliding arm with aluminium slide track • For Professional Plus 2 door closers, C2110 series 	0,800	1	1	07155	21	0	97
	<ul style="list-style-type: none"> • Closer hold-open device with sliding arm for C2010 03 and C2011 03 series 			1	1	07210	01	0



Technical features:

- Solid cast iron body
- Steel arm, with or without hold open device
- ADJUSTMENTS:
Closing speed adjusting valve

Supplied as standard:

- Fixing screws
- Installation template

Finishes:


- The required finish must always be specified in the order
- Finishes available:
aluminium colour (fin. 97)
gold colour (fin. 98)

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight 	Pieces 	ITEM				
							Type	Dim. Hand	Fin.	Pers. Spec.	
<ul style="list-style-type: none"> • Arm without hold-open device 		1	750	30	2,392	2	1	60130	01	0	98
		2	830	45	3,167	2	1	60140	02	0	98
		3	930	60	3,717	2	1	60150	03	0	98
		4	1030	80	4,900	2	1	60160	04	0	98
<ul style="list-style-type: none"> • Arm with hold-open device 		1	750	30	2,480	2	1	60131	01	0	98
		2	830	45	3,205	2	1	60141	02	0	98
		3	930	60	3,705	2	1	60151	03	0	98
		4	1030	80	5,025	2	1	60161	04	0	98

Type	Description	For series/item	L	Unit weight Kg	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.

The required finish must always be specified in the order (where necessary)


- Finishes available
 - aluminium colour (fin. 97)
 - gold colour (fin. 98)
 - dark bronze colour (fin. 99)

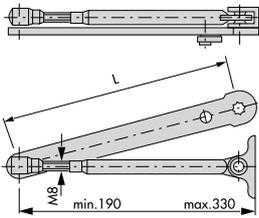

- Steel arm without hold-open device

60130, 60170 200,0 0,420 1 1 07132 00 0 97

60140, 60150, 240,0 0,475 1 1 07134 00 0 97
60160, 60180,
60190

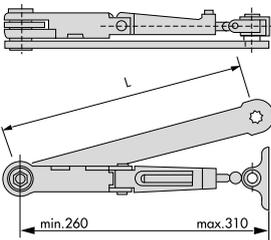

- Steel arm with hold-open device

60131, 60171 200,0 0,515 1 1 07133 00 0 97

60141, 60151, 240,0 0,595 1 1 07135 00 0 97
60161, 60181,
60191



Technical features:

- Pressure die-cast aluminium case and cover, painted and anti-corrosion treatment (resists more than 500 hours in salt spray)
- Stainless steel adjusters
- Zinc-plated fixing screws
- Zinc-plated steel springs
- Tested for 200,000 opening and closing cycles

Operation:

- For use on gates up to 1200 mm and weighing a maximum of 55 kg
- Completely mechanical operation with no fluids (operates irrespective of outdoor temperature).

- Adjustable opening / closing force
- Adjustable closing speed
- Possibility of hold open between 90° and 100°
- Maximum opening of gate 100°
- Courtesy opening function
- Possibility of inverting operation from "gate closer" to "gate opener"

Finishes:

- Black
- Silver grey

Standards:

- Patented system A000790 of 2013

Supplied as standard:


- Zinc-plated adjustable corner mounting plate item 1.07155.01.0.
- Fixing screws
- Instruction sheet

On request:

- Plates for installation on different kinds of gates items 1.07155.02.0, 1.07155.03.0.


Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight	Pieces	ITEM						
							Type	Dim.	Hand	Fin.	Pers. Spec.		
	• BLACK gate closer		1200		1,500	1	1	C1310	01	0	0		
	• GREY gate closer		1200		1,500	1	1	C1310	01	0	97		
	• Lower hinge		1200		0,260	1	1	07155	04	0			
	• Corner plate (supplied as standard)		1200		0,540	1	1	07155	01	0			
	• Flat plate		1200		0,540	1	1	07155	02	0			
	• Plate for retrofitting		1200		0,260	1	1	07155	03	0			
	• Standard arm		1200		0,540	1	1	07155	05	0			

Type	Description	Closing strength	Max. door width	Max. door weight	 Unit weight	 Pieces	ITEM					
							Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Sliding arm 		1200		0,540	1	1	07155	06	0		
	<ul style="list-style-type: none"> • Kit of spare springs 		1200		0,050	1	1	07156	03	0		

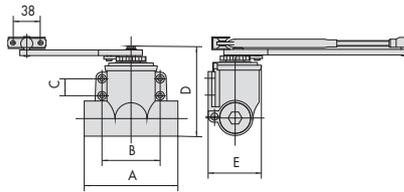


	A	B	C	D	E
1.60130.01	132	75,5	19	144	68
1.60131.01	132	75,5	19	144	68
1.60140.02	137	82	24	124	73
1.60141.02	137	82	24	124	73
1.60150.03	147	92	29	140	81
1.60151.03	147	92	29	140	81
1.60160.04	150	105	31	156	96
1.60161.04	150	105	31	156	96

1

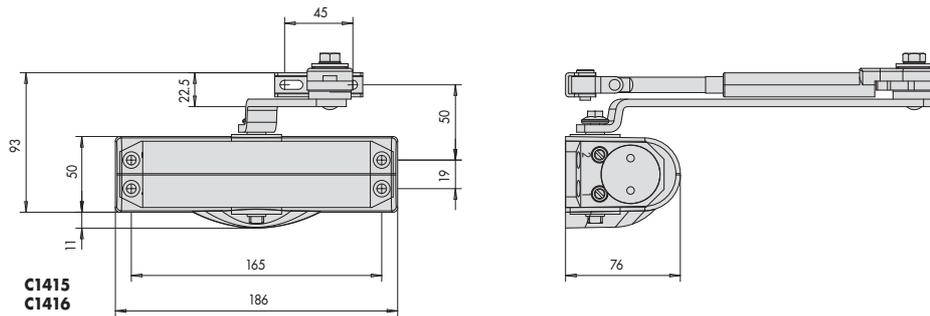


C1415
C1416

2

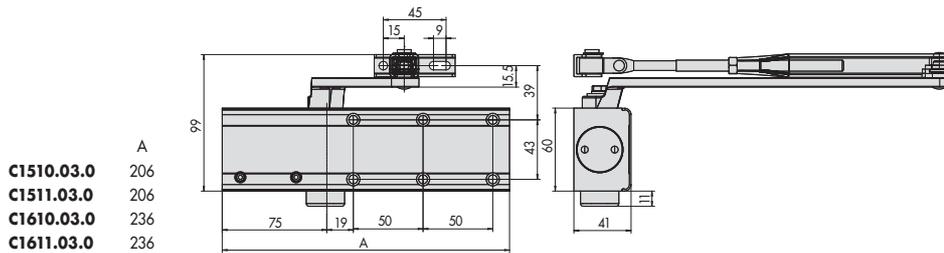


	A
C1510.03.0	206
C1511.03.0	206
C1610.03.0	236
C1611.03.0	236

3

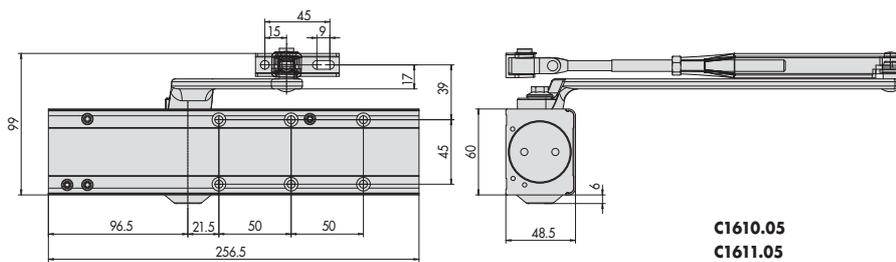


C1610.05
C1611.05

4

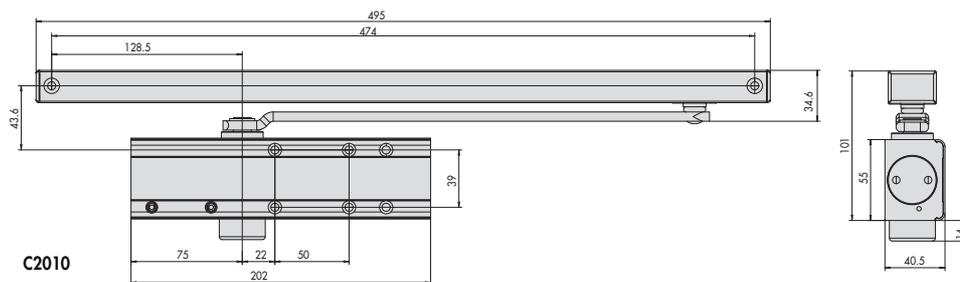


C2010

5

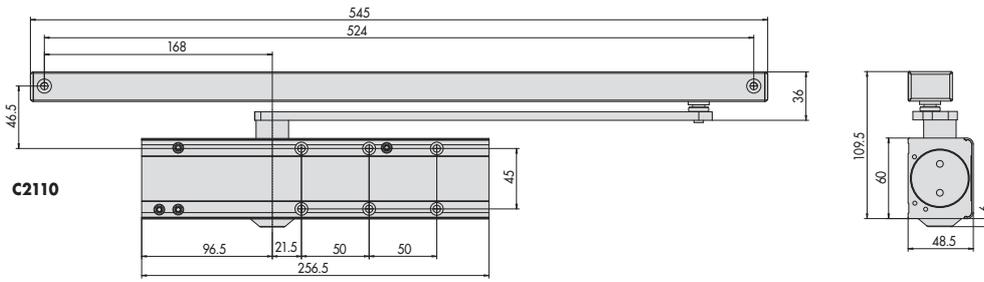


C2110

6

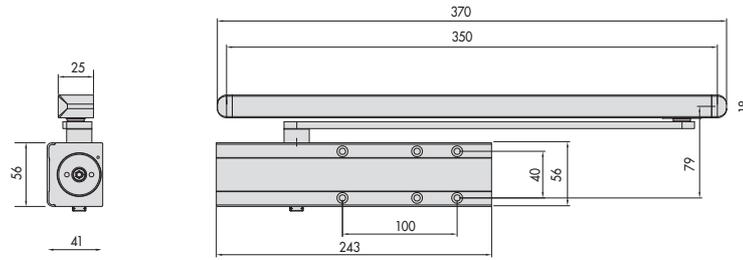


D5200

7

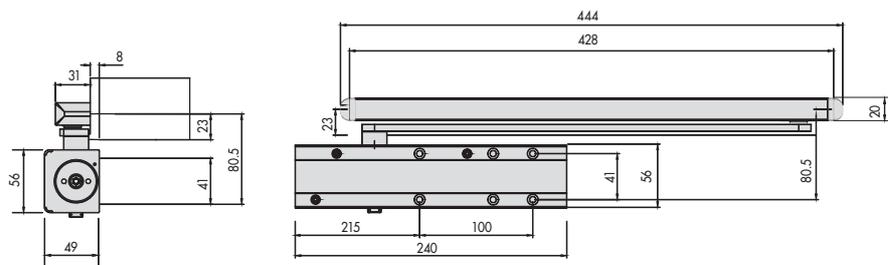


**D6200
D6210**

8

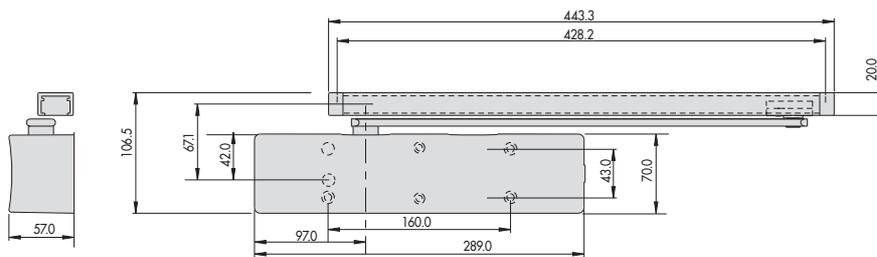

D7200

9

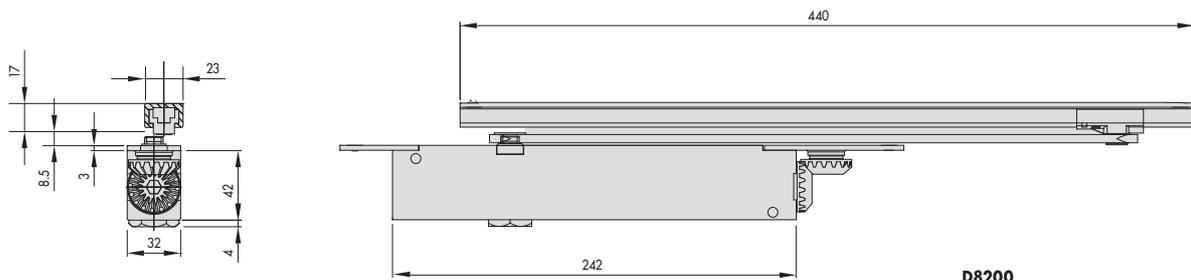

D8200

10



CISA®

Safes



Wall safes with electronic combinator - Digit vision.....	553	Standing safes with key	560
Wall safes with key	554	Standing safes with mechanical combinator.....	561
Wall safes, with mechanical combinator.....	555	Standing safes, 1 star key	562
Darwin series modular wall safes.....	556	Hotel safes - Digit Plus	563
Wall safes, 1 star key	557	Spare parts and accessories for safes	564
Standing safes with electronic combinator -		Safes display stand.....	570
Digit vision	558	Dimensional drawing.....	571
CASH Standing safes with electronic combinator	559		





Technical features:


- Lit keypad.
- 10 mm thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Power cable
- Shelves (where these are provided for)
- Use and maintenance instructions
- Installation instructions.

DGT Vision

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Kg	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.

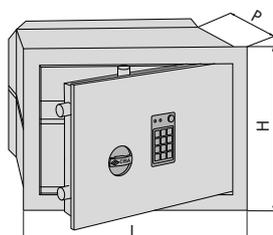

- Back-lit alphanumeric keypad
- Electronic combinator
- Internal light
- 1.5 V alkaline thin battery operation
- Removable door
- Laser welded sealing parts assembly
- Sound and visual indications
- Tamper-proof lock

*	360	240	150	10	2	1	14,400	1	1 82710 30 0				
*	360	240	200	10	2	1	15,400	1	1 82710 31 0				
*	360	240	250	10	2	1	16,700	1	1 82710 32 0				
*	420	300	200	10	2	2	21,600	1	1 82710 40 0				
*	420	300	250	10	2	2	23,100	1	1 82710 41 0				
	420	300	300	10	2	2	24,900	1	1 82710 42 0				
*	490	360	200	10	2	2	28,950	1	1 82710 50 0				
*	490	360	250	10	2	2	30,000	1	1 82710 51 0				
	490	360	300	10	2	2	31,750	1	1 82710 52 0				
	360	490	200	10	2	4	29,350	1	1 82710 70 0				
	360	490	250	10	2	4	31,000	1	1 82710 71 0				
	360	490	300	10	2	4	32,700	1	1 82710 72 0				
	420	550	200	12	2	4	39,700	1	1 82710 80 0				
	420	550	250	12	2	4	39,700	1	1 82710 81 0				
	420	550	300	12	2	4	39,700	1	1 82710 82 0				
	490	620	200	12	2	4	51,000	1	1 82710 90 0				
	490	620	250	12	2	4	51,000	1	1 82710 91 0				
	490	620	300	12	2	4	51,000	1	1 82710 92 0				




Technical features:

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled through automated welding
- Nickel-plated steel deadbolts (diameter 22 mm.)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Kg	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.

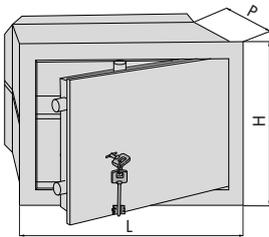

- Key only version
- 2 keys item 1.00101.00.2

260	170	150	10	2	-	8,300	1	1	82010 10 0					
260	170	200	10	2	-	9,300	1	1	82010 11 0					
*	310	190	150	10	2	1	10,600	1	82010 20 0					
*	310	190	200	10	2	1	11,400	1	82010 21 0					
360	240	150	10	2	1	14,550	1	1	82010 30 0					
*	360	240	200	10	2	1	15,600	1	82010 31 0					
360	240	250	10	2	1	16,900	1	1	82010 32 0					
*	420	300	200	10	2	2	21,600	1	82010 40 0					
*	420	300	250	10	2	2	25,000	1	82010 41 0					
420	300	300	10	2	2	24,500	1	1	82010 42 0					
490	360	200	10	2	2	33,000	1	1	82010 50 0					
*	490	360	250	10	2	2	30,500	1	82010 51 0					
490	360	300	10	2	2	31,700	1	1	82010 52 0					
360	490	200	10	2	4	2	32,200	1	82010 70 0					
360	490	250	10	2	4	2	34,400	1	82010 71 0					
360	490	300	10	2	4	2	35,700	1	82010 72 0					
420	550	200	12	2	4	2	39,700	1	82010 80 0					
420	550	250	12	2	4	2	41,300	1	82010 81 0					
420	550	300	12	2	4	2	43,500	1	82010 82 0					
490	620	200	12	2	4	2	51,000	1	82010 90 0					
490	620	250	12	2	4	2	52,800	1	82010 91 0					
490	620	300	12	2	4	2	54,800	1	82010 92 0					




Technical features:

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm.)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:


- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.

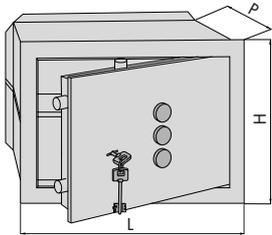

- Key and 3-knob combinator version
- 2 keys item 1.00101.00.2

310	190	150	10	2	1	11,000	1	1	82210 20 0
310	190	200	10	2	1	12,000	1	1	82210 21 0
360	240	150	10	2	1	15,000	1	1	82210 30 0
*	360	240	200	10	2	15,850	1	1	82210 31 0
360	240	250	10	2	1	12,900	1	1	82210 32 0
*	420	300	200	10	2	22,200	1	1	82210 40 0
420	300	250	10	2	2	23,500	1	1	82210 41 0
420	300	300	10	2	2	24,750	1	1	82210 42 0
490	360	200	10	2	2	28,700	1	1	82210 50 0
490	360	250	10	2	2	30,500	1	1	82210 51 0
490	360	300	10	2	2	32,000	1	1	82210 52 0
360	490	200	10	2	4	29,400	1	1	82210 70 0
360	490	250	10	2	4	30,950	1	1	82210 71 0
360	490	300	10	2	4	36,150	1	1	82210 72 0
420	550	200	12	2	4	40,000	1	1	82210 80 0
420	550	250	12	2	4	42,850	1	1	82210 81 0
420	550	300	12	2	4	43,900	1	1	82210 82 0
490	620	200	12	2	4	51,000	1	1	82210 90 0
490	620	250	12	2	4	52,800	1	1	82210 91 0
490	620	300	12	2	4	55,250	1	1	82210 92 0

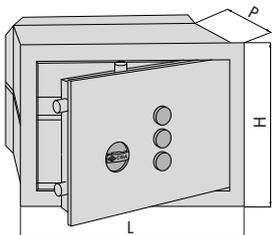

- 3-knob combinator only version

310	190	150	10	2	1	10,800	1	1	82410 20 0
310	190	200	10	2	1	11,700	1	1	82410 21 0
360	240	150	10	2	1	14,700	1	1	82410 30 0
*	360	240	200	10	2	15,800	1	1	82410 31 0
360	240	250	10	2	1	17,300	1	1	82410 32 0
420	300	200	10	2	2	22,000	1	1	82410 40 0
420	300	250	10	2	2	23,150	1	1	82410 41 0
420	300	300	10	2	2	24,500	1	1	82410 42 0
490	360	200	10	2	2	28,950	1	1	82410 50 0
490	360	250	10	2	2	30,700	1	1	82410 51 0
490	360	300	10	2	2	35,000	1	1	82410 52 0
360	490	200	10	2	4	29,500	1	1	82410 70 0
360	490	250	10	2	4	31,000	1	1	82410 71 0
360	490	300	10	2	4	35,700	1	1	82410 72 0
420	550	200	12	2	4	40,700	1	1	82410 80 0
420	550	250	12	2	4	42,000	1	1	82410 81 0
420	550	300	12	2	4	44,000	1	1	82410 82 0
490	620	200	12	2	4	50,700	1	1	82410 90 0
490	620	250	12	2	4	53,000	1	1	82410 91 0
490	620	300	12	2	4	54,500	1	1	82410 92 0



Technical features:


- Modular front and safe compartment
- 10 mm. thick steel front
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Frame edge cover
- Shelf
- Bolts for fixing the compartment
- Instruction sheet
- Installation instructions


Darwin

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight Kg	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.

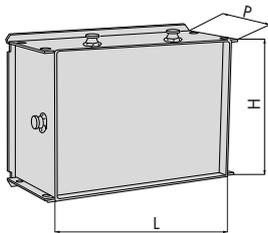


- Safe compartment with temporary cover

*	470	336	200	-	10,650	1	1 83000 40 0
	470	336	250	-	12,000	1	1 83000 41 0



- Faceplate with key
- Two keys item 1.00101.00.2
- To be combined with item 83000.40/41

	420	300	10	2	2	1	19,400	1	1 83010 40 0
--	-----	-----	----	---	---	---	--------	---	---------------------



- Back-lit alphanumeric keypad
- Faceplate with electronic combinator
- Internal light
- To be combined with item 83000.40/41
- 1.5 V alkaline thin battery operation
- Laser welded sealing parts assembly
- SUPPLIED AS STANDARD:
- Power cable
- Shelf

*	420	300	10	2	2	1	18,300	1	1 83710 40 0
---	-----	-----	----	---	---	---	--------	---	---------------------




Technical features:

- 8 mm. thick steel doors with laser cut between the frame and door
- Nickel-plated steel anti-sawing rolling deadbolts (diameter 22 mm.)
- Seals are assembled through automated welding
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door

Supplied as standard:

- Shelves (where these are provided for)
- Installation instructions
- Instruction sheet

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.

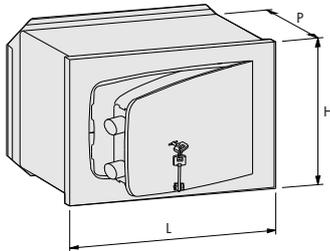

- Key only version
- 2 keys item 1.00100.00.2

*	310	190	145	8	2	1	9,400	1	1 8A010 20 0				
*	310	190	195	8	2	1	10,300	1	1 8A010 21 0				
*	360	240	145	8	2	1	12,650	1	1 8A010 30 0				
*	360	240	195	8	2	1	13,700	1	1 8A010 31 0				
*	420	300	195	8	2	1	18,100	1	1 8A010 40 0				
*	420	300	245	8	2	1	20,000	1	1 8A010 41 0				



Technical features:


- Lit keypad.
- 10 mm thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Power cable
- Shelves (where these are provided for)
- Use and maintenance instructions
- Installation instructions.

DGT Vision

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight Kg	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.

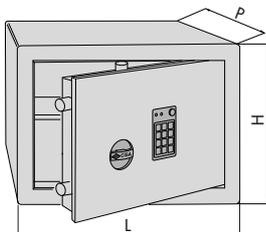

- Back-lit alphanumeric keypad
- Electronic combinator
- Internal light
- 1.5 V alkaline thin battery operation
- Removable door
- Laser welded sealing parts assembly
- Sound and visual indications
- Tamper-proof lock

*	360	240	300	10	2	1	28,200	1	1 82750 34 0
*	420	300	350	10	2	1	40,500	1	1 82750 43 0
	490	360	350	10	2	1	51,000	1	1 82750 53 0
	360	490	400	10	2	4	55,650	1	1 82750 74 0
	420	550	450	12	2	4	75,000	1	1 82750 85 0
	490	620	450	12	2	4	92,000	1	1 82750 95 0



Technical features:


- Lit keypad.
- 10 mm thick, steel front
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Window sticker
- Power cable
- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

DGT Cash

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.

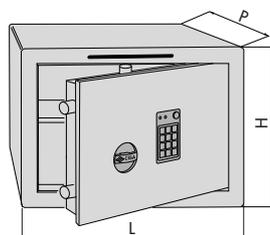

- Back-lit alphanumeric keypad
- Slot to introduce money or papers
- Opening delay programmable between 1 and 99 minutes
- Electronic combinator
- Internal light
- 1.5 V alkaline battery powered
- Removable door
- Laser welded sealing part assembly

			360	270	300	10	2	1	22,200	1	1	82751	35	0
			360	520	400	10	2	4	52,400	1	1	82751	75	0




Technical features:

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	Pieces 	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.

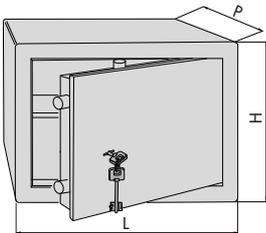

- Key only version
- Two keys item 1.00101.00.2

360	240	300	10	2	1	28,300	1	1 82050 34 0
420	300	350	10	2	2	40,900	1	1 82050 43 0
490	360	350	10	2	2	54,000	1	1 82050 53 0
360	490	400	10	2	4	54,900	1	1 82050 74 0
420	550	450	12	2	4	75,500	1	1 82050 85 0
490	620	450	12	2	4	92,000	1	1 82050 95 0




Technical features:

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:


- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand.	Fin.

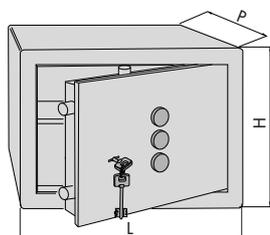

- Key and 3-knob combinator version
- Two keys item 1.00101.00.2

360	240	300	10	2	1	28,600	1	1 82250 34 0					
420	300	350	10	2	1	42,800	1	1 82250 43 0					
490	360	350	10	2	1	55,000	1	1 82250 53 0					
360	490	400	10	2	4	59,000	1	1 82250 74 0					
420	550	450	12	2	4	75,750	1	1 82250 85 0					
490	620	450	12	2	4	93,080	1	1 82250 95 0					

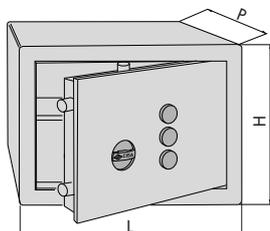

- 3-knob combinator only version

360	240	300	10	2	1	28,600	1	1 82450 34 0					
420	300	350	10	2	1	42,200	1	1 82450 43 0					
490	360	350	10	2	1	53,800	1	1 82450 53 0					
360	490	400	10	2	4	58,700	1	1 82450 74 0					
420	550	450	12	2	4	75,600	1	1 82450 85 0					
490	620	450	12	2	4	92,500	1	1 82450 95 0					




Technical features:

- 8 mm thick, steel front
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.

Supplied as standard:

- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM			
			L	H	P							Type	Dim.	Hand Fin.	Pers. Spec.

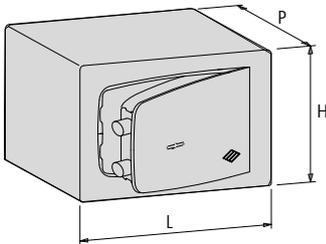

- Key only version
- 2 keys item 1.00100.00.2

310	190	250	8	2	1	13,200	1	1	8A050 23 0
360	240	300	8	2	1	19,600	1	1	8A050 34 0
420	300	350	8	2	1	27,350	1	1	8A050 43 0

**Technical features:**

- Door laser cut
- Audit trail can be stored to an SD card
- Automatic interior lighting
- Easy-to-read ADA-compliant keypad
- 7-digit led display
- Size to place a 15" laptop inside
- 2-level service Master Code
- Motorised lock
- Emergency mechanical override

Supplied as standard:

- 4x AARL6 batteries
- Interior carpet
- Emergency key
- Interior lighting

On request:


- Internal power socket
- Left hand opening
- AP3 S protected duplication emergency key

Finishes:

- Supplied as standard:
Dark grey Grafite™ (RAL 7015)
- On request:
Light grey Silicon (RAL 7032)

CISA eSIGNO

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	Pieces 	ITEM			
			L	H	P							Type	Dim. Hand	Fin.	Pers. Spec.



- C2000 cylinder for mechanical emergency override
- Finish: silica gray

DX	190	430	350	5	2	-	11,600	1	1	A0L02	01	0		
SX	190	430	350	5	2	-	11,600	1	1	A0L02	01	4		

- C2000 cylinder for mechanical emergency override
- Finish: graphite gray

DX	190	430	350	5	2	-	11,600	1	1	A0L02	01	0	93	
SX	190	430	350	5	2	-	11,600	1	1	A0L02	01	4	93	

- C2000 cylinder for mechanical emergency override
- Finish: silica gray
- Power supply socket

DX	190	430	350	5	2	-	11,600	1	1	A0L02	31	0		
SX	190	430	350	5	2	-	11,600	1	1	A0L02	31	4		

- C2000 cylinder for mechanical emergency override
- Finish: graphite gray
- Power supply socket

DX	190	430	350	5	2	-	11,600	1	1	A0L02	31	0	93	
SX	190	430	350	5	2	-	11,600	1	1	A0L02	31	4	93	

- AP3 S cylinder for mechanical emergency override
- Finish: silica gray

DX	190	430	350	5	2	-	11,600	1	1	A0L01	01	0		
SX	190	430	350	5	2	-	11,600	1	1	A0L01	01	4		

- AP3 S cylinder for mechanical emergency override
- Finish: graphite gray







DX	190	430	350	5	2	-	11,600	1	1	A0L01	01	0	93	
SX	190	430	350	5	2	-	11,600	1	1	A0L01	01	4	93	







- AP3 S cylinder for mechanical emergency override
- Finish: silica gray
- Power supply socket





DX	190	430	350	5	2	-	11,600	1	1	A0L01	31	0		
SX	190	430	350	5	2	-	11,600	1	1	A0L01	31	4		






- AP3 S cylinder for mechanical emergency override
- Finish: graphite gray
- Power supply socket



DX	190	430	350	5	2	-	11,600	1	1	A0L01	31	0	93	
SX	190	430	350	5	2	-	11,600	1	1	A0L01	31	4	93	

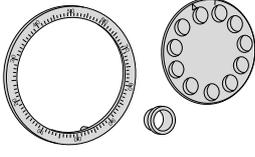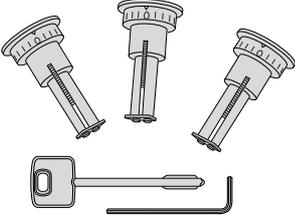
Type	Description	For series/item		ITEM				
		Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.
	• Combinator dial and plate	1 58010 00 0	0,200	1	1	07095 00 0		
	• Set of 3 knobs and combinator changing key	1 58011 00 0	0,150	1	1	07108 00 0		
	• Lock operating knob	1 57424 30 1, 1 57429 30 1	0,160	1	1	07109 00 0		
	• Changing key for safes with combinator	1 58010 00 0, 82310, 82350, 82510, 82550	0,020	1	1	07109 01 0		
	• Changing key set for safes with 3-knob combinator	1 58011 00 0, 82210, 82250, 82410, 82450	0,040	0	1	07109 03 0		
	• 9V battery holder	82610, 82650	0,030	1	1	07114 00 0		
	• Electronic board 6V master code		0,035	1	1	07114 12 0		
	• Electronic board for Digit Vision safe	82710, 82750	0,035	1	1	07114 15 0		
	• 6V battery holder	82610, 82650, 82710, 82750	0,030	1	1	07114 05 0		
	• Solenoid plate group 6V		0,250	0	1	07114 06 0		

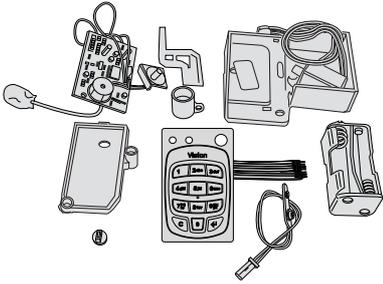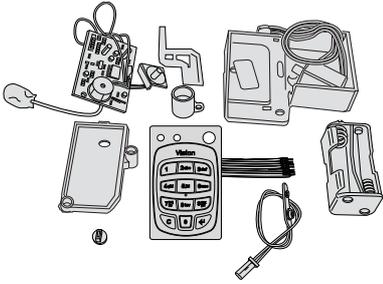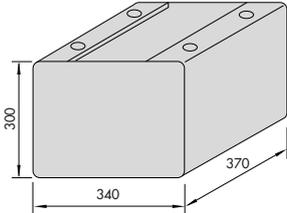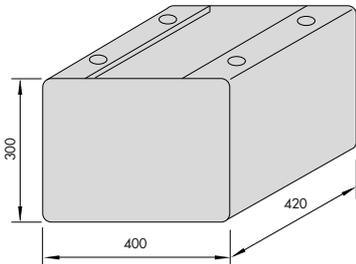Type	Description	For series/item		ITEM				
		Unit weight	Pieces	Type	Dim.	Hand	Fitt.	Pers. Spec.
	<ul style="list-style-type: none"> Kit to convert from safes Digit to safes Digit Vision Master Code 	0,370	1	1 07114 11 0				
	<ul style="list-style-type: none"> Key pad for Digit Vision safe 	0,005	1	1 07114 16 0				
	<ul style="list-style-type: none"> Kit to convert from safes Digit to safes Digit Vision 	0,370	1	1 07114 17 0				
	<ul style="list-style-type: none"> Lacquered steel support for furniture safes 	1 82050 74 0, 1 82250 74 0, 1 82350 74 0, 1 82450 74 0, 1 82550 74 0, 1 82650 74 0	16,650	1	1 07125 00 0			
	<ul style="list-style-type: none"> Lacquered steel support for furniture safes 	1 82050 85 0, 1 82050 95 0, 1 82250 85 0, 1 82250 95 0, 1 82350 85 0, 1 82350 95 0, 1 82450 85 0, 1 82450 95 0, 1 82550 85 0, 1 82550 95 0	17,950	1	1 07125 01 0			
	<ul style="list-style-type: none"> 9V external power supply cable 	82610, 82650, 82651	0,030	1	1 07430 31 0			

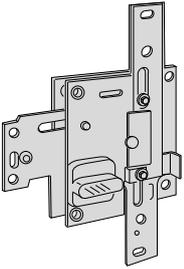
Type	Description	For series/item		ITEM				
		Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • 6V external power supply cable 	82710, 82750, 82751	0,030	1	1	07430	32	0
	<ul style="list-style-type: none"> • Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR KEY-OPERATED SAFES: item 1.82010.10.0 item 1.82010.11.0 		0,426	1	1	57409	30	1
	<ul style="list-style-type: none"> • Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR SAFES OPERATED EITHER BY KEY ONLY OR KEY AND MECHANICAL COMBINATOR: Series 82010.20 ÷ 32 Series 82050.34 Series 82210.20 ÷ 32 Series 82250.34 Series 82310.30 ÷ 32 Series 82350.34 		0,460	1	1	57411	30	1
	<ul style="list-style-type: none"> • Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR 1 STAR SAFES OPERATED BY KEY ONLY: Series 8A010.20 ÷ 41 		0,460	1	1	57411	31	1
	<ul style="list-style-type: none"> • Zinc plated steel lock • Three locking points • Two keys item 1.00101.00.2 • FOR SAFES OPERATED EITHER BY KEY ONLY OR KEY AND MECHANICAL COMBINATOR: Series 82010.40 ÷ 92 Series 82050.43 ÷ 95 Series 82210.40 ÷ 92 Series 82250.43 ÷ 95 Series 82310.40 ÷ 92 Series 82350.43 ÷ 95 Series 83010.40 		0,620	1	1	57416	30	1
	<ul style="list-style-type: none"> • Zinc plated steel lock • Three locking points • Two keys item 1.00101.00.2 • FOR 1 STAR SAFES OPERATED BY KEY ONLY: Series 8A010.50/51 		0,620	1	1	57416	31	1

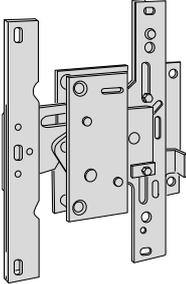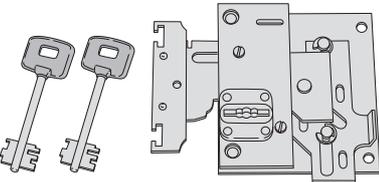Type	Description	For series/item		ITEM				
		Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Zinc plated single throw steel lock • Three locking points • FOR SAFES OPERATED EITHER BY MECHANICAL OR ELECTRONICAL COMBINATOR: Series 82410.40 ÷ 92 Series 82450.43 ÷ 95 Series 82510.40 ÷ 92 Series 82550.43 ÷ 95 Series 82610.40 ÷ 72 Series 82650.43 ÷ 74 Series 83610.40 	0,500	1	1	57424	30	1	
	<ul style="list-style-type: none"> • Zinc plated single throw steel lock • One locking point • FOR SAFES OPERATED EITHER BY MECHANICAL OR ELECTRONICAL COMBINATOR: Series 82410.20 ÷ 32 Series 82450.34 Series 82510.30 ÷ 32 Series 82550.34 Series 82610.30 ÷ 32 Series 82650.34 	0,400	1	1	57429	30	1	
	<ul style="list-style-type: none"> • Combinator dial 	82310, 82315, 82350, 82510, 82515, 82550	0,400	1	1	58010	00	0
	<ul style="list-style-type: none"> • 3-knob combinator 	82210, 82250, 82410, 82450	0,430	1	1	58011	00	0
	<ul style="list-style-type: none"> • Steel lock with zinc coating • One locking point • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 10 0, 1 82010 11 0, 1 82010 20 0, 1 82010 21 0, 1 82210 20 0, 1 82210 21 0	0,426	1	1	87409	30	1
	<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 40 0, 1 82010 41 0, 1 82010 42 0, 1 82050 43 0, 1 82210 40 0, 1 82210 41 0, 1 82210 42 0, 1 82250 43 0	0,426	1	1	87412	30	1
	<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 50 0, 1 82010 51 0, 1 82010 52 0, 1 82050 53 0	0,426	1	1	87414	30	1

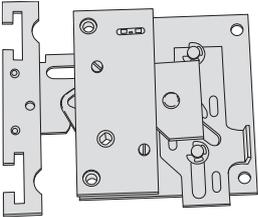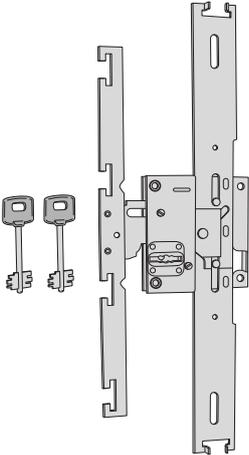Type	Description	For series/item		ITEM										
		Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.						
	<ul style="list-style-type: none"> • Steel lock with zinc coating • One locking point • Suitable for safes with turning deadbolts 	1 82410 20 0,	0,426	1	1	B7411	30	1						
		1 82410 21 0,												
		1 82410 30 0,												
		1 82410 31 0,												
		1 82410 32 0,												
		1 82450 34 0,												
		1 82710 30 0,												
		1 82710 31 0,												
		1 82710 32 0,												
		1 82750 34 0,												
		1 82751 35 0												
		<hr/>												
		<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts 	1 82410 50 0,	0,426					1	1	B7415	30	1	
			1 82410 51 0,											
1 82410 52 0,														
1 82450 53 0,														
1 82710 50 0,														
1 82710 51 0,														
1 82710 52 0,														
1 82750 53 0														
<hr/>														
<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts 	1 82210 41 0,	0,426	1	1	B7413	30	1							
	1 82410 40 0,													
	1 82410 42 0,													
	1 82450 43 0,													
	1 82710 40 0,													
	1 82710 41 0,													
	1 82710 42 0,													
	1 82750 43 0													
<hr/>														
	<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 70 0,	0,426	1	1	B7424	30	1						
		1 82010 71 0,												
		1 82010 72 0,												
		1 82050 74 0,												
		1 82210 70 0,												
		1 82210 71 0,												
		1 82210 72 0,												
		1 82250 74 0												
		<hr/>												
		<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 80 0,	0,426					1	1	B7426	30	1	
			1 82010 81 0,											
			1 82010 82 0,											
			1 82050 85 0,											
			1 82210 80 0,											
1 82210 81 0,														
1 82210 82 0,														
1 82250 85 0														
<hr/>														
<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts 	1 82010 90 0,	0,426	1	1	B7428	30	1							
	1 82010 91 0,													
	1 82010 92 0,													
	1 82050 95 0,													
	1 82210 90 0,													
	1 82210 91 0,													
	1 82210 92 0,													
	1 82250 95 0													
<hr/>														

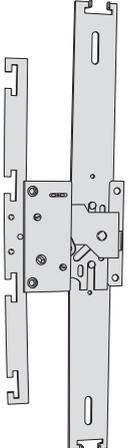
Type	Description	For series/item		ITEM								
		Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.				
	<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts 	1 82410 70 0,	0,426	1	1 B7425 30 1							
		1 82410 71 0,										
		1 82410 72 0,										
		1 82450 74 0,										
		1 82710 70 0,										
		1 82710 71 0,										
		1 82710 72 0,										
		1 82750 74 0,										
		1 82751 75 0										
		<hr/>										
			<ul style="list-style-type: none"> • Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts 	1 82410 90 0,		0,426	1	1 B7429 30 1				
				1 82410 91 0,								
				1 82410 92 0,								
				1 82450 95 0,								
1 82710 90 0,												
1 82710 91 0,												
1 82710 92 0,												
1 82750 95 0,												
1 82750 95 0												
<hr/>												

Type	Description	For series/item	Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.

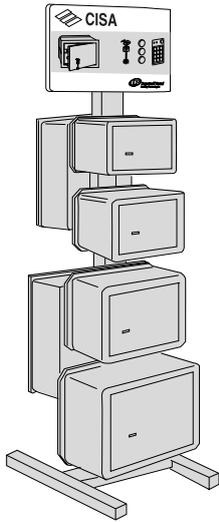


- DISPLAY FOR WALL SAFES
- WITH ADJUSTABLE SUPPORTS
- FOR WALL AND STANDING SAFES


15,000 1 1 06610 50 0

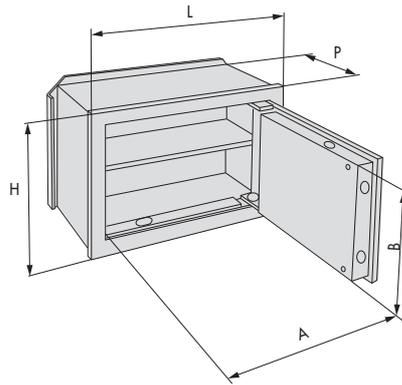

ITEM	DIMENSIONS (mm)										Doorbolt	Shelves	Weight Kg
	Outside			Inside			A B		Rear Outside				
	L	H	P	L	H	P	A	B					
1-8A010-20	310	190	150	292	172	100	192	115	340	210	2	1	12,9
1-8A010-21	"	"	200	"	"	150	192	115	340	210	2	1	13,6
1-8A010-30	360	240	150	342	222	100	242	165	390	260	2	1	17,5
1-8A010-31	"	"	200	"	"	150	242	165	390	260	2	1	18,4
1-8A010-40	420	300	200	402	282	150	302	225	450	320	2	1	24,7
1-8A010-41	"	"	250	"	"	200	302	225	450	320	2	1	25,8
1-82010-10	260	170	150	242	152	100	142	95	290	190	2	-	7,3
1-82010-11	"	"	200	"	"	150	142	95	290	190	2	-	8,0
1-82010-20 1-82210-20 1-82410-20	310	190	150	292	172	100	192	115	340	210	2	1	12,9
1-82010-21 1-82210-21 1-82410-21	"	"	200	"	"	150	192	115	340	210	2	1	13,6
1-82010-22 1-82210-22 1-82410-22	"	"	250	"	"	200	192	115	340	210	2	1	14,4
1-82010-30 1-82210-30 1-82410-30 1-82710-30	360	240	150	342	222	100	242	165	390	260	2	1	17,5
1-82010-31 1-82210-31 1-82410-31 1-82710-31	"	"	200	"	"	150	242	165	390	260	2	1	18,4
1-82010-32 1-82210-32 1-82410-32 1-82710-32	"	"	250	"	"	200	242	165	390	260	2	1	19,3
1-82010-40 1-82210-40 1-82410-40 1-82710-40	420	300	200	402	282	150	302	225	450	320	4+2	1	24,7
1-82010-41 1-82210-41 1-82410-41 1-82710-41	"	"	250	"	"	200	302	225	450	320	4+2	1	25,8
1-82010-42 1-82210-42 1-82410-42 1-82710-42	"	"	300	"	"	250	302	225	450	320	4+2	1	26,9
1-82010-50 1-82210-50 1-82410-50 1-82710-50	490	360	200	472	342	150	372	285	520	380	4+2	1	33,1
1-82010-51 1-82210-51 1-82410-51 1-82710-51	"	"	250	"	"	200	372	285	520	380	4+2	1	34,4
1-82010-52 1-82210-52 1-82410-52 1-82710-52	"	"	300	"	"	250	372	285	520	380	4+2	1	35,7
1-82010-70 1-82210-70 1-82410-70 1-82710-70	360	490	200	342	472	150	242	415	390	510	4+2	2	33,1
1-82010-71 1-82210-71 1-82410-71 1-82710-71	"	"	250	"	"	200	242	415	390	510	4+2	2	34,4
1-82010-72 1-82210-72 1-82410-72 1-82710-72	"	"	300	"	"	250	242	415	390	510	4+2	2	35,7
1-82010-80 1-82210-80 1-82410-80 1-82710-80	420	550	200	402	532	150	302	475	450	570	4+2	2	39,7
1-82010-81 1-82210-81 1-82410-81 1-82710-81	"	"	250	"	"	200	302	475	450	570	4+2	2	41,3
1-82010-82 1-82210-82 1-82410-82 1-82710-82	"	"	300	"	"	250	302	475	450	570	4+2	2	42,9
1-82010-90 1-82210-90 1-82410-90 1-82710-90	490	620	200	472	602	150	372	545	520	640	4+2	2	51,0
1-82010-91 1-82210-91 1-82410-91 1-82710-91	"	"	250	"	"	200	372	545	520	640	4+2	2	52,8
1-82010-92 1-82210-92 1-82410-92 1-82710-92	"	"	300	"	"	250	372	545	520	640	4+2	2	54,6

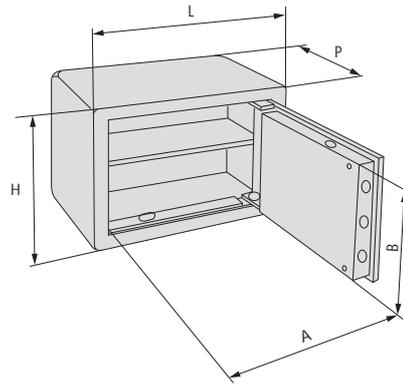


ITEM	DIMENSIONS (mm)								Deadbolt	Shelves	Weight Kg
	Outside			Inside			A	B			
	L	H	P	L	H	P					
1-8A050-23	360	240	300	350	230	245	242	165	2	1	13,2
1-8A050-34	420	300	350	410	290	295	302	225	2	1	19,6
1-8A050-43	490	360	350	480	350	295	372	285	2	1	22,5
1-82050-34 1-82250-34 1-82450-34 1-82750-34	360	240	300	350	230	245	242	165	2	1	25,5
1-82050-43 1-82250-43 1-82450-43 1-82750-43	420	300	350	410	290	295	302	225	4+2	1	38,7
1-82050-53 1-82250-53 1-82450-53 1-82750-53	490	360	350	480	350	295	372	285	4+2	1	49,5
1-82050-74 1-82250-74 1-82450-74 1-82750-74	360	490	400	350	480	345	242	415	4+2	2	54,2
1-82050-85 1-82250-85 1-82450-85 1-82750-85	420	550	450	410	540	395	302	475	4+2	2	69,4
1-82050-95 1-82250-95 1-82450-95 1-82750-95	490	620	450	480	610	395	372	545	4+2	2	84,5
1-82751-34	360	240	300	350	230	245	242	165	2	1	27,2
1-82751-74	360	490	400	350	480	345	242	415	4+2	2	52,4
1-A0L01-01	430	190	350	427	185	295	131	365	1		11,6
1-A0L01-31	430	190	350	427	185	295	131	365	1		11,6
1-A0L02-01	430	190	350	427	185	295	131	365	1		11,6
1-A0L02-31	430	190	350	427	185	295	131	365	1		11,6

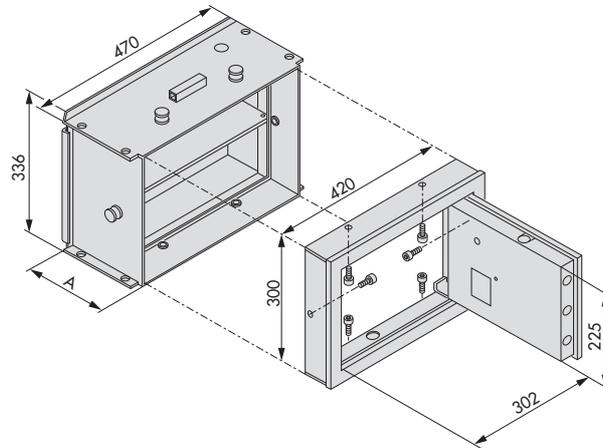

	DIMENSIONS (mm)								Deadbolt	Shelves	Weight Kg	
	Esterne			Inside			Outside					Rear outside
	L	H	P	L	H	P	A	B				
SAFES COMPARTMENT												
1-83000-40	470	336	200	420	300	200	-	-	450	320	-	15,2
1-83000-41	"	"	250	"	"	250	-	-	"	"	-	16,3
FRONTAL												
1-83010-40	420	300	-	-	-	-	302	225	-	-	2+2	19,4
1-83710-40	"	"	-	-	-	-	"	"	-	-	2+2	19,7



Keying kits

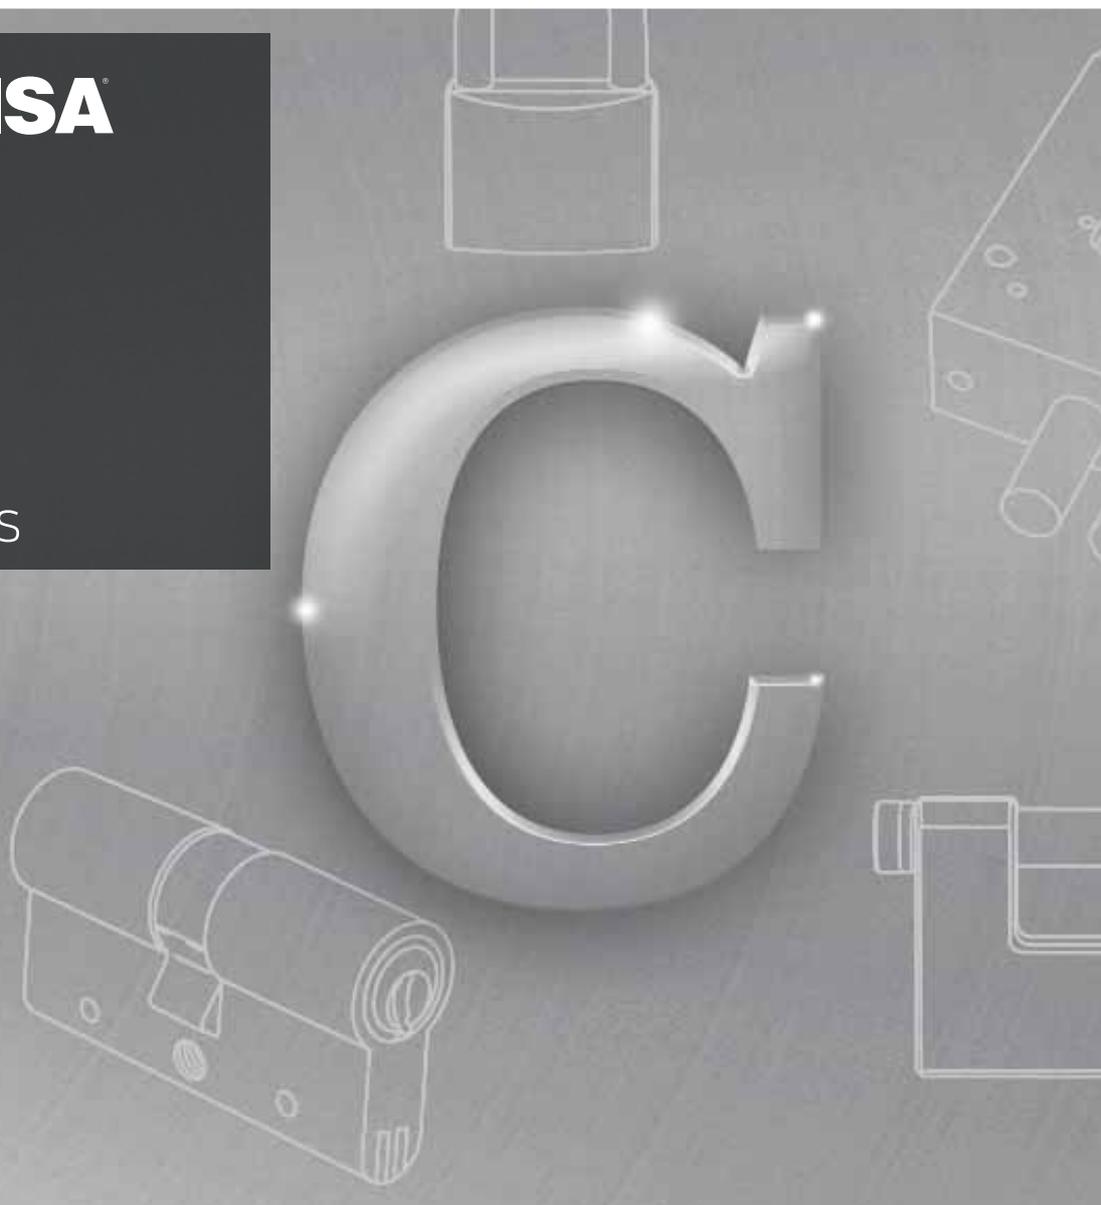

Keying components for cylinders and padlocks574
Keying components for double-bit key locks.....582

Assembling tools for cylinders and padlocks 587


Cylinders and padlocks are available in **SEMI-ASSEMBLED** or **UNASSEMBLED** versions :

- "SEMI - ASSEMBLED"(ready for keying)
- "UNASSEMBLED" (completely unassembled)

In both cases, keys, pins, drivers, springs, pin hole plugs, circlips, are to be ordered separately.


CYLINDERS	SEMI-ASSEMBLED 90			UNASSEMBLED 91				
	STD	C2000	SP	STD	C2000	SP	Astral Astral-S	Astral Tekno
<ul style="list-style-type: none"> • Euro profile double cylinders • Euro profile single cylinders..... • Euro profile thumb turn cylinders • Rim cylinders, cam locks, furniture cylinders • Rim cylinder set • Hardened steel padlock cylinders 	TO BE DISCONTINUED	TO BE DISCONTINUED	TO BE DISCONTINUED	• • - - -	• • • • -	TO BE DISCONTINUED	• • • • •	• • • • •
BRASS PADLOCKS	SEMI-ASSEMBLED 90							
	STANDARD		LIM					
<ul style="list-style-type: none"> • 22010-30/40 • 22010-50/60 	• •		See PP					
<p>HARDENED STEEL PADLOCKS in "UNASSEMBLED" version 91</p> <ul style="list-style-type: none"> - Hardened steel padlocks in UNASSEMBLED version are supplied without cylinder and without the cylinder and padlock drill resistant plate When ordering the padlock cylinder you must specify separately the relevant padlock drill resistant plate (the cylinder drill resistant plate is supplied as standard). 								
HARDENED STEEL PADLOCKS								
<ul style="list-style-type: none"> • 28050-55/56/57, 28350-62..... • 28050-70/71/72, 28350-73, 28550-66/67/75/84/85 				• •				

Type	Description	Bitting	H	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.




- Bronze pin for cylinders and padlocks with key item 00401, 01310, 01320, 01330
- root depth: 0.65 mm.

1	5,20	0,305	1000	1 07551 01 0
2	5,85	0,340	1000	1 07551 02 0
3	6,50	0,370	1000	1 07551 03 0
4	7,15	0,384	1000	1 07551 04 0
5	7,80	0,430	1000	1 07551 05 0
6	8,45	0,480	1000	1 07551 06 0




- Bronze pin for cylinders and padlocks with key item 00500 and 00450
- root depth: 0.5 mm.

4,00	0,235	1000	1 07551 11 0	
1	4,50	0,250	1000	1 07551 12 0
2	5,00	0,250	1000	1 07551 13 0
3	5,50	0,315	1000	1 07551 14 0
4	6,00	0,330	1000	1 07551 15 0
5	6,50	0,365	1000	1 07551 16 0
6	7,00	0,400	1000	1 07551 17 0
7	7,50	0,480	1000	1 07551 18 0




- Bronze pin for C2000 cylinders with key item 01070
- root depth: 0.44 mm.

1	5,20	0,305	1000	1 07551 01 0
2	5,64	0,285	1000	1 07551 41 0
3	6,07	0,330	1000	1 07551 42 0
4	6,50	0,370	1000	1 07551 03 0
5	6,94	0,365	1000	1 07551 43 0
6	7,37	0,400	1000	1 07551 44 0
7	7,80	0,430	1000	1 07551 05 0
8	8,25	0,460	1000	1 07551 45 0




- Bronze pin for ASTRAL and ASIX cylinders with key item 1.00620.01.0, 1.00620.90.0, 1.00670.01.0
- root depth: 0.48 mm.

1	5,05	0,255	1000	1 07551 71 0
2	5,53	0,185	1000	1 07551 72 0
3	6,01	0,290	1000	1 07551 73 0
4	6,49	0,185	1000	1 07551 74 0
5	6,97	0,185	1000	1 07551 75 0
6	7,45	0,185	1000	1 07551 76 0




- Bronze pin for padlocks with key item 01410, 01420, 01425, 01430
- root depth: 0.65 mm.

1	4,45	0,206	1000	1 07551 51 0
2	5,10	0,250	1000	1 07551 52 0
3	5,75	0,260	1000	1 07551 53 0
4	6,40	0,300	1000	1 07551 54 0
5	7,05	0,322	1000	1 07551 55 0
6	7,70	0,350	1000	1 07551 56 0








- Hardened steel upper passive pin ASTRAL

5,80	0,241	1000	1 07551 79 0
------	-------	------	--------------







- Brass driver for cylinders and padlocks with key item 00401, 00450, 00500, 01310, 01320, 01330, 01070

3,00	0,295	1000	1 07552 01 0
4,00	0,226	1000	1 07552 02 0
5,00	0,305	1000	1 07552 03 0

Type	Description	Bitting	H	Unit weight Kg	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Brass driver for cylinders and padlocks with key item 01410, 01420, 01425, 01430 • Brass driver for padlocks item 1.22010.30.0 	3,85	0,215	1000	1	07552	51	0		
		3,4	0,215	1000	1	07552	04	0		
	<ul style="list-style-type: none"> • Mushroom brass driver for ASTRAL cylinders with key item 1.00620.01.0, 1.00620.90.0 	1	8,00	0,410	1000	1	07552	71	0	
		2	7,50	0,410	1000	1	07552	72	0	
		3	7,00	0,410	1000	1	07552	73	0	
		4	6,50	0,410	1000	1	07552	74	0	
		5	6,00	0,410	1000	1	07552	75	0	
	<ul style="list-style-type: none"> • Brass driver for ASTRAL and ASIX cylinders with key item 1.00620.01.0, 1.00620.90.0, 1.00670.00.0 	6	5,50	0,410	1000	1	07552	76	0	
	<ul style="list-style-type: none"> • Brass driver for ASTRAL and ASIX rim cylinders with key item 1.00620.01.0, 1.00620.90.0, 1.00670.01.0 	1	5,50	0,410	1000	1	07552	81	0	
		2	0,00	0,410	1000	1	07552	82	0	
		3	4,50	0,410	1000	1	07552	83	0	
		4	3,95	0,410	1000	1	07552	84	0	
		5	3,30	0,410	1000	1	07552	85	0	
		6	2,65	0,410	1000	1	07552	86	0	
	<ul style="list-style-type: none"> • Mushroom brass driver for cylinders and padlocks with key item 00401, 00450, 00500, 01310, 01320, 01330, 01070 	3,00	0,255	1000	1	07553	01	0		
		4,00	0,212	1000	1	07553	02	0		
		5,00	0,228	1000	1	07553	03	0		
	<ul style="list-style-type: none"> • Mushroom brass driver for cylinders and padlocks with key item 01410, 01420, 01425, 01430 • Mushroom brass driver for padlocks item 1.22010.30.0 	3,85	0,170	1000	1	07553	51	0		
		3,4	0,170	1000	1	07553	04	0		
	<ul style="list-style-type: none"> • Brass spring for cylinders series 02500 and 06500 	13,50	0,095	1000	1	07554	01	0		
	<ul style="list-style-type: none"> • Brass spring for cylinders series 02550, 02552, 06200 	10,50	0,080	1000	1	07554	02	0		
	<ul style="list-style-type: none"> • Brass spring for: Cylinders series C2000, 08300, 08700, 08800 Padlocks item 1.22010.50/60 and 1.26010.50/60 	15,50	0,094	1000	1	07554	03	0		
	<ul style="list-style-type: none"> • Brass spring for cylinders series 07573 	10,70	0,102	1000	1	07554	05	0		
	<ul style="list-style-type: none"> • Brass spring for padlocks item 1.22010.30/40 	9,00	0,080	1000	1	07554	51	0		







Type	Description	Bitting	H	Kg	Pieces	ITEM			
						Type	Dim.	Hand	Fin.
	• Bronze spring for ASTRAL SIGILLO cylinders	9,50	0,078	1000	1	07554	71	0	
	• Bronze spring for ASTRAL ASIX cylinders	12,00	0,065	1000	1	07554	72	0	
	• Bronze spring for ASTRAL and ASIX rim cylinders	10,00	0,102	1000	1	07554	73	0	
	• Steel spring for snap resistant cylinders SIGILLO	9,50	0,078	1000	1	07554	91	0	
	• Steel spring for mortice cylinders	12,00	0,065	1000	1	07554	92	0	
	• Brass master pin for cylinders and padlocks with key item 00401, 01310, 01320, 01330, 01070	1	0,55	0,070	1000	1	07555	01	0
	• root depth: 0,65 mm.	2	1,20	0,100	1000	1	07555	02	0
		3	1,85	0,145	1000	1	07555	03	0
		4	2,50	0,177	1000	1	07555	04	0
		5	3,15	0,213	1000	1	07555	05	0
	• Brass master pin for cylinders and padlocks with key item 00401, 01310, 01320, 01330, 01070	1	0,65	0,078	1000	1	07555	11	0
	• root depth: 0,65 mm.	2	1,30	0,100	1000	1	07555	12	0
		3	1,95	0,145	1000	1	07555	13	0
		4	2,65	0,175	1000	1	07555	14	0
	• Brass master pin for cylinders and padlocks with key item 00450, 00500	2	1,00	0,095	1000	1	07555	21	0
	• root depth: 0,5 mm.	3	1,50	0,120	1000	1	07555	22	0
		4	2,00	0,130	1000	1	07555	23	0
		5	2,50	0,185	1000	1	07555	24	0
		6	3,00	0,170	1000	1	07555	25	0
		7	3,50	0,230	1000	1	07555	26	0
	• Additional brass master pin for complex systems with ASTRAL, ASIX, C3000, TEKNO and AP4 cylinders	2	0,96	0,078	1000	1	07555	31	0
	• root depth 0,48 mm.	3	1,44	0,078	1000	1	07555	32	0
		4	1,92	0,078	1000	1	07555	39	0
		5	2,40	0,078	1000	1	07555	40	0
	• Brass master pin for ASTRAL, ASIX, C3000, TEKNO and AP4 cylinders	2	0,88	0,213	1000	1	07555	33	0
	• root depth: 0,48 mm.	3	1,36	0,213	1000	1	07555	34	0
		4	1,84	0,213	1000	1	07555	35	0
		5	2,32	0,213	1000	1	07555	36	0
		6	2,80	0,213	1000	1	07555	37	0
	7	3,28	0,213	1000	1	07555	38	0	
	• Brass master pin for cylinders and padlocks with key item 01410, 01420, 01425, 01430	1	0,55	0,067	1000	1	07555	51	0
	• root depth: 0,65 mm.	2	1,20	0,095	1000	1	07555	52	0
		3	1,85	0,125	1000	1	07555	53	0
		4	2,50	0,153	1000	1	07555	54	0
		5	3,15	0,170	1000	1	07555	55	0
	• Additional brass master pin for complex systems with key item 01410, 01420, 01425, 01430	1	0,65	0,073	1000	1	07555	61	0
	• root depth: 0,65 mm.	2	1,30	0,097	1000	1	07555	62	0
		3	1,95	0,121	1000	1	07555	63	0
		4	2,60	0,154	1000	1	07555	64	0

Type	Description	Bitting	H	Unit weight Kg	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.
	• Brass plug retaining pin for padlocks item 1.22010.30.0	11,6	0,165	250	1	07556	03	0		
	• Brass plug retaining pin for padlocks item 1.22010.40.0	16,8	0,270	250	1	07556	04	0		
	• Brass plug retaining pin for padlocks item 1.22010.50.0	21,2	0,313	250	1	07556	05	0		
	• Brass plug retaining pin for padlocks item 1.22010.60.0	26,1	0,360	250	1	07556	06	0		
	• Brass pin hole plug for padlocks item 1.22010.50.0	4,50	0,323	1000	1	07557	01	0		
	• Brass pin hole plug for padlocks item 1.22010.60.0	9,50	0,630	1000	1	07557	02	0		
	• Brass pin hole plug for cylinders series C2000, 08300, 08700, 08800	5,5	0,295	1000	1	07557	11	0		
	• Pin hole plug for padlocks item 1.22010.40.0	5,50	0,322	1000	1	07557	52	0		
	• Pin hole plug for padlocks item 1.22010.30.0	2,6	0,322	1000	1	07557	03	0		
	• Brass plug retaining circlip for rim cylinders	0,195		250	1	07558	01	0		
	• Brass circlip for rim cylinders	0,275		250	1	07558	02	0		
	• Brass plug retaining circlip for cylinders series 07573	0,275		250	1	07558	03	0		
	• Steel circlip for rim cylinders	0,275		250	1	07558	05	0		

Type	Description	Bitting	H	Kg Unit weight	Pieces	ITEM				
						Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Hardened steel pin for cylinders and padlock with key item 00401, 01310, 01320, 01330 	1	5,20	0,220	1000	1 07571 01 0				
		2	5,85	0,265	1000	1 07571 02 0				
		3	6,50	0,300	1000	1 07571 03 0				
		4	7,15	0,335	1000	1 07571 04 0				
		5	7,80	0,370	1000	1 07571 05 0				
		6	8,45	0,400	1000	1 07571 06 0				
		6	8,45	0,400	1000	1 07571 06 0				
	<ul style="list-style-type: none"> Hardened steel pin for cylinders and padlocks with key item 00450 and 00500 		4,00	0,400	1000	1 07571 11 0				
		1	4,50	0,400	1000	1 07571 12 0				
		2	5,00	0,400	1000	1 07571 13 0				
		3	5,50	0,295	1000	1 07571 14 0				
		4	6,00	0,400	1000	1 07571 15 0				
		5	6,50	0,400	1000	1 07571 16 0				
		6	7,00	0,400	1000	1 07571 17 0				
		7	7,50	0,400	1000	1 07571 18 0				
	<ul style="list-style-type: none"> Hardened steel pin for C2000 cylinders a with key item 01070 root depth: 0.44 mm. 	1	5,20	0,220	1000	1 07571 01 0				
		2	5,64	0,220	1000	1 07571 41 0				
		3	6,07	0,265	1000	1 07571 42 0				
		4	6,50	0,300	1000	1 07571 03 0				
		5	6,94	0,300	1000	1 07571 43 0				
		6	7,37	0,335	1000	1 07571 44 0				
		7	7,80	0,370	1000	1 07571 05 0				
		8	8,25	0,435	1000	1 07571 45 0				
		8	8,25	0,435	1000	1 07571 45 0				
	<ul style="list-style-type: none"> Hardened steel pin for ASTRAL, ASIX, C3000 and AP4 cylinders with key item 1.00430.00.1, 1.00810.00.0, 1.00620.01.0, 1.00620.90.0 1.00670.01.0, root depth: 0,48 mm. 	0	4,57	0,155	1000	1 07571 70 0				
		1	5,05	0,155	1000	1 07571 71 0				
		2	5,53	0,155	1000	1 07571 72 0				
		3	6,01	0,155	1000	1 07571 73 0				
		4	6,49	0,155	1000	1 07571 74 0				
		5	6,97	0,155	1000	1 07571 75 0				
		6	7,45	0,155	1000	1 07571 76 0				
		7	7,93	0,155	1000	1 07571 80 0				
	<ul style="list-style-type: none"> Hardened steel driver for cylinders and padlocks with key item 00401, 00450, 00500, 01313, 01320, 01330 		2,50	0,235	1000	1 07572 01 0				
			3,50	0,235	1000	1 07572 02 0				
			5,00	0,272	1000	1 07572 03 0				
	<ul style="list-style-type: none"> Steel driver for rim and various cylinders from the ASTRAL and ASIX series 	1	5,50	0,380	1000	1 07572 71 0				
		2	5,00	0,380	1000	1 07572 72 0				
		3	4,50	0,380	1000	1 07572 73 0				
		4	3,95	0,380	1000	1 07572 74 0				
		5	3,30	0,380	1000	1 07572 75 0				
		6	2,65	0,380	1000	1 07572 76 0				
	<ul style="list-style-type: none"> Steel driver for mortice-single cylinders 	1	8,00	0,410	1000	1 07572 81 0				
		2	7,50	0,410	1000	1 07572 82 0				
		3	7,00	0,410	1000	1 07572 83 0				
		4	6,50	0,410	1000	1 07572 84 0				

Type	Description	Bitting	H	Unit weight 	Pieces 	ITEM				
						Type	Dim.	Hand	Fin.	Pers.
	• Steel driver for mortice-single cylinders	5-6	5,50	0,380	1000	1	07572	87	0	
	• Hardened steel driver for key notch detection for SIGILLO cylinders	1	7,00	0,410	1000	1	07572	83	0	
		2	6,50	0,410	1000	1	07572	84	0	
		3	6,00	0,410	1000	1	07572	85	0	
		4	5,50	0,410	1000	1	07572	88	0	
	• Steel driver for snap resistant SIGILLO cylinders	5-6	4,50	0,410	1000	1	07572	89	0	
	• Hardened steel upper passive pin	5,80	0,241	1000	1	07551	79	0		
	• BKP steel driver assembly • CISA patented system	8,00	0,155	1000	1	07572	90	0		
		1	7,00	0,155	1000	1	07572	91	0	
		2-3	6,50	0,155	1000	1	07572	92	0	

Type	Description	Bitting	H	Unit weight	Pieces	ITEM			
						Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Hardened steel pin for ASTRAL TEKNO cylinders • Root depth: 0.48 mm. 	1	5,05	0,155	1000	1 07571 71 0			
		2	5,53	0,155	1000	1 07571 72 0			
		3	6,01	0,155	1000	1 07571 73 0			
		4	6,49	0,155	1000	1 07571 74 0			
		5	6,97	0,155	1000	1 07571 77 0			
		6	7,45	0,155	1000	1 07571 78 0			
	<ul style="list-style-type: none"> • Hardened steel driver for European profile ASTRAL TEKNO cylinders 	1	8,00	0,410	1000	1 07572 93 0			
		2	7,50	0,410	1000	1 07572 94 0			
		3	7,00	0,410	1000	1 07572 95 0			
		4	6,50	0,410	1000	1 07572 96 0			
	<ul style="list-style-type: none"> • Hardened steel pin driver for European profile ASTRAL TEKNO cylinders 	5/6	5,50	0,410	1000	1 07572 87 0			
	<ul style="list-style-type: none"> • Hardened steel pin driver for cylinders notch position detection for European profile ASTRAL TEKNO cylinders 	-	5,50	0,410	1000	1 07572 88 0			
	<ul style="list-style-type: none"> • Steel driver for rim and various from ASTRAL TEKNO cylinders 	1	5,50	0,380	1000	1 07572 71 0			
		2	5,00	0,380	1000	1 07572 72 0			
		3	4,50	0,380	1000	1 07572 73 0			
		4	4,00	0,380	1000	1 07572 77 0			
		5/6	3,30	0,380	1000	1 07572 78 0			
	<ul style="list-style-type: none"> • Hardened steel pin driver for cylinders notch position detection for rim and various ASTRAL TEKNO cylinders 	-	3,3	0,380	1000	1 07572 75 0			
	<ul style="list-style-type: none"> • Hardened steel pin for key notch detection for ASTRAL TEKNO cylinders 	-	5,30	0,241	1000	1 07571 93 0			
	<ul style="list-style-type: none"> • Hardened steel pin for key back detection for ASTRAL TEKNO cylinders 	-	4,70	0,241	1000	1 07571 94 0			

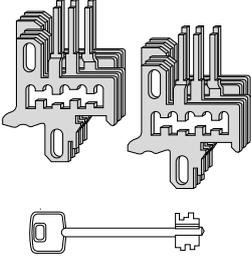
Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	57010, 57014, 57015, 57019, 57028, 57033	0,180	6	1	07590	01	0	
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	57020, 57024	0,255	6	1	07590	05	0	
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	57210, 57211, 57215, 57217, 57800	0,120	6	1	07590	12	0	
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	1 57410 30 1, 1 57415 30 1, 57220, 57223, 57225, 57226	0,120	6	1	07590	15	0	
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	57230	0,170	6	1	07590	18	0	
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00102.00.1 	57250, 57251, 57254, 57255, 57256, 57259, 57260, 57265	0,160	6	1	07590	21	0	

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	17352, 17353, 17357, 17358, 57013, 57016, 57030, 57035, 57312, 57313, 57317, 57318, 57320, 57325, 57330, 57333, 57335, 57336, 57352, 57353, 57357, 57358, 57360, 57365, 57370, 57375	0,142	6	1	07590	23	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00121.00.2 	57121	0,170	6	1	07590	24	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00120.00.1 	1 57115 60 1, 1 57125 60 1, 1 57135 60 1, 57500, 57502, 57505, 57507, 57510, 57512, 57515, 57517, 57520, 57525, 57530, 57535	0,185	6	1	07590	25	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00120.00.1 	1 57110 60 1, 1 57120 60 1, 1 57130 60 1	0,185	6	1	07590	26	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00120.00.2 	1 57110 60 2, 1 57120 60 2, 1 57130 60 2	0,195	6	1	07590	27	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00120.00.2 	1 57115 60 2, 1 57125 60 2, 1 57135 60 2	0,170	6	1	07590	28	0

Type	Description	For series/item	Unit weight Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00123.00.1 • 1 service key item 1.00120.00.1 	57501, 57506, 57511, 57516, 57518, 57521, 57526, 57536	0,213	6	1	07590	29	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00123.00.1 • 1 construction key item 1.00120.00.1 	57501, 57506, 57511, 57516, 57518, 57520, 57521, 57526, 57536	0,210	6	1	07590	30	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00125.00.1 	1 57155 60 1, 1 57165 60 1, 1 57175 60 1, 1 57500 08 0, 1 57505 08 0, 1 57510 08 0, 1 57515 08 0	0,210	6	1	07590	35	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00125.00.1 	1 57150 60 1, 1 57160 60 1, 1 57170 60 1	0,200	6	1	07590	36	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00125.00.2 	1 57150 60 2, 1 57160 60 2, 1 57170 60 2	0,233	6	1	07590	37	0
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00125.00.2 	1 57155 60 2, 1 57165 60 2, 1 57175 60 2	0,212	6	1	07590	38	0

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Set of steel levers • 2 keys item 1.00101.00.2 	1 57409 30 1, 1 57411 30 1, 1 57416 30 1	0,100	6	1 07590 45 0		
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	57010, 57015	0,152	6	1 07591 01 0		
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	57020	0,246	6	1 07591 05 0		
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	57210, 57211, 57215, 57800 57218, 57298	0,100	6	1 07591 12 0		
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	1 57410 30 1, 1 57415 30 1, 57219, 57220, 57223, 57225, 57226, 57299	0,100	6	1 07591 15 0		
	<ul style="list-style-type: none"> • Set of steel levers • 3 keys item 1.00100.00.1 	57250, 57255, 57260, 57265	0,154	6	1 07591 21 0		


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.



- Set of steel levers
- 3 keys item 1.00122.00.1

57500, 57505, 0,202 6
 57510, 57515,
 57517, 57520,
 57525, 57535





1 07591 29 0






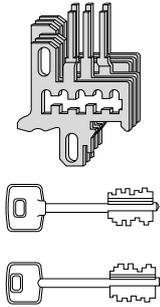


- Set of steel levers
- 3 keys item 1.00122.00.1
- 1 service key item 1.00121.00.1

57501, 57506, 0,100 6
 57511, 57516,
 57518, 57521,
 57526, 57536

1 07591 39 0

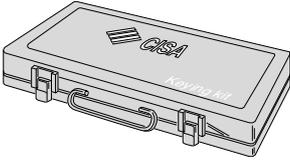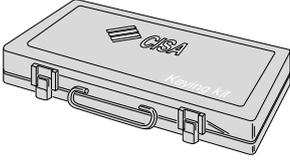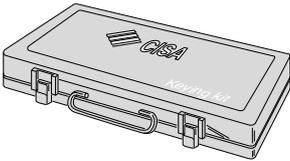Type	Description	For series/item	Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Assembly kit for: European profile cylinders Rim cylinders Padlocks item 1.22010.50/60 and 1.26020.50/60 • Pins diameter 2.8 mm. 	0G300, 08300, 08700	3,370	1	1	07550	01	0	
	<ul style="list-style-type: none"> • Assembly kit for: Padlocks item 1.22010.30/40 • Pins diameter 2.8 mm. 	1 22010 30 0, 1 22010 40 0	2,400	1	1	07550	02	0	
	<ul style="list-style-type: none"> • Assembly kit for: Steel padlocks series 28050, 28350, 28550 Brass padlocks item 1.22010.50/60 and 1.26020.50/60 • Pins diameter 2.8 mm. 	1 22010 50 0, 1 22010 60 0, 1 26020 50 0, 1 26020 60 0, 28050, 28350, 28550	2,500	1	1	07550	04	0	
	<ul style="list-style-type: none"> • Assembly kit for: European profile cylinders Rim cylinders • Pins diameter 2.5 mm. 	0N300, 0E300 0A3S1, 0M3T1 0P3S1	3,170	1	1	07550	13	0	
	<ul style="list-style-type: none"> • Dummy plug • Holes spacing: 4 mm. 	0G300, 02500, 08310, 08710	0,660	1	1	07559	01	0	
	<ul style="list-style-type: none"> • Spring retaining shoe 	0G300, 08310, 08710	0,030	1	1	07559	02	0	
		0A300, 0E300, 0M300	0,015	1	1	07559	62	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	• Spring pressing blade		0,050	1	1	07559	03	0	
		0A300, 0E300, 0M300	0,018	1	1	07559	63	0	
	• Circlip pliers • Circlip pliers Astral Tekno cylinders		0,190	1	1	07559	04	0	
			0,190	1	1	07559	42	0	
	• Tweezers		0,010	1	1	07559	05	0	
	• Spring retaining bar for rim cylinders		0,105	1	1	07559	06	0	
	• Testing tool	1 22010 50 0	0,025	1	1	07559	07	0	
	• Set of depth keys item 01310 (6 pieces)		0,061	1	1	07559	09	0	
	• Testing tool	1 22010 40 0	0,025	1	1	07559	11	0	
	• Set of depth keys item 01410 (6 pieces)		0,046	1	1	07559	12	0	
	• Pin gauge (increment 0.65 mm.)	01310, 01410	0,035	1	1	07559	13	0	
	• Pin gauge (increment 0,44 mm.)	01070	0,035	1	1	07559	48	0	
	• Dummy plug • Holes spacing: 3.5 mm.	08810, 08815	0,660	1	1	07559	19	0	
	• Pin gauge (increment 0.5 mm.)	08810, 08815	0,015	1	1	07559	22	0	
	• Set of depth keys item 00450 (8 pieces)	08810, 08815	0,150	1	1	07559	23	0	

Type	Description	For series/item	Unit weight Pieces	ITEM			
				Type	Dim.	Hand	Fin.
	• Butterfly-type spring retaining shoe for cylinders with knob		0,050 1	1	07559	24	0
	• Ball assembling tool for cylinders with knob		0,050 1	1	07559	25	0
	• Knob assembling tool for cylinders with knob		0,050 1	1	07559	26	0
	• Set of depth keys item 01070 (8 pieces)	0G300	0,081 1	1	07559	28	0
	• Spring positioning tool	0A300, 0E300, 0M300	0,055 1	1	07559	80	0
	• Dummy plug	0A300, 0E300, 0M300	2,750 1	1	07559	81	0
	• Set of depth keys Astral item 00620	0A300	0,061 1	1	07559	83	0
	• Key biting check kit, for Astral cylinder keys	0A300	0,015 1	1	07559	84	0
	• Spring positioning tool	0G300, 08310, 08710	0,080 1	1	07559	85	0

N. B.:

- **The products listed have all the characteristics indicated in the technical descriptions of CISA's catalogue, and it is advised to use them only as indicated. CISA does not guarantee any characteristics or use other than indicated. For special security needs the end-user should contact the retailer / installer of such products, or contact CISA directly to agree on specific variations to best meet the user's needs.**
- **The measurements are given in millimetres.**
- **Weights refer to unit item, not to the package.**
- **To download the product certifications click on www.cisa.com**

CISA S.p.A. reserves the right to modify products here illustrated without prior notice.

About Allegion™

Allegion (NYSE: ALLE) is a global pioneer in safety and security, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion produces a range of solutions for homes, businesses, schools and other institutions. Allegion is a \$2.4 billion company, with products sold in almost 130 countries.

For more, visit allegion.com.



 CISA SpA
Via Oberdan 42
48018 Faenza (RA) Italy

 Ph. +39 0546 677111
Fax +39 0546 677150

 Customer Service and Technical Support
+39 0546 188 0070



cisa.com
cisa.sales@allegion.com