




ALLEGION™

# Multitop MAX

4 times more secure.

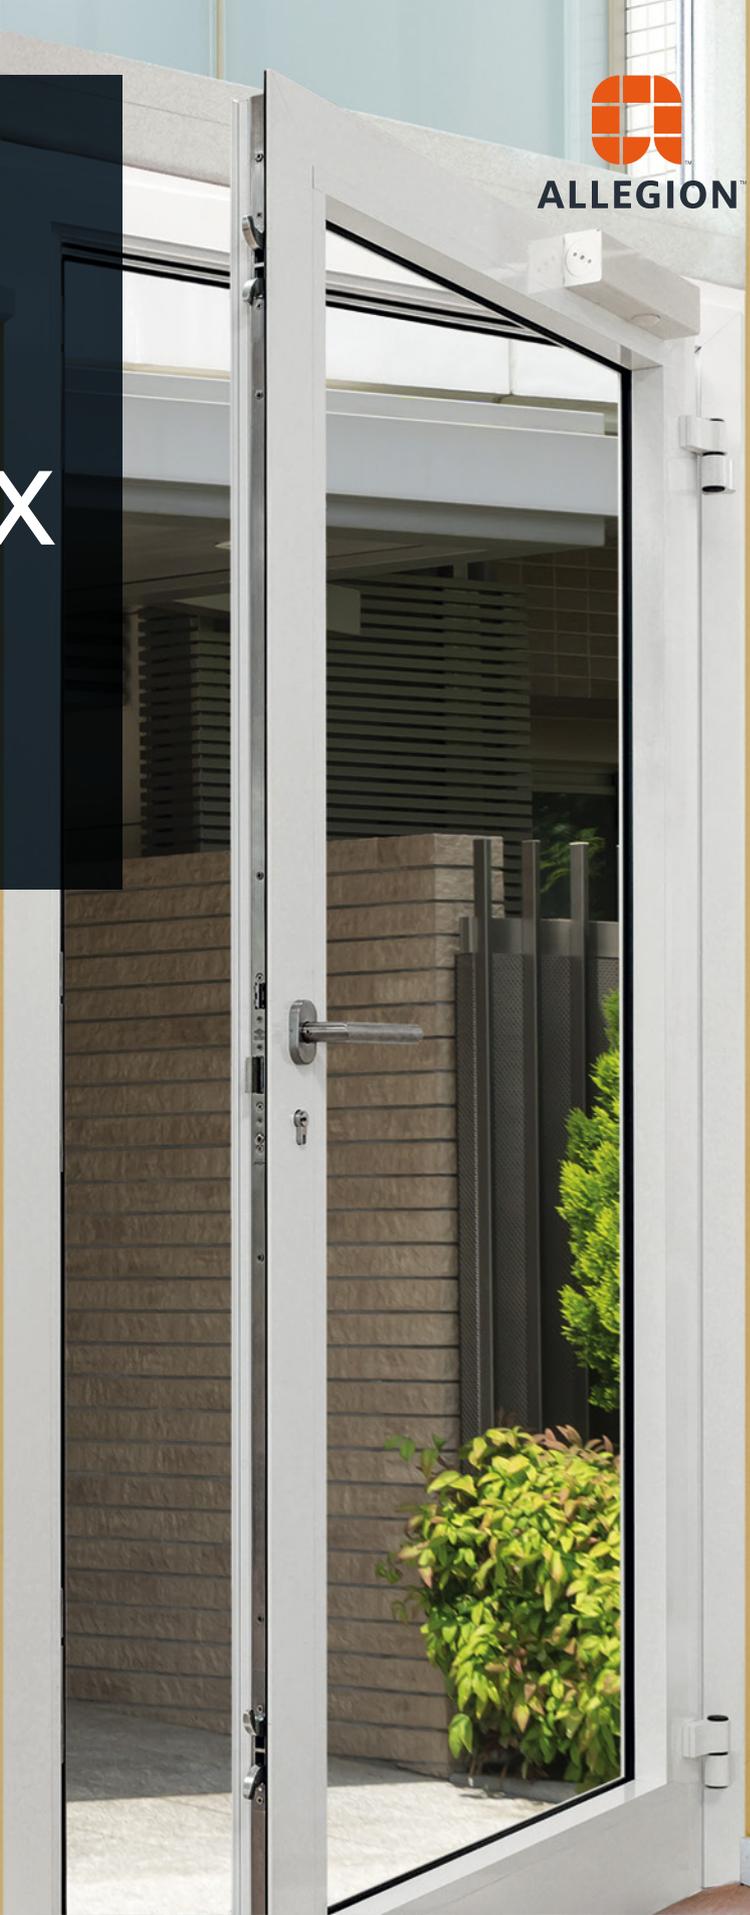

Education



Residential



Commercial



Healthcare



Hospitality

## Multitop MAX


Multipoint lock with 4 hook deadbolts for unbeatable security.

### HIGH SECURITY

- Locking system with 4 hooks which are independent of the central lock mechanism and each other. If the central deadbolt or one of the hooks is forced, the other hooks remain securely engaged. CISA patented system.

### CORRECTS HEAT DISTORTION OF THE DOOR

The rack mechanism, which makes it easier to turn the key, and the hooks with their more rounded design, effectively correct distortion of the door due to sudden changes in temperature.

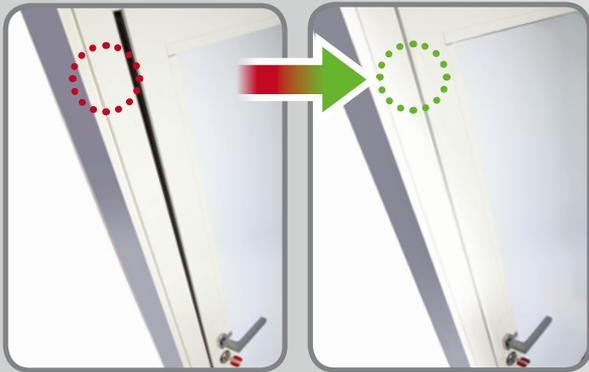

### APPLICATIONS

- Entrance doors
- Secondary entrance doors
- Railings and shutters on French windows
- Sliding doors

### BENEFITS



#### For end users

- High resistance to forced entry (2,000 kg for lateral thrust and 1,000 kg for forced entry by widening the profile).
- Energy savings and better noise insulation.



#### For locksmiths

- Cuts maintenance times and costs.
- Can be installed on different types of doors, including railings.




#### For designers and architects

- Certified According to European Standard prEN15685 and is suitable for EN1627 certified doors up to resistance class WK/RC4.
- Operates with a Euro profile cylinder and can be integrated into master key systems to manage access.



# MULTITOP MAX




## INTERCHANGEABILITY

- Multitop MAX is completely interchangeable with all Multitop locks.
- The strikes for the central lock and the divertors with hooks are the same as for Multitop PRO.

### Benefits:

- No additional work is needed on the door to install the lock.
- Uses the same current range of strikes. When installing, the position on the profile has to be adjusted only.





## ELECTRIC VERSION

Multitop MAX is also available in the electric version with a 15.5 mm thick case and a dead-locking device on the latchbolt.

### Benefits:

- Fewer holes are needed on the profile and the lock is correctly installed on thermal cut and European groove profiles
- Increases security for doors which are locked with the latchbolt only.



## SECURITY

- Locking system with four 10 mm thick hooks, protected by a hardened steel plate that is 4 mm thick. CISA patent registered.

### Benefit:

- High resistance to forced entry (2,000 kg for lateral thrust and 1,000 kg for forced entry by widening the profile).

## CERTIFICATIONS

- Grade 6 Security according to European Standard pr EN15685
- Grade 7 Security according to European Standard pr EN 15685 using protective plates for the lock and divertors series 06436
- Suitable for EN 1627 certified doors up to resistance class WK/RC4



## VERSATILE LATCHBOLT


Multitop MAX is supplied standard in the latchbolt version. The following functions are also possible:

- Change from latchbolt to roller directly from the lock faceplate (CISA patent registered).
- Insert the latchbolt backwards for the deadbolt only version.

### Benefits:

- Reduced stock.
- More flexible adjustments.
- The roller can be replaced even when the lock is installed.
- No need for additional accessories for the deadbolt only function.

TYPE	DESCRIPTION	No. LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT kg	No. PIECES	ITEM		
									TYPE	DIM.	HAND

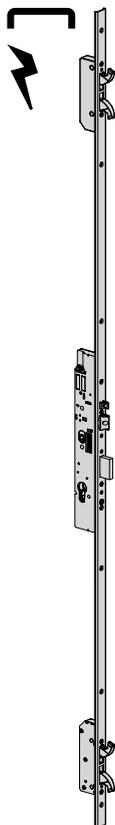

### CENTRE DISTANCE 85 MM

- Stainless steel 'U'-shaped adjustable faceplate. 24 x 5 mm, height 2300 mm.
  - top adjustment 350 mm.
  - bottom adjustment 150 mm.
- 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt.
- 4 hooks with hardened steel inserts.
- CE 12V AC voltage
- Absorbed current 3.1 A

3	2	85	24	25	3.520	1	1	19656	25	0
3	2	85	24	30	3.580	1	1	19656	30	0
3	2	85	24	35	3.640	1	1	19656	35	0
3	2	85	24	40	3.700	1	1	19656	40	0

### MATCHING ADJUSTABLE METAL STRIKES

Central lock item	Divertors (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

### CENTRE DISTANCE 85 MM

- Stainless steel 'U'-shaped adjustable faceplate. 24 x 5 mm, height 2300 mm.
  - top adjustment 350 mm.
  - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened steel inserts.

3	2	85	24	25	3.310	1	1	49656	25	0
3	2	85	24	30	3.370	1	1	49656	30	0
3	2	85	24	35	3.430	1	1	49656	35	0
3	2	85	24	40	3.490	1	1	49656	40	0

### CENTRE DISTANCE 92 MM

- Stainless steel 'U'-shaped adjustable faceplate. 24 x 5 mm, height 2300 mm.
  - top adjustment 350 mm.
  - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened steel inserts.


3	2	92	24	25	3.310	1	1	49658	25	0
3	2	92	24	30	3.370	1	1	49658	30	0
3	2	92	24	35	3.430	1	1	49658	35	0
3	2	92	24	40	3.490	1	1	49658	40	0

### MATCHING ADJUSTABLE METAL STRIKES

Central lock item	Divertors (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

"MODULAR" ROLLER ASSEMBLY:  
item 1.06000.00.0 (roller inserts supplied as standard)

TYPE	DESCRIPTION	No. LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT kg	No. PIECES	ITEM		
									TYPE	DIM.	HAND

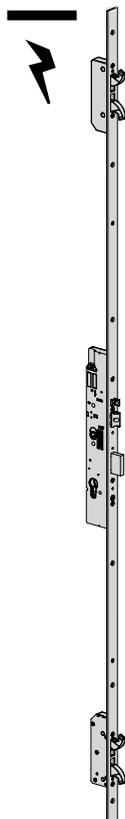


### CENTRE DISTANCE 85 MM

- Stainless steel "flat" adjustable faceplate 24 x 3 mm. height 2300 mm.  
- top adjustment 350 mm.  
- bottom adjustment 150 mm.
- 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt.
- 4 hooks with hardened steel inserts.
- CE 12V AC voltage
- Absorbed current 3.1 A

3	2	85	24	25	3.520	1	1	19746	25	0
3	2	85	24	30	3.580	1	1	19746	30	0
3	2	85	24	35	3.640	1	1	19746	35	0
3	2	85	24	40	3.700	1	1	19746	40	0

### MATCHING ADJUSTABLE METAL STRIKES

Central lock item	Divertors (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

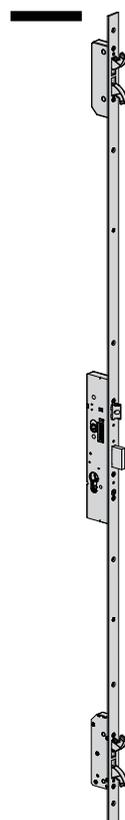

### CENTRE DISTANCE 85 MM

- Stainless steel "flat" adjustable faceplate 24 x 3 mm height 2300 mm.  
- top adjustment 350 mm.  
- bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened steel inserts.

3	2	85	24	25	3.310	1	1	49746	25	0
3	2	85	24	30	3.370	1	1	49746	30	0
3	2	85	24	35	3.430	1	1	49746	35	0
3	2	85	24	40	3.490	1	1	49746	40	0

### CENTRE DISTANCE 92 MM

- Stainless steel "flat" adjustable faceplate 24 x 3 mm height 2300 mm.  
- top adjustment 350 mm.  
- bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened steel inserts.

3	2	92	24	25	3.310	1	1	49748	25	0
3	2	92	24	30	3.370	1	1	49748	30	0
3	2	92	24	35	3.430	1	1	49748	35	0
3	2	92	24	40	3.490	1	1	49748	40	0

### MATCHING ADJUSTABLE METAL STRIKES

Central lock item	Divertors (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0




"MODULAR" ROLLER ASSEMBLY :  
item 1.06000.00.0 (roller inserts supplied as standard)



TYPE	DESCRIPTION	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT 	No. PIECES 	ITEM			
								TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> <li>Stainless steel faceplate 22 x 3 mm</li> <li>Deadbolt and latchbolt</li> <li>10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt</li> <li>Pair of nylon faceplate spacers item 1.06141.65.0</li> <li>Threaded pins for extended bolts</li> <li>CE 12V AC voltage</li> <li>Absorbed current 3.1 A</li> <li>ON REQUEST                             <ul style="list-style-type: none"> <li>Internal ragged extended bolts item 1.06441.00.0</li> <li>Internal straight extended bolts item 1.06441.10.0</li> <li>Pair of external bolt connectors item 1.06442.00.0</li> <li>Lateral locking points item 1.06443.41.0</li> <li>Lateral locking points item 1.06443.46.0</li> </ul> </li> </ul>	2	85	22	25	1.010	1	1	19225	25	0
		2	85	22	30	1.070	1	1	19225	30	0
		2	85	22	35	1.130	1	1	19225	35	0
		2	85	22	40	1.190	1	1	19225	40	0
	<ul style="list-style-type: none"> <li>Stainless steel faceplate 22 x 3 mm</li> <li>Deadbolt and latchbolt</li> <li>11 to 17 mm adjustable latchbolt</li> <li>Pair of nylon faceplate spacers item 1.06141.65.0</li> <li>Threaded pins for extended bolts</li> <li>ON REQUEST                             <ul style="list-style-type: none"> <li>Internal ragged extended bolts item 1.06441.00.0</li> <li>Internal straight extended bolts item 1.06441.10.0</li> <li>Pair of external bolt connectors item 1.06442.00.0</li> <li>Lateral locking points item 1.06443.41.0</li> <li>Lateral locking points item 1.06443.46.0</li> </ul> </li> </ul>	2	85	22	25	0.720	12	1	49225	25	0
		2	85	22	30	0.780	12	1	49225	30	0
		2	85	22	35	0.840	12	1	49225	35	0
		2	85	22	40	0.900	12	1	49225	40	0
		2	92	22	25	0.720	12	1	49228	25	0
		2	92	22	30	0.780	12	1	49228	30	0
		2	92	22	35	0.840	12	1	49228	35	0
		2	92	22	40	0.900	12	1	49228	40	0
	<ul style="list-style-type: none"> <li>Stainless steel faceplate 22 x 3 mm</li> <li>Deadbolt and roller</li> <li>2.5 to 16.5 mm adjustable roller</li> <li>Pair of nylon faceplate spacers item 1.06141.65.0</li> <li>Threaded pins for extended bolts</li> <li>ON REQUEST                             <ul style="list-style-type: none"> <li>Internal ragged extended bolts item 1.06441.00.0</li> <li>Internal straight extended bolts item 1.06441.10.0</li> <li>Pair of external bolt connectors item 1.06442.00.0</li> <li>Lateral locking points item 1.06443.41.0</li> <li>Lateral locking points item 1.06443.46.0</li> <li>Inserts for strikes for locks series 49250:                                     <ul style="list-style-type: none"> <li>item 1.06141.70.0 for item 1.06463.16/17/34/35.0</li> <li>item 1.06141.71.0 for item 1.06463.05/31/32/33.0</li> <li>item 1.06141.86.0 for item 1.06461.30/35.0</li> </ul> </li> </ul> </li> </ul>	2	-	22	25	0.720	12	1	49250	25	0
		2	-	22	30	0.780	12	1	49250	30	0
		2	-	22	35	0.840	12	1	49250	35	0
		2	-	22	40	0.900	12	1	49250	40	0

MATCHING ADJUSTABLE METAL STRIKES	
Central lock item	Divertors (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

“MODULAR” ROLLER ASSEMBLY FOR 49225 SERIES:  
item 1.06000.00.0 (roller inserts supplied as standard)



TYPE	DESCRIPTION	kg	No. PIECES	ITEM			
				TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> <li>Lock protective plate to increase drill resistance (grade 7 prEN 15685:10)</li> </ul>	0.100	6	1	06436	10	0
	<ul style="list-style-type: none"> <li>Protective plate for lateral locking points to increase drill resistance (grade 7 prEN 15685:10)</li> </ul>	0.057	6	1	06436	11	0
	<ul style="list-style-type: none"> <li>Microswitch for hook status to be used with lateral locking points 19000 and 49000 series</li> </ul>	0.020	1	1	06195	08	0
	<ul style="list-style-type: none"> <li>Protective rose for cylinders RS3, ASTRAL, AP3 (with long key CL car.), AP4 and ASIX, in chrome-plate carbonitrided steel for 19000 and 49000 series, complete with:                             <ul style="list-style-type: none"> <li>- Spacers 2 mm. (19pcs), 1 mm. (2pcs)</li> <li>- M5 x 75mm screws</li> <li>- Inside escutcheon</li> </ul> </li> <li>AVAILABLE FINISHES                             <ul style="list-style-type: none"> <li>- Gold polished steel (fin. 15)</li> </ul> </li> <li>ON REQUEST                             <ul style="list-style-type: none"> <li>- Set of additional spacers for profiles 65 to 87 mm wide item 1.06141.87.0</li> </ul> </li> </ul>	0.485	1	1	06460	05	0

TYPE	DESCRIPTION	FOR SERIES / ITEM	kg	No. PIECES	ITEM			
					TYPE	DIM.	HAND	
	<ul style="list-style-type: none"> <li>Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height 7.5 to 10 mm)</li> </ul>	106463 24 0; 106463 25 0 106463 34 0; 106463 35 0	0.019	25	1	06141	79	0
	<ul style="list-style-type: none"> <li>Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height 3 to 7.5 mm)</li> </ul>	106463 24 0; 106463 25 0 106463 34 0; 106463 35 0	0.019	25	1	06141	89	0

## TECHNICAL FEATURES

- Case thickness 15.5 mm
- Closed case
- Backsets 25-30-35-40 mm
- Latchbolt interchangeable with roller
- Centre distance 85 and 92 mm
- Case in pressure die-cast metal
- Steel cover
- Top and bottom adjustable faceplate
- 11 to 17 mm adjustable latchbolt
- 2.5 to 15.5 mm adjustable roller
- 10.5 to 16.5 mm adjustable latchbolt and deadbolt (electric versions)
- Latchbolt with anti-burglary device (electric versions)
- 10 mm thick hooks with 25 mm protrusion
- Protective plate for grade 7 item 1.06436.10/11.0
- Microswitch can be installed on the divertor case
- 8 mm square spindle
- DIN holes to fix handle plate
- CE 12V AC voltage (electric versions)

## OPERATION

- The key operates the latchbolt, central deadbolt and hooks. The remote electric control (electric locks only) and handle operate the latchbolt
- The lock is fitted with a misalignment device

## FINISHES

- Zinc-plated cases and covers
- Stainless steel faceplate
- Nickel-plated latchbolt, roller, deadbolt and hooks

## HAND

0 = non-handed

## SUPPLIED AS STANDARD

- Pair of nylon protective roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

## ON REQUEST

- Modular roller assembly item 1.06000.00.0
- Euro profile cylinder
- Adjustable metal strikes (see special vademecum)
- Cylinder protective rose item 1.06460.05.0
- Button item 1.06110.15.0 (elettroserratura)
- Pair of electric contacts item 1.06511.00.0

## SPECIFICATIONS

MULTITOP MAX MECHANICAL LOCK SERIES (4965X-XX-0 and 4974X-XX-0).

Lock classified 3X9A0G6063 or 3X9A0G7073 in accordance with European Standard prEN 15685. Lock and multipoint gear electric lock (re. CISA type "Multitop Max") with resistance to lateral thrust for 2,000 kg, pulling resistance 1,000 kg and lifting resistance 600 kg.

Grade 6 Security (Grade 7 Security by protecting the lock and locking points with hardened steel plates). Grades 6 or 7 mean the lock is suitable for EN 1627:2011 certified doors up to resistance class WK/RC 4.

Lock suitable for doors for public use. Locking system with four 10 mm thick hooks, protected by a hardened steel plate that is 4 mm thick (CISA patent registered). The 4 hooks are independent of each other and of the central lock mechanism: if the central deadbolt or one of the hooks is forced, the other locking points remain securely engaged. This locking system increases resistance to lateral thrust and forced entry by widening the profile.

Deadlocking latchbolt (electric version).


Gear mechanism to correct heat distortion of the door: door hermetically sealed, energy savings and better noise insulation.

Compulsory parts: CISA- type cylinder and strike.


Optional: microswitch to signal door status (open or locked) which is always controlled by electric contact.

Cylinder protective rose for greater security against forced entry.



Electric strike plate for remote opening.

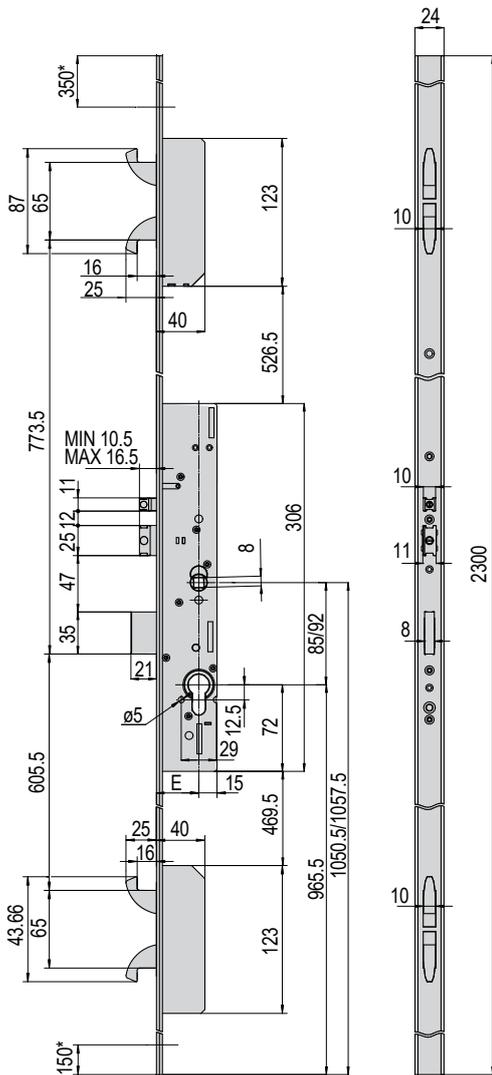


**19746**




**19656**

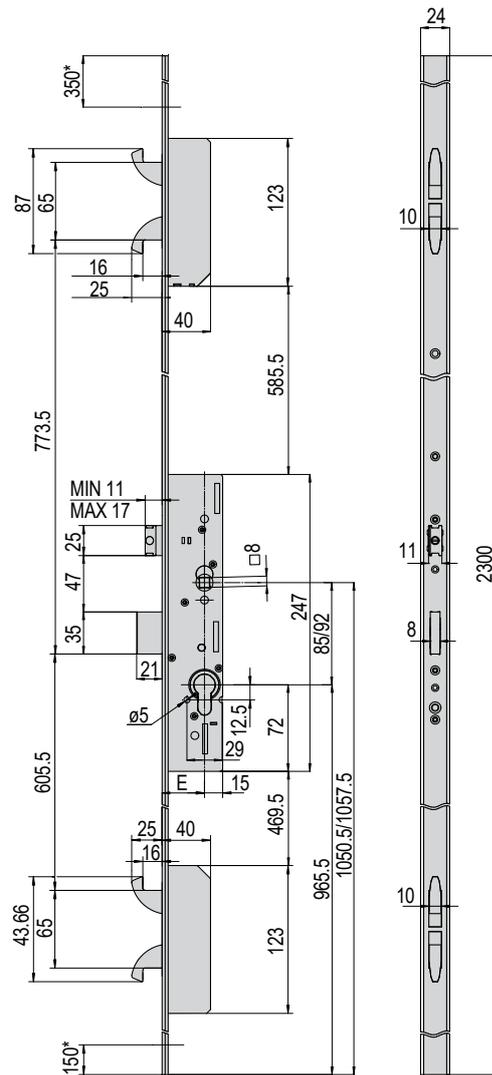


**49746 - 49748**




**49656 - 49658**




\* ADJUSTMENT  
E = 25 - 30 - 35 - 40




\* ADJUSTMENT  
E = 25 - 30 - 35 - 40

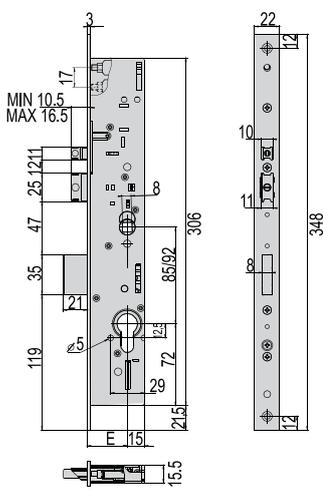

**19225**  
E = 25-30-35-40

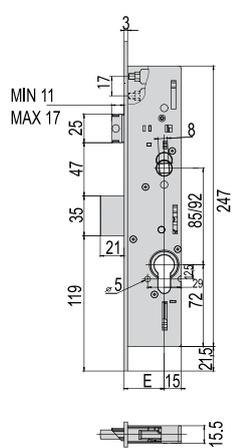

**49225 - 49228**  
E = 25-30-35-40

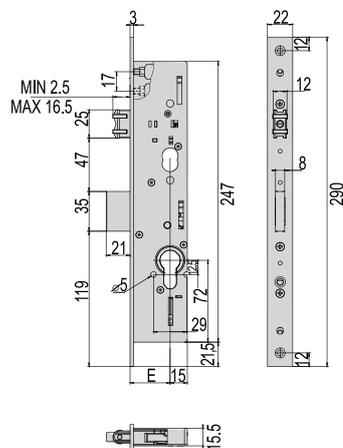

**49250**  
E = 25-30-35-40

CISA  
recommends

**MAKE YOUR DOOR EASIER TO OPEN.**

Combine Multitop MAX with a cam action door closer from the D6200 series to make the door easier to open, especially for the elderly and children.



**INCREASE YOUR SECURITY.**

Combine Multitop MAX with AP4 S or RS3 S cylinders and a protective rose to increase resistance to forced entry.



## About Allegion™

Allegion (NYSE: ALLE) is a global pioneer in safety and security, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion produces a range of solutions for homes, businesses, schools and other institutions. Allegion is a \$2 billion company, with products sold in almost 130 countries.

For more visit [allegion.com](http://allegion.com)

