CISA®

ALLEGION™

Security and access control for all buildings

CATALOGUE



CISA

Catalogue

Analytic index

Special executions

Key blanks

Cylinders

Padlocks

Locks for steel doors

Locks for aluminium doors

Locks for wooden doors

Locks for armour plated doors

Fire door locks and panic exit devices



Locks and panic exit devices






Door closers

Safes

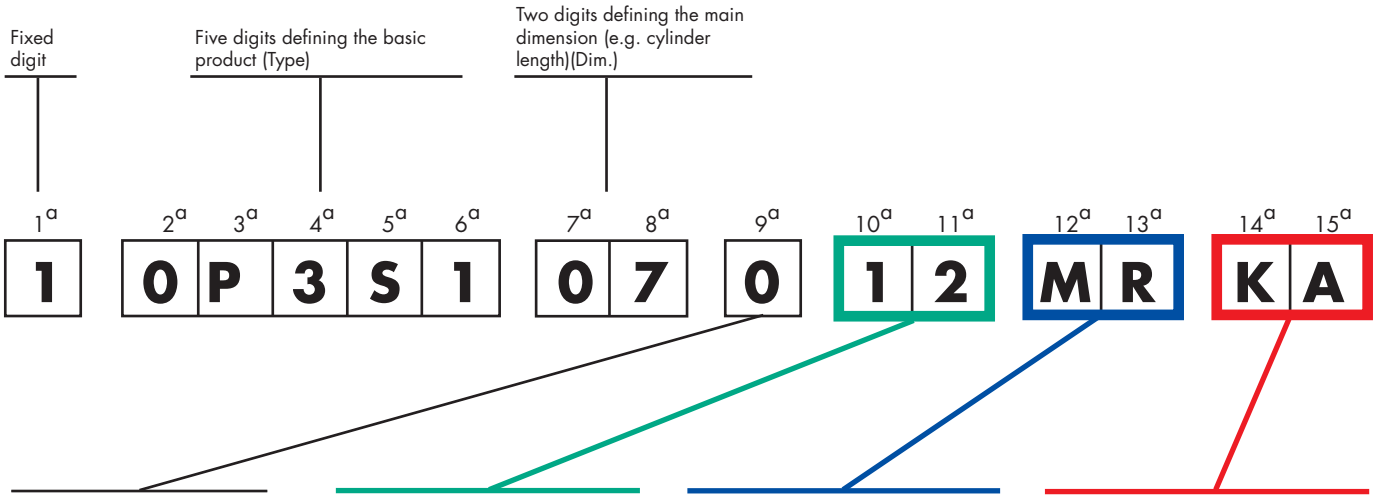
Keying kits





One digit for the hand:

Locks:

0 = reversible
1 = right hand inwards
2 = left hand inwards
3 = right hand outwards
4 = left hand outwards

Electric strikerst:

0 = reversible
1 = right hand inwards
left hand outwards
2 = left hand inwards
right hand outwards

Panic exit devices

0= reversible
1 = right hand outwards
2 = left hand outwards

Two digits which **must always be the 10th and the 11th**, defining a FINISH other than the standard ones.
Use the **green codes** from the finishes list.

Two digits which **must always be the 12th and the 13th**, defining PERSONALIZATION, if any.
Any personalizatio n must be **previously agreed upon with CISA** who will assign the relevant code.

Two digits which **must always be the 14th and the 15th**, defining any SPECIAL EXECUTION. Use the **red codes** from the special features list. Orders for uncoded special features must be accompanied by a description.

EXAMPLES:

1) When ordering a **basic item** from the list specify the code up to the hand digit. For example, to order a cylinder:

1	0M311	07	0			

2) When ordering an item with a non-standard finish, for example **a nickel-plated cylinder**, indicate:

1	0M311	07	0	12		

3) When ordering a personalized item, for example a **cylinder with a customer's design feature**, indicate:

1	0M311	07	0	00	MR	

where MR is to be assigned by CISA

4) When ordering a special item, for example a **KA cylinder**, indicate:

1	0M311	07	0	00	MR	KA

EN STANDARDS OVERVIEW
For determination of the Classification Coding System




European standard EN 1303:2015
CYLINDERS




European standard EN 12209:2016
MECHANICAL LOCKS



European standard prEN 15685:2014
MULTIPOINT MECHANICAL LOCKS




European standard EN 14846:2008
ELECTRICAL LOCKS



European standard EN 1125:2008
PANIC EXIT DEVICES



European standard EN 179:2008
PUSH PAD PANIC EXIT DEVICES



European standard EN 1154:1996 + A1:2002
DOOR CLOSERS



CYLINDERS

Example for AP4 S cylinders

1	2	3	4	5	6	7	8
1	6	0	B	0	C	6	D

1 Category of use

Grade 1: for use by people with a high incentive to exercise care

2 Durability

Grade 4: 25 000 cycles
Grade 5: 50 000 cycles
Grade 6: 100 000 cycles

3 Door mass

Grado 0: all

4 Suitability for use on fire/smoke doors

Grade 0: Not approved for use on fire/smoke door
Grade A: Suitable for use on smoke door assemblies
Grade B: Suitable for use on fire/smoke door assemblies

5 Safety

Grade 0: all

6 Corrosion resistance and temperature

Grade 0: No defined corrosion resistance, no temperature requirement
Grade A: High corrosion resistance, no temperature requirement
Grade B: No defined corrosion requirement, temperature requirement: -25°C to +65°C
Grade C: High corrosion resistance; temperature requirement: -25°C to +65°C

7 Key related security

Grade 1: 100 effective differs, minimum 2 mobile elements
Grade 2: 300 effective differs, minimum 3 mobile elements
Grade 3: 15,000 effective differs, minimum 5 mobile elements
Grade 4: 30,000 effective differs, minimum 5 mobile elements
Grade 5: 30,000 effective differs, minimum 6 mobile elements
Grade 6: 100,000 effective differs, minimum 6 mobile elements

8 Attack resistance

Grade 0: No defined resistance to drilling and mechanical attack
Grade A: Resistance to drilling for 3/5 mins and mecanical attack, excluding plug extraction
Grade B: Resistance to drilling for 5/10 mins and mechanical attack, excluding plug extraction
Grade C: Resistance to drilling for 3/5 mins and mechanical attack
Grade D: Resistance to drillling for 5/10 mins and mechanical attack

CISA



MECHANICAL LOCKS

Example for a Multitop PRO lock, series 49225

1	2	3	4	5	6	7	8
3	X	9	0	0	G	6-7	0

1 Category of use

Grade 1: For use by people with a high incentive to exercise care and with a small chance of misuse, e.g. residential doors

Grade 2: For use by people with some incentive to exercise care but where there is some chance of misuse, e.g. office doors

Grade 3: For use by the public where there is little incentive to exercise care and where there is a high chance ofmisuse, e.g. doors in public buildings

2 Durability

Grade A:	50 000 test cycles	no force on latch bolt, or for locks without latchbolt
Grade B:	100 000 test cycles	no force on latch bolt, or for locks without latchbolt
Grade C:	200 000 test cycles	no force on latch bolt, or for locks without latchbolt
Grade L:	100 000 test cycles	25 N load on latchbolt
Grade M:	200 000 test cycles	25 N load on latchbolt
Grade R:	100 000 test cycles	50 N load on latchbolt
Grade S:	200 000 test cycles	50 N load on latchbolt
Grade W:	100 000 test cycles	120 N load on latchbolt
Grade X:	200 000 test cycles	120 N load on latchbolt

3 Door mass and closing force

Grade 0:	Locks without a latchbolt	
Grade 1:	Up to 100 kg door mass	50 N maximum closing force
Grade 2:	Up to 200 kg door mass	50 N maximum closing force
Grade 3:	Above 200 kg door mass or as specified by the manufacturer	50 N maximum closing force
Grade 4:	Up to 100 kg door mass	25 N maximum closing force
Grade 5:	Up to 200 kg door mass	25 N maximum closing force
Grade 6:	Above 200 kg door mass or as specified by the manufacturer	25 N maximum closing force
Grade 7:	Up to 100 kg door mass	15 N maximum closing force
Grade 8:	Up to 200 kg door mass	15 N maximum closing force
Grade 9:	Above 200 kg door mass or as specified by the manufacturer	15 N maximum closing force

4 Suitability for use on fire resisting and/or smoke control doorset

Grade 0: Not verified for use on fire resisting /smoke control doorset assemblies;

Grade A: For use on smoke control doorset assemblies based on a test in accordance with EN 1634-3 where the lock contributes to the integrity

Grade B: For use on smoke control and fire resisting doorset assemblies based on a test in accordance with EN 1634-1 or EN 1634-2 where the lock contributes to the integrity;

Grade N: For use on smoke control and fire resisting doorset assemblies based on tests where the lock does not contribute to keeping the door in a closed position during the fire resisting and/or smoke control test;

5 Safety

Grade 0: No safety requirement

6 Corrosion Resistantce and Temperature

Grade 0:	No defined corrosion resistance,	no temperature requirement
Grade A:	Low corrosion resistance (24 h),	no temperature requirement
Grade C:	High corrosion resistance (96 h),	no temperature requirement
Grade D:	Very high corrosion resistance (240 h),	no temperature requirement
Grade F:	High corrosion resistance (96 h),	Temperature requirement: -10°C to +60°C
Grade G:	Very high corrosion resistance (240 h),	Temperature requirement: -10°C to +60°C

7 Security and drill resistance

Grade	Side force on deadbolt	Disengaging force	Deadbolt projection	In case of hook, resistance for pulling of antiseparation bolt	In case of hook, resistance to forcing of antilifting device in sliding door lock	Drill resistance
0	-	-	-	-	-	-
1	1 kN	1 kN	10 mm	1 kN	1 kN	no
2	3 kN	2 kN	12 mm	3 kN	3 kN	no
3	5 kN	4 kN	14 mm	5 kN	3 kN	no
4	7 kN	5 kN	20 mm	7 kN	5 kN	no
5	7 kN	5 kN	20 mm	7 kN	5 kN	yes
6	10 kN	6 kN	20 mm	10 kN	6 kN	no
7	10 kN	6 kN	20 mm	10 kN	6 kN	yes

note: 1kN = 100 kg

8 Key identification of lever locks

Grade 0: No requirement

Grade A: Minimum three detaining elements

Grade B: Minimum five detaining elements

Grade C: Minimum five detaining elements, extended number of effective differs

Grade D: Minimum six detaining elements

Grade E: Minimum six detaining elements, extended number of effective differs

Grade F: Minimum seven detaining elements

Grade G: Minimum seven detaining elements, extended number of effective differs

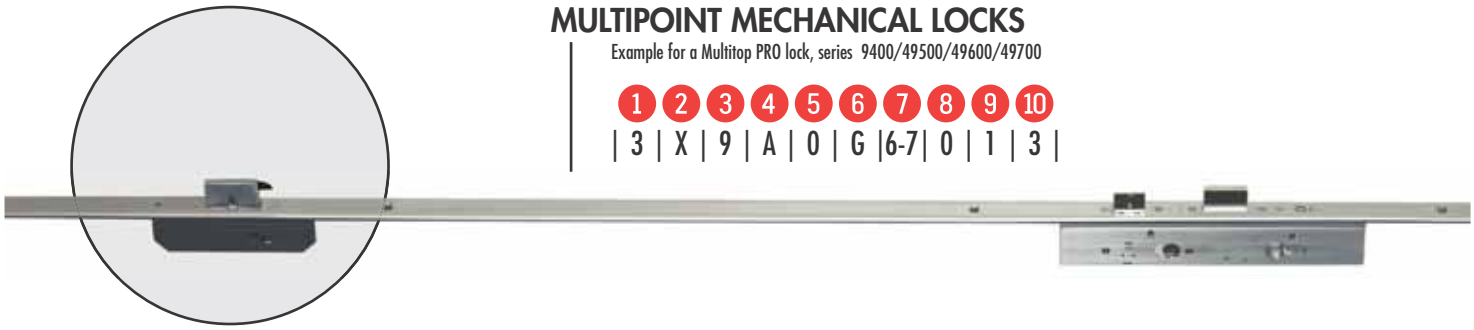
Grade H: Minimum eight detaining elements, extended number of effective differs

CISA

MULTIPOINT MECHANICAL LOCKS

Example for a Multitop PRO lock, series 9400/49500/49600/49700

1	2	3	4	5	6	7	8	9	10
3	X	9	A	0	G	6-7	0	1	3



1 Category of use

Grade 1: for use by people with a high incentive to exercise care and with a small chance of misuse, e.g. residential doors

Grade 2: for use by people with some incentive to exercise care but where there is some chance of misuse, e.g. office doors.

Grade 3: for use by the public where there is little incentive to exercise care and where there is a high chance of misuse, e.g. doors in public buildings.

2 Durability

Grade A: 50 000 test cycles; no load on latch bolt; or for multipoint locks without latchbolt;

Grade B: 100 000 test cycles; no load on latch bolt; or for multipoint locks without latchbolt;

Grade C: 200 000 test cycles; no load on latch bolt; or for multipoint locks without latchbolt;

Grade L: 100 000 test cycles; 25 N load on latch bolt;

Grade M: 200 000 test cycles; 25 N load on latch bolt;

Grade R: 100 000 test cycles; 50 N load on latch bolt;

Grade S: 200 000 test cycles; 50 N load on latch bolt;

Grade W: 100 000 test cycles; 120 N load on latch bolt;

Grade X: 200 000 test cycles; 120 N load on latch bolt.

3 Door mass and closing force

Grade 0: Multipoint locks without a latch bolt (latching function)

Grade 1:	up to 100 kg door mass	50 N maximum closing force
Grade 2:	up to 200 kg door mass	50 N maximum closing force
Grade 3:	above 200 kg door mass as specified by the manufacturer	50 N maximum closing force
Grade 4:	up to 100 kg door mass	25 N maximum closing force
Grade 5:	up to 200 kg door mass	25 N maximum closing force
Grade 6:	above 200 kg door mass as specified by the manufacturer	25 N maximum closing force
Grade 7:	up to 100 kg door mass;	15 N maximum closing force
Grade 8:	up to 200 kg door mass;	15 N maximum closing force
Grade 9:	above 200 kg door mass as specified by the manufacturer	15 N maximum closing force

4 Suitability for use on fire resistance and smoke control doors

Grade 0: not verified for use on fire resisting /smoke control door set assemblies;

Grade A: for use on smoke control door set assemblies based on a test in accordance with EN 1634-3 where the multipoint lock contributes to the integrity;

Grade B: for use on smoke control and fire resisting door set assemblies based on a test in accordance with EN 1634-1 or EN 1634-2 where the multipoint lock contributes to the integrity;

Grade N: for use on smoke control and fire resisting door set assemblies based on tests where the multipoint lock does not contribute to keeping the door in a closed position during the fire resisting and/or smoke control test;

5 Safety

Grade 0: no safety requirement

6 Corrosion resistance and temperature

Grade 0:	No defined corrosion resistance,	no temperature requirement
Grade A:	Low corrosion resistance (24 h),	no temperature requirement
Grade C:	High corrosion resistance (96 h),	no temperature requirement
Grade D:	Very high corrosion resistance (240 h),	no temperature requirement
Grade F:	High corrosion resistance (96 h),	Temperature requirement: -10°C to +60°C
Grade G:	Very high corrosion resistance (240 h),	Temperature requirement: -10°C to +60°C

7 Security for locking points

Grade	Side force on deadbolt	Disengaging force	Deadbolt projection	In case of hook, resistance for pulling of antiseparation bolt	In case of hook, resistance to forcing of antilifting device in sliding door lock	Drill resistance
0	-	-	-	-	-	-
1	1 kN	1 kN	10 mm	1 kN	1 kN	no
2	3 kN	2 kN	12 mm	3 kN	3 kN	no
3	5 kN	4 kN	14 mm	5 kN	3 kN	no
4	7 kN	5 kN	20 mm	7 kN	5 kN	no
5	7 kN	5 kN	20 mm	7 kN	5 kN	yes
6	10 kN	6 kN	20 mm	10 kN	6 kN	no
7	10 kN	6 kN	20 mm	10 kN	6 kN	yes

note: 1kN =100 kg

8 Key identification of lever locks

Grade 0: Not applicable;

Grade A: Minimum three detaining elements;

Grade B: Minimum five detaining elements;

Grade C: Minimum five detaining elements, extended number of effective differs;

Grade D: Minimum six detaining elements;

Grade E: Minimum six detaining elements, extended number of effective differs;

Grade F: Minimum seven detaining elements;

Grade G: Minimum seven detaining elements, extended number of effective differs;

Grade H: Minimum eight detaining elements, extended number of effective differs

9 Security for anti-separation points

Grade	Side force on deadbolt	Disengaging force	Antiseparation point bolt projection	In case of hook, resistance for pulling of antiseparation bolt	In case of hook, resistance to forcing of antilifting device in sliding door lock	Drill resistance
0	-	-	-	-	-	-
1	1 kN	1 kN	5 mm	1 kN	1 kN	no
2	3 kN	2 kN	5 mm	1 kN	1 kN	no
3	3 kN	2 kN	5 mm	3 kN	3 kN	no
4	5 kN	4 kN	5 mm	5 kN	4 kN	no
5	7 kN	5 kN	5 mm	7 kN	5 kN	yes
6	10 kN	6 kN	5 mm	10 kN	6 kN	no
7	10 kN	6 kN	5 mm	10 kN	6 kN	yes

note: 1kN =100 kg

10 Clenching points

Grade 0: No clenching force requirements

Grade 1: Clenching force = 10 N

Grade 2: Clenching force = 25 N

Grade 3: Clenching force = 50 N

Grade 4: Clenching force = 120 N

CISA



ELECTRICAL LOCKS

Example for a Multitop PRO lock, series 19225

1	2	3	4	5	6	7	8	9
|	3	|	X	|	9	|	0	|	0	|	M	|	6-7	|	0	|	2	|

1 Category of use

Grade 1: For use by people with a high incentive to exercise care and with a small chance of misuse, e.g. residential doors

Grade 2: For use by people with some incentive to exercise care but where there is some chance of misuse, e.g. office doors.

Grade 3: For use by the public where there is little incentive to exercise care and where there is a high chance of misuse, e.g. doors in public buildings.

2 Durability

Grade A:	50 000 test cycles	No load on latchbolt
Grade B:	100 000 test cycles	No load on latchbolt
Grade C:	200 000 test cycles	No load on latchbolt
Grade F:	50 000 test cycles	10 N load on latchbolt
Grade G:	100 000 test cycles	10 N load on latchbolt
Grade H:	200 000 test cycles	10 N load on latchbolt
Grade L:	100 000 test cycles	25 N load on latchbolt
Grade M:	200 000 test cycles	25 N load on latchbolt
Grade R:	100 000 test cycles	50 N load on latchbolt
Grade S:	200 000 test cycles	50 N load on latchbolt
Grade W:	100 000 test cycles	120 N load on latchbolt
Grade X:	200 000 test cycles	120 N load on latchbolt
Grade Y:	200 000 test cycles	250 N load on latchbolt

3 Door mass and closing force

Grade 1:	Up to 100 kg door mass	50 N maximum closing force
Grade 2:	Up to 200 kg door mass	50 N maximum closing force
Grade 3:	Above 200 kg door mass or as specified by the manufacturer	50 N maximum closing force
Grade 4:	Up to 100 kg door mass	25 N maximum closing force
Grade 5:	Up to 200 kg door mass	25 N maximum closing force
Grade 6:	Above 200 kg door mass or as specified by the manufacturer	25 N maximum closing force
Grade 7:	Up to 100 kg door mass	15 N maximum closing force
Grade 8:	Up to 200 kg door mass	15 N maximum closing force
Grade 9:	Above 200 kg door mass or as specified by the manufacturer	15 N maximum closing force

4 Suitability for use on fire/smoke doors

Grade 0: Not intended for use on smoke/fire door assemblies

Grade A: Suitable for use on smoke door assemblies - based solely on the requirements of the relevant product standard

Grade B: Suitable for use on smoke/fire door assemblies: with a classification time of: 15 min

Grade C: Suitable for use on smoke/fire door assemblies: with a minimum classification time of: 30 min

Grade D: Suitable for use on smoke/fire door assemblies: with a minimum classification time of: 60 min

Grade E: Suitable for use on smoke/fire door assemblies: with a minimum classification time of: 90 min

Grade F: Suitable for use on smoke/fire door assemblies: with a classification time of: 120 minor grater

5 Safety

Grade 0: No safety requirement

6 Environmental suitability

Grade 0:	No defined resistance	No defined resistance	No defined resistance
Grade A:	No defined resistance	No defined resistance	+40 °C with initial relative humidity of 95 %.
Grade B:	No defined resistance	No defined resistance	+55 °C with initial relative humidity of 95 %.
Grade C:	Low resistance (24 h)	+5 °C to +55 °C	+40 °C with initial relative humidity of 95 %.
Grade D:	Moderate resistance (48 h)	+5 °C to +55 °C	+40 °C with initial relative humidity of 95 %.
Grade E:	High resistance (96 h)	+5 °C to +55 °C	+40 °C with initial relative humidity of 95 %.
Grade F:	Very high resistance (240 h)	+5 °C to +55 °C	+40 °C with initial relative humidity of 95 %.
Grade G:	Moderate resistance (48 h)	-10 °C to +55 °C	+40 °C with initial relative humidity of 95 %.
Grade H:	High resistance (96 h)	-10 °C to +55 °C	+40 °C with initial relative humidity of 95 %.
Grade J:	Very high resistance (240 h)	-10 °C to +55 °C	+40 °C with initial relative humidity of 95 %.
Grade K:	Moderate resistance (48 h)	-25 °C to +70 °C	+55 °C with initial relative humidity of 95 %.
Grade L:	High resistance (96 h)	-25 °C to +70 °C	+55 °C with initial relative humidity of 95 %.
Grade M:	Very high resistance (240 h)	-25 °C to +70 °C	+55 °C with initial relative humidity of 95 %.
Grade N:	No defined resistance	-25 °C to +70 °C	+40 °C with initial relative humidity of 95 %.
Grade P:	No defined resistance	-25 °C to +70 °C	+55 °C with initial relative humidity of 95 %.

7 Security and drill resistance

Grade	Side force on deadbolt	Disengaging force	Deadbolt projection	In case of hook, resistance for pulling of antiseparation bolt	In case of hook, resistance to forcing of antilifting device in sliding door lock	Drill resistance
0	-	-	-	-	-	-
1	1 kN	1 kN	10 mm	1 kN	1 kN	no
2	3 kN	2 kN	12 mm	3 kN	3 kN	no
3	5 kN	4 kN	14 mm	5 kN	3 kN	no
4	7 kN	5 kN	20 mm	7 kN	5 kN	no
5	7 kN	5 kN	20 mm	7 kN	5 kN	yes
6	10 kN	6 kN	20 mm	10 kN	6 kN	no
7	10 kN	6 kN	20 mm	10 kN	6 kN	yes

note: 1kN = 100 kg

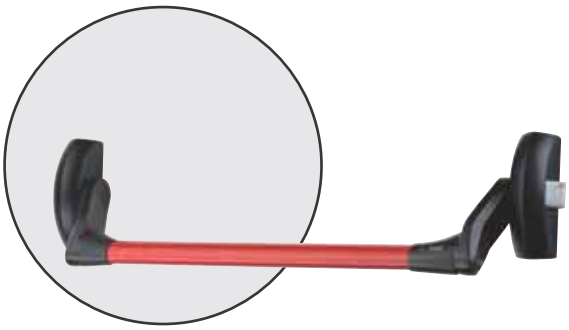
8 Security - electrical function

Grade 0: no requirement

Grade 1: status indication

9 Security - electrical manipulation

Grade	Voltage drop protection	Protection against the effect of cutting cables	Protection against the effects of wire manipulation	Resistance to electromagnetic manipulation	Resistance to electrostatic discharge	Resistance to electrostatic manipulation
0						
1					Level 2 (EN 61000-4-2)	
2	yes	yes		yes	Level 4 (EN 61000-4-2)	Level 4 (EN 61000-4-2)
3	yes	yes	yes	yes	Level 4 (EN 61000-4-2)	Level 4 (EN 61000-4-2)



PANIC EXIT DEVICES

Example for Panic exit devices series 59001/11//16

1	2	3	4	5	6	7	8	9	10
3	7	7	A	1	4	2	2	A	A

1 Category of use

Grade 3: High frequency of use where there is little incentive to exercise care, i.e. where there is a chance of an accident occurring and of misuse

2 Durability

Grade 6: 100.000 Test cycles
Grade 7: 200.000 Test cycles

3 Door mass

Grade 5: Up to 100 kg
Grade 6: Up to 200 kg
Grade 7: Above 200 kg

4 Suitability for use on fire/smoke doors

Grade 0: Not approved for use on fire/smoke door assemblies
Grade A: Suitable for use on fire/smoke door assemblies based on the requirements of B.1
Grade B: Suitable for use on fire/smoke door assemblies based on the requirements of EN 1634-1

5 Safety

Grade 1: All panic and emergency devices have a critical safety function therefore only the top grade 1 is identified

6 Corrosion resistance

Two grades of corrosion resistance given in EN 1670:2007, 5.6:
Grade 3: 96 h (high resistance)
Grade 4: 240 h (very high resistance)

7 Security

Grade 2: Panic devices are primarily for the operation of a door from inside and security is secondary to that of safety

8 Projection of horizontal bar

Grade 1: Projection up to 150 mm (large projection)
Grade 2: Projection up to 100 mm (standard projection)

9 Type of horizontal bar operation

Type A: Panic exit device with “push-bar” operation
Type B: Panic exit device with “touch-bar” operation

10 Field of door application

Grade A: Single door, double door: active or inactive leaf
Grade B: Single door only
Grade C: Double door, inactive leaf only



PUSH PAD PANIC EXIT DEVICES

Example for the Push Pad series 59051/61/66

1	2	3	4	5	6	7	8	9	10
3	7	7	A	1	4	5	2	B	A

1 Category of use

Grade 3: High frequency of use where there is little incentive to exercise care, i.e. where there is a chance of an accident occurring and of misuse

2 Durability

Grade 6: 100.000 Test cycles
Grade 7: 200.000 Test cycles

3 Door mass

Grade 5: Up to 100 kg
Grade 6: Up to 200 kg
Grade 7: Above 200 kg

4 Suitability for use on fire/smoke doors

Grade 0: Not approved for use on fire/smoke door assemblies
Grade A: Suitable for use on fire/smoke door assemblies based on the requirements of B.1
Grade B: Suitable for use on fire/smoke door assemblies based on the requirements of EN 1634-1

5 Safety

Grade 1: All panic and emergency devices have a critical safety function therefore only the top grade 1 is identified

6 Corrosion resistance

Two grades of corrosion resistance given in EN 1670:2007, 5.6:
Grade 3: 96 h (high resistance)
Grade 4: 240 h (very high resistance)

7 Security

Grade 2: 1.000 N
Grade 3: 2.000 N
Grade 4: 3.000 N
Grade 5: 5.000 N

8 Projection of operating element

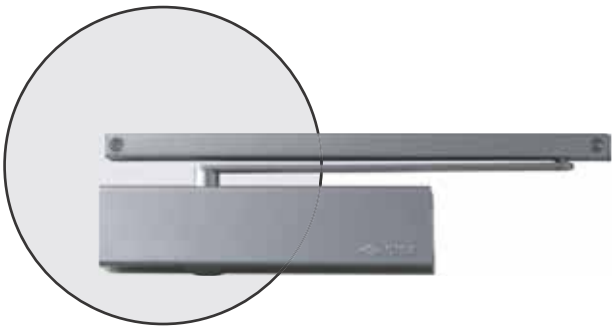
Grade 1: Projection up to 150 mm (large projection)
Grade 2: Projection up to 100 mm (standard projection)

9 Type of operation

Type A: Emergency exit device with “lever handle” operation
Type B: Emergency exit device with “push pad” operation

10 Field of door application

Grade A: Outward opening single exit door, double exit door: active or inactive leaf
Grade B: Outward opening single exit door only
Grade C: Outward opening double exit door: inactive leaf only
Grade D: Inward opening single exit door only



DOOR CLOSERS

Example for door closers series D5200

1	2	3	4	5	6
4	8	1-4	1	1	3

1 Category of use

Grade 3: For closing doors from at least 105° open
Grade 4: For closing doors from 180° open

2 Durability

Only one test duration is identified for door closers manufactured to this standard:
Grade 8: 500.000 Test cycles

3 Door closer power size

Grade 1-7: See table below: Where a door closer provides a range of power sizes both the minimum and the maximum sizes shall be identified

Door closer power size	Recommended door leaf width	Test door mass	Closing moment				Opening moment	Door close efficienty
			between 0° and 4°		between 88° and 92°	any other angle	between 0° and 60°	between 0° and 4°
	mm (max)	Kg	Nm (min)	Nm (max)	Nm (min)	Nm (max)	Nm (max)	% (max)
1	750	20	9	13	3	2	26	50
2	850	40	13	18	4	3	36	50
3	950	60	18	26	6	4	47	55
4	1.100	80	26	37	9	6	62	60
5	1.250	100	37	54	12	8	83	65
6	1.400	120	54	87	18	11	134	65
7	1.600	160	87	140	29	18	215	65

4 Suitability for use on fire/smoke doors

Grade 0: Not suitable for use on fire/smoke door assemblies
Grade 1: Suitable for use on fire/smoke door assemblies

5 Safety

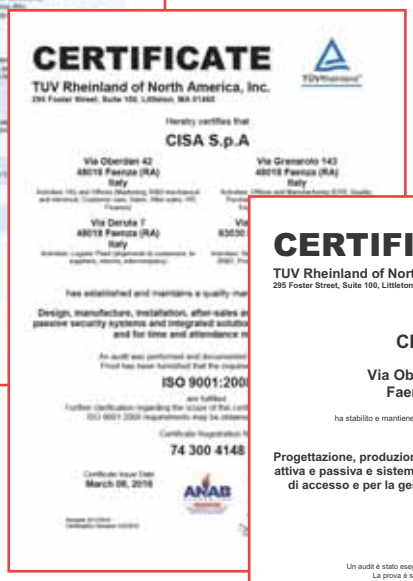
Grade 1: All door closers are required to satisfy the essential requirement of safety in use; Therefore only grade 1 is identified

6 Corrosion resistance

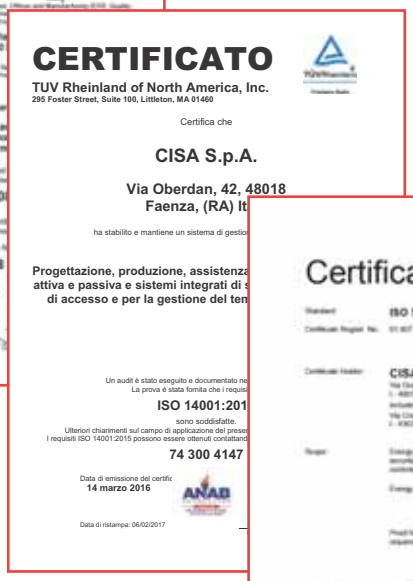
Grade 0: No defined corrosion resistance
Grade 1: Mild resistance
Grade 2: Moderate resistance
Grade 3: High resistance
Grade 4: Very high resistance



BS 0HSAS
18001:2007



ISO 9001:2008



ISO 14001:2004



ISO 50001:2011



AEO F14 0871

Bodies and associations

ALLEGION

CISA

Analytic index



ITEM	PAGE	DRAWING Page	DRAWING Table
1 A0L01 01 0	581		
1 A0L01 01 0 93	581		
1 A0L01 01 4	581		
1 A0L01 01 4 93	581		
1 A0L01 31 0	581		
1 A0L01 31 0 93	581		
1 A0L01 31 4	581		
1 A0L01 31 4 93	581		
1 A0L02 01 0	581		
1 A0L02 01 0 93	581		
1 A0L02 01 4	581		
1 A0L02 01 4 93	581		
1 A0L02 31 0	581		
1 A0L02 31 0 93	581		
1 A0L02 31 4	581		
1 A0L02 31 4 93	581		
1 B6505 28 0	396	448	14
1 B6505 38 0	396	448	14
1 B6505 48 0	396	448	14
1 B6505 58 0	396	448	14
1 B6515 25 0	396	448	14
1 B6515 28 0	396	448	14
1 B6515 28 B	393	448	14
1 B6515 38 0	396	448	14
1 B6515 38 B	393	448	14
1 B6515 48 0	396	448	14
1 B6515 48 B	393	448	14
1 B6515 58 0	396	448	14
1 B6515 58 B	393	448	14
1 B6525 28 0	398	448	15
1 B6525 38 0	398	448	15
1 B6525 48 0	398	448	15
1 B6525 58 0	398	448	15
1 B6535 28 0	398	448	15
1 B6535 28 B	394	448	15
1 B6535 38 0	398	448	15
1 B6535 38 B	394	448	15
1 B6535 48 0	398	448	15
1 B6535 48 B	394	448	15
1 B6535 58 0	398	448	15
1 B6535 58 B	394	448	15
1 B6615 28 0	396	448	14
1 B6615 38 0	396	448	14
1 B6615 48 0	396	448	14
1 B6615 58 0	396	448	14
1 B6764 28 0	415	448	16
1 B6764 38 0	415	448	16
1 B6764 48 0	415	448	16
1 B6764 58 0	415	448	16
1 B6765 28 0	415	448	16
1 B6765 38 0	415	448	16
1 B6765 48 0	415	448	16
1 B6765 58 0	415	448	16
1 B6766 28 0	415	448	16
1 B6766 28 B	415	448	16
1 B6766 38 0	415	448	16
1 B6766 38 B	415	448	16
1 B6766 48 B	415	448	16
1 B6766 58 0	415	448	16
1 B6766 58 B	415	448	16
1 B6784 28 0	423	448	17
1 B6784 38 0	423	448	17
1 B6784 48 0	423	448	17
1 B6784 58 0	423	448	17
1 B6785 28 0	423	448	17
1 B6785 38 0	423	448	17
1 B6785 48 0	423	448	17
1 B6785 58 0	423	448	17
1 B6786 28 B	423	448	17
1 B6786 38 0	423	448	17
1 B6786 38 B	423	448	17
1 B6786 48 0	423	448	17
1 B6786 48 B	423	448	17
1 B6786 58 0	423	448	17
1 B6786 58 B	423	448	17
1 B7409 30 1	585		
1 B7410 30 1	585		
1 B7411 30 1	586		
1 B7412 30 1	585		
1 B7413 30 1	586		
1 B7414 30 1	585		
1 B7415 30 1	586		
1 B7424 30 1	586		
1 B7425 30 1	587		
1 B7426 30 1	586		
1 B7428 30 1	586		
1 B7429 30 1	587		
1 B7505 25 0	408	448	14
1 B7505 28 0	408	448	14
1 B7505 38 0	408	448	14
1 B7505 58 0	408	448	14
1 B7515 25 0	408	448	14
1 B7515 28 0	408	448	14
1 B7515 38 0	408	448	14
1 B7515 48 0	408	448	14
1 B7515 58 0	408	448	14
1 B7525 28 0	410	448	15
1 B7525 38 0	410	448	15
1 B7525 48 0	410	448	15
1 B7525 58 0	410	448	15
1 B7535 28 0	410	448	15
1 B7535 38 0	410	448	15
1 B7535 48 0	410	448	15
1 B7535 58 0	410	448	15
1 B7655 28 A	402	448	14
1 B7655 38 A	402	448	14
1 B7655 48 A	402	448	14
1 B7655 58 A	402	448	14
1 B7665 28 A	403	448	14
1 B7665 38 A	403	448	14
1 B7665 48 A	403	448	14
1 B7665 58 A	403	448	14
1 B7675 28 A	405	448	15
1 B7675 38 A	405	448	15
1 B7675 48 A	405	448	15
1 B7675 58 A	405	448	15
1 B7685 28 A	405	448	15
1 B7685 38 A	405	448	15
1 B7685 58 A	405	448	15
1 B7764 28 0	416	448	16
1 B7764 38 0	416	448	16
1 B7764 48 0	416	448	16
1 B7764 58 0	416	448	16
1 B7765 38 0	416	448	16
1 B7765 48 0	416	448	16
1 B7765 58 0	416	448	16
1 B7766 28 0	416	448	16
1 B7766 38 0	416	448	16
1 B7766 48 0	416	448	16
1 B7766 58 0	416	448	16
1 B7784 28 0	424	448	17
1 B7784 38 0	424	448	17
1 B7784 48 0	424	448	17
1 B7784 58 0	424	448	17
1 B7785 28 0	424	448	17
1 B7785 38 0	424	448	17
1 B7785 48 0	424	448	17
1 B7785 58 0	424	448	17
1 B7786 28 0	424	448	17
1 B7786 38 0	424	448	17
1 B7786 48 0	424	448	17
1 B7786 58 0	424	448	17
1 B7964 28 A	418	448	16
1 B7964 38 A	418	448	16
1 B7964 48 A	418	448	16
1 B7964 58 A	418	448	16
1 B7965 28 A	418	448	16
1 B7965 38 A	418	448	16
1 B7965 48 A	418	448	16
1 B7965 58 A	418	448	16
1 B7966 28 A	418	448	16
1 B7966 38 A	418	448	16
1 B7966 48 A	418	448	16
1 B7966 58 A	418	448	16
1 B7984 28 A	426	448	17
1 B7984 38 A	426	448	17
1 B7984 48 A	426	448	17
1 B7984 58 A	426	448	17
1 B7985 28 A	426	448	17
1 B7985 38 A	426	448	17
1 B7985 48 A	426	448	17
1 B7985 58 A	426	448	17
1 B7986 38 A	426	448	17
1 B7986 48 A	426	448	17
1 B7986 58 A	426	448	17
1 C1310 01 0	564		
1 C1310 01 0 97	564		
1 C1415 03 0 97	558	566	2
1 C1416 03 0 97	558	566	2
1 C1510 03 0 97	556	566	3
1 C1511 03 0 97	556	566	3
1 C1610 03 0 97	556	566	3
1 C1610 05 0 97	556	566	4
1 C1611 03 0 97	556	566	3
1 C1611 05 0 97	556	566	4
1 C2010 03 0 97	557	566	5
1 C2110 03 0 97	557	567	6
1 D5200 03 0 97	551	567	7
1 D5210 03 0 97	551	567	7
1 D6200 03 0 97	553	567	8
1 D6210 03 0 97	553	567	8
1 D7200 04 0 97	554	567	9
1 D7210 04 0 97	554	567	9
1 D8200 03 0 97	555	567	10
1 E0000 00 0	198	303	77
1 E6516 28 0	387	448	18
1 E6516 38 0	387	448	18
1 E6536 28 0	388	448	18
1 0A112 00 0	91		
1 0A114 00 0	91		
1 0A115 00 0	92		
1 0A116 00 0	92		
1 0A120 00 0	92		
1 0A149 00 0	92		
1 0A150 00 0	91		
1 0A155 00 0	92		
1 0A210 50 0	91	123	7
1 0A310 05 0	89	124	18
1 0A310 06 0	89	124	18
1 0A310 07 0	89	124	18
1 0A310 08 0	89	124	18
1 0A310 10 0	89	124	18
1 0A310 11 0	89	124	18
1 0A310 12 0	89	124	18
1 0A310 13 0	89	124	18
1 0A310 17 0	89	124	18
1 0A310 18 0	89	124	18
1 0A310 19 0	89	124	18
1 0A310 20 0	89	124	18
1 0A310 21 0	89	124	18
1 0A310 22 0	89	124	18
1 0A310 23 0	89	124	18
1 0A310 24 0	89	124	18
1 0A310 25 0	89	124	18
1 0A310 26 0	89	124	18
1 0A310 27 0	89	124	18
1 0A310 28 0	89	124	18
1 0A310 29 0	89	124	18
1 0A310 30 0	89	124	18
1 0A310 31 0	89	124	18
1 0A310 32 0	89	124	18
1 0A310 33 0	89	124	18
1 0A310 35 0	89	124	18
1 0A310 36 0	89	124	18
1 0A310 37 0	89	124	18
1 0A310 38 0	89	124	18
1 0A310 39 0	89	124	18
1 0A310 41 0	89	124	18
1 0A310 42 0	89	124	18
1 0A310 43 0	89	124	18
1 0A310 70 0	89	124	18
1 0A310 71 0	89	124	18
1 0A312 07 0	90	124	12
1 0A312 10 0	90	124	12
1 0A312 12 0	90	124	12
1 0A312 13 0	90	124	12
1 0A312 17 0	90	124	12
1 0A312 18 0	90	124	12
1 0A312 21 0	90	124	12
1 0A312 23 0	90	124	12
1 0A312 27 0	90	124	12
1 0A312 29 0	90	124	12
1 0A312 42 0	90	124	12
1 0A312 43 0	90	124	12
1 0A312 54 0	90	124	12
1 0A312 64 0	90	124	12
1 0A312 81 0	90	124	12
1 0A312 82 0	90	124	12
1 0A312 84 0	90	124	12
1 0A312 85 0	90	124	12
1 0A312 89 0	90	124	12
1 0A314 02 0	90	124	13
1 0A314 03 0	90	124	13
1 0A314 04 0	90	124	13
1 0A314 05 0	90	124	13
1 0A314 06 0	90	124	13

ITEM	PAGE	DRAWING	
		Page	Table
1 0A317 07 0	90	124	16
1 0A317 12 0	90	124	16
1 0A317 81 0	90	124	16
1 0A317 87 0	90	124	16
1 0A317 88 0	90	124	16
1 0A317 90 0	90	124	16
1 0A3M1 07 0 12CL	71		
1 0A3M2 07 0 12CL	72		
1 0A3M4 02 0 12CL	72		
1 0A3M7 07 0 12CL	72		
1 0A3S1 06 0	87	124	18
1 0A3S1 07 0	87	124	18
1 0A3S1 09 0	87	124	18
1 0A3S1 10 0	87	124	18
1 0A3S1 11 0	87	124	18
1 0A3S1 12 0	87	124	18
1 0A3S1 13 0	87	124	18
1 0A3S1 17 0	87	124	18
1 0A3S1 18 0	87	124	18
1 0A3S1 19 0	87	124	18
1 0A3S1 20 0	87	124	18
1 0A3S1 21 0	87	124	18
1 0A3S1 22 0	87	124	18
1 0A3S1 23 0	87	124	18
1 0A3S1 24 0	87	124	18
1 0A3S1 25 0	87	124	18
1 0A3S1 26 0	87	124	18
1 0A3S1 27 0	87	124	18
1 0A3S1 28 0	87	124	18
1 0A3S1 29 0	87	124	18
1 0A3S1 30 0	87	124	18
1 0A3S1 31 0	87	124	18
1 0A3S1 32 0	87	124	18
1 0A3S1 33 0	87	124	18
1 0A3S1 35 0	87	124	18
1 0A3S1 36 0	87	124	18
1 0A3S1 37 0	87	124	18
1 0A3S1 38 0	87	124	18
1 0A3S1 39 0	87	124	18
1 0A3S1 41 0	87	124	18
1 0A3S1 43 0	87	124	18
1 0A3S1 46 0	87	124	18
1 0A3S1 49 0	87	124	18
1 0A3S1 56 0	87	124	18
1 0A3S1 59 0	87	124	18
1 0A3S1 64 0	87	124	18
1 0A3S1 65 0	87	124	18
1 0A3S1 70 0	87	124	18
1 0A3S1 77 0	87	124	18
1 0A3S2 07 0	88	124	12
1 0A3S2 10 0	88	124	12
1 0A3S2 13 0	88	124	12
1 0A3S2 17 0	88	124	12
1 0A3S2 18 0	88	124	12
1 0A3S2 19 0	88	124	12
1 0A3S2 20 0	88	124	12
1 0A3S2 21 0	88	124	12
1 0A3S2 23 0	88	124	12
1 0A3S2 25 0	88	124	12
1 0A3S2 26 0	88	124	12
1 0A3S2 28 0	88	124	12
1 0A3S2 29 0	88	124	12
1 0A3S2 30 0	88	124	12
1 0A3S2 35 0	88	124	12
1 0A3S2 37 0	88	124	12
1 0A3S2 39 0	88	124	12
1 0A3S2 40 0	88	124	12
1 0A3S2 42 0	88	124	12
1 0A3S2 43 0	88	124	12
1 0A3S2 46 0	88	124	12
1 0A3S2 54 0	88	124	12
1 0A3S2 70 0	88	124	12
1 0A3S2 71 0	88	124	12
1 0A3S2 72 0	88	124	12
1 0A3S2 81 0	88	124	12
1 0A3S2 82 0	88	124	12
1 0A3S2 83 0	88	124	12
1 0A3S2 84 0	88	124	12
1 0A3S2 86 0	88	124	12
1 0A3S2 89 0	88	124	12
1 0A3S2 94 0	88	124	12
1 0A3S2 98 0	88	124	12
1 0A3S7 07 0	88	124	16
1 0A3S7 12 0	88	124	16
1 0A3S7 81 0	88	124	16
1 0A3S7 87 0	88	124	16
1 0A3S7 88 0	88	124	16
1 0A3S7 90 0	88	124	16
1 0A3S7 91 0	88	124	16
1 0A3S7 92 0	88	124	16
1 0A410 00 0	93	125	20
1 0A415 01 0	93	125	21
1 0A415 03 0	93	125	21
1 0A510 00 0	91	123	2
1 0A510 11 0	91	123	3
1 0A610 00 0	93	123	8
1 0A610 10 0	93		
1 0A610 11 0	93		
1 0E115 00 0	99		
1 0E149 00 0	99		
1 0E150 00 0	99		
1 0E200 50 0	99	123	7
1 0E300 05 0	96	124	18
1 0E300 06 0	96	124	18
1 0E300 07 0	96	124	18
1 0E300 07 0 12SD	94	124	18
1 0E300 08 0	96	124	18
1 0E300 08 0 12SD	94	124	18
1 0E300 09 0	96	124	18
1 0E300 10 0	96	124	18
1 0E300 11 0	96	124	18
1 0E300 12 0	96	124	18
1 0E300 12 0 12SD	94	124	18
1 0E300 13 0	96	124	18
1 0E300 13 0 12SD	94	124	18
1 0E300 17 0	96	124	18
1 0E300 17 0 12SD	94	124	18
1 0E300 18 0	96	124	18
1 0E300 18 0 12SD	94	124	18
1 0E300 19 0	96	124	18
1 0E300 19 0 12SD	94	124	18
1 0E300 20 0	96	124	18
1 0E300 20 0 12SD	94	124	18
1 0E300 21 0	96	124	18
1 0E300 21 0 12SD	94	124	18
1 0E300 22 0	96	124	18
1 0E300 23 0	96	124	18
1 0E300 23 0 12SD	94	124	18
1 0E300 24 0	96	124	18
1 0E300 24 0 12SD	94	124	18
1 0E300 25 0	96	124	18
1 0E300 25 0 12SD	94	124	18
1 0E300 26 0	96	124	18
1 0E300 26 0 12SD	94	124	18
1 0E300 27 0	96	124	18
1 0E300 27 0 12SD	94	124	18
1 0E300 28 0	96	124	18
1 0E300 28 0 12SD	94	124	18
1 0E300 29 0	96	124	18
1 0E300 29 0 12SD	94	124	18
1 0E300 30 0	96	124	18
1 0E300 30 0 12SD	94	124	18
1 0E300 31 0	96	124	18
1 0E300 31 0 12SD	94	124	18
1 0E300 32 0	96	124	18
1 0E300 33 0	96	124	18
1 0E300 33 0 12SD	94	124	18
1 0E300 35 0	96	124	18
1 0E300 35 0 12SD	94	124	18
1 0E300 36 0	96	124	18
1 0E300 36 0 12SD	94	124	18
1 0E300 37 0	96	124	18
1 0E300 38 0	96	124	18
1 0E300 39 0	96	124	18
1 0E300 40 0	96	124	18
1 0E300 41 0	96	124	18
1 0E300 42 0	96	124	18
1 0E300 43 0	96	124	18
1 0E300 44 0	96	124	18
1 0E300 45 0	96	124	18
1 0E300 49 0	96	124	18
1 0E300 54 0	96	124	18
1 0E300 56 0	96	124	18
1 0E300 61 0	96	124	18
1 0E300 62 0	96	124	18
1 0E300 64 0	96	124	18
1 0E300 70 0	96	124	18
1 0E301 06 0	97	124	18
1 0E301 07 0	97	124	18
1 0E301 09 0	97	124	18
1 0E301 10 0	97	124	18
1 0E301 11 0	97	124	18
1 0E301 12 0	97	124	18
1 0E301 13 0	97	124	18
1 0E301 17 0	97	124	18
1 0E301 18 0	97	124	18
1 0E301 20 0	97	124	18
1 0E301 21 0	97	124	18
1 0E301 22 0	97	124	18
1 0E301 23 0	97	124	18
1 0E301 24 0	97	124	18
1 0E301 25 0	97	124	18
1 0E301 26 0	97	124	18
1 0E301 27 0	97	124	18
1 0E301 28 0	97	124	18
1 0E301 29 0	97	124	18
1 0E301 30 0	97	124	18
1 0E301 31 0	97	124	18
1 0E301 32 0	97	124	18
1 0E301 33 0	97	124	18
1 0E301 35 0	97	124	18
1 0E301 36 0	97	124	18
1 0E301 37 0	97	124	18
1 0E301 38 0	97	124	18
1 0E301 39 0	97	124	18
1 0E301 41 0	97	124	18
1 0E301 42 0	97	124	18
1 0E301 43 0	97	124	18
1 0E301 70 0	97	124	18
1 0E301 71 0	97	124	18
1 0E302 07 0	98	124	12
1 0E302 12 0	98	124	12
1 0E302 13 0	98	124	12
1 0E302 17 0	98	124	12
1 0E302 18 0	98	124	12
1 0E302 19 0	98	124	12
1 0E302 20 0	98	124	12
1 0E302 21 0	98	124	12
1 0E302 23 0	98	124	12
1 0E302 26 0	98	124	12
1 0E302 28 0	98	124	12
1 0E302 29 0	98	124	12
1 0E302 30 0	98	124	12
1 0E302 36 0	98	124	12
1 0E302 39 0	98	124	12
1 0E302 40 0	98	124	12
1 0E302 42 0	98	124	12
1 0E302 43 0	98	124	12
1 0E302 46 0	98	124	12
1 0E302 54 0	98	124	12
1 0E302 64 0	98	124	12
1 0E302 81 0	98	124	12
1 0E302 82 0	98	124	12
1 0E302 84 0	98	124	12
1 0E303 07 0 12	98	124	13
1 0E304 02 0	97	124	13
1 0E304 02 0 12NV	94	124	13
1 0E304 02 0 12NV KA	94	124	13
1 0E304 03 0	97	124	13
1 0E304 03 0 12NV KA	94	124	13
1 0E304 04 0	97	124	13
1 0E304 05 0	97	124	13
1 0E304 06 0	97	124	13
1 0E304 07 0	97	124	13
1 0E304 07 0 12NV KA	94	124	13
1 0E304 08 0	97	124	13
1 0E304 10 0	97	124	13
1 0E304 13 0	97	124	13
1 0E304 18 0	97	124	13
1 0E304 18 0 12NV	94	124	13
1 0E304 18 0 12NV KA	94	124	13
1 0E304 20 0	97	124	13
1 0E304 21 0	97	124	13
1 0E305 02 0 12	98	124	13
1 0E307 07 0	98	124	16
1 0E307 07 0 12SD	95	124	16
1 0E307 12 0	98	124	16
1 0E307 12 0 12SD	95	124	16
1 0E307 81 0	98	124	16
1 0E307 81 0 12SD	95	124	16
1 0E307 87 0	98	124	16
1 0E307 87 0 12SD	95	124	16
1 0E307 88 0	98	124	16
1 0E307 88 0 12SD	95	124	16
1 0E307 90 0	98	124	16
1 0E307 90 0 12SD	95	124	16

ITEM	PAGE	DRAWING Page	DRAWING Table
1 0E307 91 0	98	124	16
1 0E307 91 0 12SD	95	124	16
1 0E500 00 0	99	123	2
1 0E600 00 0	100	123	8
1 0E600 10 0	100		
1 0E600 11 0	100		
1 0G115 00 0	113		
1 0G150 00 0	113		
1 0G200 05 0	113	123	7
1 0G200 55 0	113	123	7
1 0G200 65 0	113	123	7
1 0G200 75 0	113	123	7
1 0G200 85 0	113	123	7
1 0G200 95 0	113	123	7
1 0G300 02 0	108	124	18
1 0G300 03 0	108	124	18
1 0G300 04 0	108	124	18
1 0G300 05 0	108	124	18
1 0G300 06 0	108	124	18
1 0G300 07 0	108	124	18
1 0G300 08 0	108	124	18
1 0G300 09 0	108	124	18
1 0G300 10 0	108	124	18
1 0G300 11 0	108	124	18
1 0G300 12 0	108	124	18
1 0G300 13 0	108	124	18
1 0G300 14 0	108	124	18
1 0G300 15 0	108	124	18
1 0G300 16 0	108	124	18
1 0G300 17 0	108	124	18
1 0G300 18 0	108	124	18
1 0G300 19 0	108	124	18
1 0G300 20 0	108	124	18
1 0G300 21 0	108	124	18
1 0G300 22 0	108	124	18
1 0G300 23 0	108	124	18
1 0G300 24 0	108	124	18
1 0G300 25 0	108	124	18
1 0G300 26 0	108	124	18
1 0G300 27 0	108	124	18
1 0G300 28 0	108	124	18
1 0G300 29 0	108	124	18
1 0G300 30 0	108	124	18
1 0G300 31 0	108	124	18
1 0G300 32 0	108	124	18
1 0G300 33 0	108	124	18
1 0G300 35 0	108	124	18
1 0G300 36 0	109	124	18
1 0G300 37 0	108	124	18
1 0G300 38 0	108	124	18
1 0G300 39 0	108	124	18
1 0G300 40 0	109	124	18
1 0G300 41 0	108	124	18
1 0G300 42 0	108	124	18
1 0G300 43 0	108	124	18
1 0G300 44 0	108	124	18
1 0G300 45 0	109	124	18
1 0G300 46 0	108	124	18
1 0G300 49 0	108	124	18
1 0G300 50 0	109	124	18
1 0G300 52 0	109	124	18
1 0G300 53 0	109	124	18
1 0G300 54 0	108	124	18
1 0G300 56 0	109	124	18
1 0G300 57 0	109	124	18
1 0G300 58 0	109	124	18
1 0G300 59 0	109	124	18
1 0G300 60 0	109	124	18
1 0G300 61 0	109	124	18
1 0G300 62 0	109	124	18
1 0G300 64 0	109	124	18
1 0G300 65 0	109	124	18
1 0G300 66 0	109	124	18
1 0G300 70 0	109	124	18
1 0G300 77 0	109	124	18
1 0G301 05 0	109	124	18
1 0G301 06 0	109	124	18
1 0G301 07 0	109	124	18
1 0G301 09 0	109	124	18
1 0G301 11 0	109	124	18
1 0G301 12 0	109	124	18
1 0G301 13 0	109	124	18
1 0G301 26 0	109	124	18
1 0G301 28 0	109	124	18
1 0G301 30 0	109	124	18
1 0G302 07 0	110	124	12
1 0G302 10 0	110	124	12
1 0G302 12 0	110	124	12
1 0G302 13 0	110	124	12
1 0G302 17 0	110	124	12
1 0G302 18 0	110	124	12
1 0G302 19 0	110	124	12
1 0G302 20 0	110	124	12
1 0G302 21 0	110	124	12
1 0G302 23 0	110	124	12
1 0G302 26 0	110	124	12
1 0G302 28 0	110	124	12
1 0G302 29 0	110	124	12
1 0G302 30 0	110	124	12
1 0G302 35 0	110	124	12
1 0G302 36 0	110	124	12
1 0G302 37 0	110	124	12
1 0G302 39 0	110	124	12
1 0G302 40 0	110	124	12
1 0G302 42 0	110	124	12
1 0G302 43 0	110	124	12
1 0G302 46 0	110	124	12
1 0G302 54 0	110	124	12
1 0G302 64 0	110	124	12
1 0G302 71 0	110	124	12
1 0G302 72 0	110	124	12
1 0G302 81 0	110	124	12
1 0G302 82 0	110	124	12
1 0G302 83 0	110	124	12
1 0G302 84 0	110	124	12
1 0G302 85 0	110	124	12
1 0G302 86 0	110	124	12
1 0G302 89 0	110	124	12
1 0G303 07 0 12	110	124	18
1 0G304 02 0	109	124	13
1 0G304 03 0	109	124	13
1 0G304 04 0	109	124	13
1 0G304 05 0	109	124	13
1 0G304 06 0	109	124	13
1 0G304 07 0	109	124	13
1 0G304 09 0	109	124	13
1 0G304 10 0	109	124	13
1 0G304 11 0	109	124	13
1 0G304 13 0	109	124	13
1 0G304 18 0	109	124	13
1 0G304 20 0	109	124	13
1 0G304 21 0	109	124	13
1 0G304 35 0	109	124	13
1 0G305 02 0 12	111	124	13
1 0G307 07 0	110	124	16
1 0G307 12 0	110	124	16
1 0G307 81 0	110	124	16
1 0G307 87 0	110	124	16
1 0G307 88 0	110	124	16
1 0G307 90 0	110	124	16
1 0G307 91 0	110	124	16
1 0G308 07 0 66	112	124	17
1 0G308 10 0 66	112	124	17
1 0G308 12 0 66	112	124	17
1 0G308 13 0 66	112	124	17
1 0G308 17 0 66	112	124	17
1 0G308 19 0 66	112	124	17
1 0G308 20 0 66	112	124	17
1 0G308 21 0 66	112	124	17
1 0G308 26 0 66	112	124	17
1 0G308 27 0 66	112	124	17
1 0G308 29 0 66	112	124	17
1 0G308 30 0 66	112	124	17
1 0G308 31 0 66	112	124	17
1 0G308 37 0 66	112	124	17
1 0G308 38 0 66	112	124	17
1 0G308 43 0 66	112	124	17
1 0G308 46 0 66	112	124	17
1 0G308 72 0 66	112	124	17
1 0G308 81 0 66	112	124	17
1 0G308 85 0 66	112	124	17
1 0G308 86 0 66	112		
1 0G308 89 0 66	112		
1 0G308 91 0 66	112		
1 0G308 97 0 66	112		
1 0G308 99 0 66	112		
1 0G308 A1 0 66	112		
1 0G308 A6 0 66	112		
1 0G500 00 0	113	123	2
1 0G325 05 0	114	124	12
1 0G325 C8 0	114	124	12
1 0G325 07 0	114	124	12
1 0G325 10 0	114	124	12
1 0G325 13 0	114	124	12
1 0G325 12 0	114	124	12
1 0G359 02 0	114	124	14
1 0G359 03 0	114	124	14
1 0G359 07 0	114	124	14
1 0G359 09 0	114	124	14
1 0G359 10 0	114	124	14
1 0G359 11 0	114	124	14
1 0L112 00 0 12CL	65		
1 0L114 00 0 12CL	65		
1 0L116 00 0 12CL	66		
1 0L120 00 0 12CL	66		
1 0L149 00 0 12CL	65		
1 0L150 00 0 12CL	66		
1 0L155 00 0 12CL	65		
1 0L156 00 0 12CL	65		
1 0L210 50 0 12CL	65	123	7
1 0L314 02 0 12CL	60	124	13
1 0L314 03 0 12CL	60	124	13
1 0L314 04 0 12CL	60	124	13
1 0L314 05 0 12CL	60	124	13
1 0L314 06 0 12CL	60	124	13
1 0L314 07 0 12CL	60	124	13
1 0L314 08 0 12CL	60	124	13
1 0L314 13 0 12CL	60	124	13
1 0L314 20 0 12CL	60	124	13
1 0L314 21 0 12CL	60	124	13
1 0L3M1 07 0 12CL	61		
1 0L3M2 07 0 12CL	61		
1 0L3M4 02 0 12CL	61		
1 0L3M7 07 0 12CL	61		
1 0L3S1 07 0 12CL	59	124	18
1 0L3S1 12 0 12CL	59	124	18
1 0L3S1 13 0 12CL	59	124	18
1 0L3S1 17 0 12CL	59	124	18
1 0L3S1 18 0 12CL	59	124	18
1 0L3S1 19 0 12CL	59	124	18
1 0L3S1 20 0 12CL	59	124	18
1 0L3S1 21 0 12CL	59	124	18
1 0L3S1 22 0 12CL	59	124	18
1 0L3S1 23 0 12CL	59	124	18
1 0L3S1 24 0 12CL	59	124	18
1 0L3S1 25 0 12CL	59	124	18
1 0L3S1 26 0 12CL	59	124	18
1 0L3S1 27 0 12CL	59	124	18
1 0L3S1 28 0 12CL	59	124	18
1 0L3S1 29 0 12CL	59	124	18
1 0L3S1 30 0 12CL	59	124	18
1 0L3S1 31 0 12CL	59	124	18
1 0L3S1 32 0 12CL	59	124	18
1 0L3S1 33 0 12CL	59	124	18
1 0L3S1 35 0 12CL	59	124	18
1 0L3S1 36 0 12CL	59	124	18
1 0L3S1 37 0 12CL	59	124	18
1 0L3S1 38 0 12CL	59	124	18
1 0L3S1 39 0 12CL	59	124	18
1 0L3S1 42 0 12CL	59	124	18
1 0L3S1 43 0 12CL	59	124	18
1 0L3S1 55 0 12CL	59	124	18
1 0L3S1 60 0 12CL	59	124	18
1 0L3S1 70 0 12CL	59	124	18
1 0L3S2 07 0 12CL	60	124	12
1 0L3S2 12 0 12CL	60	124	12
1 0L3S2 13 0 12CL	60	124	12
1 0L3S2 17 0 12CL	60	124	12
1 0L3S2 18 0 12CL	60	124	12
1 0L3S2 19 0 12CL	60	124	12
1 0L3S2 20 0 12CL	60	124	12
1 0L3S2 21 0 12CL	60	124	12
1 0L3S2 23 0 12CL	60	124	12
1 0L3S2 26 0 12CL	60	124	12
1 0L3S2 27 0 12CL	60	124	12
1 0L3S2 28 0 12CL	60	124	12
1 0L3S2 29 0 12CL	60	124	12
1 0L3S2 30 0 12CL	60	124	12
1 0L3S2 40 0 12CL	60	124	12
1 0L3S2 42 0 12CL	60	124	12
1 0L3S2 43 0 12CL	60	124	12
1 0L3S2 64 0 12CL	60	124	12
1 0L3S2 71 0 12CL	60	124	12
1 0L3S2 81 0 12CL	60	124	12
1 0L3S2 83 0 12CL	60	124	12
1 0L3S2 84 0 12CL	60	124	12

ITEM	PAGE	DRAWING Page	DRAWING Table
1 0L3S2 85 0 12CL	60	124	12
1 0L3S2 86 0 12CL	60	124	12
1 0L3S2 89 0 12CL	60	124	12
1 0L3S2 94 0 12CL	60	124	12
1 0L3S2 98 0 12CL	60	124	12
1 0L3S2 99 0 12CL	60	124	12
1 0L3S7 07 0 12CL	60	124	13
1 0L3S7 12 0 12CL	60	124	13
1 0L3S7 81 0 12CL	60	124	13
1 0L3S7 87 0 12CL	60	124	13
1 0L3S7 88 0 12CL	60	124	13
1 0L3S7 90 0 12CL	60	124	13
1 0L3S7 91 0 12CL	60	124	13
1 0L410 00 0 12CL	67	125	20
1 0L415 01 0 12CL	67	125	21
1 0L415 03 0 12CL	67	125	21
1 0L510 00 0 12CL	65	123	2
1 0L510 10 0 12CL	65	123	3
1 0L610 00 0 00CL	67		
1 0L610 10 0 00CL	67		
1 0M112 00 0 12CL	83		
1 0M114 00 0 12CL	83		
1 0M116 00 0 12CL	84		
1 0M120 00 0 12CL	84		
1 0M149 00 0 12CL	84		
1 0M150 00 0 12CL	83		
1 0M155 00 0 12CL	84		
1 0M156 00 0 12CL	84		
1 0M210 50 0 12CL	83	123	7
1 0M324 02 0 12	81	124	13
1 0M324 03 0 12	81	124	13
1 0M324 04 0 12	81	124	13
1 0M324 05 0 12	81	124	13
1 0M324 06 0 12	81	124	13
1 0M324 07 0 12	81	124	13
1 0M324 08 0 12	81	124	13
1 0M324 13 0 12	81	124	13
1 0M324 20 0 12	81	124	13
1 0M324 21 0 12	81	124	13
1 0M3T1 06 0 12	80	124	18
1 0M3T1 07 0 12	80	124	18
1 0M3T1 09 0 12	80	124	18
1 0M3T1 10 0 12	80	124	18
1 0M3T1 11 0 12	80	124	18
1 0M3T1 12 0 12	80	124	18
1 0M3T1 13 0 12	80	124	18
1 0M3T1 17 0 12	80	124	18
1 0M3T1 18 0 12	80	124	18
1 0M3T1 19 0 12	80	124	18
1 0M3T1 20 0 12	80	124	18
1 0M3T1 21 0 12	80	124	18
1 0M3T1 22 0 12	80	124	18
1 0M3T1 23 0 12	80	124	18
1 0M3T1 24 0 12	80	124	18
1 0M3T1 25 0 12	80	124	18
1 0M3T1 26 0 12	80	124	18
1 0M3T1 27 0 12	80	124	18
1 0M3T1 28 0 12	80	124	18
1 0M3T1 29 0 12	80	124	18
1 0M3T1 30 0 12	80	124	18
1 0M3T1 31 0 12	80	124	18
1 0M3T1 32 0 12	80	124	18
1 0M3T1 33 0 12	80	124	18
1 0M3T1 35 0 12	81	124	18
1 0M3T1 36 0 12	81	124	18
1 0M3T1 37 0 12	81	124	18
1 0M3T1 38 0 12	80	124	18
1 0M3T1 39 0 12	80	124	18
1 0M3T1 40 0 12	81	124	18
1 0M3T1 41 0 12	80	124	18
1 0M3T1 42 0 12	80	124	18
1 0M3T1 43 0 12	80	124	18
1 0M3T1 44 0 12	80	124	18
1 0M3T1 45 0 12	81	124	18
1 0M3T1 49 0 12	81	124	18
1 0M3T1 52 0 12	81	124	18
1 0M3T1 53 0 12	81	124	18
1 0M3T1 54 0 12	80	124	18
1 0M3T1 56 0 12	81	124	18
1 0M3T1 57 0 12	81	124	18
1 0M3T1 59 0 12	81	124	18
1 0M3T1 60 0 12	81	124	18
1 0M3T1 61 0 12	81	124	18
1 0M3T1 64 0 12	81	124	18
1 0M3T1 65 0 12	81	124	18
1 0M3T1 66 0 12	81	124	18
1 0M3T1 70 0 12	81	124	18
1 0M3T1 71 0 12	81	124	18
1 0M3T1 77 0 12	81	124	18
1 0M3T2 07 0 12	81	124	12
1 0M3T2 12 0 12	81	124	12
1 0M3T2 13 0 12	81	124	12
1 0M3T2 17 0 12	81	124	12
1 0M3T2 18 0 12	81	124	12
1 0M3T2 19 0 12	81	124	12
1 0M3T2 20 0 12	81	124	12
1 0M3T2 21 0 12	81	124	12
1 0M3T2 23 0 12	81	124	12
1 0M3T2 25 0 12	81	124	12
1 0M3T2 26 0 12	81	124	12
1 0M3T2 27 0 12	81	124	12
1 0M3T2 28 0 12	81	124	12
1 0M3T2 29 0 12	81	124	12
1 0M3T2 30 0 12	81	124	12
1 0M3T2 39 0 12	81	124	12
1 0M3T2 81 0 12	81	124	12
1 0M3T2 82 0 12	81	124	12
1 0M3T2 83 0 12	81	124	12
1 0M3T2 91 0 12	81	124	12
1 0M3T7 07 0 12	82	124	16
1 0M3T7 12 0 12	82	124	16
1 0M3T7 81 0 12	82	124	16
1 0M3T7 87 0 12	82	124	16
1 0M3T7 88 0 12	82	124	16
1 0M3T7 90 0 12	82	124	16
1 0M3T7 91 0 12	82	124	16
1 0M3T7 92 0 12	82	124	16
1 0M3T7 93 0 12	82	124	16
1 0M3T7 A3 0 12	82	124	16
1 0M3T7 C6 0 12	82	124	16
1 0M3T7 C7 0 12	82	124	16
1 0M410 00 0 12CL	85	125	20
1 0M415 01 0 12CL	85	125	21
1 0M415 03 0 12CL	86	125	21
1 0M510 00 0 12CL	83	123	2
1 0M510 10 0 12CL	83	123	3
1 0M610 00 0 00CL	85	123	8
1 0M610 10 0 12CL	85	123	8
1 0M610 11 0 12CL	85	123	8
1 0M610 12 0 12CL	85		
1 0N116 00 0 12	106		
1 0N149 00 0 12	106		
1 0N150 00 0 12	106		
1 0N210 55 0 12	106	123	7
1 0N310 07 0 12	104	124	18
1 0N310 10 0 12	104	124	18
1 0N310 12 0 12	104	124	18
1 0N310 13 0 12	104	124	18
1 0N310 17 0 12	104	124	18
1 0N310 18 0 12	104	124	18
1 0N310 19 0 12	104	124	18
1 0N310 20 0 12	104	124	18
1 0N310 21 0 12	104	124	18
1 0N310 22 0 12	104	124	18
1 0N310 23 0 12	104	124	18
1 0N310 24 0 12	104	124	18
1 0N310 25 0 12	104	124	18
1 0N310 26 0 12	104	124	18
1 0N310 27 0 12	104	124	18
1 0N310 28 0 12	104	124	18
1 0N310 29 0 12	104	124	18
1 0N310 30 0 12	104	124	18
1 0N310 31 0 12	104	124	18
1 0N310 32 0 12	104	124	18
1 0N310 33 0 12	104	124	18
1 0N310 35 0 12	104	124	18
1 0N310 36 0 12	104	124	18
1 0N310 37 0 12	104	124	18
1 0N310 38 0 12	104	124	18
1 0N310 39 0 12	104	124	18
1 0N310 40 0 12	104	124	18
1 0N310 41 0 12	104	124	18
1 0N310 42 0 12	104	124	18
1 0N310 43 0 12	104	124	18
1 0N310 44 0 12	104	124	18
1 0N310 45 0 12	104	124	18
1 0N310 49 0 12	104	124	18
1 0N310 52 0 12	104	124	18
1 0N310 54 0 12	104	124	18
1 0N310 56 0 12	104	124	18
1 0N310 57 0 12	104	124	18
1 0N310 59 0 12	104	124	18
1 0N310 60 0 12	104	124	18
1 0N310 61 0 12	104	124	18
1 0N310 64 0 12	104	124	18
1 0N310 65 0 12	104	124	18
1 0N310 70 0 12	104	124	18
1 0N310 71 0 12	104	124	18
1 0N310 77 0 12	104	124	18
1 0N312 07 0 12	105	124	12
1 0N312 10 0 12	105	124	12
1 0N312 12 0 12	105	124	12
1 0N312 13 0 12	105	124	12
1 0N312 17 0 12	105	124	12
1 0N312 18 0 12	105	124	12
1 0N312 19 0 12	105	124	12
1 0N312 20 0 12	105	124	12
1 0N312 21 0 12	105	124	12
1 0N312 23 0 12	105	124	12
1 0N312 25 0 12	105	124	12
1 0N312 26 0 12	105	124	12
1 0N312 27 0 12	105	124	12
1 0N312 28 0 12	105	124	12
1 0N312 29 0 12	105	124	12
1 0N312 30 0 12	105	124	12
1 0N312 35 0 12	105	124	12
1 0N312 36 0 12	105	124	12
1 0N312 37 0 12	105	124	12
1 0N312 39 0 12	105	124	12
1 0N312 42 0 12	105	124	12
1 0N312 43 0 12	105	124	12
1 0N312 54 0 12	105	124	12
1 0N312 64 0 12	105	124	12
1 0N312 81 0 12	105	124	12
1 0N312 82 0 12	105	124	12
1 0N312 83 0 12	105	124	12
1 0N312 84 0 12	105	124	12
1 0N312 85 0 12	105	124	12
1 0N312 91 0 12	105	124	12
1 0N312 98 0 12	105	124	12
1 0N314 02 0 12	105	124	13
1 0N314 03 0 12	105	124	13
1 0N314 04 0 12	105	124	13
1 0N314 05 0 12	105	124	13
1 0N314 06 0 12	105	124	13
1 0N314 07 0 12	105	124	13
1 0N314 08 0 12	105	124	13
1 0N314 09 0 12	105	124	13
1 0N317 07 0 12	105	124	16
1 0N317 12 0 12	105	124	16
1 0N317 81 0 12	105	124	16
1 0N317 87 0 12	105	124	16
1 0N317 88 0 12	105	124	16
1 0N317 90 0 12	105	124	16
1 0N317 91 0 12	105	124	16
1 0N317 92 0 12	105	124	16
1 0N317 93 0 12	105	124	16
1 0N317 A3 0 12	105	124	16
1 0N324 02 0 12	102	124	13
1 0N324 03 0 12	102	124	13
1 0N324 04 0 12	102	124	13
1 0N324 05 0 12	102	124	13
1 0N324 06 0 12	102	124	13
1 0N324 07 0 12	102	124	13
1 0N324 08 0 12	102	124	13
1 0N324 09 0 12	102	124	13
1 0N3M1 07 0 12	72		
1 0N3M2 07 0 12	72		
1 0N3M4 02 0 12	72		
1 0N3M7 07 0 12	72		
1 0N3S1 07 0 12	101	124	18
1 0N3S1 12 0 12	101	124	18
1 0N3S1 13 0 12	101	124	18
1 0N3S1 17 0 12	101	124	18
1 0N3S1 18 0 12	101	124	18
1 0N3S1 19 0 12	101	124	18
1 0N3S1 20 0 12	101	124	18
1 0N3S1 21 0 12	101	124	18
1 0N3S1 22 0 12	101	124	18
1 0N3S1 23 0 12	101	124	18
1 0N3S1 24 0 12	101	124	18
1 0N3S1 25 0 12	101	124	18
1 0N3S1 26 0 12	101	124	18
1 0N3S1 27 0 12	101	124	18
1 0N3S1 28 0 12	101	124	18
1 0N3S1 29 0 12	101	124	18

ITEM	PAGE	DRAWING Page	DRAWING Table
1 0N3S1 30 0 12	101	124	18
1 0N3S1 31 0 12	101	124	18
1 0N3S1 32 0 12	101	124	18
1 0N3S1 33 0 12	101	124	18
1 0N3S1 35 0 12	101	124	18
1 0N3S1 36 0 12	101	124	18
1 0N3S1 37 0 12	101	124	18
1 0N3S1 38 0 12	101	124	18
1 0N3S1 39 0 12	101	124	18
1 0N3S1 40 0 12	101	124	18
1 0N3S1 41 0 12	101	124	18
1 0N3S1 42 0 12	101	124	18
1 0N3S1 43 0 12	101	124	18
1 0N3S1 44 0 12	101	124	18
1 0N3S1 49 0 12	101	124	18
1 0N3S1 52 0 12	101	124	18
1 0N3S1 53 0 12	101	124	18
1 0N3S1 54 0 12	101	124	18
1 0N3S1 56 0 12	101	124	18
1 0N3S1 57 0 12	101	124	18
1 0N3S1 59 0 12	101	124	18
1 0N3S1 60 0 12	101	124	18
1 0N3S1 61 0 12	101	124	18
1 0N3S1 64 0 12	101	124	18
1 0N3S1 65 0 12	101	124	18
1 0N3S1 66 0 12	101	124	18
1 0N3S1 70 0 12	101	124	18
1 0N3S1 71 0 12	101	124	18
1 0N3S1 77 0 12	101	124	18
1 0N3S2 07 0 12	102	124	12
1 0N3S2 10 0 12	102	124	12
1 0N3S2 12 0 12	102	124	12
1 0N3S2 13 0 12	102	124	12
1 0N3S2 17 0 12	102	124	12
1 0N3S2 18 0 12	102	124	12
1 0N3S2 19 0 12	102	124	12
1 0N3S2 20 0 12	102	124	12
1 0N3S2 21 0 12	102	124	12
1 0N3S2 23 0 12	102	124	12
1 0N3S2 25 0 12	102	124	12
1 0N3S2 26 0 12	102	124	12
1 0N3S2 27 0 12	102	124	12
1 0N3S2 28 0 12	102	124	12
1 0N3S2 29 0 12	102	124	12
1 0N3S2 30 0 12	102	124	12
1 0N3S2 35 0 12	102	124	12
1 0N3S2 36 0 12	102	124	12
1 0N3S2 37 0 12	102	124	12
1 0N3S2 39 0 12	102	124	12
1 0N3S2 40 0 12	102	124	12
1 0N3S2 42 0 12	102	124	12
1 0N3S2 43 0 12	102	124	12
1 0N3S2 44 0 12	102	124	12
1 0N3S2 54 0 12	102	124	12
1 0N3S2 58 0 12	102	124	12
1 0N3S2 61 0 12	102	124	12
1 0N3S2 64 0 12	102	124	12
1 0N3S2 65 0 12	102	124	12
1 0N3S2 70 0 12	102	124	12
1 0N3S2 71 0 12	102	124	12
1 0N3S2 72 0 12	102	124	12
1 0N3S2 81 0 12	102	124	12
1 0N3S2 82 0 12	102	124	12
1 0N3S2 83 0 12	102	124	12
1 0N3S2 84 0 12	102	124	12
1 0N3S2 85 0 12	102	124	12
1 0N3S2 86 0 12	102	124	12
1 0N3S2 89 0 12	102	124	12
1 0N3S2 91 0 12	102	124	12
1 0N3S2 94 0 12	102	124	12
1 0N3S2 98 0 12	102	124	12
1 0N3S7 07 0 12	103	124	16
1 0N3S7 12 0 12	103	124	16
1 0N3S7 81 0 12	103	124	16
1 0N3S7 87 0 12	103	124	16
1 0N3S7 88 0 12	103	124	16
1 0N3S7 90 0 12	103	124	16
1 0N3S7 91 0 12	103	124	16
1 0N3S7 92 0 12	103	124	16
1 0N3S7 93 0 12	103	124	16
1 0N3S7 A3 0 12	103	124	16
1 0N3S7 C6 0 12	103	124	16
1 0N3S7 C7 0 12	103	124	16
1 0N410 00 0 12	107	125	20
1 0N510 00 0 12	106	123	2
1 0N610 00 0	107		
1 0P116 00 0 12	77		
1 0P120 00 0 12	77		
1 0P149 00 0 12	77		
1 0P150 00 0 12	76		
1 0P156 00 0 12	77		
1 0P210 55 0 12	76	123	7
1 0P314 02 0 12	69	124	13
1 0P314 03 0 12	69	124	13
1 0P314 04 0 12	69	124	13
1 0P314 05 0 12	69	124	13
1 0P314 06 0 12	69	124	13
1 0P314 07 0 12	69	124	13
1 0P314 08 0 12	69	124	13
1 0P314 13 0 12	69	124	13
1 0P314 20 0 12	69	124	13
1 0P314 21 0 12	69	124	13
1 0P3M1 07 0 12	71		
1 0P3M2 07 0 12	71		
1 0P3M4 02 0 12	71		
1 0P3M7 07 0 12	71		
1 0P3S1 06 0 12	68	124	18
1 0P3S1 07 0 12	68	124	18
1 0P3S1 10 0 12	68	124	18
1 0P3S1 12 0 12	68	124	18
1 0P3S1 13 0 12	68	124	18
1 0P3S1 17 0 12	68	124	18
1 0P3S1 18 0 12	68	124	18
1 0P3S1 19 0 12	68	124	18
1 0P3S1 20 0 12	68	124	18
1 0P3S1 21 0 12	68	124	18
1 0P3S1 22 0 12	68	124	18
1 0P3S1 23 0 12	68	124	18
1 0P3S1 24 0 12	68	124	18
1 0P3S1 25 0 12	68	124	18
1 0P3S1 26 0 12	68	124	18
1 0P3S1 27 0 12	68	124	18
1 0P3S1 28 0 12	68	124	18
1 0P3S1 29 0 12	68	124	18
1 0P3S1 30 0 12	68	124	18
1 0P3S1 31 0 12	68	124	18
1 0P3S1 32 0 12	68	124	18
1 0P3S1 33 0 12	68	124	18
1 0P3S1 35 0 12	68	124	18
1 0P3S1 36 0 12	68	124	18
1 0P3S1 37 0 12	68	124	18
1 0P3S1 38 0 12	68	124	18
1 0P3S1 39 0 12	68	124	18
1 0P3S1 40 0 12	68	124	18
1 0P3S1 41 0 12	68	124	18
1 0P3S1 42 0 12	68	124	18
1 0P3S1 43 0 12	68	124	18
1 0P3S1 49 0 12	68	124	18
1 0P3S1 52 0 12	68	124	18
1 0P3S1 53 0 12	68	124	18
1 0P3S1 54 0 12	68	124	18
1 0P3S1 56 0 12	68	124	18
1 0P3S1 57 0 12	68	124	18
1 0P3S1 59 0 12	68	124	18
1 0P3S1 60 0 12	68	124	18
1 0P3S1 61 0 12	68	124	18
1 0P3S1 64 0 12	68	124	18
1 0P3S1 65 0 12	68	124	18
1 0P3S1 66 0 12	68	124	18
1 0P3S1 70 0 12	68	124	18
1 0P3S1 71 0 12	68	124	18
1 0P3S1 77 0 12	68	124	18
1 0P3S2 07 0 12	69	124	12
1 0P3S2 10 0 12	69	124	12
1 0P3S2 12 0 12	69	124	12
1 0P3S2 13 0 12	69	124	12
1 0P3S2 17 0 12	69	124	12
1 0P3S2 18 0 12	69	124	12
1 0P3S2 19 0 12	69	124	12
1 0P3S2 20 0 12	69	124	12
1 0P3S2 21 0 12	69	124	12
1 0P3S2 23 0 12	69	124	12
1 0P3S2 25 0 12	69	124	12
1 0P3S2 26 0 12	69	124	12
1 0P3S2 27 0 12	69	124	12
1 0P3S2 28 0 12	69	124	12
1 0P3S2 29 0 12	69	124	12
1 0P3S2 30 0 12	69	124	12
1 0P3S2 35 0 12	69	124	12
1 0P3S2 36 0 12	69	124	12
1 0P3S2 37 0 12	69	124	12
1 0P3S2 39 0 12	69	124	12
1 0P3S2 42 0 12	69	124	12
1 0P3S2 43 0 12	69	124	12
1 0P3S2 44 0 12	69	124	12
1 0P3S2 54 0 12	69	124	12
1 0P3S2 57 0 12	69	124	12
1 0P3S2 61 0 12	69	124	12
1 0P3S2 64 0 12	69	124	12
1 0P3S2 65 0 12	69	124	12
1 0P3S2 81 0 12	69	124	12
1 0P3S2 82 0 12	69	124	12
1 0P3S2 83 0 12	69	124	12
1 0P3S2 84 0 12	69	124	12
1 0P3S2 85 0 12	69	124	12
1 0P3S2 91 0 12	69	124	12
1 0P3S2 98 0 12	69	124	12
1 0P3S7 07 0 12	70	124	16
1 0P3S7 12 0 12	70	124	16
1 0P3S7 81 0 12	70	124	16
1 0P3S7 87 0 12	70	124	16
1 0P3S7 88 0 12	70	124	16
1 0P3S7 90 0 12	70	124	16
1 0P3S7 91 0 12	70	124	16
1 0P3S7 92 0 12	70	124	16
1 0P3S7 93 0 12	70	124	16
1 0P3S7 A3 0 12	70	124	16
1 0P3S7 C6 0 12	70	124	16
1 0P3S7 C7 0 12	70	124	16
1 0P410 00 0 12	78	125	20
1 0P415 01 0 12	79	125	21
1 0P415 03 0 12	79	125	21
1 0P510 00 0 12	76	123	2
1 0P510 10 0 12	76	123	3
1 0P610 00 0	78	123	8
1 0P610 10 0 12	78	123	8
1 0P610 11 0 12	78	123	8
1 0P610 12 0 12	78	123	8
1 00100 00 1	55		
1 00101 00 1	55		
1 00101 00 2	55		
1 00102 00 1	55		
1 00104 00 1	55		
1 00110 00 1	55		
1 00120 00 1	55		
1 00120 00 2	55		
1 00121 00 1	55		
1 00122 00 1	55		
1 00123 00 1	55		
1 00124 00 1	55		
1 00125 00 1	55		
1 00125 00 2	55		
1 00162 00 1	55		
1 00163 00 1	55		
1 00170 00 1	56		
1 00171 00 1	56		
1 00210 00 0	49		
1 00211 00 0	49		
1 00401 00 1	53		
1 00401 00 2	53		
1 00430 00 1	54		
1 00600 01 0	53		
1 00620 01 0	53		
1 00620 90 0	54		
1 00670 01 0	53		
1 00670 01 0 00SD	53		
1 00690 00 0 00CL	54		
1 01040 01 1	49		
1 01040 02 1	49		
1 01040 03 1	49		
1 01040 04 1	49		
1 01040 05 1	49		
1 01060 10 0	49		
1 01070 01 1	50		
1 01070 01 2	50		
1 01070 05 1	50		
1 01070 05 2	50		
1 01070 10 1	50		
1 01070 10 2	50		
1 01210 00 2	49		
1 01220 00 2	50		
1 01310 00 1	50		
1 01310 00 2	50		
1 01310 05 1	50		
1 01310 10 1	51		
1 01310 10 2	51		

ITEM	PAGE	DRAWING Page	DRAWING Table
1 01310 20 1	51		
1 01310 20 2	51		
1 01310 25 0 00 00 MK	112		
1 01310 30 1	51		
1 01310 30 2	51		
1 01310 40 1	51		
1 01320 00 1	51		
1 01320 00 2	51		
1 01320 10 1	51		
1 01320 10 2	51		
1 01330 00 1	51		
1 01330 00 2	51		
1 01336 00 1	52		
1 01336 00 2	52		
1 01337 00 1	52		
1 01337 00 2	52		
1 01410 00 1	52		
1 01410 00 2	52		
1 01420 00 1	52		
1 01420 00 2	52		
1 01425 00 1	52		
1 01425 00 2	52		
1 01430 00 1	52		
1 01510 00 1	52		
1 01510 00 2	52		
1 02102 00 0	115		
1 02104 00 0	115		
1 02106 00 0	115		
1 02110 00 0	115		
1 02139 00 0	115		
1 02142 00 0	115		
1 02145 00 0	115		
1 02146 00 0	115		
1 02156 00 0	115		
1 02400 10 0	116	123	1
1 02400 11 0	116	123	1
1 02520 00 0	115	123	4
1 02544 10 0	115	123	5
1 02544 14 0	115	123	5
1 02544 15 0	115	123	5
1 02550 25 0	115	123	6
1 02649 10 0	116	123	8
1 02649 11 0	116	123	8
1 02715 10 1	427	447	1
1 02715 11 1	427	447	1
1 02716 00 1	428	447	1
1 02716 01 1	428	447	1
1 02716 10 1	428	447	1
1 02716 11 1	428	447	1
1 02716 50 1	428	447	1
1 02716 51 1	428	447	1
1 02716 60 1	428	447	1
1 02716 61 1	428	447	1
1 05001 00 0 06	325		
1 05001 00 0 07	325		
1 05001 00 0 12	325		
1 05001 00 0 38	325		
1 05002 00 1 06	325		
1 05002 00 1 07	325		
1 05002 00 1 20	325		
1 05002 00 1 38	325		
1 05002 00 2 06	325		
1 05002 00 2 07	325		
1 05002 00 2 20	325		
1 05002 00 2 38	325		
1 05003 00 1 06	326		
1 05003 00 1 07	326		
1 05003 00 2 06	326		
1 05003 00 2 07	326		
1 05004 00 1 06	326		
1 05004 00 1 07	326		
1 05004 00 2 06	326		
1 05004 00 2 07	326		
1 05005 00 0 06	253		
1 05005 00 0 07	253		
1 05005 00 0 12	253		
1 05005 00 0 20	253		
1 05005 00 0 38	253		
1 05020 00 0	253		
1 05021 00 1	253		
1 05021 00 2	253		
1 05030 00 0	437		
1 05031 00 0	437		
1 06000 00 0	206		
1 06002 00 0	265		
1 06003 00 0	178		
1 06003 01 0	178		
1 06004 00 0	178		
1 06004 01 0	179		
1 06005 00 0	179		
1 06010 00 0	119		
1 06011 00 0	119		
1 06012 00 0	119		
1 06012 01 0	265		
1 06018 25 0	119		
1 06027 00 0	119		
1 06027 01 0	265		
1 06035 00 0	357		
1 06043 00 0	120		
1 06047 51 0	429		
1 06048 02 0	371		
1 06048 03 0	371		
1 06062 00 0	278		
1 06072 00 0	278		
1 06075 00 0	179		
1 06077 16 0	265		
1 06077 20 0	265		
1 06078 16 0	265		
1 06078 20 0	265		
1 06079 16 0	265		
1 06079 20 0	266		
1 06079 77 0	266		
1 06080 16 0	266		
1 06080 20 0	266		
1 06081 00 0	371		
1 06081 01 0	438		
1 06082 00 0	371		
1 06083 00 0	371		
1 06084 00 0	364		
1 06086 00 0	179		
1 06086 01 0	266		
1 06086 02 0	266		
1 06091 10 0	360		
1 06092 00 0	180		
1 06093 00 0	356		
1 06093 01 0	356		
1 06093 02 0	356		
1 06093 04 0	356		
1 06093 10 0	356		
1 06093 11 0	356		
1 06098 00 0	361		
1 06100 10 0	361		
1 06100 15 0	361		
1 06101 10 0	361		
1 06102 10 0	361		
1 06102 13 0	361		
1 06107 00 0	361		
1 06110 00 0	357		
1 06110 15 0	267		
1 06119 00 0	371		
1 06120 00 0	197		
1 06123 00 1	267		
1 06123 03 0	267		
1 06123 04 0	438		
1 06124 00 0	180		
1 06124 02 0	180		
1 06140 00 0	369		
1 06140 01 0	369		
1 06140 02 0	369		
1 06141 35 0	278		
1 06141 36 0	278		
1 06141 37 0	278		
1 06141 38 0	278		
1 06141 40 0	279		
1 06141 42 0	279		
1 06141 44 0	279		
1 06141 52 0	267		
1 06141 53 0	267		
1 06141 55 0	267		
1 06141 56 0	267		
1 06141 57 0	267		
1 06141 63 0	267		
1 06141 65 0	267		
1 06141 66 0	268		
1 06141 67 0	268		
1 06141 68 0	268		
1 06141 69 0	268		
1 06141 70 0	268		
1 06141 71 0	268		
1 06141 74 0	268		
1 06141 75 0	269		
1 06141 76 0	269		
1 06141 77 0	269		
1 06141 78 0	269		
1 06141 79 0	269		
1 06141 80 0	539		
1 06141 82 0	270		
1 06141 84 0	270		
1 06141 85 0	270		
1 06141 86 0	270		
1 06141 87 0	270		
1 06141 88 0	539		
1 06141 89 0	270		
1 06141 95 0	270		
1 06141 96 0	271		
1 06142 00 0	365		
1 06142 01 0	438		
1 06142 02 0	438		
1 06142 51 0	438		
1 06142 85 0	539		
1 06143 00 0	371		
1 06144 10 1	439		
1 06144 15 0	439		
1 06144 50 1	439		
1 06145 10 0	439		
1 06145 11 0	439		
1 06145 15 0	440		
1 06145 50 0	440		
1 06146 00 0	368		
1 06147 00 0	271		
1 06147 01 0	271		
1 06149 00 0	361		
1 06150 00 0	361		
1 06152 00 0	361		
1 06157 00 0	271		
1 06162 00 0	362		
1 06163 00 0	362		
1 06167 00 0	271		
1 06168 00 0	230		
1 06195 05 0	502		
1 06195 06 0	502		
1 06195 07 0	502		
1 06195 08 0	214		
1 06195 09 0	502		
1 06195 10 0	502		
1 06196 43 0	481	529	11
1 06196 60 0	501		
1 06198 70 0	496		
1 06198 75 0	507		
1 06206 00 0	362		
1 06213 05 0	372		
1 06216 00 0	362		
1 06218 00 0	357		
1 06220 00 0	440		
1 06220 02 0	440		
1 06220 03 0	440		
1 06220 05 0	440		
1 06220 20 0	440		
1 06220 26 0	440		
1 06220 27 0	440		
1 06220 28 0	441		
1 06220 29 0	441		
1 06221 00 0	441		
1 06221 01 0	441		
1 06221 10 0	441		
1 06221 11 0	441		
1 06221 15 0	441		
1 06221 16 0	441		
1 06221 17 0	441		
1 06221 18 0	441		
1 06221 20 0	441		
1 06221 50 0	442		
1 06221 51 0	442		
1 06221 52 0	442		
1 06221 60 0	442		
1 06221 62 0	442		
1 06223 00 0	362		
1 06224 00 0	271		
1 06224 50 0	442		
1 06224 60 0	442		
1 06226 00 0	362		
1 06228 08 0	442		
1 06228 28 0	442		
1 06231 00 0	365		
1 06232 00 0	181		
1 06232 01 0	181		

ITEM	PAGE	DRAWING Page	DRAWING Table
1 06232 05 0	271		
1 06232 06 0	271		
1 06232 20 0	181		
1 06232 21 0	181		
1 06232 22 0	181		
1 06233 00 0	272		
1 06233 01 0	272		
1 06233 02 0	272		
1 06233 03 0	272		
1 06235 00 0	365		
1 06236 00 0	369		
1 06237 01 0	369		
1 06243 00 0	362		
1 06271 00 0	365		
1 06272 00 0	365		
1 06275 00 0	365		
1 06277 01 0	279		
1 06277 02 0	279		
1 06277 03 0	279		
1 06277 10 0	280		
1 06277 11 0	280		
1 06277 14 0	280		
1 06277 28 0	280		
1 06277 32 0	280		
1 06277 41 0	280		
1 06277 44 0	281		
1 06277 76 0	281		
1 06277 77 0	281		
1 06277 78 0	281		
1 06277 80 0	281		
1 06277 88 0	281		
1 06277 89 0	282		
1 06277 92 0	282		
1 06277 95 0	282		
1 06277 98 0	282		
1 06277 99 0	282		
1 06278 00 0	365		
1 06278 01 0	283		
1 06278 02 0	283		
1 06278 04 0	283		
1 06278 05 0	283		
1 06278 06 0	283		
1 06278 07 0	283		
1 06278 11 0	366		
1 06278 16 0	284		
1 06278 17 0	284		
1 06278 19 0	284		
1 06278 20 0	284		
1 06278 21 0	284		
1 06278 22 0	284		
1 06278 26 0	285		
1 06278 27 0	285		
1 06278 28 0	285		
1 06278 64 0	285		
1 06278 65 0	285		
1 06278 66 0	285		
1 06278 80 0	286		
1 06279 00 0	366		
1 06279 10 0	372		
1 06279 10 0 82	372		
1 06279 11 0	372		
1 06279 12 0	366		
1 06281 00 0	366		
1 06282 00 0	366		
1 06283 01 0	366		
1 06283 02 0 B7	366		
1 06284 00 0	366		
1 06284 01 0	366		
1 06285 25 0	286		
1 06285 27 0	286		
1 06285 30 0	286		
1 06285 32 0	286		
1 06285 34 0	286		
1 06285 35 0	287		
1 06285 36 0	287		
1 06285 37 0	287		
1 06285 38 0	287		
1 06285 42 0	287		
1 06285 43 0	288		
1 06285 44 0	288		
1 06287 02 0	288		
1 06287 11 0	288		
1 06287 14 0	289		
1 06287 17 0	289		
1 06287 21 0	289		
1 06287 26 0	289		
1 06287 27 0	290		
1 06287 29 0	290		
1 06287 50 0	290		
1 06287 64 0	290		
1 06287 65 0	290		
1 06287 77 0	291		
1 06287 88 0	291		
1 06287 89 0	291		
1 06287 92 0	291		
1 06287 94 0	291		
1 06287 95 0	292		
1 06287 97 0	292		
1 06290 00 0	272		
1 06290 05 0	181		
1 06290 06 0	181		
1 06290 10 0	181		
1 06291 00 0	366		
1 06291 01 0	272		
1 06291 05 0	367		
1 06291 06 0	273		
1 06291 07 0	182		
1 06291 20 0	367		
1 06291 50 0	443		
1 06292 00 0	372		
1 06292 01 0	373		
1 06293 00 0	373		
1 06293 01 0	373		
1 06300 14 0	145		
1 06300 18 0	145		
1 06301 50 0	145		
1 06301 60 0	145		
1 06302 25 0	145		
1 06302 60 0	146		
1 06303 00 0	146		
1 06316 04 0	496		
1 06322 00 0	373		
1 06323 00 0	373		
1 06323 00 0 82	373		
1 06323 01 0	373		
1 06325 00 0	373		
1 06328 00 0	373		
1 06328 00 0 82	373		
1 06328 00 0 B7	373		
1 06329 00 0	373		
1 06329 00 0 82	373		
1 06329 00 0 B7	373		
1 06331 00 0	374		
1 06353 00 0 44	120		
1 06353 00 0 60	120		
1 06353 00 0 62	120		
1 06353 00 0 64	120		
1 06354 00 0 23	120		
1 06354 00 0 68	120		
1 06355 00 0 12	120		
1 06355 00 0 66	120		
1 06356 00 0 12	120		
1 06356 00 0 66	120		
1 06357 00 0 12	120		
1 06357 00 0 66	120		
1 06411 01 0	120		
1 06411 02 0	120		
1 06411 03 0	120		
1 06411 04 0	120		
1 06412 01 0	121		
1 06412 02 0	121		
1 06412 03 0	121		
1 06412 04 0	121		
1 06412 51 0	121		
1 06413 01 0	121		
1 06413 02 0	121		
1 06413 03 0	121		
1 06413 04 0	121		
1 06414 01 0	121		
1 06414 02 0	121		
1 06414 03 0	121		
1 06414 04 0	121		
1 06414 20 0	121		
1 06414 25 0	121		
1 06414 30 0	121		
1 06415 00 0	367		
1 06416 00 0	367		
1 06418 00 0	369		
1 06418 01 0	443		
1 06418 03 0	443		
1 06421 10 1	443		
1 06421 10 2	443		
1 06422 00 0	370		
1 06424 00 0	370		
1 06425 02 0	443		
1 06425 03 0	443		
1 06425 04 0	444		
1 06425 05 0	444		
1 06425 06 0	444		
1 06425 07 0	370		
1 06426 07 0	370		
1 06429 00 0	429		
1 06429 05 0	429		
1 06429 06 0	429		
1 06429 10 0	429		
1 06429 15 0	429		
1 06429 16 0	430		
1 06429 20 0	430		
1 06429 50 0	430		
1 06429 51 0	430		
1 06429 60 1	430		
1 06433 00 0	445		
1 06433 01 0	445		
1 06433 10 0	445		
1 06433 11 0	445		
1 06434 00 0	445		
1 06434 01 0	445		
1 06436 10 0	214		
1 06436 11 0	214		
1 06436 12 0	197		
1 06436 13 0	197		
1 06437 00 0	445		
1 06437 01 0	445		
1 06441 00 0	236		
1 06441 10 0	236		
1 06441 15 0	182		
1 06441 20 0	236		
1 06442 00 0	237		
1 06443 00 0	237		
1 06443 05 0	237		
1 06443 21 0	238		
1 06443 26 0	238		
1 06443 31 0	207		
1 06443 36 0	207		
1 06443 41 0	214		
1 06443 46 0	214		
1 06444 46 0	208		
1 06444 47 0	208		
1 06444 56 0	208		
1 06444 66 0	208		
1 06444 67 0	208		
1 06444 76 0	208		
1 06444 86 0	197		
1 06444 87 0	197		
1 06444 96 0	197		
1 06449 00 0	238		
1 06449 05 0	208		
1 06449 10 0	209		
1 06449 11 0	209		
1 06451 00 0	239		
1 06451 10 0	239		
1 06452 05 0	239		
1 06453 05 0	239		
1 06458 10 0	431		
1 06458 11 0	370		
1 06458 20 0	431		
1 06459 01 0	273		
1 06459 02 0	273		
1 06460 00 0	273		
1 06460 05 0	273		
1 06460 15 0	374		
1 06460 40 0	431		
1 06460 50 0	431		
1 06460 51 0	431		
1 06460 60 0	431		
1 06461 01 0	274		
1 06461 02 0	274		
1 06461 03 1	217		
1 06461 03 2	217		
1 06461 04 1	217		
1 06461 04 2	217		
1 06461 07 0	274		
1 06461 11 0	274		
1 06461 12 0	274		
1 06461 17 0	274		
1 06461 20 0	274		

ITEM	PAGE	DRAWING Page	DRAWING Table
1 06461 21 0	274		
1 06461 22 0	274		
1 06461 23 0	217		
1 06461 25 0	275		
1 06461 26 0	275		
1 06461 27 1	217		
1 06461 27 2	217		
1 06461 30 0	275		
1 06461 34 0	275		
1 06461 35 0	275		
1 06461 39 0	275		
1 06461 40 0	275		
1 06461 43 0	255		
1 06461 45 0	275		
1 06461 50 0	431		
1 06461 51 0	431		
1 06461 60 0	431		
1 06461 61 0	431		
1 06462 01 0	276		
1 06462 20 0	276		
1 06463 05 0	258		
1 06463 06 0	258		
1 06463 09 0	258		
1 06463 16 0	259		
1 06463 57 0	255		
1 06463 58 0	255		
1 06463 67 0	256		
1 06463 68 0	256		
1 06463 72 0	254		
1 06463 73 0	254		
1 06463 74 0	256		
1 06463 75 0	256		
1 06463 82 0	254		
1 06463 83 0	254		
1 06463 84 0	257		
1 06463 85 0	257		
1 06465 02 0	261		
1 06465 03 0	261		
1 06465 05 0	261		
1 06465 06 0	262		
1 06465 08 0	262		
1 06465 10 0	262		
1 06465 52 0	255		
1 06465 57 0	256		
1 06465 58 0	256		
1 06465 72 0	255		
1 06465 73 0	255		
1 06465 74 0	257		
1 06465 75 0	257		
1 06466 01 0	431		
1 06466 02 0	431		
1 06472 00 0	433		
1 06472 10 0	433		
1 06472 40 0	433		
1 06473 00 0	433		
1 06473 10 0	433		
1 06473 20 0	276		
1 06473 20 0 B1	276		
1 06473 30 0	276		
1 06473 30 0 B1	276		
1 06473 50 0	434		
1 06473 51 0	434		
1 06473 60 0	362		
1 06480 00 0	432		
1 06480 01 0	432		
1 06480 02 0	432		
1 06480 10 0	432		
1 06480 11 0	432		
1 06480 12 0	432		
1 06480 20 0	432		
1 06480 21 0	432		
1 06480 22 0	432		
1 06483 00 0	432		
1 06483 20 0	432		
1 06483 60 0	432		
1 06483 61 0	433		
1 06483 80 0	432		
1 06483 81 0	433		
1 06485 00 0	432		
1 06485 01 0	432		
1 06485 02 0	432		
1 06485 20 0	432		
1 06485 21 0	432		
1 06485 22 0	432		
1 06490 00 0	434		
1 06490 01 0	434		
1 06490 02 0	434		
1 06490 10 0	435		
1 06490 50 0	434		
1 06490 51 0	434		
1 06490 52 0	434		
1 06490 53 0	434		
1 06510 00 0	357		
1 06510 10 0	446		
1 06510 50 0	389		
1 06511 00 0	276		
1 06515 00 0	438		
1 06515 15 0	438		
1 06515 21 0	451		
1 06520 00 1	406		
1 06520 01 1	406		
1 06520 10 1	406		
1 06520 11 1	406		
1 06520 50 1	406		
1 06520 51 1	406		
1 06520 55 1	406		
1 06520 60 1	406		
1 06520 61 1	406		
1 06520 65 1	406		
1 06521 50 1	406		
1 06522 00 0	406		
1 06525 51 0 L6	389		
1 06525 51 0 L7	389		
1 06525 51 0 L8	389		
1 06525 51 0 L9	389		
1 06525 71 0 L6	389		
1 06525 71 0 L7	389		
1 06525 71 0 L8	389		
1 06525 71 0 L9	389		
1 06525 73 0 L6	389		
1 06525 73 0 L7	389		
1 06525 73 0 L8	389		
1 06525 73 0 L9	389		
1 06525 75 0 L6	389		
1 06525 75 0 L7	389		
1 06525 75 0 L8	389		
1 06525 75 0 L9	389		
1 06525 77 0	479		
1 06525 77 0 B1	479		
1 06526 11 0	390		
1 06526 21 0	390		
1 06526 30 0	390		
1 06526 40 0	390		
1 06610 50 0	588		
1 06740 00 0	446		
1 07007 13 0	467		
1 07007 14 0	467		
1 07007 15 0	467		
1 07007 60 0	467		
1 07007 61 0	467		
1 07007 62 0	467		
1 07009 00 0	357		
1 07012 00 0	357		
1 07013 00 0	276		
1 07017 10 1	357		
1 07017 10 2	357		
1 07018 00 1	183		
1 07018 00 2	183		
1 07018 00 3	183		
1 07018 00 4	183		
1 07018 10 3	358		
1 07018 10 4	358		
1 07019 10 1	358		
1 07019 10 2	358		
1 07020 00 1	183		
1 07020 00 2	183		
1 07021 00 0	183		
1 07021 01 0	183		
1 07021 05 0	184		
1 07021 10 0	358		
1 07021 11 0	358		
1 07022 00 0	153		
1 07022 10 0	153		
1 07022 20 0	466		
1 07023 00 0	153		
1 07024 00 1	360		
1 07024 00 2	360		
1 07025 00 0	184		
1 07025 10 0	153		
1 07027 00 0	277		
1 07028 00 0	277		
1 07028 10 0	277		
1 07030 40 0	198		
1 07030 41 0	198		
1 07030 70 0	390		
1 07030 72 0	390		
1 07030 80 0	390		
1 07032 00 0	363		
1 07047 00 0	277		
1 07054 00 0	370		
1 07055 00 0	370		
1 07056 00 0	184		
1 07060 01 0	446		
1 07060 03 0	390		
1 07060 10 0	198		
1 07061 00 1	184		
1 07061 00 2	184		
1 07061 10 0	184		
1 07063 15 1	490	545	11
1 07063 20 0	490	545	11
1 07063 21 0	492	545	11
1 07063 26 1	486	529	11
1 07063 26 1 C2	486	529	11
1 07063 26 2	486	529	11
1 07063 26 2 C2	486	529	11
1 07063 30 0	490	545	11
1 07063 31 0	492	545	11
1 07063 35 2	490	545	11
1 07063 36 1	492	545	11
1 07063 36 2	492	545	11
1 07063 40 0	490	545	11
1 07063 41 0	492	545	11
1 07063 51 0	484	529	11
1 07063 51 0 C2	484	529	11
1 07063 53 0	485	529	11
1 07063 61 0	484	529	11
1 07063 61 0 C2	484	529	11
1 07063 63 0	485	529	11
1 07063 66 1	485	529	11
1 07063 66 1 C2	485	529	11
1 07063 66 2	485	529	11
1 07063 66 2 C2	485	529	11
1 07063 71 0	486	529	11
1 07063 71 0 C2	486	529	11
1 07064 51 0	486	529	11
1 07064 51 0 C2	486	529	11
1 07064 60 0	491	545	11
1 07064 61 0	493	545	11
1 07064 71 0	486	529	11
1 07064 71 0 C2	486	529	11
1 07065 52 0	502		
1 07070 12 0	468		
1 07070 14 0	468		
1 07070 15 0	468		
1 07070 16 0	468		
1 07070 50 0	446		
1 07070 56 0 B1	540		
1 07070 60 0	446		
1 07070 66 0 B1	540		
1 07070 70 0	355		
1 07070 71 0	355		
1 07070 72 0	355		
1 07070 73 0	355		
1 07070 80 0	355		
1 07070 81 0	355		
1 07070 82 0	355		
1 07071 10 0	468		
1 07072 11 0	502		
1 07072 14 0	502		
1 07072 20 0	503		
1 07072 21 0	503		
1 07072 25 0	503		
1 07072 26 0	503		
1 07072 27 0	504		
1 07072 28 0	504		
1 07072 30 0	504		
1 07072 31 0	504		
1 07072 32 0	504		
1 07072 33 0	505		
1 07072 34 0	505		
1 07072 70 0	503		
1 07072 71 0	503		
1 07072 77 0	504		
1 07072 78 0	504		
1 07073 20 0	468		
1 07073 21 0	469		

ITEM	PAGE	DRAWING Page	DRAWING Table
1 07074 70 0	466	543	1
1 07074 71 0	466	543	1
1 07074 80 0	497	543	2
1 07076 11 0	469		
1 07076 13 0	469		
1 07076 14 0	469		
1 07076 15 0	469		
1 07076 16 0	469		
1 07076 65 0	470		
1 07076 66 0	471		
1 07076 70 0	541		
1 07076 70 0 C2	541		
1 07076 71 0	541		
1 07076 71 0 C2	541		
1 07077 14 0	505		
1 07077 14 0 C2	505		
1 07077 15 0	505		
1 07077 15 0 C2	505		
1 07078 35 0	495	543	3
1 07078 35 0 C2	495	543	3
1 07078 36 0	495	543	4
1 07078 36 0 00SH	495	543	4
1 07078 38 0	496	543	5
1 07078 38 0 00SH	496	543	5
1 07078 65 0	495	543	6
1 07078 65 0 C2	495	543	6
1 07078 68 0	496	544	7
1 07078 68 0 00SH	496	544	7
1 07078 69 0	496	544	8
1 07078 69 0 00SH	496	544	8
1 07081 06 0	491	545	11
1 07081 12 0	470		
1 07081 61 0	493	545	11
1 07083 05 0	498	544	9
1 07083 06 0	498	544	9
1 07083 07 0	498	544	9
1 07083 40 0	498	544	9
1 07083 41 0	498	544	9
1 07083 50 0	471		
1 07083 51 0	471		
1 07083 52 0	471		
1 07083 53 0	471		
1 07083 70 0	471		
1 07083 80 0	498	544	9
1 07083 81 0	498	544	9
1 07083 82 0	498	544	9
1 07083 90 0	498	544	9
1 07084 10 0	506		
1 07084 11 0	506		
1 07084 20 0	506		
1 07084 21 0	506		
1 07085 75 0	471		
1 07085 76 0	471		
1 07085 77 0	541		
1 07086 00 0	277		
1 07086 01 0	277		
1 07088 00 0	240		
1 07088 03 0	184		
1 07088 03 0 00DZ	185		
1 07088 04 0	185		
1 07088 04 0 00CG	185		
1 07088 05 0	185		
1 07089 50 0	471		
1 07089 52 0	542		

ITEM	PAGE	DRAWING Page	DRAWING Table
1 07090 01 0	499		
1 07090 01 0 C2	499		
1 07090 05 0	499		
1 07090 05 0 C2	499		
1 07090 10 0	499		
1 07090 10 0 C2	499		
1 07090 50 0	457		
1 07091 01 0	500		
1 07091 01 0 C2	500		
1 07091 02 0	500		
1 07091 02 0 C2	500		
1 07091 03 0	500		
1 07091 50 0	457	475	14
1 07095 00 0	582		
1 07108 00 0	582		
1 07109 00 0	582		
1 07109 01 0	582		
1 07109 03 0	582		
1 07110 00 0			
1 07114 00 0	582		
1 07114 05 0	582		
1 07114 06 0	582		
1 07114 11 0	583		
1 07114 12 0	582		
1 07114 15 0	582		
1 07114 16 0	583		
1 07114 17 0	583		
1 07118 00 1	358		
1 07118 00 2	358		
1 07118 01 1	358		
1 07118 01 2	358		
1 07120 00 1	359		
1 07120 00 2	359		
1 07120 01 1	359		
1 07120 01 2	359		
1 07125 00 0	583		
1 07125 01 0	583		
1 07126 01 0	472		
1 07126 02 0	198		
1 07126 51 0	472		
1 07128 00 0	277		
1 07132 00 0 97	563		
1 07133 00 0 97	563		
1 07134 00 0 97	563		
1 07135 00 0 97	563		
1 07141 01 0 97	559		
1 07142 01 0 97	559		
1 07153 02 0 97	559		
1 07153 03 0 97	559		
1 07153 04 0 97	559		
1 07153 05 0 97	559		
1 07153 06 0 97	559		
1 07153 15 0 97	551		
1 07155 01 0	564		
1 07155 02 0	564		
1 07155 03 0	564		
1 07155 04 0	564		
1 07155 05 0	564		
1 07155 06 0	565		
1 07155 10 0 12	560		
1 07155 11 0 97	560		
1 07155 12 0 97	560		
1 07155 13 0 97	560		
1 07155 14 0 97	560		

ITEM	PAGE	DRAWING Page	DRAWING Table
1 07155 15 0 97	560		
1 07155 20 0 97	560		
1 07155 21 0 97	561		
1 07156 03 0	565		
1 07158 00 0 97	552		
1 07158 01 0 97	552		
1 07158 02 0 97	552		
1 07165 00 0	122		
1 07165 01 0	122		
1 07165 02 0	122		
1 07165 03 0	122		
1 07165 04 0	122		
1 07165 21 0	506		
1 07165 50 0	506		
1 07165 51 0	507		
1 07165 51 0 C2	507		
1 07173 00 0	374		
1 07174 00 0	374		
1 07174 00 0 82	374		
1 07174 00 0 B7	374		
1 07175 00 0	375		
1 07175 00 0 82	375		
1 07175 00 0 B7	375		
1 07176 00 0	375		
1 07176 10 0	375		
1 07176 61 0	542		
1 07176 61 0 C2	542		
1 07176 62 0	542		
1 07176 62 0 C2	542		
1 07176 63 0	542		
1 07176 63 0 C2	542		
1 07176 66 0	542		
1 07176 66 0 C2	542		
1 07177 00 0	375		
1 07177 10 0	375		
1 07178 00 0	376		
1 07178 10 0	376		
1 07206 00 0	542		
1 07206 01 0	368		
1 07209 00 0	555		
1 07209 01 0	555		
1 07209 02 0	553		
1 07209 20 0 97	555		
1 07209 21 0	555		
1 07209 25 0	555		
1 07210 00 0	554		
1 07210 01 0	561		
1 07430 31 0	583		
1 07430 32 0	584		
1 07550 01 0	605		
1 07550 02 0	605		
1 07550 04 0	605		
1 07550 12 0	64		
1 07550 13 0	605		
1 07550 14 0	75		
1 07551 01 0	593		
1 07551 02 0	593		
1 07551 03 0	593		
1 07551 04 0	593		
1 07551 05 0	593		
1 07551 06 0	593		
1 07551 11 0	593		
1 07551 12 0	593		
1 07551 13 0	593		

ITEM	PAGE	DRAWING Page	DRAWING Table
1 07551 14 0	593		
1 07551 15 0	593		
1 07551 16 0	593		
1 07551 17 0	593		
1 07551 41 0	593		
1 07551 42 0	593		
1 07551 43 0	593		
1 07551 44 0	593		
1 07551 45 0	593		
1 07551 51 0	593		
1 07551 52 0	593		
1 07551 53 0	593		
1 07551 54 0	593		
1 07551 55 0	593		
1 07551 56 0	593		
1 07551 71 0	593		
1 07551 72 0	593		
1 07551 73 0	593		
1 07551 74 0	593		
1 07551 75 0	593		
1 07551 76 0	593		
1 07551 79 0	593		
1 07552 01 0	593		
1 07552 02 0	593		
1 07552 03 0	593		
1 07552 04 0	594		
1 07552 51 0	594		
1 07552 71 0	594		
1 07552 72 0	594		
1 07552 73 0	594		
1 07552 74 0	594		
1 07552 75 0	594		
1 07552 76 0	594		
1 07552 81 0	594		
1 07552 82 0	594		
1 07552 83 0	594		
1 07552 84 0	594		
1 07552 85 0	594		
1 07552 86 0	594		
1 07553 01 0	594		
1 07553 02 0	594		
1 07553 03 0	594		
1 07553 04 0	594		
1 07553 51 0	594		
1 07554 01 0	594		
1 07554 02 0	594		
1 07554 03 0	594		
1 07554 05 0	594		
1 07554 51 0	594		
1 07554 71 0	595		
1 07554 72 0	595		
1 07554 73 0	595		
1 07554 91 0	595		
1 07554 92 0	595		
1 07555 01 0	595		
1 07555 02 0	595		
1 07555 03 0	595		
1 07555 04 0	595		
1 07555 05 0	595		
1 07555 11 0	595		
1 07555 12 0	595		
1 07555 13 0	595		
1 07555 14 0	595		
1 07555 21 0	595		

ITEM	PAGE	DRAWING Page	DRAWING Table
1 07555 22 0	595		
1 07555 23 0	595		
1 07555 24 0	595		
1 07555 25 0	595		
1 07555 26 0	595		
1 07555 31 0	595		
1 07555 32 0	595		
1 07555 33 0	595		
1 07555 34 0	595		
1 07555 35 0	595		
1 07555 36 0	595		
1 07555 37 0	595		
1 07555 38 0	595		
1 07555 39 0	595		
1 07555 40 0	595		
1 07555 51 0	595		
1 07555 52 0	595		
1 07555 53 0	595		
1 07555 54 0	595		
1 07555 55 0	595		
1 07555 61 0	595		
1 07555 62 0	595		
1 07555 63 0	595		
1 07555 64 0	595		
1 07556 03 0	596		
1 07557 01 0	596		
1 07557 02 0	596		
1 07557 03 0	596		
1 07557 11 0	596		
1 07557 52 0	596		
1 07558 01 0	596		
1 07558 02 0	596		
1 07558 05 0	596		
1 07559 01 0	605		
1 07559 02 0	605		
1 07559 03 0	606		
1 07559 04 0	606		
1 07559 05 0	606		
1 07559 06 0	606		
1 07559 07 0	606		
1 07559 09 0	606		
1 07559 11 0	606		
1 07559 12 0	606		
1 07559 13 0	606		
1 07559 19 0	606		
1 07559 22 0	606		
1 07559 24 0	607		
1 07559 25 0	607		
1 07559 26 0	607		
1 07559 28 0	607		
1 07559 42 0	606		
1 07559 48 0	606		
1 07559 62 0	605		
1 07559 63 0	606		
1 07559 80 0	607		
1 07559 81 0	607		
1 07559 83 0	607		
1 07559 84 0	607		
1 07559 85 0	607		
1 07571 01 0	597		
1 07571 02 0	597		
1 07571 03 0	597		
1 07571 04 0	597		
1 07571 05 0	597		
1 07571 06 0	597		
1 07571 11 0	597		
1 07571 12 0	597		
1 07571 13 0	597		
1 07571 14 0	597		
1 07571 15 0	597		
1 07571 16 0	597		
1 07571 17 0	597		
1 07571 18 0	597		
1 07571 41 0	597		
1 07571 42 0	597		
1 07571 43 0	597		
1 07571 44 0	597		
1 07571 45 0	597		
1 07571 70 0	597		
1 07571 71 0	597		
1 07571 72 0	597		
1 07571 73 0	597		
1 07571 74 0	597		
1 07571 75 0	597		
1 07571 76 0	597		
1 07571 77 0	599		
1 07571 78 0	599		
1 07571 80 0	597		
1 07571 93 0	599		
1 07571 94 0	599		
1 07572 01 0	597		
1 07572 02 0	597		
1 07572 03 0	597		
1 07572 71 0	597		
1 07572 72 0	597		
1 07572 73 0	597		
1 07572 74 0	597		
1 07572 75 0	597		
1 07572 76 0	597		
1 07572 77 0	599		
1 07572 78 0	599		
1 07572 81 0	597		
1 07572 82 0	597		
1 07572 83 0	597		
1 07572 84 0	597		
1 07572 85 0	598		
1 07572 87 0	598		
1 07572 88 0	598		
1 07572 89 0	598		
1 07572 90 0	598		
1 07572 91 0	598		
1 07572 92 0	598		
1 07572 93 0	599		
1 07572 94 0	599		
1 07572 95 0	599		
1 07572 96 0	599		
1 07580 01 0	72		
1 07580 02 0	72		
1 07580 03 0	72		
1 07580 05 0	72		
1 07580 10 0	73		
1 07580 11 A	73		
1 07580 11 B	73		
1 07580 12 A	73		
1 07580 12 B	73		
1 07580 13 A	73		
1 07580 13 B	73		
1 07580 14 A	73		
1 07580 14 B	73		
1 07580 15 A	73		
1 07580 15 B	73		
1 07580 16 A	73		
1 07580 16 B	73		
1 07580 17 A	73		
1 07580 20 0	73		
1 07580 21 0	62		
1 07580 22 0	62		
1 07580 23 0	62		
1 07580 24 0	62		
1 07580 30 A	73		
1 07580 30 0	73		
1 07580 31 0	73		
1 07580 32 A	73		
1 07580 33 A	73		
1 07580 34 0	73		
1 07580 47 0 12	73		
1 07580 48 0 12	73		
1 07580 50 0	62		
1 07580 51 0	62		
1 07580 52 0	62		
1 07580 53 0	62		
1 07580 55 0	62		
1 07580 60 A	73		
1 07580 61 0	62		
1 07580 62 0	62		
1 07580 70 0	62		
1 07582 10 0	75		
1 07582 11 0	75		
1 07582 12 0	75		
1 07582 13 0	75		
1 07582 14 0	75		
1 07582 15 0	75		
1 07582 16 0	75		
1 07582 17 0	75		
1 07582 18 0	75		
1 07582 20 0	75		
1 07582 23 0	75		
1 07582 30 0	74		
1 07582 31 0	74		
1 07582 32 0	74		
1 07582 33 0	74		
1 07582 34 0	74		
1 07582 35 0	74		
1 07582 36 0	74		
1 07582 37 0	74		
1 07582 38 0	74		
1 07582 39 0	74		
1 07582 40 0	74		
1 07582 41 0	74		
1 07582 42 0	74		
1 07582 44 0	74		
1 07582 46 0	74		
1 07582 47 0	74		
1 07582 48 0	74		
1 07582 49 0	74		
1 07582 50 0	74		
1 07582 51 0	74		
1 07582 52 0	74		
1 07582 53 0	74		
1 07582 54 0	74		
1 07582 55 0	74		
1 07582 56 0	74		
1 07582 57 0	74		
1 07582 58 0	74		
1 07582 59 0	74		
1 07582 60 0	74		
1 07582 61 0	74		
1 07582 62 0	74		
1 07582 63 0	74		
1 07582 64 0	74		
1 07582 66 0	74		
1 07582 67 0	74		
1 07582 68 0	74		
1 07582 69 0	74		
1 07582 71 0	74		
1 07582 72 0	74		
1 07582 76 0	74		
1 07582 77 0	74		
1 07582 78 0	74		
1 07582 79 0	74		
1 07582 80 0	74		
1 07582 82 0	74		
1 07582 86 0	74		
1 07582 87 0	74		
1 07582 88 0	74		
1 07582 95 0	74		
1 07586 04 0	144		
1 07586 05 0	144		
1 07586 06 1	144		
1 07586 08 0	144		
1 07586 09 0	144		
1 07586 10 0	144		
1 07589 02 0	144		
1 07589 03 1	144		
1 07589 04 0	144		
1 07589 05 0	144		
1 07590 01 0	600		
1 07590 05 0	600		
1 07590 12 0	600		
1 07590 15 0	600		
1 07590 18 0	600		
1 07590 21 0	600		
1 07590 23 0	601		
1 07590 24 0	601		
1 07590 25 0	601		
1 07590 26 0	601		
1 07590 27 0	601		
1 07590 28 0	601		
1 07590 29 0	602		
1 07590 30 0	602		
1 07590 35 0	602		
1 07590 36 0	602		
1 07590 37 0	602		
1 07590 38 0	602		
1 07590 45 0	603		
1 07591 01 0	603		
1 07591 05 0	603		
1 07591 12 0	603		
1 07591 15 0	603		
1 07591 21 0	603		
1 07591 29 0	604		
1 07591 39 0	604		
1 08210 01 0	118	123	9
1 08210 02 0	118	123	9
1 08210 05 0	118	123	9
1 08210 06 0	118	123	9

ITEM	PAGE	DRAWING Page	DRAWING Table
1 08210 12 0	118	123	9
1 08210 13 0	118	123	9
1 08210 14 0	118	123	9
1 08210 16 0	118	123	9
1 08210 18 0	118	123	9
1 08220 02 0	118	124	10
1 08230 02 0	118	124	11
1 08230 06 0	118	124	11
1 1A610 00 0	307	378	10
1 1A610 00 0 00PC	307	378	10
1 1A611 00 0	307	378	10
1 1A611 00 0 00DF	152	187	8
1 1A611 00 0 00PC	307	378	10
1 1A630 00 0	307	378	10
1 1A631 00 0	307	378	10
1 1A721 00 0	151	187	8
1 1A721 00 0 00PA	151	187	8
1 1A721 00 0 00PB	151	187	8
1 1A721 00 0 00PC	151	187	8
1 1A721 00 0 79	151	187	8
1 1A731 00 0	151	187	8
1 1A731 00 0 00PA	151	187	8
1 1A731 00 0 00PB	151	187	8
1 1A731 00 0 00PC	151	187	8
1 1A731 00 0 79	151	187	8
1 11610 50 1	308	378	2
1 11610 50 2	308	378	2
1 11610 50 3	309	378	2
1 11610 50 4	309	378	2
1 11610 60 1	308	378	2
1 11610 60 2	308	378	2
1 11610 60 3	309	378	2
1 11610 60 4	309	378	2
1 11610 70 1	308	378	2
1 11610 70 2	308	378	2
1 11610 70 3	309	378	2
1 11610 70 4	309	378	2
1 11610 80 1	308	378	2
1 11610 80 2	308	378	2
1 11610 80 3	309	378	2
1 11610 80 4	309	378	2
1 11611 50 1	308	378	1
1 11611 50 2	308	378	1
1 11611 60 1	308	378	1
1 11611 60 2	308	378	1
1 11611 70 1	308	378	1
1 11611 70 2	308	378	1
1 11611 80 1	308	378	1
1 11611 80 2	308	378	1
1 11630 50 1	308	378	2
1 11630 50 2	308	378	2
1 11630 50 3	309	378	2
1 11630 50 4	309	378	2
1 11630 60 1	308	378	2
1 11630 60 2	308	378	2
1 11630 60 3	309	378	2
1 11630 60 4	309	378	2
1 11630 70 1	308	378	2
1 11630 70 2	308	378	2
1 11630 80 1	308	378	2
1 11630 80 2	308	378	2
1 11631 50 1	308	378	1
1 11631 50 2	308	378	1
1 11631 60 1	308	378	1
1 11631 60 2	308	378	1
1 11631 70 1	308	378	1
1 11631 70 2	308	378	1
1 11670 50 1	309	378	3
1 11670 50 2	309	378	3
1 11670 60 1	309	378	3
1 11670 60 2	309	378	3
1 11670 70 1	309	378	3
1 11670 70 2	309	378	3
1 11670 80 1	309	378	3
1 11670 80 2	309	378	3
1 11671 50 1	309	378	3
1 11671 50 2	309	378	3
1 11671 60 1	309	378	3
1 11671 60 2	309	378	3
1 11671 70 1	309	378	3
1 11671 70 2	309	378	3
1 11671 80 1	309	378	3
1 11671 80 2	309	378	3
1 11721 50 1	154	187	1
1 11721 50 2	154	187	1
1 11721 60 1	154	187	1
1 11721 60 2	154	187	1
1 11721 70 1	154	187	1
1 11721 70 2	154	187	1
1 11721 80 1	154	187	1
1 11721 80 2	154	187	1
1 11731 50 1	154	187	1
1 11731 50 2	154	187	1
1 11731 60 1	154	187	1
1 11731 60 2	154	187	1
1 11731 70 1	154	187	1
1 11731 70 2	154	187	1
1 11731 80 1	154	187	1
1 11731 80 2	154	187	1
1 11761 50 1	154	187	2
1 11761 50 2	154	187	2
1 11761 60 1	154	187	2
1 11761 60 2	154	187	2
1 11761 70 1	154	187	2
1 11761 70 2	154	187	2
1 11761 80 1	154	187	2
1 11761 80 2	154	187	2
1 11771 50 1	154	187	2
1 11771 50 2	154	187	2
1 11771 60 1	154	187	2
1 11771 60 2	154	187	2
1 11771 70 1	154	187	2
1 11771 70 2	154	187	2
1 11771 80 1	154	187	2
1 11771 80 2	154	187	2
1 11823 80 1	155	187	3
1 11823 80 2	155	187	3
1 11921 50 1	155	187	1
1 11921 50 2	155	187	1
1 11921 50 3	155	187	4
1 11921 50 4	155	187	4
1 11921 60 1	155	187	1
1 11921 60 2	155	187	1
1 11921 60 3	155	187	4
1 11921 60 4	155	187	4
1 11921 70 1	155	187	1
1 11921 70 2	155	187	1
1 11921 70 3	155	187	4
1 11921 70 4	155	187	4
1 11921 80 1	155	187	1
1 11921 80 2	155	187	1
1 11921 80 3	155	187	4
1 11921 80 4	155	187	4
1 11931 50 1	155	187	1
1 11931 50 2	155	187	1
1 11931 50 3	155	187	4
1 11931 50 4	155	187	4
1 11931 60 1	155	187	1
1 11931 60 2	155	187	1
1 11931 60 3	155	187	4
1 11931 60 4	155	187	4
1 11931 70 1	155	187	1
1 11931 70 2	155	187	1
1 11931 70 3	155	187	4
1 11931 70 4	155	187	4
1 11931 80 1	155	187	1
1 11931 80 2	155	187	1
1 11931 80 3	155	187	4
1 11931 80 4	155	187	4
1 12010 40 0	311	378	4
1 12010 50 0	311	378	4
1 12010 60 0	311	378	4
1 12010 70 0	311	378	4
1 12011 40 0	311	378	4
1 12011 50 0	311	378	4
1 12011 60 0	311	378	4
1 12011 70 0	311	378	4
1 12015 40 0	311	378	4
1 12015 50 0	311	378	4
1 12015 60 0	311	378	4
1 12015 70 0	311	378	4
1 12016 40 0	311	378	4
1 12016 50 0	311	378	4
1 12016 60 0	311	378	4
1 12016 70 0	311	378	4
1 13010 10 1	310	378	5
1 13010 10 2	310	378	5
1 13010 11 1	310	378	5
1 13010 11 2	310	378	5
1 13010 12 1	310	378	5
1 13010 12 2	310	378	5
1 13010 60 1	310	378	5
1 13010 60 2	310	378	5
1 13010 70 1	310	378	5
1 13010 70 2	310	378	5
1 13010 80 1	310	378	5
1 13010 80 2	310	378	5
1 13010 90 1	310	378	5
1 13010 90 2	310	378	5
1 13100 65 0	451	474	1
1 13110 65 0	454	474	1
1 13160 65 1	454	474	1
1 13160 65 2	454	474	1
1 13200 65 0	451	474	1
1 13210 65 0	454	474	1
1 13260 65 1	454	474	1
1 13260 65 2	454	474	1
1 14010 60 1	250	293	1
1 14010 60 2	250	293	1
1 14011 60 1	250	293	1
1 14011 60 2	250	293	1
1 14012 60 1	250	293	1
1 14012 60 2	250	293	1
1 14017 60 1	250	293	1
1 14017 60 2	250	293	1
1 14020 15 1	243	293	2
1 14020 15 2	243	293	2
1 14020 18 1	243	293	2
1 14020 18 2	243	293	2
1 14021 15 1	243	293	2
1 14021 15 2	243	293	2
1 14021 18 1	243	293	2
1 14021 18 2	243	293	2
1 14350 70 0	247	293	3
1 14350 80 0	247	293	3
1 14350 90 0	247	293	3
1 14351 70 0	247	293	3
1 14351 80 0	247	293	3
1 14351 90 0	247	293	3
1 14352 70 0	247	293	3
1 14352 80 0	247	293	3
1 14450 70 0	247	293	4
1 14450 80 0	247	293	4
1 14450 90 0	247	293	4
1 14451 70 0	247	293	4
1 14451 80 0	247	293	4
1 14451 90 0	247	293	4
1 14452 70 0	247	293	4
1 14452 80 0	247	293	4
1 14452 90 0	247	293	4
1 14460 70 0	247	293	5
1 14460 80 0	247	293	5
1 14460 90 0	247	293	5
1 14461 70 0	247	293	5
1 14461 80 0	247	293	5
1 14461 90 0	247	293	5
1 14462 70 0	247	293	5
1 14462 80 0	247	293	5
1 14462 90 0	247	293	5
1 14510 70 0	248	293	6
1 14510 80 0	248	293	6
1 14510 90 0	248	293	6
1 14511 70 0	248	293	6
1 14511 80 0	248	293	6
1 14511 90 0	248	293	6
1 14512 70 0	248	293	6
1 14512 80 0	248	293	6
1 14512 90 0	248	293	6
1 15001 00 0 06	315	378	6
1 15001 00 0 07	315	378	6
1 15005 00 0 06	315	378	7
1 15005 00 0 07	315	378	7
1 15100 00 0	252	378	8
1 15101 00 0	252	378	8
1 15102 00 0	252	378	8
1 15110 00 0	252	378	8
1 15120 00 0	252	378	8
1 15121 00 0	252	378	8
1 15122 00 0	252	378	8
1 15130 00 0	252	378	8
1 15140 00 0	252	378	8
1 15150 00 0	252	378	8
1 15160 00 0	253	378	8
1 15170 00 0	253	378	8
1 15180 00 0	253	378	8
1 15200 00 0	253		

ITEM	PAGE	DRAWING Page	DRAWING Table
1 15300 00 1	437	378	9
1 15300 00 2	437	378	9
1 15515 28 0	395	447	2
1 15515 28 B	393	447	2
1 15515 38 0	395	447	2
1 15515 38 B	393	447	2
1 15515 48 0	395	447	2
1 15515 48 B	393	447	2
1 15515 58 0	395	447	2
1 15535 28 0	397	447	3
1 15535 28 B	394	447	3
1 15535 48 0	397	447	3
1 15535 48 B	394	447	3
1 16205 25 0	224	293	7
1 16205 30 0	224	293	7
1 16205 35 0	224	293	7
1 16215 25 0	224	293	8
1 16215 30 0	224	293	8
1 16215 35 0	224	293	8
1 16217 25 0	224	293	8
1 16217 30 0	224	293	8
1 16217 35 0	224	293	8
1 16225 25 0	225	293	9
1 16225 30 0	225	293	9
1 16225 35 0	225	293	9
1 16227 25 0	225	293	9
1 16227 30 0	225	293	9
1 16227 35 0	225	293	9
1 16325 25 0	165	187	5
1 16325 30 0	165	187	5
1 16325 35 0	165	187	5
1 16425 25 0	218	294	10
1 16425 30 0	218	294	10
1 16425 35 0	218	294	10
1 16525 25 0	221	294	10
1 16525 30 0	221	294	10
1 16525 35 0	221	294	10
1 16605 25 0	530	294	11
1 16605 30 0	530	294	11
1 16605 35 0	530	294	11
1 16625 25 0	218	294	10
1 16625 30 0	218	294	10
1 16625 35 0	218	294	10
1 16725 25 0	221	294	10
1 16725 30 0	221	294	10
1 16725 35 0	221	294	10
1 16766 28 0	411	447	4
1 16766 28 B	411	447	4
1 16766 48 0	411	447	4
1 16766 48 B	411	447	4
1 16786 28 0	419	447	5
1 16786 28 B	419	447	5
1 16786 48 0	419	447	5
1 16786 48 B	419	447	5
1 17352 10 0	233	294	12
1 17352 90 0	233	294	12
1 17353 90 0	175	187	6
1 17357 10 0	233	294	13
1 17357 11 0	233	294	13
1 17357 90 0	233	294	13
1 17357 91 0	233	294	13
1 17358 90 0	175	187	7
1 17515 28 0	407	447	2
1 17515 38 0	407	447	2
1 17515 48 0	407	447	2
1 17515 58 0	407	447	2
1 17535 28 0	409	447	3
1 17535 48 0	409	447	3
1 17665 28 A	402	447	2
1 17665 38 A	402	447	2
1 17665 48 A	402	447	2
1 17665 58 A	402	447	2
1 17685 28 A	404	447	3
1 17685 48 A	404	447	3
1 17766 28 0	411	447	4
1 17766 48 0	411	447	4
1 17786 28 0	419	447	5
1 17786 48 0	419	447	5
1 17966 28 A	412	447	4
1 17966 48 A	412	447	4
1 17986 28 A	420	447	5
1 17986 48 A	420	447	5
1 19205 25 0	200		
1 19205 30 0	200		
1 19205 35 0	200		
1 19205 40 0	200		
1 19225 25 0	200	294	14
1 19225 30 0	200	294	14
1 19225 35 0	200	294	14
1 19225 40 0	200	294	14
1 19426 25 0	202	294	15
1 19426 30 0	202	294	15
1 19426 35 0	202	294	15
1 19426 40 0	202	294	15
1 19436 25 0	202	294	15
1 19436 30 0	202	294	15
1 19436 35 0	202	294	15
1 19436 40 0	202	294	15
1 19526 25 0	205	294	15
1 19526 30 0	205	294	15
1 19526 35 0	205	294	15
1 19526 40 0	205	294	15
1 19626 25 0	202	294	15
1 19626 30 0	202	294	15
1 19626 35 0	202	294	15
1 19626 40 0	202	294	15
1 19636 25 0	202	294	15
1 19636 30 0	202	294	15
1 19636 35 0	202	294	15
1 19636 40 0	202	294	15
1 19638 25 0	203	294	15
1 19638 30 0	203	294	15
1 19638 35 0	203	294	15
1 19638 40 0	203	294	15
1 19656 25 0	210	295	16
1 19656 30 0	210	295	16
1 19656 35 0	210	295	16
1 19656 40 0	210	295	16
1 19726 25 0	205	294	15
1 19726 30 0	205	294	15
1 19726 35 0	205	294	15
1 19726 40 0	205	294	15
1 19728 25 0	205	294	15
1 19728 30 0	205	294	15
1 19728 35 0	205	294	15
1 19728 40 0	205	294	15
1 19746 25 0	212	295	16
1 19746 30 0	212	295	16
1 19746 35 0	212	295	16
1 19746 40 0	212	295	16
1 21010 20 0	141		
1 21010 25 0	141		
1 21010 30 0	141		
1 21010 40 0	141		
1 21010 50 0	141		
1 21010 60 0	141		
1 21010 70 0	141		
1 21011 30 0	141		
1 21011 40 0	141		
1 21011 50 0	141		
1 21090 20 0	141		
1 21090 25 0	141		
1 21090 30 0	141		
1 21090 40 0	141		
1 21090 50 0	141		
1 21090 60 0	141		
1 21091 30 0	142		
1 21091 40 0	142		
1 21091 50 0	142		
1 21190 20 0	143		
1 21190 30 0	143		
1 21190 40 0	143		
1 21610 50 0	139		
1 21610 63 0	139		
1 21610 70 0	139		
1 21610 90 0	139		
1 21710 30 0	140		
1 21710 40 0	140		
1 21710 50 0	140		
1 21710 60 0	140		
1 21711 40 0	140		
1 21810 65 0	138		
1 21810 80 0	138		
1 22010 15 0	137		
1 22010 20 0	137		
1 22010 25 0	137		
1 22010 30 0	137		
1 22010 40 0	137		
1 22010 50 0	137		
1 22010 60 0	137		
1 22011 20 0	137		
1 22011 30 0	137		
1 22011 31 0	137		
1 22011 40 0	137		
1 22011 41 0	137		
1 22011 50 0	137		
1 22011 52 0	137		
1 26020 30 0	136		
1 26020 40 0	136		
1 26021 40 0	136		
1 26022 50 0	136		
1 26022 60 0	136		
1 26810 55 0	135		
1 28050 55 0	134		
1 28050 56 0	134		
1 28050 57 0	134		
1 28050 70 0	134		
1 28050 71 0	134		
1 28050 72 0	134		
1 28053 56 0	133		
1 28053 70 0	133		
1 28053 71 0	133		
1 28053 72 0	133		
1 28055 55 0	134		
1 28055 56 0	134		
1 28055 57 0	134		
1 28055 70 0	134		
1 28055 71 0	134		
1 28055 72 0	134		
1 28059 55 0 00CL	129		
1 28059 56 0 00CL	129		
1 28059 70 0 00CL	129		
1 28059 72 0 00CL	129		
1 2805M 55 0	131		
1 2805M 56 0	131		
1 2805M 57 0	131		
1 2805M 70 0	131		
1 2805M 71 0	131		
1 2805M 72 0	131		
1 2805N 55 0	132		
1 2805N 56 0	132		
1 2805N 57 0	132		
1 2805N 70 0	132		
1 2805N 71 0	132		
1 2805N 72 0	132		
1 2805P 55 0	130		
1 2805P 56 0	130		
1 2805P 57 0	130		
1 2805P 70 0	130		
1 2805P 71 0	130		
1 2805P 72 0	130		
1 28550 66 0	134		
1 28550 67 0	134		
1 28550 75 0	134		
1 28550 84 0	134		
1 28550 85 0	134		
1 28553 66 0	133		
1 28553 67 0	133		
1 28553 75 0	133		
1 28553 84 0	133		
1 28553 85 0	133		
1 28555 66 0	134		
1 28555 67 0	134		
1 28555 75 0	134		
1 28555 84 0	134		
1 28555 85 0	134		
1 28559 66 0 00CL	129		
1 28559 75 0 00CL	129		
1 28559 84 0 00CL	129		
1 28559 85 0 00CL	129		
1 2855M 66 0	131		
1 2855M 67 0	131		
1 2855M 75 0	131		
1 2855M 84 0	131		
1 2855M 85 0	131		
1 2855N 66 0	132		
1 2855N 67 0	132		
1 2855N 75 0	132		
1 2855N 84 0	132		
1 2855N 85 0	132		
1 2855P 66 0	130		
1 2855P 67 0	130		
1 2855P 75 0	130		
1 2855P 84 0	130		
1 2855P 85 0	130		
1 30210 11 0 A3	270		

ITEM	PAGE	DRAWING	
		Page	Table
1 4A000 35 0	195	301	63
1 4A000 40 0	195	301	63
1 4A000 45 0	195	301	63
1 4A010 35 0	195	301	63
1 4A010 40 0	195	301	63
1 4A010 45 0	195	301	63
1 4A100 35 0	196	301	63
1 4A100 40 0	196	301	63
1 4A100 45 0	196	301	63
1 4A110 35 0	196	301	63
1 4A110 40 0	196	301	63
1 4A110 45 0	196	301	63
1 4A200 35 0	196	301	63
1 4A200 40 0	196	301	63
1 4A200 45 0	196	301	63
1 4A210 35 0	196	301	63
1 4A210 40 0	196	301	63
1 4A210 45 0	196	301	63
1 4A300 35 0	199	301	64
1 4A300 40 0	199	301	64
1 4A300 45 0	199	301	64
1 4A310 35 0	199	301	64
1 4A310 40 0	199	301	64
1 4A310 45 0	199	301	64
1 41010 80 0	156	187	9
1 41110 60 0	156	188	10
1 41110 60 1	156	188	10
1 41110 60 2	156	188	10
1 41111 60 0	156	188	10
1 41210 78 0	156	188	11
1 41220 78 0	156	188	12
1 41220 78 1	156	188	12
1 41220 78 2	156	188	12
1 41221 78 0	156	188	12
1 41230 78 0	156	188	12
1 41230 78 1	156	188	12
1 41230 78 2	156	188	12
1 41231 78 0	156	188	12
1 41310 78 0	156	188	12
1 41310 78 1	156	188	12
1 41310 78 2	156	188	12
1 41311 78 0	156	188	12
1 41320 78 0	156	188	11
1 41410 78 0	156	188	11
1 41420 78 0	156	188	12
1 41420 78 1	156	188	12
1 41420 78 2	156	188	12
1 41421 78 0	156	188	12
1 41510 78 0	157	188	11
1 41510 78 0 00ZQ	157	188	11
1 41525 78 0	157	188	12
1 41525 78 1	157	188	12
1 41525 78 2	157	188	12
1 41526 78 0	157	188	12
1 41600 00 0	158	188	13
1 41620 00 0	158	188	14
1 41650 00 0	158	188	15
1 42010 50 0	159	188	16
1 42012 50 0	159	188	16
1 42020 50 0	159	188	16
1 42022 50 0	159	188	16
1 42030 50 0	159	188	17
1 42032 50 0	159	188	17
1 42110 30 0	160	188	18
1 42112 30 0	160	188	18
1 42120 30 0	160	188	18
1 42122 30 0	160	188	18
1 42210 30 0	160	189	19
1 42212 30 0	160	189	19
1 42310 50 0	160	189	20
1 42312 50 0	160	189	20
1 42410 30 0	161	189	21
1 42412 30 0	161	189	21
1 42420 30 0	161	189	21
1 42422 30 0	161	189	21
1 42510 50 0	161	189	22
1 42512 50 0	161	189	22
1 43000 65 0	451	474	1
1 43014 65 0	451	474	1
1 43015 65 0	452	474	5
1 43020 65 0	452	474	2
1 43024 65 0	452	474	2
1 43025 65 0	453	474	3
1 43091 00 0	453	474	4
1 43110 65 0	455	474	1
1 43114 65 0	455	474	1
1 43115 65 0	455	474	5
1 43120 65 0	455	474	2
1 43130 65 0	456	474	2
1 43160 65 1	456	474	1
1 43160 65 2	456	474	1
1 43190 65 0	456	474	6
1 43190 95 0	456	474	6
1 43191 65 0	456	474	7
1 43191 95 0	456	474	7
1 43225 30 0	526	474	8
1 43225 35 0	526	474	8
1 43225 40 0	526	474	8
1 43225 45 0	526	474	8
1 43235 30 0	526	474	8
1 43235 35 0	526	474	8
1 43235 40 0	526	474	8
1 43235 45 0	526	474	8
1 43236 35 0	526	474	8
1 43295 30 0	527	475	9
1 43295 40 0	527	475	9
1 43295 60 0	527	475	9
1 43295 75 0	527	475	9
1 43520 25 0	458	475	10
1 43520 30 0	458	475	10
1 43520 35 0	458	475	10
1 43520 40 0	458	475	10
1 43520 45 0	458	475	10
1 43530 35 0	458	475	10
1 43530 40 0	458	475	10
1 43620 25 0	459	475	10
1 43620 30 0	459	475	10
1 43620 35 0	459	475	10
1 43620 40 0	459	475	10
1 43620 45 0	459	475	10
1 43630 25 0	459	475	10
1 43630 30 0	459	475	10
1 43630 35 0	459	475	10
1 43630 40 0	459	475	10
1 43630 45 0	459	475	10
1 43650 25 0	460	475	11
1 43650 30 0	460	475	11
1 43650 35 0	460	475	11
1 43650 40 0	460	475	11
1 43650 45 0	460	475	11
1 43660 25 0	460	475	11
1 43660 30 0	460	475	11
1 43660 35 0	460	475	11
1 43660 40 0	460	475	11
1 43660 45 0	460	475	11
1 43661 25 0	460	475	11
1 43661 30 0	460	475	11
1 43661 35 0	460	475	11
1 43661 40 0	460	475	11
1 43661 45 0	460	475	11
1 43662 25 0	460	475	11
1 43662 30 0	460	475	11
1 43662 35 0	460	475	11
1 43662 40 0	460	475	11
1 43662 45 0	460	475	11
1 43690 30 0	460	475	12
1 43690 40 0	460	475	12
1 43690 60 0	460	475	12
1 43690 75 0	460	475	12
1 43725 30 0	524	475	13
1 43725 35 0	524	475	13
1 43725 40 0	524	475	13
1 43725 45 0	524	475	13
1 43735 30 0	524	475	13
1 43735 35 0	524	475	13
1 43735 40 0	524	475	13
1 43735 45 0	524	475	13
1 43825 30 0	525	475	13
1 43825 35 0	525	475	13
1 43825 40 0	525	475	13
1 43825 45 0	525	475	13
1 43835 30 0	525	475	13
1 43835 35 0	525	475	13
1 43835 40 0	525	475	13
1 43835 45 0	525	475	13
1 44110 60 0	250	295	17
1 44111 60 0	250	295	17
1 44115 60 0	250	295	18
1 44116 60 0	250	295	18
1 44120 60 0	250	295	19
1 44121 60 0	250	295	19
1 44130 60 0	251	295	20
1 44131 60 0	251	295	20
1 44140 60 0	251	295	21
1 44141 60 0	251	295	21
1 44145 60 0	251	295	22
1 44146 60 0	251	295	22
1 44150 60 0	248	295	23
1 44150 70 0	248	295	23
1 44150 80 0	248	295	23
1 44150 90 0	248	295	23
1 44151 60 0	248	295	23
1 44151 70 0	248	295	23
1 44151 80 0	248	295	23
1 44151 90 0	248	295	23
1 44152 70 0	248	295	23
1 44152 80 0	248	295	23
1 44152 90 0	248	295	23
1 44155 60 0	248	296	24
1 44155 70 0	248	296	24
1 44155 80 0	248	296	24
1 44155 90 0	248	296	24
1 44156 60 0	248	296	24
1 44156 70 0	248	296	24
1 44156 80 0	248	296	24
1 44156 90 0	248	296	24
1 44160 60 0	248	296	25
1 44160 70 0	248	296	25
1 44160 80 0	248	296	25
1 44160 90 0	248	296	25
1 44161 60 0	248	296	25
1 44161 70 0	248	296	25
1 44161 80 0	248	296	25
1 44161 90 0	248	296	25
1 44210 16 0	243	296	26
1 44217 15 0	243	296	27
1 44218 15 0	243	296	27
1 44219 25 0	244	296	28
1 44219 30 0	244	296	28
1 44220 15 0	244	296	28
1 44220 18 0	244	296	28
1 44220 25 0	244	296	28
1 44220 30 0	244	296	28
1 44220 35 0	244	296	28
1 44220 35 0 00EN	244	296	28
1 44221 15 0	244	296	28
1 44221 18 0	244	296	28
1 44221 25 0	244	296	28
1 44221 30 0	244	296	28
1 44221 35 0	244	296	28
1 44224 25 0	244	296	28
1 44224 30 0	244	296	28
1 44225 15 0	244	296	28
1 44225 18 0	244	296	28
1 44225 25 0	244	296	28
1 44225 30 0	244	296	28
1 44225 35 0	244	296	28
1 44225 35 0 00 EN	244	296	28
1 44226 15 0	244	296	28
1 44226 18 0	244	296	28
1 44226 25 0	244	296	28
1 44226 30 0	244	296	28
1 44226 35 0	244	296	28
1 44227 15 0	244	296	29
1 44228 15 0	244	296	29
1 44230 15 0	244	296	30
1 44230 18 0	244	296	30
1 44230 25 0	244	296	30
1 44230 30 0	244	296	30
1 44230 35 0	244	296	30
1 44231 15 0	244	296	30
1 44231 18 0	244	296	30
1 44231 25 0	244	296	30
1 44231 30 0	244	296	30
1 44231 35 0	244	296	30
1 44235 15 0	245	296	30
1 44235 18 0	245	296	30
1 44235 25 0	245	296	30
1 44235 30 0	245	296	30
1 44235 35 0	245	296	30
1 44236 18 0	245	296	30
1 44236 25 0	245	296	30
1 44236 30 0	245	296	30
1 44236 35 0	245	296	30
1 44237 15 0	245	296	31
1 44238 15 0	245	296	31

ITEM	PAGE	DRAWING	
		Page	Table
1 44240 15 0	245	296	32
1 44240 18 0	245	296	32
1 44240 25 0	245	296	32
1 44240 30 0	245	296	32
1 44240 35 0	245	296	32
1 44241 15 0	245	296	32
1 44241 18 0	245	296	32
1 44241 25 0	245	296	32
1 44241 30 0	245	296	32
1 44241 35 0	245	296	32
1 44242 15 0	245	296	32
1 44245 15 0	246	296	32
1 44245 18 0	246	296	32
1 44245 25 0	246	296	32
1 44245 30 0	246	296	32
1 44245 35 0	246	296	32
1 44246 15 0	246	296	32
1 44246 18 0	246	296	32
1 44246 25 0	246	296	32
1 44246 30 0	246	296	32
1 44246 35 0	246	296	32
1 44350 70 0	248	297	33
1 44351 70 0	248	297	33
1 44360 70 0	249	297	34
1 44360 80 0	249	297	34
1 44360 90 0	249	297	34
1 44361 70 0	249	297	34
1 44361 80 0	249	297	34
1 44361 90 0	249	297	34
1 44362 70 0	249	297	34
1 44362 80 0	249	297	34
1 44362 90 0	249	297	34
1 44370 70 0	249	297	35
1 44370 80 0	249	297	35
1 44370 90 0	249	297	35
1 44371 70 0	249	297	35
1 44371 80 0	249	297	35
1 44371 90 0	249	297	35
1 44450 70 0	249	297	36
1 44451 70 0	249	297	36
1 44460 70 0	249	297	37
1 44460 80 0	249	297	37
1 44460 90 0	249	297	37
1 44461 70 0	249	297	37
1 44461 80 0	249	297	37
1 44461 90 0	249	297	37
1 44462 70 0	249	297	37
1 44462 80 0	249	297	37
1 44462 90 0	249	297	37
1 44470 70 0	249	297	38
1 44470 80 0	249	297	38
1 44470 90 0	249	297	38
1 44471 70 0	249	297	38
1 44471 80 0	249	297	38
1 44471 90 0	249	297	38
1 44650 20 0	241	297	39
1 44650 20 0 20	241	297	39
1 44650 25 0	241	297	39
1 44650 25 0 20	241	297	39
1 44650 30 0	241	297	39
1 44650 30 0 20	241	297	39
1 44650 35 0	241	297	39
1 44650 35 0 20	241	297	39
1 44660 20 0	241	297	39

ITEM	PAGE	DRAWING	
		Page	Table
1 44660 20 0 20	241	297	39
1 44660 25 0	241	297	39
1 44660 25 0 20	241	297	39
1 44660 30 0	241	297	39
1 44660 30 0 20	241	297	39
1 44660 35 0	241	297	39
1 44660 35 0 20	241	297	39
1 44665 20 0	241	297	39
1 44665 25 0	241	297	39
1 44665 30 0	241	297	39
1 44665 35 0	241	297	39
1 44670 20 0	241	297	40
1 44670 25 0	241	297	40
1 44670 30 0	241	297	40
1 44670 35 0	241	297	40
1 44680 20 0	242	297	41
1 44680 25 0	242	297	41
1 44680 30 0	242	297	41
1 44680 35 0	242	297	41
1 45010 16 0	246	298	42
1 45012 16 0	246	298	42
1 45027 16 0	246	298	42
1 45100 30 0	242	189	23
1 45100 35 0	242	189	23
1 45100 40 0	242	189	23
1 45100 45 0	242	189	23
1 45100 50 0	242	189	23
1 45100 60 0	242	189	23
1 45110 30 0	242	189	23
1 45110 35 0	242	189	23
1 45110 40 0	242	189	23
1 45110 45 0	242	189	23
1 45110 50 0	242	189	23
1 45110 60 0	242	189	23
1 46200 25 0	223	298	43
1 46200 30 0	223	298	43
1 46200 35 0	223	298	43
1 46210 25 0	225	298	44
1 46210 30 0	225	298	44
1 46210 35 0	225	298	44
1 46212 25 0	225	298	44
1 46212 30 0	225	298	44
1 46212 35 0	225	298	44
1 46213 25 0	225	298	44
1 46213 30 0	225	298	44
1 46213 35 0	225	298	44
1 46215 25 0	226	298	45
1 46215 30 0	226	298	45
1 46215 35 0	226	298	45
1 46217 25 0	227	298	45
1 46217 30 0	227	298	45
1 46217 35 0	227	298	45
1 46218 25 0	226	298	45
1 46218 30 0	226	298	45
1 46218 35 0	226	298	45
1 46219 25 0	226	298	45
1 46219 30 0	226	298	45
1 46219 35 0	226	298	45
1 46220 25 0	226	298	46
1 46220 30 0	226	298	46
1 46220 35 0	226	298	46
1 46222 25 0	226	298	46
1 46222 30 0	226	298	46
1 46222 35 0	226	298	46

ITEM	PAGE	DRAWING	
		Page	Table
1 46225 25 0	227	298	47
1 46225 30 0	227	298	47
1 46225 35 0	227	298	47
1 46227 25 0	227	298	47
1 46227 30 0	227	298	47
1 46227 35 0	227	298	47
1 46230 25 0	228	298	48
1 46230 30 0	228	298	48
1 46230 35 0	228	298	48
1 46233 25 0	228	298	48
1 46233 30 0	228	298	48
1 46233 35 0	228	298	48
1 46240 25 0	228	298	49
1 46240 30 0	228	298	49
1 46240 35 0	228	298	49
1 46250 25 0	228	298	50
1 46250 30 0	228	298	50
1 46250 35 0	228	298	50
1 46252 25 0	228	298	50
1 46252 30 0	228	298	50
1 46252 35 0	228	298	50
1 46260 25 0	229	299	51
1 46260 30 0	229	299	51
1 46260 35 0	229	299	51
1 46265 25 0	223	299	52
1 46265 30 0	223	299	52
1 46265 35 0	223	299	52
1 46270 25 0	229	299	53
1 46270 30 0	229	299	53
1 46270 35 0	229	299	53
1 46275 25 0	223	299	54
1 46275 30 0	223	299	54
1 46275 35 0	223	299	54
1 46305 19 0	162	189	24
1 46305 25 0	162	189	24
1 46305 30 0	162	189	24
1 46307 19 0	162	189	24
1 46307 25 0	162	189	24
1 46420 25 0	219	299	55
1 46420 30 0	219	299	55
1 46420 35 0	219	299	55
1 46425 25 0	219	299	56
1 46425 30 0	219	299	56
1 46425 35 0	219	299	56
1 46445 25 0	220	299	57
1 46445 30 0	220	299	57
1 46445 35 0	220	299	57
1 46450 25 0	220	299	58
1 46450 30 0	220	299	58
1 46450 35 0	220	299	58
1 46520 25 0	221	299	55
1 46520 30 0	221	299	55
1 46520 35 0	221	299	55
1 46525 25 0	222	299	56
1 46525 30 0	222	299	56
1 46525 35 0	222	299	56
1 46550 25 0	222	299	58
1 46550 30 0	222	299	58
1 46550 35 0	222	299	58
1 46625 25 0	219	299	56
1 46625 30 0	219	299	56
1 46625 35 0	219	299	56
1 46650 25 0	220	299	58
1 46650 30 0	220	299	58

ITEM	PAGE	DRAWING	
		Page	Table
1 46650 35 0	220	299	58
1 46725 25 0	222	299	56
1 46725 30 0	222	299	56
1 46725 35 0	222	299	56
1 46750 25 0	222	299	58
1 46750 30 0	222	299	58
1 46750 35 0	222	299	58
1 46800 25 0	163	189	25
1 46800 30 0	163	189	25
1 46800 35 0	163	189	25
1 46802 25 0	163	189	25
1 46802 30 0	163	189	25
1 46802 35 0	163	189	25
1 46803 25 0	163	189	25
1 46803 30 0	163	189	25
1 46803 35 0	163	189	25
1 46815 25 0	165	189	26
1 46815 30 0	165	189	26
1 46815 35 0	165	189	26
1 46820 25 0	165	189	25
1 46820 30 0	165	189	25
1 46820 35 0	165	189	25
1 46822 25 0	166	189	25
1 46822 30 0	166	189	25
1 46822 35 0	166	189	25
1 46823 25 0	166	189	25
1 46823 30 0	166	189	25
1 46823 35 0	166	189	25
1 46825 25 0	166	189	26
1 46825 30 0	166	189	26
1 46825 35 0	166	189	26
1 46827 25 0	166	189	26
1 46827 30 0	166	189	26
1 46827 35 0	166	189	26
1 46860 25 0	167	189	27
1 46860 30 0	167	189	27
1 46860 35 0	167	189	27
1 46865 25 0	164	189	27
1 46865 30 0	164	189	27
1 46865 35 0	164	189	27
1 46870 25 0	167	190	28
1 46870 30 0	167	190	28
1 46870 35 0	167	190	28
1 46873 25 0	167		
1 46873 30 0	167		
1 46873 35 0	167		
1 46875 25 0	164	190	28
1 46875 30 0	164	190	28
1 46875 35 0	164	190	28
1 46878 25 0	164		
1 46878 30 0	164		
1 46878 35 0	164		
1 48816 35 0	215	300	59
1 48816 40 0	215	300	59
1 48916 35 0	216	300	59
1 48916 40 0	216	300	59
1 49225 25 0	201	300	60
1 49225 30 0	201	300	60
1 49225 35 0	201	300	60
1 49225 40 0	201	300	60
1 49228 25 0	201	300	60
1 49228 30 0	201	300	60
1 49228 35 0	201	300	60
1 49228 40 0	201	300	60

ITEM	PAGE	DRAWING	
		Page	Table
1 49250 25 0	201	300	61
1 49250 30 0	201	300	61
1 49250 35 0	201	300	61
1 49250 40 0	201	300	61
1 49426 25 0	204	294	15
1 49426 30 0	204	294	15
1 49426 35 0	204	294	15
1 49426 40 0	204	294	15
1 49436 25 0	204	294	15
1 49436 30 0	204	294	15
1 49436 35 0	204	294	15
1 49436 40 0	204	294	15
1 49526 25 0	206	294	15
1 49526 30 0	206	294	15
1 49526 35 0	206	294	15
1 49526 40 0	206	294	15
1 49626 25 0	204	294	15
1 49626 30 0	204	294	15
1 49626 35 0	204	294	15
1 49626 40 0	204	294	15
1 49636 25 0	204	294	15
1 49636 30 0	204	294	15
1 49636 35 0	204	294	15
1 49636 40 0	204	294	15
1 49638 25 0	204	294	15
1 49638 30 0	204	294	15
1 49638 35 0	204	294	15
1 49638 40 0	204	294	15
1 49656 25 0	211	300	62
1 49656 30 0	211	300	62
1 49656 35 0	211	300	62
1 49656 40 0	211	300	62
1 49658 25 0	211	300	62
1 49658 30 0	211	300	62
1 49658 35 0	211	300	62
1 49658 40 0	211	300	62
1 49726 25 0	206	294	15
1 49726 30 0	206	294	15
1 49726 35 0	206	294	15
1 49726 40 0	206	294	15
1 49728 25 0	206	294	15
1 49728 30 0	206	294	15
1 49728 35 0	206	294	15
1 49728 40 0	206	294	15
1 49746 25 0	213	300	62
1 49746 30 0	213	300	62
1 49746 35 0	213	300	62
1 49746 40 0	213	300	62
1 49748 25 0	213	300	62
1 49748 30 0	213	300	62
1 49748 35 0	213	300	62
1 49748 40 0	213	300	62
1 5C010 20 0	326	384	58
1 5C010 25 0	326	384	58
1 5C010 30 0	326	384	58
1 5C011 20 0	326	384	58
1 5C011 25 0	326	384	58
1 5C011 30 0	326	384	58
1 5C021 20 0	326	384	59
1 5C021 25 0	326	384	59
1 5C021 30 0	326	384	59
1 5C031 20 0	326	384	58
1 5C031 25 0	326	384	58
1 5C031 30 0	326	384	58
1 5C110 35 0	323	384	60
1 5C110 40 0	323	384	60
1 5C110 45 0	323	384	60
1 5C110 50 0	323	384	60
1 5C110 60 0	323	384	60
1 5C110 70 0	323	384	60
1 5C120 35 0	323	384	61
1 5C120 40 0	323	384	61
1 5C120 45 0	323	384	61
1 5C120 50 0	323	384	61
1 5C120 60 0	323	384	61
1 5C120 70 0	323	384	61
1 5C130 35 0	323	384	60
1 5C130 40 0	323	384	60
1 5C130 45 0	323	384	60
1 5C130 50 0	323	384	60
1 5C130 60 0	323	384	60
1 5C130 70 0	323	384	60
1 5C140 35 0	323	384	61
1 5C140 40 0	323	384	61
1 5C140 45 0	323	384	61
1 5C140 50 0	323	384	61
1 5C140 60 0	323	384	61
1 5C140 70 0	323	384	61
1 5C150 35 0	324	384	60
1 5C150 40 0	324	384	60
1 5C150 45 0	324	384	60
1 5C150 50 0	324	384	60
1 5C150 60 0	324	384	60
1 5C150 70 0	324	384	60
1 5C170 45 0	324	384	60
1 5C170 50 0	324	384	60
1 5C170 60 0	324	384	60
1 5C170 70 0	324	384	60
1 5C611 35 0	325	384	60
1 5C611 40 0	325	384	60
1 5C611 45 0	325	384	62
1 5C611 50 0	325	384	62
1 5C611 60 0	325	384	62
1 5C611 70 0	325	384	62
1 5C621 40 0	325	384	63
1 5C621 45 0	325	384	63
1 5C621 50 0	325	384	63
1 5C621 60 0	325	384	63
1 5C631 35 0	325	384	62
1 5C631 40 0	325	384	62
1 5C631 45 0	325	384	62
1 5C631 50 0	325	384	62
1 5C631 60 0	325	384	62
1 5C631 70 0	325	384	62
1 5C671 45 0	325	384	62
1 5C671 50 0	325	384	62
1 5C671 60 0	325	384	62
1 5C671 70 0	325	384	62
1 50110 40 1	316	379	11
1 50110 40 2	316	379	11
1 50110 50 1	316	379	11
1 50110 50 2	316	379	11
1 50110 60 1	316	379	11
1 50110 60 2	316	379	11
1 50110 70 1	316	379	11
1 50110 70 2	316	379	11
1 50111 40 1	316	379	11
1 50111 40 2	316	379	11
1 50111 50 1	316	379	11
1 50111 50 2	316	379	11
1 50111 60 1	316	379	11
1 50111 60 2	316	379	11
1 50111 70 1	316	379	11
1 50111 70 2	316	379	11
1 50120 40 1	316	379	11
1 50120 40 2	316	379	11
1 50120 50 1	316	379	11
1 50120 50 2	316	379	11
1 50120 60 1	316	379	11
1 50120 60 2	316	379	11
1 50120 70 1	316	379	11
1 50120 70 2	316	379	11
1 50121 40 1	316	379	11
1 50121 40 2	316	379	11
1 50121 50 1	316	379	11
1 50121 50 2	316	379	11
1 50121 60 1	316	379	11
1 50121 60 2	316	379	11
1 50121 70 1	316	379	11
1 50121 70 2	316	379	11
1 50125 60 1	317	379	11
1 50125 60 2	317	379	11
1 50126 60 1	317	379	11
1 50126 60 2	317	379	11
1 50130 40 1	317	379	12
1 50130 40 2	317	379	12
1 50130 50 1	317	379	12
1 50130 50 2	317	379	12
1 50130 60 1	317	379	12
1 50130 60 2	317	379	12
1 50130 70 1	317	379	12
1 50130 70 2	317	379	12
1 50131 40 1	317	379	12
1 50131 40 2	317	379	12
1 50131 50 1	317	379	12
1 50131 50 2	317	379	12
1 50131 60 1	317	379	12
1 50131 60 2	317	379	12
1 50131 70 1	317	379	12
1 50131 70 2	317	379	12
1 50141 40 1	317	379	12
1 50141 40 2	317	379	12
1 50141 50 1	317	379	12
1 50141 50 2	317	379	12
1 50141 60 1	317	379	12
1 50141 60 2	317	379	12
1 50141 70 1	317	379	12
1 50141 70 2	317	379	12
1 50160 40 1	317	379	13
1 50160 40 2	317	379	13
1 50160 50 1	317	379	13
1 50160 50 2	317	379	13
1 50160 60 1	317	379	13
1 50160 60 2	317	379	13
1 50161 40 1	317	379	11
1 50161 40 2	317	379	11
1 50161 50 1	317	379	11
1 50161 50 2	317	379	11
1 50161 60 1	317	379	11
1 50161 60 2	317	379	11
1 50170 60 1	318	379	14
1 50170 60 2	318	379	14
1 50171 60 1	318	379	14
1 50171 60 1 00 66	168	190	31
1 50171 60 2	318	379	14
1 50171 60 2 00 66	168	190	31
1 50180 60 1	318	379	14
1 50180 60 2	318	379	14
1 50181 60 1	318	379	14
1 50181 60 2	318	379	14
1 50210 45 1	318	379	15
1 50210 45 2	318	379	15
1 50211 45 1	318	379	15
1 50211 45 2	318	379	15
1 50220 45 1	318	379	16
1 50220 45 2	318	379	16
1 50221 45 1	318	379	16
1 50221 45 2	318	379	16
1 50320 50 1	319	379	11
1 50320 50 2	319	379	11
1 50320 60 1	319	379	11
1 50320 60 2	319	379	11
1 50321 50 1	319	379	11
1 50321 50 2	319	379	11
1 50321 60 1	319	379	11
1 50321 60 2	319	379	11
1 50330 40 1	319	379	11
1 50330 40 2	319	379	11
1 50330 50 1	319	379	11
1 50330 50 2	319	379	11
1 50330 60 1	319	379	11
1 50330 60 2	319	379	11
1 50340 40 1	319	379	11
1 50340 40 2	319	379	11
1 50340 50 1	319	379	11
1 50340 50 2	319	379	11
1 50340 60 1	319	379	11
1 50340 60 2	319	379	11
1 50421 60 1	168	190	29
1 50421 60 2	168	190	29
1 50421 70 1	168	190	29
1 50421 70 2	168	190	29
1 50461 50 1	168	190	30
1 50461 50 2	168	190	30
1 50471 60 1	168	190	31
1 50471 60 2	168	190	31
1 50481 60 1	168	190	31
1 50481 60 2	168	190	31
1 50521 60 1	169	190	32
1 50521 60 2	169	190	32
1 50521 70 1	169	190	32
1 50521 70 2	169	190	32
1 50571 60 1	169	190	33
1 50571 60 2	169	190	33
1 52210 25 0	327	379	17
1 52210 30 0	327	379	17
1 52300 60 0	327	379	18
1 52310 35 0	327	379	19
1 52310 40 0	327	379	19
1 52310 45 0	327	379	19
1 52310 50 0	327	379	19
1 52310 60 0	327	379	19
1 52310 70 0	327	379	19
1 52318 60 0	335		
1 52338 60 0	335		
1 52507 45 0	376	380	26

ITEM	PAGE	DRAWING	
		Page	Table
1 52507 50 0	376	380	26
1 52507 60 0	376	380	26
1 52508 45 0	376	380	26
1 52508 50 0	376	380	26
1 52508 60 0	376	380	26
1 52520 45 0	330	380	20
1 52520 50 0	330	380	20
1 52520 60 0	330	380	20
1 52521 45 0	330	380	20
1 52521 50 0	330	380	20
1 52521 60 0	330	380	20
1 52526 45 0	330	380	21
1 52526 50 0	330	380	21
1 52526 60 0	330	380	21
1 52527 45 0	376		
1 52527 50 0	376		
1 52527 60 0	376		
1 52528 45 0	376		
1 52528 50 0	376		
1 52528 60 0	376		
1 52710 60 0	331	380	22
1 52710 70 0	331	380	22
1 52710 80 0	331	380	22
1 52710 90 0	331	380	22
1 52711 60 0	331	380	22
1 52711 70 0	331	380	22
1 52711 80 0	331	380	22
1 52711 90 0	331	380	22
1 52730 60 0	331	380	22
1 52730 70 0	331	380	22
1 52730 80 0	331	380	22
1 52731 60 0	331	380	22
1 52731 70 0	331	380	22
1 52731 80 0	331	380	22
1 52731 90 0	331	380	22
1 52750 60 0	332	380	23
1 52750 70 0	332	380	23
1 52750 80 0	332	380	23
1 52751 60 0	332	380	23
1 52751 70 0	332	380	23
1 52751 90 0	332	380	23
1 52755 60 0	332	380	24
1 52755 70 0	332	380	24
1 52755 80 0	332	380	24
1 52756 60 0	332	380	24
1 52756 70 0	332	380	24
1 52756 80 0	332	380	24
1 52760 60 0	332	380	24
1 52760 70 0	332	380	24
1 52760 90 0	332	380	24
1 52761 60 0	333	380	24
1 52761 70 0	333	380	24
1 52761 80 0	333	380	24
1 52761 90 0	333	380	24
1 52780 60 0	333	380	25
1 52780 70 0	333	380	25
1 52780 80 0	333	380	25
1 52780 90 0	333	380	25
1 52781 60 0	333	380	25
1 52781 70 0	333	380	25
1 52781 80 0	333	380	25
1 52781 90 0	333	380	25
1 52810 40 1	335		
1 52810 40 2	335		
1 52810 45 0	335		
1 52810 50 0	335		
1 52810 60 0	335		
1 52810 70 0	335		
1 52830 40 1	335		
1 52830 40 2	335		
1 52830 45 0	335		
1 52830 50 0	335		
1 52830 60 0	335		
1 52830 70 0	335		
1 52840 60 0	333	380	22
1 52840 70 0	333	380	22
1 52840 80 0	333	380	22
1 52840 90 0	333	380	22
1 52842 60 0	334	380	22
1 52842 70 0	334	380	22
1 52842 80 0	334	380	22
1 52842 90 0	334	380	22
1 52844 60 0	334	380	22
1 52844 70 0	334	380	22
1 52844 80 0	334	380	22
1 52844 90 0	334	380	22
1 52860 60 0	333	380	22
1 52860 70 0	333	380	22
1 52860 80 0	333	380	22
1 52860 90 0	333	380	22
1 52862 60 0	334	380	22
1 52862 70 0	334	380	22
1 52862 80 0	334	380	22
1 52862 90 0	334	380	22
1 52864 60 0	334	380	24
1 52864 70 0	334	380	24
1 52864 80 0	334	380	24
1 52864 90 0	334	380	24
1 53002 45 0	347	380	27
1 53002 45 0 82	347	380	27
1 53002 45 0 B7	347	380	27
1 53002 50 0	347	380	27
1 53002 50 0 82	347	380	27
1 53002 50 0 B7	347	380	27
1 53002 60 0	347	380	27
1 53002 60 0 82	347	380	27
1 53002 60 0 B7	347	380	27
1 53003 45 0	348	380	27
1 53003 45 0 82	348	380	27
1 53003 45 0 B7	348	380	27
1 53003 50 0	348	380	27
1 53003 50 0 82	348	380	27
1 53003 50 0 B7	348	380	27
1 53003 60 0	348	380	27
1 53003 60 0 82	348	380	27
1 53003 60 0 B7	348	380	27
1 53035 50 0	348	380	27
1 53035 60 0	348	380	27
1 53131 45 0	349	380	28
1 53131 50 0	349	380	28
1 53131 60 0	349	380	28
1 53133 45 0	349	380	28
1 53133 50 0	349	380	28
1 53133 60 0	349	380	28
1 53135 45 0	350	380	28
1 53135 50 0	350	380	28
1 53135 60 0	350	380	28
1 53137 45 0	351	380	28
1 53137 50 0	351	380	28
1 53137 60 0	351	380	28
1 53151 45 0	349	380	28
1 53151 50 0	349	380	28
1 53151 60 0	349	380	28
1 53153 50 0	349	380	28
1 53153 60 0	349	380	28
1 53155 45 0	350	380	28
1 53155 50 0	350	380	28
1 53155 60 0	350	380	28
1 53157 45 0	351	380	28
1 53157 50 0	351	380	28
1 53157 60 0	351	380	28
1 54310 60 0	320	381	29
1 54311 60 0	320	381	29
1 54315 60 0	320	381	29
1 54316 60 0	320	381	29
1 54340 60 0	320	381	30
1 54341 60 0	320	381	30
1 54510 60 0	321	381	31
1 54550 60 0	321	381	31
1 54560 60 0	321	381	31
1 54570 60 0	321	381	32
1 55051 50 1	322	381	33
1 55051 60 1	322	381	33
1 55054 50 1	322	381	33
1 55054 60 1	322	381	33
1 55071 50 1	322	381	33
1 55071 60 1	322	381	33
1 55074 50 1	322	381	33
1 55074 60 1	322	381	33
1 55254 50 1	170	190	34
1 55254 60 1	170	190	34
1 55274 50 1	170	190	34
1 55274 60 1	170	190	34
1 56010 50 0	328	381	34
1 56010 60 0	328	381	34
1 56010 70 0	328	381	34
1 56013 50 0	171	190	35
1 56013 60 0	171	190	35
1 56013 70 0	171	190	35
1 56015 60 0	328	381	35
1 56015 70 0	328	381	35
1 56016 60 0	171	190	36
1 56016 70 0	171	190	36
1 56020 60 0	328	381	36
1 56020 70 0	328	381	36
1 56152 60 1	343	381	37
1 56152 60 2	343	381	37
1 56157 60 1	343	381	37
1 56157 60 2	343	381	37
1 56162 60 1	343	381	37
1 56162 60 2	343	381	37
1 56167 60 1	344	381	37
1 56167 60 2	344	381	37
1 56172 60 1	343	381	37
1 56172 60 2	343	381	37
1 56177 60 1	344	381	37
1 56177 60 2	344	381	37
1 56250 60 0	329	382	38
1 56255 60 0	329	382	39
1 56357 10 0	230	302	65
1 56357 90 0	230	302	65
1 56358 10 0	172	191	
1 56358 90 0	172	191	
1 56378 11 0	172	191	38
1 56505 28 0	395	447	6
1 56505 28 B	393	447	6
1 56505 38 0	395	447	6
1 56505 38 B	393	447	6
1 56505 48 0	395	447	6
1 56505 48 B	393	447	6
1 56505 58 0	395	447	6
1 56515 25 0	395	447	7
1 56515 27 0	395	447	7
1 56515 28 0	395	447	7
1 56515 32 0	395	447	7
1 56515 38 0	395	447	7
1 56515 38 B	393	447	7
1 56515 48 0	395	447	7
1 56515 48 B	393	447	7
1 56515 58 0	395	447	7
1 56515 58 B	393	447	7
1 56525 28 0	397	447	8
1 56525 28 B	394	447	8
1 56525 48 0	397	447	8
1 56525 48 B	394	447	8
1 56535 28 0	397	447	9
1 56535 28 B	394	447	9
1 56535 48 0	397	447	9
1 56535 48 B	394	447	9
1 56615 28 0	395	447	7
1 56615 48 0	395	447	7
1 56715 28 0	412	448	10
1 56715 28 B	412	448	10
1 56715 48 0	412	448	10
1 56715 48 B	412	448	10
1 56716 28 0	412	448	10
1 56716 48 0	412	448	10
1 56735 28 0	420	448	11
1 56735 28 B	420	448	11
1 56735 48 0	420	448	11
1 56735 48 B	420	448	11
1 56736 28 0	420	448	11
1 56736 28 B	420	448	11
1 56736 48 0	420	448	11
1 56736 48 B	420	448	11
1 56765 28 0	413	448	10
1 56765 28 B	413	448	10
1 56765 48 0	413	448	10
1 56765 48 B	413	448	10
1 56766 28 0	413	448	10
1 56766 28 B	413	448	10
1 56766 48 0	413	448	10
1 56766 48 B	413	448	10
1 56767 28 0	414	448	10
1 56767 28 B	414	448	10
1 56767 48 0	414	448	10
1 56767 48 B	414	448	10
1 56768 28 0	414	448	10
1 56768 28 B	414	448	10
1 56768 48 0	414	448	10
1 56768 48 B	414	448	10
1 56785 28 0	421	448	11
1 56785 28 B	421	448	11
1 56785 48 0	421	448	11
1 56785 48 B	421	448	11
1 56786 28 0	421	448	11

ITEM	PAGE	DRAWING	
		Page	Table
1 56786 28 B	421	448	11
1 56786 48 0	421	448	11
1 56786 48 B	421	448	11
1 56787 28 0	422	448	11
1 56787 28 B	422	448	11
1 56788 28 B	422	448	11
1 56788 48 0	422	448	11
1 56788 48 B	422	448	11
1 56815 27 0	391	447	7
1 56815 28 0	391	447	7
1 56815 38 0	391	447	7
1 56815 47 0	391	447	7
1 56815 48 0	391	447	7
1 56815 58 0	391	447	7
1 56835 28 0	392	447	9
1 56835 48 0	392	447	9
1 56916 27 0	400	447	7
1 56916 28 0	400	447	7
1 56916 38 0	400	447	7
1 56916 47 0	400	447	7
1 56916 48 0	400	447	7
1 56916 58 0	400	447	7
1 56917 27 0	400	447	7
1 56917 28 0	400	447	7
1 56917 38 0	400	447	7
1 56917 47 0	400	447	7
1 56917 48 0	400	447	7
1 56917 58 0	400	447	7
1 56936 28 0	401	447	9
1 56936 48 0	401	447	9
1 56937 28 0	401	447	9
1 56937 48 0	401	447	9
1 57010 50 0	336	382	40
1 57010 51 0	336	382	40
1 57010 60 0	336	382	40
1 57010 61 0	336	382	40
1 57010 70 0	336	382	40
1 57010 71 0	336	382	40
1 57013 50 0 0030	173	191	39
1 57013 52 0 0030	173	191	39
1 57013 60 0 0030	173	191	39
1 57013 62 0 0030	173	191	39
1 57013 70 0 0030	173	191	39
1 57013 72 0 0030	173	191	39
1 57015 60 0	336	382	41
1 57015 61 0	336	382	41
1 57015 70 0	336	382	41
1 57015 71 0	336	382	41
1 57016 60 0	173	191	40
1 57016 62 0	173	191	40
1 57016 70 0	173	191	40
1 57016 72 0	173	191	40
1 57020 60 0	336	382	42
1 57020 61 0	336	382	42
1 57020 70 0	336	382	42
1 57020 71 0	336	382	42
1 57028 50 0	338	382	43
1 57028 51 0	338	382	43
1 57028 60 0	338	382	43
1 57028 61 0	338	382	43
1 57030 60 0	173	191	41
1 57030 62 0	173	191	41
1 57030 70 0	173	191	41
1 57030 72 0	173	191	41
1 57033 60 0	338	382	44
1 57035 60 0	174	191	42
1 57035 62 0	174	191	42
1 57035 70 0	174	191	42
1 57035 72 0	174	191	42
1 57152 60 1	345	382	45
1 57152 60 2	345	382	45
1 57157 60 1	345	382	45
1 57157 60 2	345	382	45
1 57162 60 1	345	382	45
1 57162 60 2	345	382	45
1 57167 60 1	346	382	45
1 57167 60 2	346	382	45
1 57172 60 1	345	382	45
1 57172 60 2	345	382	45
1 57177 60 1	346	382	45
1 57177 60 2	346	382	45
1 57192 00 0	346	382	46
1 57210 40 0	340	383	47
1 57210 45 0	340	383	47
1 57210 50 0	340	383	47
1 57210 60 0	340	383	47
1 57211 40 0	340	383	47
1 57211 41 0	340	383	47
1 57211 45 0	340	383	47
1 57211 46 0	340	383	47
1 57211 50 0	340	383	47
1 57211 51 0	340	383	47
1 57211 60 0	340	383	47
1 57211 61 0	340	383	47
1 57215 45 0	340	383	48
1 57215 46 0	340	383	48
1 57215 50 0	340	383	48
1 57215 51 0	340	383	48
1 57215 60 0	340	383	48
1 57215 61 0	340	383	48
1 57217 45 0	341	383	49
1 57217 50 0	341	383	49
1 57217 60 0	341	383	49
1 57218 45 0	377		
1 57218 46 0	377		
1 57218 50 0	377		
1 57218 51 0	377		
1 57218 60 0	377		
1 57218 61 0	377		
1 57219 45 0	377		
1 57219 50 0	377		
1 57220 40 0	341	383	50
1 57220 41 0	341	383	50
1 57220 45 0	341	383	50
1 57220 46 0	341	383	50
1 57220 50 0	341	383	50
1 57220 51 0	341	383	50
1 57220 60 0	341	383	50
1 57220 61 0	341	383	50
1 57223 40 0	174	191	43
1 57223 42 0	174	191	43
1 57223 45 0	174	191	43
1 57223 47 0	174	191	43
1 57223 50 0	174	191	43
1 57223 52 0	174	191	43
1 57223 60 0	174	191	43
1 57223 62 0	174	191	43
1 57225 45 0	341	383	51
1 57225 46 0	341	383	51
1 57225 50 0	341	383	51
1 57225 51 0	341	383	51
1 57225 60 0	341	383	51
1 57225 61 0	341	383	51
1 57226 45 0	174	191	44
1 57226 47 0	174	191	44
1 57226 50 0	174	191	44
1 57226 52 0	174	191	44
1 57226 60 0	174	191	44
1 57226 62 0	174	191	44
1 57230 45 0	341	383	52
1 57230 46 0	341	383	52
1 57230 50 0	341	383	52
1 57230 51 0	341	383	52
1 57230 60 0	341	383	52
1 57230 61 0	341	383	52
1 57250 60 0	337	383	53
1 57250 61 0	337	383	53
1 57255 60 0	337	383	54
1 57255 61 0	337	383	54
1 57256 60 0	337	383	55
1 57260 60 0	339	384	56
1 57260 61 0	339	384	56
1 57265 60 0	339	384	57
1 57265 61 0	339	384	57
1 57290 45 0	342	380	20
1 57290 46 0	342	380	20
1 57290 50 0	342	380	20
1 57290 51 0	342	380	20
1 57290 60 0	342	380	20
1 57290 61 0	342	380	20
1 57291 45 0	342	380	20
1 57291 46 0	342	380	20
1 57291 50 0	342	380	20
1 57291 51 0	342	380	20
1 57291 60 0	342	380	20
1 57291 61 0	342	380	20
1 57296 45 0	342	380	21
1 57296 46 0	342	380	21
1 57296 50 0	342	380	21
1 57296 51 0	342	380	21
1 57296 60 0	342	380	21
1 57296 61 0	342	380	21
1 57298 45 0	377		
1 57298 46 0	377		
1 57298 50 0	377		
1 57298 51 0	377		
1 57298 60 0	377		
1 57298 61 0	377		
1 57299 45 0	377		
1 57299 50 0	377		
1 57299 60 0	377		
1 57312 73 0	231	302	66
1 57313 72 0	176	191	45
1 57313 73 0	176	191	45
1 57317 71 0	231	302	67
1 57317 73 0	231	302	67
1 57318 72 0	176	192	46
1 57318 73 0	176	192	46
1 57320 73 0	231	302	68
1 57325 71 0	232	302	69
1 57325 73 0	232	302	69
1 57335 73 0	232	302	70
1 57336 70 0	176	192	47
1 57352 10 0	233	302	71
1 57352 90 0	233	302	71
1 57353 90 0	176	192	48
1 57357 10 0	234	302	72
1 57357 11 0	234	302	72
1 57357 90 0	234	302	72
1 57357 91 0	234	302	72
1 57358 90 0	177	192	49
1 57358 92 0	177	192	49
1 57360 10 0	234	302	73
1 57360 90 0	234	302	73
1 57365 10 0	234	303	74
1 57365 11 0	234	303	74
1 57365 90 0	234	303	74
1 57365 91 0	234	303	74
1 57370 10 0	234	303	75
1 57370 90 0	234	303	75
1 57375 10 0	235	303	76
1 57375 90 0	235	303	76
1 57378 90 0	177	192	50
1 57409 30 1	584		
1 57410 30 1	436	448	12
1 57410 30 2	436	448	12
1 57410 35 1	436	448	12
1 57410 35 2	436	448	12
1 57411 30 1	584		
1 57411 31 1	584		
1 57415 30 1	436	448	13
1 57415 35 1	436	448	13
1 57415 35 2	436	448	13
1 57416 30 1	584		
1 57416 31 1	584		
1 57424 30 1	585		
1 57429 30 1	585		
1 57505 28 0	407	447	6
1 57505 38 0	407	447	6
1 57506 28 0	407	447	6
1 57506 38 0	407	447	6
1 57515 25 0	408	447	7
1 57515 27 0	408	447	7
1 57515 28 0	408	447	7
1 57515 32 0	408	447	7
1 57515 38 0	408	447	7
1 57515 48 0	408	447	7
1 57515 68 0	408	447	7
1 57516 28 0	408	447	7
1 57516 38 0	408	447	7
1 57517 28 0	408	447	7
1 57517 38 0	408	447	7
1 57525 28 0	409	447	8
1 57526 28 0	409	447	8
1 57535 28 0	410	447	9
1 57535 48 0	410	447	9
1 57535 68 0	410	447	9
1 57535 88 0	410	447	9
1 57536 28 0	410	447	9
1 57655 28 A	402	447	6
1 57655 32 A	402	447	6
1 57655 38 A	402	447	6
1 57655 48 A	402	447	6
1 57655 58 A	402	447	6
1 57665 25 A	402	447	7
1 57665 28 A	402	447	7

ITEM	PAGE	DRAWING Page	DRAWING Table
1 57665 38 A	402	447	7
1 57665 48 A	402	447	7
1 57665 58 A	402	447	7
1 57675 28 A	404	447	8
1 57675 48 A	404	447	8
1 57685 28 A	404	447	9
1 57685 48 A	404	447	9
1 57765 28 0	415	448	10
1 57765 48 0	415	448	10
1 57766 28 0	415	448	10
1 57766 48 0	415	448	10
1 57767 28 0	416	448	10
1 57767 48 0	416	448	10
1 57768 28 0	416	448	10
1 57785 28 0	423	448	11
1 57785 48 0	423	448	11
1 57786 28 0	423	448	11
1 57786 48 0	423	448	11
1 57787 48 0	424	448	11
1 57788 48 0	424	448	11
1 57831 45 0	352	380	28
1 57831 46 0	352	380	28
1 57831 50 0	352	380	28
1 57831 51 0	352	380	28
1 57831 60 0	352	380	28
1 57831 61 0	352	380	28
1 57833 45 0	353	380	28
1 57833 46 0	353	380	28
1 57833 50 0	353	380	28
1 57833 51 0	353	380	28
1 57833 60 0	353	380	28
1 57833 61 0	353	380	28
1 57835 45 0	354	380	28
1 57835 46 0	354	380	28
1 57835 50 0	354	380	28
1 57835 51 0	354	380	28
1 57835 60 0	354	380	28
1 57835 61 0	354	380	28
1 57851 45 0	352	380	28
1 57851 46 0	352	380	28
1 57851 50 0	352	380	28
1 57851 51 0	352	380	28
1 57851 60 0	352	380	28
1 57851 61 0	352	380	28
1 57853 45 0	353	380	28
1 57853 46 0	353	380	28
1 57853 50 0	353	380	28
1 57853 51 0	353	380	28
1 57853 60 0	353	380	28
1 57855 45 0	354	380	28
1 57855 46 0	354	380	28
1 57855 50 0	354	380	28
1 57855 51 0	354	380	28
1 57855 60 0	354	380	28
1 57855 61 0	354	380	28
1 57965 28 A	417	448	10
1 57965 48 A	417	448	10
1 57966 28 A	417	448	10
1 57966 48 A	417	448	10
1 57968 48 A	417	448	10
1 57986 28 A	425	448	11
1 57986 48 A	425	448	11
1 57987 28 A	425	448	11
1 57987 48 A	425	448	11
1 57988 48 A	425	448	11
1 58010 00 0	585		
1 58011 00 0	585		
1 59001 10 0	482	529	11
1 59011 10 0	482	529	11
1 59011 10 0 C2	482	529	11
1 59014 10 0	487	529	11
1 59016 10 0	482	529	11
1 59051 10 0	483	529	11
1 59061 10 0	483	529	11
1 59061 10 0 C2	483	529	11
1 59066 10 0	483	529	11
1 59301 10 0	488	545	11
1 59311 10 0	488	545	11
1 59316 10 0	488	545	11
1 59321 10 0	464	545	11
1 59351 10 0	489	545	11
1 59361 10 0	489	545	11
1 59366 10 0	489	545	11
1 59371 10 0	465	545	11
1 59607 10 0	537	545	13
1 59607 10 0 C2	537	545	13
1 59616 00 0	461	545	12
1 59616 10 0	461	545	12
1 59617 00 0	549		
1 59617 12 0	537		
1 59647 00 0	461	546	14
1 59711 00 0	536	546	15
1 59711 00 0 00 SB	536	546	15
1 59711 00 0 C2	536	546	15
1 59711 01 0	536	546	15
1 59711 10 0	536	546	15
1 59711 10 0 00 SB	536	546	15
1 59711 10 0 C2	536	546	15
1 59711 11 0	536	546	15
1 59801 10 0	480	529	11
1 59801 11 0	480	529	11
1 59811 09 0	480	529	11
1 59811 10 0	480	529	11
1 59811 10 0 00 SB	481	529	11
1 59811 10 0 C2	480	529	11
1 59811 11 0	480	529	11
1 59811 11 0 C2	480	529	11
1 59816 10 0	481	529	11
1 59816 11 0	481	529	11
1 59851 09 0	479		
1 59851 10 0	479		
1 59851 11 0	479		
1 60130 01 0 98	562	566	1
1 60131 01 0 98	562	566	1
1 60140 02 0 98	562	566	1
1 60141 02 0 98	562	566	1
1 60150 03 0 98	562	566	1
1 60151 03 0 98	562	566	1
1 60160 04 0 98	562	566	1
1 60161 04 0 98	562	566	1
1 72210 16 0	117	125	19
1 72210 20 0	117	125	19
1 72210 25 0	117	125	19
1 72210 30 0	117	125	19
1 72215 16 0	117	125	19
1 72215 20 0	117	125	19
1 72215 25 0	117	125	19
1 72215 30 0	117	125	19
1 72250 26 0	117	125	20
1 72251 01 0	117	125	21
1 72251 03 0	117	125	21
1 8A010 20 0	575	589	1
1 8A010 21 0	575	589	1
1 8A010 30 0	575	589	1
1 8A010 31 0	575	589	1
1 8A010 40 0	575	589	1
1 8A010 41 0	575	589	1
1 8A050 23 0	580	590	2
1 8A050 34 0	580	590	2
1 8A050 43 0	580	590	2
1 82010 10 0	572	589	1
1 82010 11 0	572	589	1
1 82010 20 0	572	589	1
1 82010 21 0	572	589	1
1 82010 30 0	572	589	1
1 82010 31 0	572	589	1
1 82010 32 0	572	589	1
1 82010 40 0	572	589	1
1 82010 41 0	572	589	1
1 82010 42 0	572	589	1
1 82010 50 0	572	589	1
1 82010 51 0	572	589	1
1 82010 52 0	572	589	1
1 82010 70 0	572	589	1
1 82010 71 0	572	589	1
1 82010 72 0	572	589	1
1 82010 80 0	572	589	1
1 82010 81 0	572	589	1
1 82010 82 0	572	589	1
1 82010 90 0	572	589	1
1 82010 91 0	572	589	1
1 82010 92 0	572	589	1
1 82050 34 0	578	590	2
1 82050 43 0	578	590	2
1 82050 53 0	578	590	2
1 82050 74 0	578	590	2
1 82050 85 0	578	590	2
1 82050 95 0	578	590	2
1 82210 20 0	573	589	1
1 82210 21 0	573	589	1
1 82210 30 0	573	589	1
1 82210 31 0	573	589	1
1 82210 32 0	573	589	1
1 82210 40 0	573	589	1
1 82210 41 0	573	589	1
1 82210 42 0	573	589	1
1 82210 50 0	573	589	1
1 82210 51 0	573	589	1
1 82210 52 0	573	589	1
1 82210 70 0	573	589	1
1 82210 71 0	573	589	1
1 82210 72 0	573	589	1
1 82210 80 0	573	589	1
1 82210 81 0	573	589	1
1 82210 82 0	573	589	1
1 82210 90 0	573	589	1
1 82210 91 0	573	589	1
1 82210 92 0	573	589	1
1 82250 34 0	579	590	2
1 82250 43 0	579	590	2
1 82250 53 0	579	590	2
1 82250 74 0	579	590	2
1 82250 85 0	579	590	2
1 82250 95 0	579	590	2
1 82410 20 0	573	589	1
1 82410 21 0	573	589	1
1 82410 30 0	573	589	1
1 82410 31 0	573	589	1
1 82410 32 0	573	589	1
1 82410 40 0	573	589	1
1 82410 41 0	573	589	1
1 82410 42 0	573	589	1
1 82410 50 0	573	589	1
1 82410 51 0	573	589	1
1 82410 52 0	573	589	1
1 82410 70 0	573	589	1
1 82410 71 0	573	589	1
1 82410 72 0	573	589	1
1 82410 80 0	573	589	1
1 82410 81 0	573	589	1
1 82410 82 0	573	589	1
1 82410 90 0	573	589	1
1 82410 91 0	573	589	1
1 82410 92 0	573	589	1
1 82450 34 0	579	590	2
1 82450 43 0	579	590	2
1 82450 53 0	579	590	2
1 82450 74 0	579	590	2
1 82450 85 0	579	590	2
1 82450 95 0	579	590	2
1 82710 30 0	571	589	1
1 82710 31 0	571	589	1
1 82710 32 0	571	589	1
1 82710 40 0	571	589	1
1 82710 41 0	571	589	1
1 82710 42 0	571	589	1
1 82710 50 0	571	589	1
1 82710 51 0	571	589	1
1 82710 52 0	571	589	1
1 82710 70 0	571	589	1
1 82710 71 0	571	589	1
1 82710 72 0	571	589	1
1 82710 80 0	571	589	1
1 82710 81 0	571	589	1
1 82710 82 0	571	589	1
1 82710 90 0	571	589	1
1 82710 91 0	571	589	1
1 82710 92 0	571	589	1
1 82750 34 0	576	590	2
1 82750 43 0	576	590	2
1 82750 53 0	576	590	2
1 82750 74 0	576	590	2
1 82750 85 0	576	590	2
1 82750 95 0	576	590	2
1 82751 35 0	577	590	2
1 82751 75 0	577	590	2
1 83000 40 0	574	590	3
1 83000 41 0	574	590	3
1 83010 40 0	574	590	3
1 83710 40 0	574	590	3

ALLEGION

CISA

Special executions












SURCHARGES FOR SPECIAL FINISHES	Nickel-plated 12	Bronze-plated visible parts 47	Polished visible parts 66	Polished chrome plated 21
CYLINDERS				
• Single rim cylinders - Cam locks and furniture cylinders	●	-	-	-
• Rim cylinder sets - Double cylinders (standard, with tumb turn shaft)	●	-	●	-
• Single mortice cylinders (standard, with tumb turn shaft)	●	-	●	-
• Double cylinders with round knob, Hotel Function	-	-	-	●
ROSES:				
• 06010 - 06011 - 06012 - 06018 - 06027	●	-	-	-
• 06043 - 06081 - 06082 - 06083 - 06143	●	●	-	-
LOCKS (visible parts):				
• 12010 - 12011 - 12015 - 12016 - 5C010 - 5C011 - 5C021 - 5C031 - 52210 - 52300 - 52310 -52520 - 52521 - 52526	●	-	-	-
• 44010 - 44011	●	-	-	
• 45100	●	-	-	
• 5C110 - 5C120 - 5C130 - **5C140 - 5C150 - 5C170**	●	-	-	-
• 5C611 - 5C631	●	●	-	-
STRIKERS	●	●	-	-
BUTTON ITEM 1.06110.00.0	●	-	-	-



SPECIAL FINISHES









PAINTED RAL COLORS	41 red RAL 3000	42 yellow RAL 1004	43 green RAL 6001	44 black RAL 9005	45 white RAL 9010	97 grey RAL 9006	B9 steel grey
FAST PANIC EXIT DEVICES							
• **eFAST Touch 59851 series**							
- White casing ..... White bar .....Fin. 45							●
- Grey casing ..... Grey bar .....Fin. 97							-
- St. steeel grey casing ... St. steel grey bar .....Fin. B9							-
• **FAST Touch, eFAST** item 59811.10.0, 59711.00.0, 59711.10.0, 59851.10.0, 59851.11.0							
- Red casing ..... Black bar.....Fin. 41	●						
- Yellow casing ..... Black bar.....Fin. 42		●					
- Green casing ..... Black bar.....Fin. 43			●				
- Black casing ..... Black bar.....Fin. 44				●			
- White casing ..... White bar .....Fin. 45					●		
- Grey casing ..... Grey bar .....Fin. 97						-	
- St. steeel grey casing ... St. steel grey bar .....Fin. B9							-
• **FAST Touch** item 59811.10.0.00.00.SB, 59711.00/10.0.00.00.SB (casing fin.) **bar not supplied as stand.**							
- Red casing ..... Fin. 41.....	●						
- Yellow casing ..... Fin. 42.....		●					
- Green casing ..... Fin. 43.....			●				
- Black casing ..... Fin. 44.....				●			
- White casing ..... Fin. 45.....					●		
- Grey casing ..... Fin. 97.....						-	
• **FAST Push** series 59011, 59066 and **Prestige** series 59311, 59607, 59617.XX							
- Red casing ..... Fin. 41.....	●						
- Yellow casing ..... Fin. 42.....		●					
- Green casing ..... Fin. 43.....			●				
- White casing ..... Fin. 45.....					●		
- Grey casing ..... Fin. 97 (*) Surcharge for Prestige series only							●
- St. steeel grey casing ... Fin. B9(**) Not available for 59617 series							-
• **Additional locking points and components for FAST and Prestige series** *(fin. 44 for horizontal bar only)*							
• Set of latchbolt item 1. 07063-20/30/35/40/51/53/61/63/66/71.0.....	●						
• Inside plate item 07176.60/61/62/63/70/71.0				●			
• Set for top rod extentions item 1.07081.06.0					●		
• Kit of vertical rod item 1.07064.51/61/71.0.							●
• Hold open devices item 1.07165.50/51.0.....							●
• Strikers series 07072							●
• Horizontal bar item 07007.13/14/15.0							●
• Outside operation devices item 07078.....							●
• Electric strikers item 1.07083.05/06/07/40/41/80/81/82/90							●
• **FAST Flow panic exit devices art. 1.59014.10.0**							
- White casing (panic exit device, latchbolt set and rod) Fin. 45.....					●		
- Grey casing (panic exit device, latchbolt set and rod) Fin. 97.						-	
- St. steel grey casing (panic exit device, latchbolt set and rod) Fin. 97.....							-



NOTE: Finishing C2 (satin stainless steel PVD) not on the price list contact customer service CISA









SPECIAL KEYING ARRANGEMENTS	CROSS KEY	STANDARD C2000	Asix
			
KEYED ALIKE SYSTEMS			
A) KEY-CHANGES AT OUR CHOICE			
- Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob, cross key cylinders.....	● (*)	●	●
- Rim locks with double cylinder, double cylinders, rim cylinder sets..... **KA**	-	●	●
KA WITH A DIFFERENT NUMBER OF KEYS THAN THE STANDARD (specify number in order)			
- **Less** than standard number **WHERE AVAILABLE**.....	-	-	-
- **More** than standard number	-	●	●
KA CODED (specify code in order)			
- Padlocks, rim locks with single cylinder, Single mortice cylinder single rim cylinders, cylinder with knob, cross key cylinder	● (*)	●	●
- Rim locks with double cylinder, double cylinders, , rim cylinder sets..... **KC**	-	●	●
(*) Cylinder supplied with one key.			
MASTER KEY SYSTEMS **MK - GMK - GGMK** Key code numbering, as standard. Cylinder code numbering, as standard only for Astral Tekno, Astral Tekno PRO, AP4 S and RS3 S serie)			
A) KEY-CHANGES AT OUR CHOICE			
- Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob.....	-	●	●
- Rim locks with double cylinder, double cylinders, rim cylinder sets..... **MK**	-	●	●
MK WITH A DIFFERENT NUMBER OF KEYS THAN THE STANDARD (specify number in order)			
- **Less** than standard number	-	●	●
- **More** than standard number	-	●	●
MK CODED FOR EXTENSIONS (specify system code in order)			
- Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob	-	●	●
- Rim locks with double cylinder, double cylinders, rim cylinder sets.	-	●	●
B) MASTER KEY.....	-	●	●

Astral		C3000	C3000S	Astral S		Astral Tekno PRO	AP4 S	RS3 S
 Short key	 Long key			 Short key	 Long key			
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•

SPECIAL KEYING ARRANGEMENTS	STANDARD C2000	Asix
		
1-2 SYSTEM PLUS CONSTRUCTION KEY (available with RS3 S only) 3C *Standard supply 1+3+1: one ALI construction key (white-black wings), three ALI keys LEVEL 1 (red wings) , one ALI key LEVEL 2 (red-white wings)* **1-2 SYSTEM PLUS CONSTRUCTION KEY (available with AP4 S)** *Standard supply 1+3+1: one construction key (black wings), three keys LEVEL 1 (red wings) , one key LEVEL 2 (green wings)* *Each level is supplied with its specific Security Card* *Different number of keys can be supplied upon request.*		
- Single cylinders, cylinder with knob	-	-
- Double cylinders	-	-
1-2-3 SYSTEM PLUS CONSTRUCTION KEY (available with RS3 S only) 3L *Standard supply 3+1+1: three ALI keys LEVEL 1 (red wings) , one ALI key LEVEL 2 (red-white wings), one ALI key LEVEL 3 (white wings)* *Each level is supplied with its specific Security Card* **1-2-3 SYSTEM PLUS CONSTRUCTION KEY (available with AP4 S)** *Standard supply 3+1+1: three keys LEVEL 1 (red wings) , one key LEVEL 2 (green wings), one key LEVEL 3 (orange wings)* *Each level is supplied with its specific Security Card* *Different number of keys can be supplied upon request.*		
- Single cylinders, cylinder with knob	-	-
- Double cylinders	-	-
Key code numbering, as standard. Cylinder code numbering, as standard only for Astral Tekno, Astral Tekno PRO, AP4 S and RS3 S series. **OWNER / SERVICE SYSTEM (DADA SYSTEM on RS3 S, AP4 S)** CE A) KEY-CHANGES AT OUR CHOICE		
- Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob, cross key cylinders..	●	●
- Rim locks with double cylinder, double cylinders, rim cylinder set	●	●
B) CODED (specify system code or key bitting in order)		
- Padlocks, rim locks with single cylinder, single cylinders, single rim cylinders, cylinders with knob	●	●
- Rim locks with double cylinder, double cylinders, rim cylinder set	●	●
N.B. If requested: add surcharge for cylinder body numbering or special numberings.		
CONSTRUCTION KEY SYSTEMS: CA • **Master key systems** *The construction master key opens all the cylinder until the individual or master one is used., which cancels it definitively*		
- Single cylinder, cylinder with knob	●	-
- Double cylinder	●	-
- Master construction key	●	-
If Master Keys are not required, CISA recommends the **"Single Cylinder"** • **Single Cylinder** (Surcharge must be added to the cylinder price as appropriate). Each cylinder has construction key (marked C) and 3 ownwr's key. The construction key opens the cylinder until the owner's one is used.		
- Single cylinder, cylinder with knob,(construction key included)	-	-
- Double cylinder (construction key included)	-	-

Astral		C3000	C3000S	Astral S		Astral Tekno PRO	AP4 S	RS3 S
 Short key	 Long key			 Short key	 Long key			
- -	- -	- -	- -	- -	- -	- -	• •	• •
- -	- -	- -	- -	- -	- -	- -	• •	• •
• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	• • • •
• • • • • •	• • • • • •	• • • • • •	• • • • • •	• • • • • •	• • • • • •	• • • • • •	• • • • • •	• • • • • •

KEYS OPTIONS	**STANDARD C2000**	**Asix**
		
BITTED KEYS IN ADDITION TO STANDARD SUPPLY.		
A) **3** keys supply (standard supply 2 keys) **C3** — **5** keys supply (standard supply 2 keys / 3 keys) **C5** — **different key supply** (specify the total number of keys) **CH**	●*	-
(*only padlocks)		
NOTE		
CYLINDERS ordered with 5 KEYS (standard supply: 3 keys)	-	●
CYLINDERS SUPPLIED WITH 3 LONG KEYS ..... **CL**	-	-
KEY DUPLICATION AND SECURITY CARD.		
KEYS **C2000, SP, ASIX, ASTRAL, ASTRAL-S** ORDERED SEPARATELY BY QUOTING THE KEY BITTING CODE OR CODE CARD / ORDERED AS PER SAMPLE	●	●
C3000 - C3000 S KEYS ORDERED SEPARATELY WITH SECURITY CARD (code 1.00430.00.1.00.00.**KC**)	-	-
SECURITY CARD **C3000 - C3000 S** ORDERED ACCORDING TO EXISTING PROCEDURE 1.00430.80.0.00.00.**KC**	-	-
TSP KEYS ORDERED SEPARATELY WITH SECURITY CARD (**TSP short key code** 1.00500.01.1.00.00 **KC**), (**TSP long key code** 1.00500.90.1.00.00 **KC**)	-	-
SECURITY CARD **TSP** ORDERED ACCORDING TO EXISTING PROCEDURE 1.00500.80.0.00.00.**KC**	-	-
ASTRAL TEKNO, ASTRAL TEKNO PRO KEYS ORDERED SEPARATELY WITH SECURITY CARD (1.00690.00.0.00 **CL.KC**)	-	-
SECURITY CARD **ASTRAL TEKNO, ASTRAL TEKNO PRO** ORDERED ACCORDING TO EXISTING PROCEDURE 1.00690.80.0.00.00.**KC**.....	-	-
AP3 S, AP4 S KEYS ORDERED SEPARATELY WITH SECURITY CARD (**AP3 S** code 1.00770.00.0.00.00 **KC**), (**AP4 S** code 1.00810.00.0.00.00 **KC**)	-	-
SECURITY CARD **AP3 S** 1.00770.80.0.00.00.**KC** , **AP4 S** 1.00810.80.0.00.00.**KC** ORDERED ACCORDING TO EXISTING PROCEDURE	-	-
RS3 S KEYS ORDERED SEPARATELY WITH SECURITY CARD (**RS3 S** CODE 1.00800.00.0.00 **CL.KC**)	-	-
SECURITY CARD **RS3 S** ORDERED ACCORDING TO EXISTING PROCEDURE 1.00800.80.0.00.00.**KC**	-	-
NOTE • **Copies of keys or of Security Cards TSP, AP3 S, AP4 S and RS3 S must be requested by submitting specific orders.** • **Shipment by express courier. Any additional forwarding charges shall be at the customer's expense.** • **Key delivery time: 5 working days from order date for orders up to 10pcs (shipment time excluded), for larger orders, delivery shall be agreed upon.** **If a Security card is lost or stolen, we advise replacing the cylinder(s) to ensure the same level of security.**		
• **CYLINDERS WITH PERSONALIZED KEYWAY** (specify on order form) **PP** - Cylinders (for cylinder locks, order cylinder separately) ..... - Key ..... STANDARD, C3000, C3000S, ASTRAL, ASTRAL-S, ASTRAL TEKNO, ASTRAL TEKNO PRO Cylinders (min 300 pcs first order), **50 PCS SECOND ORDER**	● ●	- -
• KEY COINING (CS) OR INSERT (CP) FOR PERSONALIZED KEYBOW (ONE SIDE ONLY). Minimum quantity: - **STANDARD, ASIX** keys **3.000** pcs. — - **STANDARD, ASIX** cylinder **1.000** pcs. **CS** - **ASTRAL, C3000, C3000S** keys **2.000** pcs. — - **ASTRAL, C3000, C3000S** cylinder **1.000** pcs. - **AP4 S** keys See Solution Partner program — - **AP4 S, RS3 S** cylinder **300** pcs. - **ASTRAL TEKNO** keys- — - **ASTRAL TEKNO** cylinder - **ASTRAL TEKNO PRO** keys **500** pcs. — - **ASTRAL TEKNO PRO** cylinder **300** pcs. **CP**		

Astral Astral S		SP		C3000	C3000S	TSP		Astral Tekno Astral Tekno PRO	AP4 S AP3 S	RS3 S
 Short key	 Long key	 Short key	 Long key			 Short key	 Long key			
•	•	-	-	•	•	-	-	•	•	•
-	-	-	-	-	-	-	-	•	•	•
-	•	-	-	-	-	-	-	-	-	-
•	•	•	•	-	-	-	-	-	-	-
-	-	-	-	•	•	-	-	-	-	-
-	-	-	-	•	•	-	-	-	-	-
-	-	-	-	-	-	•	•	-	-	-
-	-	-	-	-	-	•	•	-	-	-
-	-	-	-	-	-	-	-	•	-	-
-	-	-	-	-	-	-	-	•	-	-
-	-	-	-	-	-	-	-	-	•	-
-	-	-	-	-	-	-	-	-	•	-
-	-	-	-	-	-	-	-	-	-	•
-	-	-	-	-	-	-	-	-	-	•
		-	-	-		-	-			-
		-	-	-		-	-			-


SPECIAL KEYING ARRANGEMENTS



DOUBLE-BIT KEY
MORTICE LOCKS

		SINGLE LOCKS	TWIN LOCKS
KEYED ALIKE SYSTEMS			
A) KEY-CHANGES AT OUR CHOICE	KA	•	•
KA WITH A DIFFERENT NUMBER OF KEYS THAN THE STANDARD (specify number in order)			
- **Less** than standard number		•	•
- **More** than standard number		•	•
B) CODED (specify system code or key bitting in order)	KC	•	•

ADDITIONAL BITTED KEYS



		Key item	
BITTED KEYS IN ADDITION TO STANDARD SUPPLY specify the total number of keys	CH	**00100**	•
		00101	•
		00102	•
		00104	•
		00110	•
		00112	•
		00120	•
		00121	•
		00122	•
		00123	•
		00125	•
For REKEYABLE LOCKS		**00162**	•
" "		**00163**	•
For DOUBLE BIT CYLINDERS		**00162**	•
" "		**00163**	•
For DOUBLE BIT CYLINDERS for REKEYABLE locks		**00162**	•
" " "		**00163**	•



DOUBLE-BIT KEY MORTICE LOCKS	DOUBLE-BIT KEY RIM LOCKS and 6-LEVER ARMOURED DOOR LOCKS		DOUBLE BIT CYLINDER for 6-LEVER DOUBLE-BIT KEY LOCKS	DOUBLE BIT CYLINDER for 6-LEVER DOUBLE-BIT KEY LOCKS, REKEYABLE
with KEY 00110	with KEY 00120-00123	with KEY 00125		
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	V	●	●	●

KEY DUPLICATION 00162, 00163

(*) Keys duplicated by CISA only



	For REKEYABLE locks	For DOUBLE BIT CYLINDERS on 6-LEVER ARMOURED DOOR LOCKS (*)		For DOUBLE BIT CYLINDERS on REKEYABLE LOCKS (*)
		KEYING ON SHAFT	KEYING ON SHAFT AND KEY BITS	KEYING ON SHAFT AND KEY BITS
A) Ordered separately by code	●	●	-	-
B) Ordered as per sample	●	-	●	●

NUMBERING	CN NUMBERING DEFINED BY CISA (with reference to the key bitting)	NPN NUMBERING DEFINED BY CUSTOMER
• PADLOCK	●	●
• CYLINDER	●	●
• 1 KEY	●	●

PRODUCTS WITH ARRANGEMENTS DIFFERENT THAN THE STANDARD ONE	
PANIC EXIT DEVICES SERIES 59001, 59011, 59061, 59301, 59311, 59361, 59801, 59811, 59851	
- Version with steel latches, for fire doors (Spec FR)	●
- Additional locking points item 1.07063.20/30/35/51/61/66.0 with steel latch bolt for fire resistant doors (Spec. FR)	●
- Version with hold open device (not for 59851 series) (Spec FG)	●
- Version with microswitch (not for 59851 series) (Spec LA)	●
FLOOR HINGES	
- Customer's brand on the plate **free of charge for orders over 100 pcs**	
- Contribution towards creating key coining for personalised brand on plates	●
- Floor hinges without housing	●
- Cam shaft with special pivot head	●

LOCKS SUPPLIED WITH CYLINDERS OTHER THAN THE STANDARD ONE

RIM LOCKS WITH CYLINDER OR RIM CYLINDER SET IN FOLLOWING VERSIONS:

Asix AX

- For all electric locks series 1A610, 1A611, 1A630, 1A631, 1A721, 1A731, 11610, 11611, 11721, 11921
- For locks series 50110, 50111, 50130, 50131, 50180, 50181, 50330, 54310, 54311, 54315, 54316, 54340, 54941, 54510, 54550, 54570

Astral S AT

- For all electric locks series 1A600, 1A700, 11000 series 11823, 11670 excluded
- For all locks series 50000, series 50210, 50211, 50220, 50221 excluded
- For all rim latches series 54000

Astral Tekno PRO AK

- For all electric locks series 1A600, 1A700, 11000 series 11823,11670 excluded
- For all locks series 50000, series 50210, 50211, 50220, 50221 excluded
- For all rim latches series 54000

C3000 C3000S AC

- For all electric locks series 1A610, 1A611, 1A631, 1A721, 1A731, 11610, 11611, 11721, 11921
- For all locks series 50000, series 50120, 50125, 50160, 50170, 50210, 50211, 50220, 50221 50221 excluded
- For all rim latches series 54000

AP4 S AP

- For all electric locks series 1A600, 1A700, 11000 series 11823 excluded
- For all locks series 50000 series 50210, 50211, 50220, 50221 excluded
- For all rim latches series 54000

RS3 S AS

- For all electric locks series 1A600, 1A700, 11000 item.1A630, 11630, 11635, 11670, 11731, 11823, 11931 excluded
- For all locks series 50000 items 50121, 50141, 50171, 50211, 50221, 50421, 50461, 50471, 50521, 50571 excluded.
- For all rim latches series 54000

LOCKS WITH FIXED EXTERNAL CYLINDER LONGER THAN STANDARD SIZE
N.B.: Order extension kit series 07165 (see cylinder accessories section of catalogue)

ELECTRIC LOCKS 24 V a.c. POWERED ELECTRIC LOCKS
N.B.: Use coil accessory (if available) or "booster" accessory item 1.07022.00

CYLINDERS AND PADLOCKS SUPPLIED IN SEMI-ASSEMBLED OR UNASSEMBLED VERSIONS

Cylinders and padlocks are available in **SEMI-ASSEMBLED** or **UNASSEMBLED** versions :

- "**SEMI - ASSEMBLED**"(ready for keying)
- "**UNASSEMBLED**" (completely unassembled)

In both cases, keys, pins, drivers, springs, pin hole plugs, circlips, are to be ordered separately

CYLINDERS	SEMI-ASSEMBLED 90		UNASSEMBLED 91				
	STD	C2000	STD	C2000	C3000 C3000S	Astral	Astral Tekno Astral Tekno Pro
• Euro profile double cylinders	TO BE DISCONTINUED	TO BE DISCONTINUED	TO BE DISCONTINUED	●	●	●	●
• Euro profile single cylinders				●	●	●	●
• Euro profile thumb turn cylinders				●	●	●	●
• Rim cylinders, cam locks, furniture cylinders				●	●	●	●
• Rim cylinder set				●	●	●	●
• Hardened steel padlock cylinders				-	●	●	●

BRASS PADLOCKS	STANDARD	LIM
• 22010-30/40	●	
• 22010-50/60	●	See PP

HARDENED STEEL PADLOCKS

Hardened steel padlocks in **UNASSEMBLED** version are supplied without cylinder and without the cylinder and padlock drill resistant plate
When ordering the padlock cylinder you must specify separately the relevant padlock drill resistant plate (the cylinder drill resistant plate is supplied as standard).

• 28050-55/56/57, 28350-62, 28050-70/71/72, 28350-73, 28550-66/67/75/84/85	●

PADLOCKS WITH KEY ALIKE - AS PER SAMPLE (KS)

• Padlocks series 22000 and 28000	●

ALLEGION





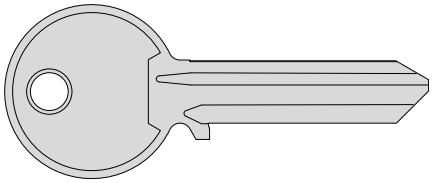
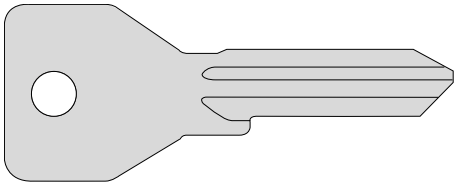
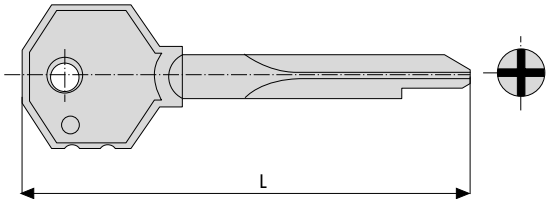
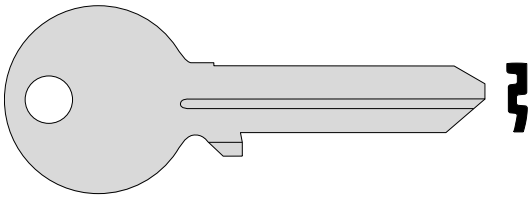
CISA

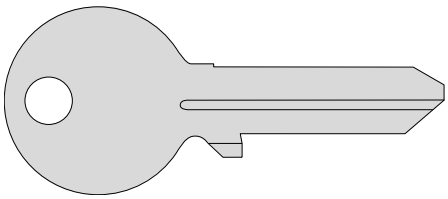
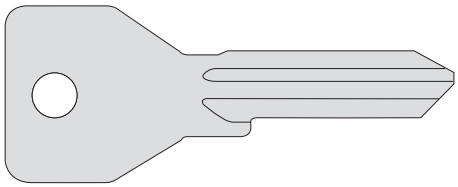
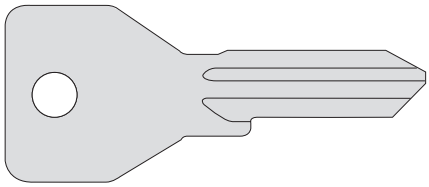
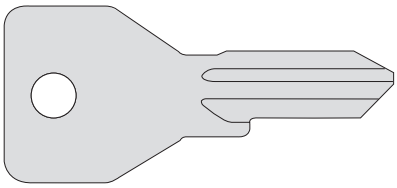
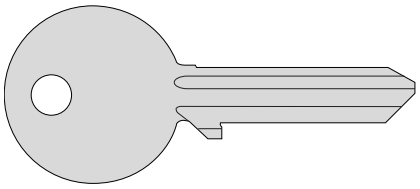
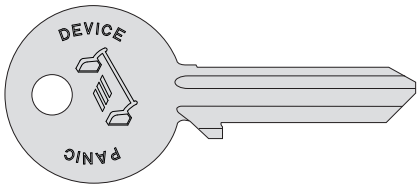
Key blanks

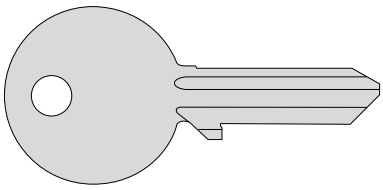
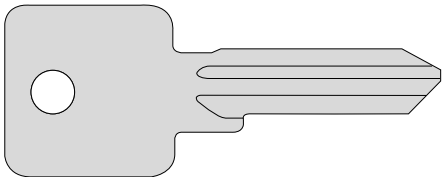
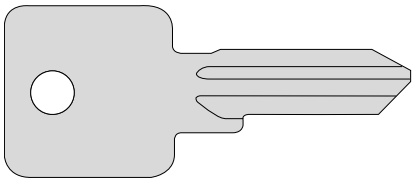
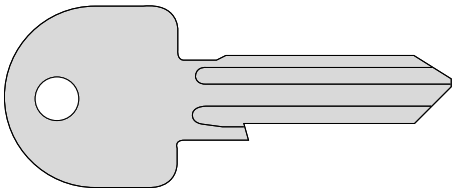
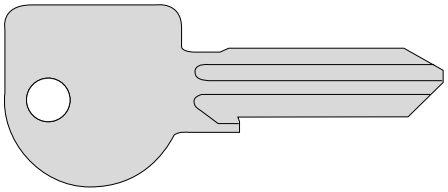
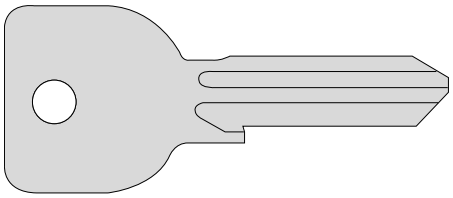
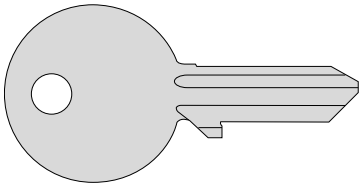


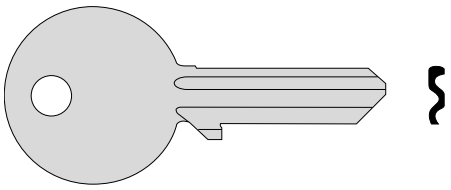
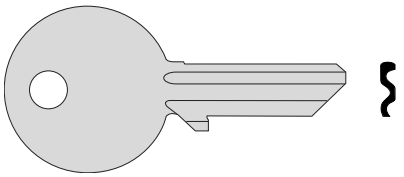
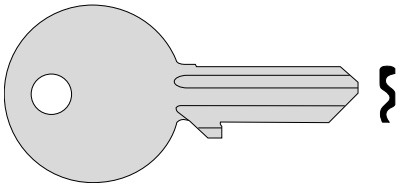


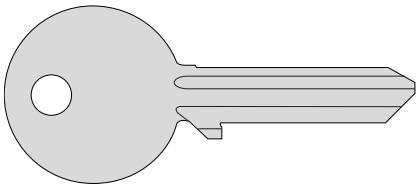
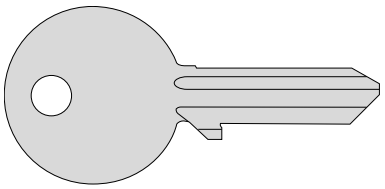
Keys compatibility 48
Key blanks - 1:1 scale 49
Double-bit key blanks 55

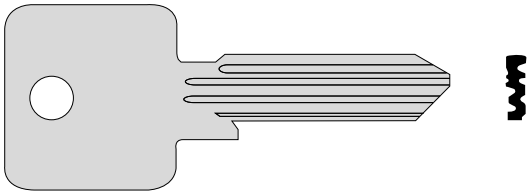
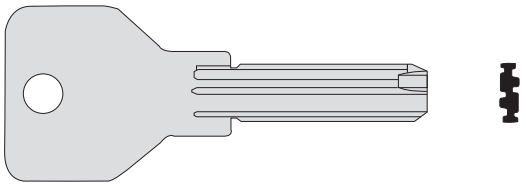
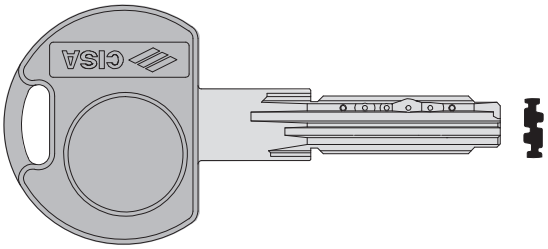
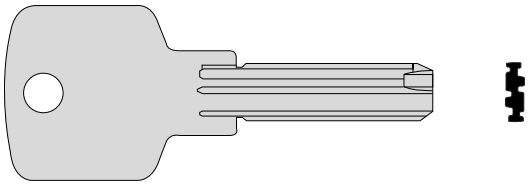
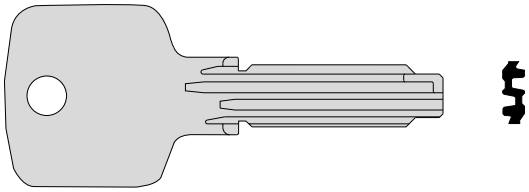
KEY BLANKS	CYLINDERS AND PADLOCKS
01060-10	41510 - 41525 - 41526
00770-00 **00810-00**	0H112 - 0H149 - 0H155 - 0H210 - 0H310 - 0H311 - 0H312 - 0H314 - 0H317 - 0H350 - 0H351 - 0H352 -0H357 - 0H410 - 0H510 - 0H610 0P112 - 0P149 - 0P155 - 0P210 - 0P3S1 - 0P3S2 - 0P314 - 0P3S7 - 0P410 - 0P510 - 0P610
00210-00/11	02400
00401-00	26020-50/60 - serie 28050 - 28350 - 28550 - 02650
00450-01/90	02163 - 02164 - 02172 - 02176 - 02179 - 02182 - 02502 - 02572 - 02652 - 08815 - 08835 08855 - 08857 - 08875 - 08887 - 72275 - 72276 - 28052 - 28352 - 28552
00500-01/90	02152 - 02162 - 02166 - 02169 - 02173 - 02174 - 02501 - 02562 - 02651 - 08810 - 08830 - 08850 - 08851 - 08870 - 08881 - 72270 72271 28051 - 28351 - 28551
00620-01/90	0A112 - 0A114 - 0A116 - 0A120 - 0A149 - 0A155 - 0A210 - 0A310 - 0A311 - 0A312 - 0A314 - 0A317 - 0A3S1 - 0A3S2 - 0A3S7 - 0A410 - 0A415 - 0A510 - 0A610 - 28053 - 28353 - 28553
01210-00	02520
01310-00/10/20/30/40	02102 - 02104 - 02106 - 02110 - 02139 - 02142 - 02145 - 02146 - 02500 - 02513 - 02550 - 02552 - 02592 - 02649 08710-07/08/10/12÷15/17÷30/35÷37/46 - 08730 22010-50/60 - 22011-50/52 - 22012-50 - 22013-50/60 - 72250
01070-10	0G300-07-08-10-12÷15-17÷70 - 0G301-07-12-13-26 - 0G304-02÷13-20-21 - 0G302 - 0G303 - 0G305 - 0G307 0G115 - 0G150 - 0G200 - 0G500 - 0G501
01320-00/10/20/30/40	02544-15 08710-04÷06/09/11/16 - 44010 - 44011
01070-05	0G300-04÷06-09/11/16 - 0G301-05-06-09-11 - 0G304-18
01330-00	02544-10/14 - 02126 - 02156
01070-01	0G300-02/03
01410-00	08210-02/05/06/12÷14/18 - 08220-02 - 08230-02/06 22010-40 - 22011-40/41 - 22012-40 - 22013-40 - 22070-40 - 26020-40 - 26021-40
01420-00	02040 - 02042 - 72010 - 72210 - 72215
01425-00	08210-01
01430-00	22010-30 - 22011-30/31 - 22012-30 - 22013-30 - 22070-30 - 26020-30
01440-00	22010-20/25 - 22011-20 - 22013-20/25 23010
01510-00	22010-115
00670-01 **00670-0005D**	0E300 - 0E304 - 0E302 - 0E303 - 0E305 - 0E115 - 0E150 - 0E200 - 0E500 - 0E600 - 0E307 0E300-(SD) - 0E307-(SD) - 0E304-(NV)
00690-00-0-00-CL	0M112 - 0M156 - 0M311 - 0M312 - 0M314 - 0M317 - 0M510 - 0M410 - 0M610 - 0M3T1 - 0M3T2 - 0M3T7
00430-00-1	0N116 - 0N210 - 0N149 - 0N310 - 0N312 - 0N314 - 0N317 - 0N510 - 0N610 - 0N410 - 0N3S1 - 0N3S2 - 0N3S7

Type	Description	L	Pins	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
	• Nickel-plated brass • Paracentrical keyway		3	0,004	50	1	01040 01 1
	• Nickel-plated brass • Paracentrical keyway		4	0,004	50	1	01040 02 1
	• Nickel-plated brass • Paracentrical keyway		4	0,010	50	1	01040 03 1
	• Nickel-plated brass • Paracentrical keyway		5	0,010	50	1	01040 04 1
	• Nickel-plated brass • Paracentrical keyway		5	0,010	50	1	01040 05 1
	• Nickel-plated brass • Paracentrical keyway		5	0,012	50	1	01060 10 0
	• Nickel-plated steel • Cross key section	75,0	6	0,018	25	1	00210 00 0
	• Nickel-plated steel • Cross key section	90,0	6	0,023	25	1	00211 00 0
	• Nickel-plated brass • Paracentrical keyway		6	0,015	25	1	01210 00 2









Type	Description	L	Pins	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
	• Nickel-plated brass • Paracentrical keyway	5	0,014	25	1	01220	00	2	
C2000 	• Nickel-plated brass • Paracentrical keyway	5	0,012	50	1	01070	10	1	
		5	0,013	50	1	01070	10	2	
C2000 	• Nickel-plated brass • Paracentrical keyway	4	0,012	50	1	01070	05	1	
		4	0,011	50	1	01070	05	2	
C2000 	• Nickel-plated brass • Paracentrical keyway	3	0,011	50	1	01070	01	1	
		3	0,011	50	1	01070	01	2	
	• Nickel-plated brass • Paracentrical keyway	5	0,010	50	1	01310	00	1	
		5	0,010	50	1	01310	00	2	
	• Outside access device blank key • Duplication also possible with: 1.01336. 00.1	5	0,010	50	1	01310	05	1	


Type	Description	L	Pins	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Nickel-plated brass • Paracentrical keyway		4	0,010	50	1	01320	00	1		
			4	0,010	50	1	01320	00	2		
	• Nickel-plated brass • Paracentrical keyway		5	0,014	50	1	01310	10	1		
			5	0,015	50	1	01310	10	2		
	• Nickel-plated brass • Paracentrical keyway		4	0,014	50	1	01320	10	1		
			4	0,013	50	1	01320	10	2		
	• Blank key for master key duplication (MK) • Nickel-plated brass • Paracentrical keyway		5	0,014	50	1	01310	20	1		
			5	0,010	50	1	01310	20	2		
	• Blank key for grand master key duplication (GMK) • Nickel-plated brass • Paracentrical keyway		5	0,014	50	1	01310	30	1		
			5	0,010	50	1	01310	30	2		
	• Blank key for great grand master key duplication (GGMK) • Nickel-plated brass • Paracentrical keyway		5	0,014	50	1	01310	40	1		
	• Nickel-plated brass • Paracentrical keyway		3	0,011	50	1	01330	00	1		
			3	0,010	50	1	01330	00	2		

Type	Description	L	Pins	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
	• Nickel-plated brass • Paracentrical keyway	5	0,007	50	1	**01410 00 1**			
		5	0,007	50	1	**01410 00 2**			
	• Nickel-plated brass • Paracentrical keyway	4	0,008	50	1	**01420 00 1**			
		4	0,008	50	1	**01420 00 2**			
	• Nickel-plated brass • Paracentrical keyway	3	0,007	50	1	**01425 00 1**			
		3	0,008	50	1	**01425 00 2**			
	• Nickel-plated brass • Paracentrical keyway	4	0,005	50	1	**01430 00 1**			
	• Nickel-plated brass • Paracentrical keyway	3	0,003	50	1	**01510 00 1**			
		3	0,002	50	1	**01510 00 2**			
	• Nickel-plated brass • Multiprofile • Paracentrical keyway	5	0,010	50	1	**01336 00 1**			
		5	0,010	50	1	**01336 00 2**			
	• Nickel-plated brass • Multiprofile • Paracentrical keyway	4	0,009	50	1	**01337 00 1**			
		4	0,009	50	1	**01337 00 2**			

Type	Description	L	Pins	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Nickel-plated brass • Paracentrical keyway	5		0,015	50	1	00401	00	1		
		5		0,015	50	1	00401	00	2		
											
Asix	• Nickel-plated brass • Thickness 2.9 mm. • Flat profile	6		0,017	50	1	00670	01	0		
											
AsixPRO	• Nickel-plated brass • Thickness 2.2 mm. • Flat profile	10		0,015	50	1	00670	01	0	00	SD
											
Astral	• Nickel-plated brass • Thickness 2.2 mm. • Flat profile	10		0,015	50	1	00600	01	0		
											
Astral	• Nickel-plated brass • Thickness 2.9 mm. • Flat profile	10		0,017	50	1	00620	01	0		
											

Type	Description	L	Pins	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
Astral	• Nickel-plated brass • Nylon bow • Long key • Thickness 2.9 mm. • Flat profile	10	0,015	20	1	00620	90	0	
Astral Tekno PRO	• Nickel-plated brass • Nylon bow • Long key 16 mm • Flat profile, thickness 2.9 mm • KEY BLANK DISTRIBUTION IS REGULATED BY CONTRACT	10	0,024	20	1	00690	00	0	00 CL
C3000-C3000S	• Nickel silver alloy • 3D Trade Mark • Paracentrical keyway • KEYBLANK DISTRIBUTION IS REGULATED BY CONTRACT	6	0,015	50	1	00430	00	1	
AP4 S	• SEE CISA SOLUTION PARTNER PROGRAM								

Type		Description	For locks series	L	Levers	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	 1	• Nickel-plated brass	17300, 57000, 57200, 57300, 57400, 57800	35,5	6	0,018	25	1 00100 00 1
				60,0	6	0,022	25	1 00102 00 1
	 1 2	• Nickel-plated brass • Nylon bow	57000, 57200, 57800	35,5	6	0,020	25	1 00101 00 1
				35,5	6	0,020	25	1 00101 00 2
				46,0		0,022	25	1 00104 00 1
	 1	• Nickel-plated brass • Nylon bow	57050, 57055, 57060	42,0	6	0,028	10	1 00110 00 1
	 1 2	• Nickel-plated brass	17500, 57100, 57500	62,0	6	0,029	25	1 00120 00 1
				62,0	6	0,029	25	1 00120 00 2
				37,0	6	0,025	25	1 00121 00 1
	 1	• Nickel-plated brass • Nylon bow	17500, 56700, 57500, 57700	37,0	6	0,029	10	1 00122 00 1
				58,0	6	0,033	25	1 00123 00 1
				47,0	6	0,030	10	1 00124 00 1
	 1 2	• Nickel-plated brass	57100, 57500	60,0	6	0,040	10	1 00125 00 1
				60,0	6	0,040	10	1 00125 00 2
	 1	• Nickel-plated brass • Nylon bow	17600, 57600, 57900	44,0	6	0,032	10	1 00162 00 1
				64,0	6	0,036	10	1 00163 00 1

Type	Description	For locks series	L	Levers	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Nickel-plated brass • Nylon snap grip	17600, 57600, 57900	44,0	6	0,042	10	1	00170	00	1		
			64,0	6	0,042	10	1	00171	00	1		

ALLEGION

CISA

Cylinders



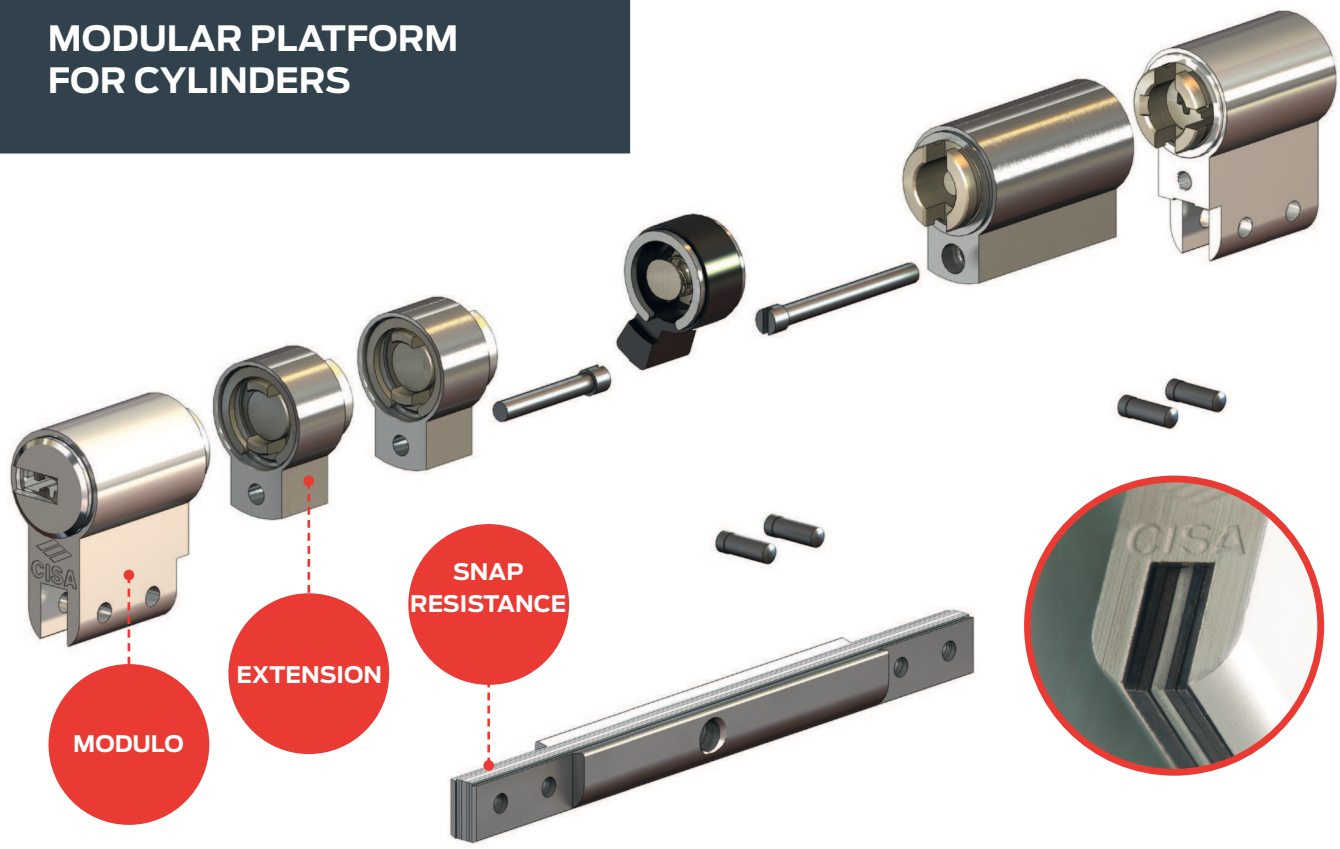
RS3 S european profile cylinders....59
RS3 S Modulo european profile cylinders....61
RS3 S rim cylinders....65
RS3 S various cylinders....67
AP4 S european profile cylinders....68
AP4S - ASTRAL S - C300 S Modulo cylinders....71
AP4 S Rim cylinders....76
AP4 Various cylinders....78
ASTRAL Tekno Pro european profile cylinders....80
ASTRAL TEKNO rim cylinders....83
ASTRAL TEKNO various cylinders....85
Snap resistant Astral Cylinders....87
ASTRAL European profile cylinders....89
ASTRAL rim cylinders....91
ASTRAL various cylinders....93
ASIX PRO European profile cylinders....94
ASIX European profile cylinders....96
ASIX rim cylinders....99
C3000 S European profile cylinders....101
C3000 European profile cylinders....104
C3000 rim cylinders....106
C3000 various cylinders....107
C2000 European profile cylinders....108
Hotel function cylinder C2000....112
C2000 rim cylinders....113
Standard european profile cylinders C2000....114
Standard rim cylinders....115
Standard various cylinders....116
Oval shaped cylinders....118
Accessories for cylinders....119
Dimensional drawings....123

MODULO SYSTEM

MODULAR PLATFORM FOR CYLINDERS

THE BUSINESS-BOOSTING SOLUTION THAT HAS LIMITED IMPACT ON YOUR STOCK

CISA's Modulo System platform uses parts belonging to the AP4 S, Astral S and C3000 S ranges, so your cylinder can be assembled and installed directly on-site, guaranteeing you the best solution for your needs without any extra stock requirements.



THE MODULO SYSTEM PLATFORM IS COMPATIBLE WITH:



AP4 S
Patented system

Reversible key with mobile part, patented and protected by 3D Trademark, can only be duplicated by CISA Solution Partners or CISA.

Up to 40 billion possible combinations (different keys)





ASTRAL S

Reversible key, free duplication.

Over 1,600,000 possible combinations (different keys)





C3000 S
Protected system

Key protected by 3D Trademark, can only be duplicated by CISA or at CISA authorised centres.

Over 240,000 possible combinations (different keys)





EN 1303:15

KEY RELATED SECURITY	1	2	3	4	5	**6**
ATTACK RESISTANCE	0	A	B	C	**D**	
DURABILITY	1	2	3	4	5	**6**

RS3 S

Technical features:

CYLINDER:
- Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying
- Security Card: authorised duplication by Cisa only
- Hardened steel pins and drivers.
- Stainless steel springs
- Brass casing with snap resistant two-material core
- Brass plug.
- Cam: DIN, self-lubricating sintered steel
- Clutch-type cam for emergency operation.

KEY:
- Non-handed, easier to use
- Patented controlled duplication
- With built-in mobile element.
- Material: nickel silver alloy.
- Numbered key head.
- Key neck length: 16 mm (compatible with protective roses).

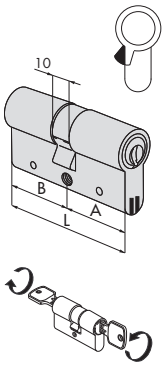
Supplied as standard:
- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.
- Fixing screw.

Finishes:
- Standard: nickel-plated sanded brass (fin. 12).
- On request: polished brass (fin. 66).

Standards:
- Compliant with the European Standard EN 1303: 2015.
- Attack resistance : D
- Key Related Security : 6
- Durability : 6
- For armored door classes 4 to 6 according to the draft Standard EN 1627

Certifications:
- ICIM certified: EN 1303:15 16010C6D - Europe.
- Gost certified - Russia.
- SKG**

Patents:
- Key: EP1728944
- Snap Resistant
  - Europe EP1583878
  - Russia RU2361989
- ALI is protected by a Shape trademark B02004C000802




- Clutch-type SNAP RESISTANT double cylinder

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30		60,0	30,0	30,0	15	1 00800 00 0 00CL	0,260	1	**1**	**0L3S1**	**07**	**0**	**12**	**CL**
30 / 35		65,0	30,0	35,0	15	1 00800 00 0 00CL	0,270	1	**1**	**0L3S1**	**26**	**0**	**12**	**CL**
35 / 35		70,0	35,0	35,0	15	1 00800 00 0 00CL	0,279	1	**1**	**0L3S1**	**13**	**0**	**12**	**CL**
40 / 30		70,0	40,0	30,0	15	1 00800 00 0 00CL	0,279	1	**1**	**0L3S1**	**12**	**0**	**12**	**CL**
35 / 40		75,0	35,0	40,0	15	1 00800 00 0 00CL	0,300	1	**1**	**0L3S1**	**28**	**0**	**12**	**CL**
30 / 45		75,0	30,0	45,0	15	1 00800 00 0 00CL	0,300	1	**1**	**0L3S1**	**27**	**0**	**12**	**CL**
35 / 45		80,0	35,0	45,0	15	1 00800 00 0 00CL	0,315	1	**1**	**0L3S1**	**19**	**0**	**12**	**CL**
40 / 40		80,0	40,0	40,0	15	1 00800 00 0 00CL	0,315	1	**1**	**0L3S1**	**18**	**0**	**12**	**CL**
30 / 50		80,0	30,0	50,0	15	1 00800 00 0 00CL	0,315	1	**1**	**0L3S1**	**17**	**0**	**12**	**CL**
35 / 50		85,0	35,0	50,0	15	1 00800 00 0 00CL	0,330	1	**1**	**0L3S1**	**31**	**0**	**12**	**CL**
40 / 45		85,0	40,0	45,0	15	1 00800 00 0 00CL	0,330	1	**1**	**0L3S1**	**30**	**0**	**12**	**CL**
30 / 55		85,0	30,0	55,0	15	1 00800 00 0 00CL	0,330	1	**1**	**0L3S1**	**33**	**0**	**12**	**CL**
35 / 55		90,0	35,0	55,0	15	1 00800 00 0 00CL	0,330	1	**1**	**0L3S1**	**32**	**0**	**12**	**CL**
40 / 50		90,0	40,0	50,0	15	1 00800 00 0 00CL	0,330	1	**1**	**0L3S1**	**21**	**0**	**12**	**CL**
45 / 45		90,0	45,0	45,0	15	1 00800 00 0 00CL	0,330	1	**1**	**0L3S1**	**29**	**0**	**12**	**CL**
30 / 60		90,0	30,0	60,0	15	1 00800 00 0 00CL	0,330	1	**1**	**0L3S1**	**20**	**0**	**12**	**CL**
40 / 55		95,0	40,0	55,0	15	1 00800 00 0 00CL	0,350	1	**1**	**0L3S1**	**42**	**0**	**12**	**CL**
35 / 60		95,0	35,0	60,0	15	1 00800 00 0 00CL	0,350	1	**1**	**0L3S1**	**38**	**0**	**12**	**CL**
45 / 50		95,0	45,0	50,0	15	1 00800 00 0 00CL	0,350	1	**1**	**0L3S1**	**39**	**0**	**12**	**CL**
35 / 65		100,0	35,0	65,0	15	1 00800 00 0 00CL	0,370	1	**1**	**0L3S1**	**22**	**0**	**12**	**CL**
40 / 60		100,0	40,0	60,0	15	1 00800 00 0 00CL	0,370	1	**1**	**0L3S1**	**25**	**0**	**12**	**CL**
45 / 55		100,0	45,0	55,0	15	1 00800 00 0 00CL	0,370	1	**1**	**0L3S1**	**43**	**0**	**12**	**CL**
50 / 50		100,0	50,0	50,0	15	1 00800 00 0 00CL	0,370	1	**1**	**0L3S1**	**23**	**0**	**12**	**CL**
30 / 70		100,0	30,0	70,0	15	1 00800 00 0 00CL	0,370	1	**1**	**0L3S1**	**24**	**0**	**12**	**CL**
40 / 70		110,0	40,0	70,0	15	1 00800 00 0 00CL	0,400	1	**1**	**0L3S1**	**35**	**0**	**12**	**CL**
50 / 60		110,0	50,0	60,0	15	1 00800 00 0 00CL	0,400	1	**1**	**0L3S1**	**36**	**0**	**12**	**CL**
55 / 55		110,0	55,0	55,0	15	1 00800 00 0 00CL	0,400	1	**1**	**0L3S1**	**70**	**0**	**12**	**CL**
30 / 80		110,0	30,0	80,0	15	1 00800 00 0 00CL	0,400	1	**1**	**0L3S1**	**37**	**0**	**12**	**CL**
40 / 80		120,0	40,0	80,0	15	1 00800 00 0 00CL	0,420	1	**1**	**0L3S1**	**60**	**0**	**12**	**CL**
50 / 80		130,0	50,0	80,0	15	1 00800 00 0 00CL	0,440	1	**1**	**0L3S1**	**55**	**0**	**12**	**CL**


CISA

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 10		40,0	30,0	10,0	15	1 00800 00 0 00CL	0,200	1	1	0L314	02	0	12	CL
35 / 10		45,0	35,0	10,0	15	1 00800 00 0 00CL	0,210	1	1	0L314	07	0	12	CL
40 / 10		50,0	40,0	10,0	15	1 00800 00 0 00CL	0,220	1	1	0L314	03	0	12	CL
45 / 10		55,0	45,0	10,0	15	1 00800 00 0 00CL	0,230	1	1	0L314	08	0	12	CL
50 / 10		60,0	50,0	10,0	15	1 00800 00 0 00CL	0,240	1	1	0L314	04	0	12	CL
60 / 10		70,0	60,0	10,0	15	1 00800 00 0 00CL	0,260	1	1	0L314	05	0	12	CL
65 / 10		75,0	65,0	10,0	15	1 00800 00 0 00CL	0,270	1	1	0L314	21	0	12	CL
70 / 10		80,0	70,0	10,0	15	1 00800 00 0 00CL	0,280	1	1	0L314	06	0	12	CL
80 / 10		90,0	80,0	10,0	15	1 00800 00 0 00CL	0,300	1	1	0L314	20	0	12	CL
95 / 10		105,0	95,0	10,0	15	1 00800 00 0 00CL	0,330	1	1	0L314	13	0	12	CL




- Single cylinder with cam adjustable to 8 positions

30 / 30		60,0	30,0	30,0	15	1 00800 00 0 00CL	0,270	1	1	0L3S2	07	0	12	CL
30 / 35		65,0	30,0	35,0	15	1 00800 00 0 00CL	0,280	1	1	0L3S2	26	0	12	CL
35 / 30		65,0	35,0	30,0	15	1 00800 00 0 00CL	0,280	1	1	0L3S2	81	0	12	CL
40 / 30		70,0	40,0	30,0	15	1 00800 00 0 00CL	0,292	1	1	0L3S2	12	0	12	CL
35 / 35		70,0	35,0	35,0	15	1 00800 00 0 00CL	0,292	1	1	0L3S2	13	0	12	CL
40 / 35		75,0	40,0	35,0	15	1 00800 00 0 00CL	0,302	1	1	0L3S2	83	0	12	CL
30 / 45		75,0	30,0	45,0	15	1 00800 00 0 00CL	0,302	1	1	0L3S2	27	0	12	CL
35 / 40		75,0	35,0	40,0	15	1 00800 00 0 00CL	0,302	1	1	0L3S2	28	0	12	CL
30 / 50		80,0	30,0	50,0	15	1 00800 00 0 00CL	0,312	1	1	0L3S2	17	0	12	CL
35 / 45		80,0	35,0	45,0	15	1 00800 00 0 00CL	0,312	1	1	0L3S2	19	0	12	CL
40 / 40		80,0	40,0	40,0	15	1 00800 00 0 00CL	0,312	1	1	0L3S2	18	0	12	CL
45 / 35		80,0	45,0	35,0	15	1 00800 00 0 00CL	0,312	1	1	0L3S2	85	0	12	CL
40 / 45		85,0	40,0	45,0	15	1 00800 00 0 00CL	0,322	1	1	0L3S2	30	0	12	CL
50 / 35		85,0	50,0	35,0	15	1 00800 00 0 00CL	0,322	1	1	0L3S2	94	0	12	CL
45 / 40		85,0	45,0	40,0	15	1 00800 00 0 00CL	0,322	1	1	0L3S2	84	0	12	CL
30 / 60		90,0	30,0	60,0	15	1 00800 00 0 00CL	0,332	1	1	0L3S2	20	0	12	CL
40 / 50		90,0	40,0	50,0	15	1 00800 00 0 00CL	0,332	1	1	0L3S2	21	0	12	CL
45 / 45		90,0	45,0	45,0	15	1 00800 00 0 00CL	0,332	1	1	0L3S2	29	0	12	CL
40 / 55		95,0	40,0	55,0	15	1 00800 00 0 00CL	0,342	1	1	0L3S2	42	0	12	CL
55 / 40		95,0	55,0	40,0	15	1 00800 00 0 00CL	0,342	1	1	0L3S2	98	0	12	CL
50 / 50		100,0	50,0	50,0	15	1 00800 00 0 00CL	0,352	1	1	0L3S2	23	0	12	CL
45 / 55		100,0	45,0	55,0	15	1 00800 00 0 00CL	0,352	1	1	0L3S2	43	0	12	CL
55 / 45		100,0	55,0	45,0	15	1 00800 00 0 00CL	0,352	1	1	0L3S2	99	0	12	CL
55 / 50		105,0	55,0	50,0	15	1 00800 00 0 00CL	0,362	1	1	0L3S2	64	0	12	CL
60 / 50		110,0	60,0	50,0	15	1 00800 00 0 00CL	0,372	1	1	0L3S2	89	0	12	CL
55 / 60		115,0	55,0	60,0	15	1 00800 00 0 00CL	0,382	1	1	0L3S2	71	0	12	CL
60 / 60		120,0	60,0	60,0	15	1 00800 00 0 00CL	0,392	1	1	0L3S2	40	0	12	CL
65 / 55		120,0	65,0	55,0	15	1 00800 00 0 00CL	0,392	1	1	0L3S2	86	0	12	CL



- Double SNAP RESISTANT cylinder pre-set for thumb turn installation
- ON REQUEST:
  Thumb turns series 06353, 06355, 06356, 06357

30 / 30		60,0	30,0	30,0	15	1 00800 00 0 00CL	0,306	1	1	0L3S7	07	0	12	CL
35 / 30		65,0	35,0	30,0	15	1 00800 00 0 00CL	0,320	1	1	0L3S7	81	0	12	CL
40 / 30		70,0	40,0	30,0	15	1 00800 00 0 00CL	0,340	1	1	0L3S7	12	0	12	CL
45 / 30		75,0	45,0	30,0	15	1 00800 00 0 00CL	0,305	1	1	0L3S7	91	0	12	CL
50 / 30		80,0	50,0	30,0	15	1 00800 00 0 00CL	0,370	1	1	0L3S7	90	0	12	CL
60 / 30		90,0	60,0	30,0	15	1 00800 00 0 00CL	0,400	1	1	0L3S7	87	0	12	CL
70 / 30		100,0	70,0	30,0	15	1 00800 00 0 00CL	0,420	1	1	0L3S7	88	0	12	CL



- Double SNAP RESISTANT cylinder pre-set for thumb turn installation
- Adjustable shaft
- can be used with inside escutcheon item 1.06458.20.0
  ON REQUEST:
  Thumb turns series 06353, 06355, 06356, 06357



EN 1303:15

KEY RELATED SECURITY	1	2	3	4	5	**6**
ATTACK RESISTANCE	0	A	B	C	**D**	
DURABILITY	1	2	3	4	5	**6**

RS3 S Modulo

Technical features:

CYLINDER:
- Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying
- Hardened steel pins and drivers.
- Stainless steel springs
- Brass casing with snap resistant two-material core
- Brass plug.
- Cam: DIN, self-lubricating sintered steel
- Clutch-type cam for emergency operation.

KEY:
- Non-handed, easier to use
- Patented controlled duplication
- **With built-in mobile element.**
- Material: nickel silver alloy.
- Numbered key head.
- Key neck length: 16 mm (compatible with protective roses).





Supplied as standard:
- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.
- Fixing screw.







Finishes:
- Standard: nickel-plated sanded brass (fin. 12).
- On request: polished brass (fin. 66).

Standards:
- Compliant with the European Standard EN 1303: 2015.
- Attack resistance : D
- Key Related Security : 6
- Durability : 6
- For armored door classes 4 to 6 according to the draft Standard EN 1627


Patents:
- Key:
  - Europe EP1728944
  - Russia RU2008150925
  - Ukraine UA200814736
- Snap system:
  - Europe EP1583878
  - Russia RU2361989
- Extension bolts units: patented pending

Certifications:
- SKG***

Type	Description	Comm. dim. A / B	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of modules for double cylinders with clutch mechanism	**30 / 30**	15	1 00800 00 0 00CL	0,272	1	1	**0L3M1**	**07**	**0**	**12**	**CL**	
	• Pair of modules for thumb turn cylinders	**30 / 30**	15	1 00800 00 0 00CL	0,272	1	1	**0L3M2**	**07**	**0**	**12**	**CL**	
	• Pair of modules for thumb turn cylinders with adjustable shaft	**30 / 30**	15	1 00800 00 0 00CL	0,272	1	1	**0L3M7**	**07**	**0**	**12**	**CL**	
	• Single cylinder module	**30**	15	1 00800 00 0 00CL	0,272	1	1	**0L3M4**	**02**	**0**	**12**	**CL**	



Type	Description	Comm. dim. A / B	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Module for nickel-plated thumb turn cylinder (fin 12)	**30**				0,305	*5	1	**07580**	**55**	**0**		
	• Extension bolt unit on key side for double cylinders or thumb turn cylinders		5,0			0,305	*20	1	**07580**	**21**	**0**		
			10,0			0,305	*20	1	**07580**	**22**	**0**		
			20,0			0,305	*10	1	**07580**	**23**	**0**		
			30,0			0,305	*10	1	**07580**	**24**	**0**		
	• Follower					0,305	*50	1	**07580**	**50**	**0**		
	• Extension bolt unit fixing screw		5,0			0,305	*50	1	**07580**	**10**	**0**		
			10,0			0,305	*50	1	**07580**	**11**	**A**		
			15,0			0,305	*50	1	**07580**	**11**	**B**		
			20,0			0,305	*50	1	**07580**	**12**	**A**		
			25,0			0,305	*50	1	**07580**	**12**	**B**		
			30,0			0,305	*50	1	**07580**	**13**	**A**		
			35,0			0,305	*50	1	**07580**	**13**	**B**		
			40,0			0,305	*25	1	**07580**	**14**	**A**		
			45,0			0,305	*25	1	**07580**	**14**	**B**		
			50,0			0,305	*25	1	**07580**	**15**	**A**		
			55,0			0,305	*25	1	**07580**	**15**	**B**		
			60,0			0,305	*10	1	**07580**	**16**	**A**		
			65,0			0,305	*10	1	**07580**	**16**	**B**		
			70,0			0,305	*10	1	**07580**	**17**	**A**		
	• SNAP RESISTANT unit fixing pin					0,305	*500	1	**07580**	**20**	**0**		
	• Follower kit for single cylinder					0,305	*5	1	**07580**	**70**	**0**		
	• Coupling unit for double cylinders with clutch mechanism	**30 / 30**				0,305	*25	1	**07580**	**51**	**0**		
		30 / 35				0,305	*25	1	**07580**	**52**	**0**		
		35 / 35				0,305	*25	1	**07580**	**53**	**0**		
	• Coupling unit for cylinder with thumb turn shaft	**30 / 30**				0,305	*50	1	**07580**	**61**	**0**		
		35 / 30				0,305	*25	1	**07580**	**62**	**0**		

*** Amount corresponding to a single code ordered**



- Pre-assembled SNAP RESISTANT system compatible with AP4 S, Astral S and C3000S

Type	Description	Comm. dim. A / B	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30						0,305	5	1	07582	30	0		
30 / 35						0,305	5	1	07582	31	0		
30 / 40						0,305	5	1	07582	32	0		
30 / 45						0,305	5	1	07582	33	0		
30 / 50						0,305	5	1	07582	34	0		
30 / 55						0,305	5	1	07582	35	0		
30 / 60						0,305	2	1	07582	36	0		
30 / 65						0,305	2	1	07582	37	0		
30 / 70						0,305	2	1	07582	38	0		
30 / 75						0,305	1	1	07582	39	0		
30 / 80						0,305	1	1	07582	40	0		
30 / 85						0,305	1	1	07582	41	0		
30 / 90						0,305	1	1	07582	42	0		
30 / 100						0,305	1	1	07582	44	0		
35 / 35						0,305	5	1	07582	46	0		
35 / 40						0,305	5	1	07582	47	0		
35 / 45						0,305	5	1	07582	48	0		
35 / 50						0,305	5	1	07582	49	0		
35 / 55						0,305	2	1	07582	50	0		
35 / 60						0,305	2	1	07582	51	0		
35 / 65						0,305	2	1	07582	52	0		
35 / 70						0,305	1	1	07582	53	0		
35 / 75						0,305	1	1	07582	54	0		
35 / 80						0,305	1	1	07582	55	0		
40 / 40						0,305	5	1	07582	56	0		
40 / 45						0,305	5	1	07582	57	0		
40 / 50						0,305	2	1	07582	58	0		
40 / 55						0,305	2	1	07582	59	0		
40 / 60						0,305	2	1	07582	60	0		
40 / 65						0,305	1	1	07582	61	0		
40 / 70						0,305	1	1	07582	62	0		
40 / 75						0,305	1	1	07582	63	0		
40 / 80						0,305	1	1	07582	64	0		
45 / 45						0,305	2	1	07582	66	0		
45 / 50						0,305	2	1	07582	67	0		
45 / 55						0,305	2	1	07582	68	0		
45 / 60						0,305	1	1	07582	69	0		
45 / 70						0,305	1	1	07582	71	0		
45 / 75						0,305	1	1	07582	72	0		
50 / 50						0,305	2	1	07582	76	0		
50 / 55						0,305	1	1	07582	77	0		
50 / 60						0,305	1	1	07582	78	0		
50 / 65						0,305	1	1	07582	79	0		
50 / 70						0,305	1	1	07582	80	0		
50 / 80						0,305	1	1	07582	82	0		
55 / 55						0,305	1	1	07582	86	0		
55 / 60						0,305	1	1	07582	87	0		
55 / 65						0,305	1	1	07582	88	0		
60 / 60						0,305	1	1	07582	95	0		

Type	Description	Comm. dim. A / B	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Single cylinder connector	**30 / 10**				0,305	5	1	**07582**	**10**	**0**		
		35 / 10				0,305	5	1	**07582**	**11**	**0**		
		40 / 10				0,305	5	1	**07582**	**12**	**0**		
		45 / 10				0,305	5	1	**07582**	**13**	**0**		
		50 / 10				0,305	5	1	**07582**	**14**	**0**		
		55 / 10				0,305	2	1	**07582**	**15**	**0**		
		60 / 10				0,305	2	1	**07582**	**16**	**0**		
		65 / 10				0,305	2	1	**07582**	**17**	**0**		
		70 / 10				0,305	2	1	**07582**	**18**	**0**		
		80 / 10				0,305	2	1	**07582**	**20**	**0**		
		95 / 10				0,305	2	1	**07582**	**23**	**0**		
	• Assembly kit for RS3 S Modulo cylinders					5,700	1	1	**07550**	**12**	**0**		









RS3 S

Technical features:

CYLINDER:
- Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying.
- Security Card: authorised duplication by Cisa only
- Hardened steel pins.
- Hardened steel drivers.
- Stainless steel springs.
- Brass plug.
- Brass casing.






KEY:
- Non-handed, easier to use.
- **With built-in mobile element.**
- Material: nickel silver alloy.
- Numbered key head.
- Key neck length: 16 mm (compatible with protective roses).
- Patented controlled duplication



Supplied as standard:
- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.

Finishes:
- Standard: nickel-plated sanded brass (fin. 12).
- On request: polished brass (fin. 66).

Patents:

Key:
- Europe EP1728944
- Russia RU2008150925
- Ukraine UA200814736

Type	Description	For locks series	L	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570	15	1	00800 00 0 00CL	0,240	1	1	**0L510**	**00**	**0**	**12**	**CL**
	• Cylinder with anti-pulling, anti-drill nickel-plated escutcheon		15	1	00800 00 0 00CL	0,325	1	1	**0L510**	**10**	**0**	**12**	**CL**
	• Tubular cylinder	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	15	1	00800 00 0 00CL	0,215	1	1	**0L210**	**50**	**0**	**12**	**CL**
	• Pair of cylinders	50120, 50125, 50160, 50170, 50210, 50220	15	1	00800 00 0 00CL	0,267	1	1	**0L112**	**00**	**0**	**12**	**CL**
		11630	15	1	00800 00 0 00CL	0,267	1	1	**0L114**	**00**	**0**	**12**	**CL**
		11670	15	1	00800 00 0 00CL	0,267	1	1	**0L156**	**00**	**0**	**12**	**CL**
	• Pair of cylinders, tubular outside	11721, 11921	15	1	00800 00 0 00CL	0,295	1	1	**0L149**	**00**	**0**	**12**	**CL**
		11671, 11761, 11771	15	1	00800 00 0 00CL	0,253	1	1	**0L155**	**00**	**0**	**12**	**CL**

Type	Description	For locks series	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of cylinders, tubular outside	1A631, 1A721, 1A731		15	1 00800 00 0 00CL	0,295	1	1	0L150	00	0	12	CL
	• Pair of cylinders, tubular outside	50121, 50126, 50141, 50161, 50171, 50421, 50461, 50471, 50521, 50561, 50571	50	15	1 00800 00 0 00CL	0,295	1	1	0L116	00	0	12	CL
		11631, 11731, 11931		15	1 00800 00 0 00CL	0,295	1	1	0L120	00	0	12	CL









RS3 S

Technical features:

CYLINDER

- Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying.
- Security Card: authorised duplication by Cisa only
- Hardened steel pins.
- Hardened steel drivers.
- Stainless steel springs.
- Brass casing with snap resistant two-material core
- Brass plug.

KEY:

- Non-handed, easier to use.
- **With built-in mobile element.**
- Material: nickel silver alloy.
- Numbered key head.
- Key neck length: 16 mm (compatible with protective roses).
- Patented controlled duplication

Supplied as standard:

- 3 keys.
- Security Card.
- Operating and Maintenance Instructions.







Finishes:

- Standard: nickel-plated sanded brass (fin. 12).

Patents:

Key:

- Europe EP1728944
- Russia RU2008150925
- Ukraine UA200814736

Type	Description	For locks series	Door thickness	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
 	• Vertical key extraction • Deadbolt to choose from items 1.06414.25.0 and 1.06414.35.0 (specify in order)		17	15	1 00800 00 0 00CL	0,150	1	**1**	**0L410**	**00**	**0**	**12**	**CL**
	• Microswitch (7 A, 250 V) with welding terminals • Automatic return to key extraction position (0)		17	15	1 00800 00 0 00CL	0,150	1	**1**	**0L415**	**01**	**0**	**12**	**CL**
	• Microswitch (7 A, 250 V) with welding terminals • Automatic return to key extraction position (0)		17	15	1 00800 00 0 00CL	0,150	1	**1**	**0L415**	**03**	**0**	**12**	**CL**
	• Plug for steel padlocks series 28000 • 2 keys • Pickled brass body • Complete with plate			15	1 00800 00 0 00CL	0,240	1	**1**	**0L610**	**00**	**0**	**00**	**CL**
	• Cylinder for panic exit device external control item 1.07078.28.0			15	1 00800 00 0 00CL	0,240	1	**1**	**0L610**	**10**	**0**	**00**	**CL**



EN 1303:15							
KEY RELATED SECURITY	1	2	3	4	5	**6**
ATTACK RESISTANCE	0	A	B	C	**D**	
DURABILITY	1	2	3	4	5	**6**

AP4 S

Technical features:
- CYLINDER:
- BKP resistance to pumping, patented system
- Security Card: protected key duplication
- Brass body with dual-material SNAP RESISTANT core
- Brass plugs
- Carbonitrided steel pins
- Cylindrical and mushroom-like steel drivers with special anti-picking shape
- Phosphor bronze and steel springs
- Clutch-type DIN cam in self-lubricating sintered steel
- KEY:
- flat reversible
- in nickel silver alloy with mobile element
  - long neck, compatible with protective roses
  - numerical code on key bow

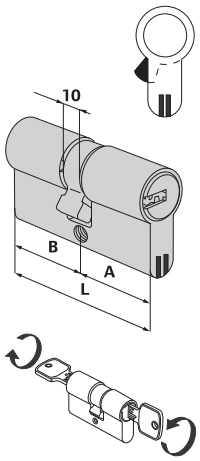
Supplied as standard:
- 3 keys
- Security Card
- Fixing screws
- Operating and maintenance instructions

Finishes:
- SUPPLIED AS STANDARD:
  - nickel-plated sanded brass (fin. 12)
- ON REQUEST:
  - polished brass (fin. 66)

Standards:
- In compliance with EN 1303:15
- Attack Resistance: grade D
- Key Related Security: grade 6
- Durability: grade 6

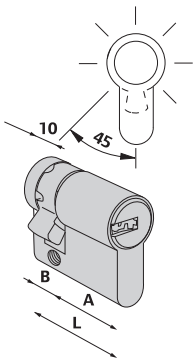
Certificates:
- ICIM EN 1303:15 16010C6D - Europe
- SKG**
- Gost - Russia

Patents:
- Key: PCT/IT2013/000297-APA (Patent) No. 1276648 (Trade Mark)
- Snap Resistant system: EP1583878
- BKP: PCT/WO2007/074163A1
- Picking: PCT/IT2016/000093




- Double cylinder with clutch system

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30		59,0	29,5	29,5	12	1 00810 00 0	0,272	1	1	0P3S1	07	0	12	
28 / 34		61,2	27,7	33,5	12	1 00810 00 0	0,272	1	1	0P3S1	06	0	12	
30 / 35		64,0	29,5	34,5	12	1 00810 00 0	0,305	1	1	0P3S1	26	0	12	
33 / 33		65,0	32,5	32,5	12	1 00810 00 0	0,272	1	1	0P3S1	10	0	12	
35 / 35		69,0	34,5	34,5	12	1 00810 00 0	0,272	1	1	0P3S1	13	0	12	
40 / 30		69,0	39,5	29,5	12	1 00810 00 0	0,272	1	1	0P3S1	12	0	12	
30 / 45		74,0	29,5	44,5	12	1 00810 00 0	0,305	1	1	0P3S1	27	0	12	
35 / 40		74,0	34,5	39,5	12	1 00810 00 0	0,305	1	1	0P3S1	28	0	12	
30 / 50		79,0	29,5	49,5	12	1 00810 00 0	0,305	1	1	0P3S1	17	0	12	
35 / 45		79,0	34,5	44,5	12	1 00810 00 0	0,305	1	1	0P3S1	19	0	12	
40 / 40		79,0	39,5	39,5	12	1 00810 00 0	0,305	1	1	0P3S1	18	0	12	
30 / 55		84,0	29,5	54,5	12	1 00810 00 0	0,305	1	1	0P3S1	33	0	12	
35 / 50		84,0	34,5	49,5	12	1 00810 00 0	0,305	1	1	0P3S1	31	0	12	
40 / 45		84,0	39,5	44,5	12	1 00810 00 0	0,305	1	1	0P3S1	30	0	12	
30 / 60		89,0	29,5	59,5	12	1 00810 00 0	0,305	1	1	0P3S1	20	0	12	
35 / 55		89,0	34,5	54,5	12	1 00810 00 0	0,305	1	1	0P3S1	32	0	12	
40 / 50		89,0	39,5	49,5	12	1 00810 00 0	0,305	1	1	0P3S1	21	0	12	
45 / 45		89,0	44,5	44,5	12	1 00810 00 0	0,305	1	1	0P3S1	29	0	12	
30 / 65		94,0	29,5	64,5	12	1 00810 00 0	0,305	1	1	0P3S1	41	0	12	
35 / 60		94,0	34,5	59,5	12	1 00810 00 0	0,305	1	1	0P3S1	38	0	12	
40 / 55		94,0	39,5	54,5	12	1 00810 00 0	0,305	1	1	0P3S1	42	0	12	
45 / 50		94,0	44,5	49,5	12	1 00810 00 0	0,305	1	1	0P3S1	39	0	12	
30 / 70		99,0	29,5	69,5	12	1 00810 00 0	0,305	1	1	0P3S1	24	0	12	
35 / 65		99,0	34,5	64,5	12	1 00810 00 0	0,305	1	1	0P3S1	22	0	12	
40 / 60		99,0	39,5	59,5	12	1 00810 00 0	0,305	1	1	0P3S1	25	0	12	
45 / 55		99,0	44,5	54,5	12	1 00810 00 0	0,305	1	1	0P3S1	43	0	12	
50 / 50		99,0	49,5	49,5	12	1 00810 00 0	0,305	1	1	0P3S1	23	0	12	
30 / 75		104,0	29,5	74,5	12	1 00810 00 0	0,305	1	1	0P3S1	56	0	12	
30 / 30		104,0	34,5	69,5	12	1 00810 00 0	0,305	1	1	0P3S1	49	0	12	
45 / 60		104,0	44,5	59,5	12	1 00810 00 0	0,305	1	1	0P3S1	54	0	12	
55 / 50		104,0	54,5	49,5	12	1 00810 00 0	0,305	1	1	0P3S1	64	0	12	
30 / 80		109,0	29,5	79,5	12	1 00810 00 0	0,305	1	1	0P3S1	37	0	12	
35 / 75		109,0	34,5	74,5	12	1 00810 00 0	0,305	1	1	0P3S1	57	0	12	
40 / 70		109,0	39,5	69,5	12	1 00810 00 0	0,305	1	1	0P3S1	35	0	12	
50 / 60		109,0	49,5	59,5	12	1 00810 00 0	0,390	1	1	0P3S1	36	0	12	
55 / 55		109,0	54,5	54,5	12	1 00810 00 0	0,305	1	1	0P3S1	70	0	12	
30 / 85		114,0	29,5	84,5	12	1 00810 00 0	0,305	1	1	0P3S1	77	0	12	
40 / 75		114,0	39,5	74,5	12	1 00810 00 0	0,305	1	1	0P3S1	59	0	12	
45 / 75		114,0	44,5	69,5	12	1 00810 00 0	0,305	1	1	0P3S1	61	0	12	
50 / 65		114,0	49,5	64,5	12	1 00810 00 0	0,305	1	1	0P3S1	65	0	12	
55 / 60		114,0	54,5	59,5	12	1 00810 00 0	0,305	1	1	0P3S1	71	0	12	
30 / 90		119,0	29,5	89,5	12	1 00810 00 0	0,305	1	1	0P3S1	52	0	12	
40 / 80		119,0	39,5	79,5	12	1 00810 00 0	0,305	1	1	0P3S1	60	0	12	
50 / 70		119,0	49,5	69,5	12	1 00810 00 0	0,305	1	1	0P3S1	66	0	12	
60 / 60		119,0	59,5	59,5	12	1 00810 00 0	0,305	1	1	0P3S1	40	0	12	
30 / 100		129,0	29,5	99,5	12	1 00810 00 0	0,305	1	1	0P3S1	53	0	12	




- Single cylinder with 8-position adjustable cam

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces		ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 10		39,5	29,5	10,0	12	1 00810 00 0	0,272	1	1	0P314	02	0	12		
35 / 10		44,5	34,5	10,0	12	1 00810 00 0	0,272	1	1	0P314	07	0	12		
40 / 10		49,5	39,5	10,0	12	1 00810 00 0	0,272	1	1	0P314	03	0	12		
45 / 10		54,5	44,5	10,0	12	1 00810 00 0	0,272	1	1	0P314	08	0	12		
50 / 10		59,5	49,5	10,0	12	1 00810 00 0	0,272	1	1	0P314	04	0	12		
60 / 10		69,5	59,5	10,0	12	1 00810 00 0	0,272	1	1	0P314	05	0	12		
65 / 10		74,5	64,5	10,0	12	1 00810 00 0	0,272	1	1	0P314	21	0	12		
70 / 10		79,5	69,5	10,0	12	1 00810 00 0	0,272	1	1	0P314	06	0	12		
80 / 10		89,5	79,5	10,0	12	1 00810 00 0	0,272	1	1	0P314	20	0	12		
95 / 10		104,5	94,5	10,0	12	1 00810 00 0	0,272	1	1	0P314	13	0	12		



- Double cylinder pre-set for thumb turn installation
- ON REQUEST:
  Thumb turns item 06353, 06355, 06356, 06357

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces		ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30		59,0	29,5	29,5	12	1 00810 00 0	0,305	1	1	0P3S2	07	0	12		
30 / 35		64,0	29,5	34,5	12	1 00810 00 0	0,305	1	1	0P3S2	26	0	12		
35 / 30		64,0	34,5	29,5	12	1 00810 00 0	0,305	1	1	0P3S2	81	0	12		
33 / 33		65,0	32,5	32,5	12	1 00810 00 0	0,305	1	1	0P3S2	10	0	12		
30 / 40		69,0	29,5	39,5	12	1 00810 00 0	0,305	1	1	0P3S2	82	0	12		
35 / 35		69,0	34,5	34,5	12	1 00810 00 0	0,305	1	1	0P3S2	13	0	12		
40 / 30		69,0	39,5	29,5	12	1 00810 00 0	0,305	1	1	0P3S2	12	0	12		
35 / 40		74,0	34,5	39,5	12	1 00810 00 0	0,305	1	1	0P3S2	28	0	12		
30 / 45		74,0	29,5	44,5	12	1 00810 00 0	0,305	1	1	0P3S2	27	0	12		
40 / 35		74,0	39,5	34,5	12	1 00810 00 0	0,305	1	1	0P3S2	83	0	12		
45 / 30		74,0	44,5	29,5	12	1 00810 00 0	0,305	1	1	0P3S2	91	0	12		
30 / 50		79,0	29,5	49,5	12	1 00810 00 0	0,305	1	1	0P3S2	17	0	12		
35 / 45		79,0	34,5	44,5	12	1 00810 00 0	0,305	1	1	0P3S2	19	0	12		
40 / 40		79,0	39,5	39,5	12	1 00810 00 0	0,305	1	1	0P3S2	18	0	12		
45 / 35		79,0	44,5	34,5	12	1 00810 00 0	0,305	1	1	0P3S2	85	0	12		
40 / 45		84,0	39,5	44,5	12	1 00810 00 0	0,305	1	1	0P3S2	30	0	12		
45 / 40		84,0	44,5	39,5	12	1 00810 00 0	0,305	1	1	0P3S2	84	0	12		
30 / 60		89,0	29,5	59,5	12	1 00810 00 0	0,305	1	1	0P3S2	20	0	12		
40 / 50		89,0	39,5	49,5	12	1 00810 00 0	0,305	1	1	0P3S2	21	0	12		
45 / 45		89,0	44,5	44,5	12	1 00810 00 0	0,305	1	1	0P3S2	29	0	12		
40 / 55		94,0	39,5	54,5	12	1 00810 00 0	0,305	1	1	0P3S2	42	0	12		
55 / 40		94,0	54,5	39,5	12	1 00810 00 0	0,305	1	1	0P3S2	98	0	12		
45 / 50		94,0	44,5	49,5	12	1 00810 00 0	0,305	1	1	0P3S2	39	0	12		
40 / 60		99,0	39,5	59,5	12	1 00810 00 0	0,305	1	1	0P3S2	25	0	12		
45 / 55		99,0	44,5	54,5	12	1 00810 00 0	0,305	1	1	0P3S2	43	0	12		
50 / 50		99,0	49,5	49,5	12	1 00810 00 0	0,305	1	1	0P3S2	23	0	12		
40 / 65		104,0	39,5	64,5	12	1 00810 00 0	0,305	1	1	0P3S2	44	0	12		
45 / 60		104,0	44,5	59,5	12	1 00810 00 0	0,305	1	1	0P3S2	54	0	12		
55 / 50		104,0	54,5	49,5	12	1 00810 00 0	0,305	1	1	0P3S2	64	0	12		
30 / 80		109,0	29,5	79,5	12	1 00810 00 0	0,305	1	1	0P3S2	37	0	12		
35 / 75		109,0	34,5	74,5	12	1 00810 00 0	0,305	1	1	0P3S2	57	0	12		
40 / 70		109,0	39,5	69,5	12	1 00810 00 0	0,305	1	1	0P3S2	35	0	12		
50 / 60		109,0	49,5	59,5	12	1 00810 00 0	0,305	1	1	0P3S2	36	0	12		
45 / 70		114,0	44,5	69,5	12	1 00810 00 0	0,305	1	1	0P3S2	61	0	12		
50 / 65		114,0	49,5	64,5	12	1 00810 00 0	0,305	1	1	0P3S2	65	0	12		



- Double cylinder with adjustable shaft, pre-set for thumb turn
- To use with inside escutcheon item 1.06458.20
- On request:
  Thumb turns item 06353, 06355, 06356, 06357

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces		ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30		59,0	29,5	29,5	12	1 00810 00 0	0,272	1	**1**	**0P3S7**	**07**	**0**	**12**		
35 / 30		64,0	34,5	29,5	12	1 00810 00 0	0,272	1	**1**	**0P3S7**	**81**	**0**	**12**		
40 / 30		69,0	39,5	29,5	12	1 00810 00 0	0,272	1	**1**	**0P3S7**	**12**	**0**	**12**		
45 / 30		74,0	44,5	29,5	12	1 00810 00 0	0,272	1	**1**	**0P3S7**	**91**	**0**	**12**		
50 / 30		79,0	49,5	29,5	12	1 00810 00 0	0,272	1	**1**	**0P3S7**	**90**	**0**	**12**		
55 / 30		84,0	54,5	29,5	12	1 00810 00 0	0,272	1	**1**	**0P3S7**	**92**	**0**	**12**		
60 / 30		89,0	59,5	29,5	12	1 00810 00 0	0,272	1	**1**	**0P3S7**	**87**	**0**	**12**		
65 / 30		94,0	64,5	29,5	12	1 00810 00 0	0,272	1	**1**	**0P3S7**	**A3**	**0**	**12**		
70 / 30		99,0	69,5	29,5	12	1 00810 00 0	0,272	1	**1**	**0P3S7**	**88**	**0**	**12**		
80 / 30		110,0	79,5	29,5	12	1 00810 00 0	0,272	1	**1**	**0P3S7**	**93**	**0**	**12**		
90 / 30		120,0	89,5	29,5	12	1 00810 00 0	0,282	1	**1**	**0P3S7**	**C6**	**0**	**12**		
100 / 30		130,0	99,5	29,5	12	1 00810 00 0	0,292	1	**1**	**0P3S7**	**C7**	**0**	**12**		
















Technical features:
- CISA patented system (AP4S - C3000S)
- Security Card: authorised key duplication by CISA or CISA Solution Partners (AP4S - C3000S)
- BKP resistance to pumping, patented system
- Brass body with dual-material SNAP RESISTANT core





Supplied as standard:
- 3 keys
- Fixing screws
- Operating and maintenance instructions


Finishes:
- SUPPLIED AS STANDARD: Nickel-plated sanded brass (fin. 12)
- ON REQUEST: Polished brass (fin. 66)

MODULO SYSTEM

Type	Description	Comm. dim. A / B	L	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of modules for cylinder with clutch system AP4S	**30 / 30**		12	1 00810 00 0	0,272	1	**1**	**0P3M1**	**07**	**0**	**12**	
	• Pair of modules for cylinder with thumb turn shaft AP4S	**30 / 30**		12	1 00810 00 0	0,272	1	**1**	**0P3M2**	**07**	**0**	**12**	
	• Pair of modules for cylinder with adjustable thumb turn shaft AP4S	**30 / 30**		12	1 00810 00 0	0,272	1	**1**	**0P3M7**	**07**	**0**	**12**	
	• Module for single cylinder ASTRAL S	**30**		12	1 00810 00 0	0,272	1	**1**	**0P3M4**	**02**	**0**	**12**	
	• Pair of modules for cylinder with clutch system ASTRAL S	**30 / 30**		10	1 00620 90 0	0,272	1	**1**	**0A3M1**	**07**	**0**	**12**	**CL**



Type	Description	Comm. dim. A / B	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of modules for cylinder with thumb turn shaft ASTRAL S	**30 / 30**		10	1 00620 90 0	0,272	1	**1**	**0A3M2**	**07**	**0**	**12**	**CL**
	• Pair of modules for cylinder with adjustable thumb turn shaft ASTRAL S	**30 / 30**		10	1 00620 90 0	0,272	1	**1**	**0A3M7**	**07**	**0**	**12**	**CL**
	• Module for single cylinder ASTRAL S	**30**		10	1 00620 90 0	0,272	1	**1**	**0A3M4**	**02**	**0**	**12**	**CL**
	• Pair of modules for cylinder with clutch system C3000S	**30 / 30**		6	1 00430 00 1	0,272	1	**1**	**0N3M1**	**07**	**0**	**12**	
	• Pair of modules for cylinder with thumb turn shaft C3000S	**30 / 30**		6	1 00430 00 1	0,272	1	**1**	**0N3M2**	**07**	**0**	**12**	
	• Pair of modules for cylinder with adjustable thumb turn shaft C3000S	**30 / 30**		6	1 00430 00 1	0,272	1	**1**	**0N3M7**	**07**	**0**	**12**	
	• Module for single cylinder C3000S	**30**		6	1 00430 00 1	0,272	1	**1**	**0N3M4**	**02**	**0**	**12**	
	• Extension bolt unit on key side for double cylinders and cylinders with thumb turn shaft (CISA patent)		5,0			0,305	30	**1**	**07580**	**05**	**0**		
			10,0			0,305	20	**1**	**07580**	**01**	**0**		
			20,0			0,305	20	**1**	**07580**	**02**	**0**		
			30,0			0,305	10	**1**	**07580**	**03**	**0**		

Type	Description	Comm. dim. A / B	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Fixing screws for extension bolt unit		5,0			0,305	50 1	07580	10	0			
			10,0			0,305	50 1	07580	11	A			
			15,0			0,305	50 1	07580	11	B			
			20,0			0,305	50 1	07580	12	A			
			25,0			0,305	50 1	07580	12	B			
			30,0			0,305	50 1	07580	13	A			
			35,0			0,305	50 1	07580	13	B			
			40,0			0,305	25 1	07580	14	A			
			45,0			0,305	25 1	07580	14	B			
			50,0			0,305	25 1	07580	15	A			
			55,0			0,305	25 1	07580	15	B			
			60,0			0,305	10 1	07580	16	A			
			65,0			0,305	10 1	07580	16	B			
			70,0			0,305	10 1	07580	17	A			
	• Follower for clutch-type cylinder (for C3000S)					0,305	100 1	07580	30	A			
	• Follower for clutch-type cylinder (for AP4S and ASTRAL S)					0,305	100 1	07580	30	0			
	• Coupling unit for cylinder with clutch system (for C3000S)	**30 / 30**				0,305	50 1	07580	34	0			
	• Coupling unit for cylinder with clutch system (for AP4S and ASTRAL S)	**30 / 30**				0,305	50 1	07580	31	0			
		30 / 35				0,305	50 1	07580	32	A			
		35 / 35				0,305	50 1	07580	33	A			
	• Follower kit for single cylinder					0,305	5 1	07580	60	A			
	• Insert for fixing the "SNAP RESISTANT" system					0,305	500 1	07580	20	0			
	• Nickel-plated module for thumb turn cylinder (fin.12) • On request: polished brass finish (fin. 66)	**30**				0,305	5 1	07580	47	0	12		
	• Nickel-plated module for thumb turn cylinder with adjustable shaft (fin.12) • On request: polished brass finish (fin. 66)	**30**				0,305	5 1	07580	48	0	12		



- Pre-assembled SNAP RESISTANT system compatible with AP4 S, Astral S and C3000S

Type	Description	Comm. dim. A / B	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		30 / 30				0,305	5	1	07582	30	0		
		30 / 35				0,305	5	1	07582	31	0		
		30 / 40				0,305	5	1	07582	32	0		
		30 / 45				0,305	5	1	07582	33	0		
		30 / 50				0,305	5	1	07582	34	0		
		30 / 55				0,305	5	1	07582	35	0		
		30 / 60				0,305	2	1	07582	36	0		
		30 / 65				0,305	2	1	07582	37	0		
		30 / 70				0,305	2	1	07582	38	0		
		30 / 75				0,305	1	1	07582	39	0		
		30 / 80				0,305	1	1	07582	40	0		
		30 / 85				0,305	1	1	07582	41	0		
		30 / 90				0,305	1	1	07582	42	0		
		30 / 100				0,305	1	1	07582	44	0		
		35 / 35				0,305	5	1	07582	46	0		
		35 / 40				0,305	5	1	07582	47	0		
		35 / 45				0,305	5	1	07582	48	0		
		35 / 50				0,305	5	1	07582	49	0		
		35 / 55				0,305	2	1	07582	50	0		
		35 / 60				0,305	2	1	07582	51	0		
		35 / 65				0,305	2	1	07582	52	0		
		35 / 70				0,305	1	1	07582	53	0		
		35 / 75				0,305	1	1	07582	54	0		
		35 / 80				0,305	1	1	07582	55	0		
		40 / 40				0,305	5	1	07582	56	0		
		40 / 45				0,305	5	1	07582	57	0		
		40 / 50				0,305	2	1	07582	58	0		
		40 / 55				0,305	2	1	07582	59	0		
		40 / 60				0,305	2	1	07582	60	0		
		40 / 65				0,305	1	1	07582	61	0		
		40 / 70				0,305	1	1	07582	62	0		
		40 / 75				0,305	1	1	07582	63	0		
		40 / 80				0,305	1	1	07582	64	0		
		45 / 45				0,305	2	1	07582	66	0		
		45 / 50				0,305	2	1	07582	67	0		
		45 / 55				0,305	2	1	07582	68	0		
		45 / 60				0,305	1	1	07582	69	0		
		45 / 70				0,305	1	1	07582	71	0		
		45 / 75				0,305	1	1	07582	72	0		
		50 / 50				0,305	2	1	07582	76	0		
		50 / 55				0,305	1	1	07582	77	0		
		50 / 60				0,305	1	1	07582	78	0		
		50 / 65				0,305	1	1	07582	79	0		
		50 / 70				0,305	1	1	07582	80	0		
		50 / 80				0,305	1	1	07582	82	0		
		55 / 55				0,305	1	1	07582	86	0		
		55 / 60				0,305	1	1	07582	87	0		
		55 / 65				0,305	1	1	07582	88	0		
		60 / 60				0,305	1	1	07582	95	0		

Type	Description	Comm. dim. A / B	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Connector for single cylinder	**30 / 10**				0,305	5	1	**07582**	**10**		**0**	
		35 / 10				0,305	5	1	**07582**	**11**		**0**	
		40 / 10				0,305	5	1	**07582**	**12**		**0**	
		45 / 10				0,305	5	1	**07582**	**13**		**0**	
		50 / 10				0,305	5	1	**07582**	**14**		**0**	
		55 / 10				0,305	2	1	**07582**	**15**		**0**	
		60 / 10				0,305	2	1	**07582**	**16**		**0**	
		65 / 10				0,305	2	1	**07582**	**17**		**0**	
		70 / 10				0,305	2	1	**07582**	**18**		**0**	
		80 / 10				0,305	2	1	**07582**	**20**		**0**	
		95 / 10				0,305	2	1	**07582**	**23**		**0**	
	• Assembly kit for Modulo System cylinders					3,000	1	1	**07550**	**14**		**0**	









Technical features:
- CISA patented system: **key with mobile element**
- Security Card: protected key duplication

CYLINDER:
- Brass body
- Brass plugs
- Carbonitrided steel pins
- Carbonitrided steel drivers
- Phosphor bronze springs





KEYS :
- flat reversible
- in nickel silver alloy with mobile element
- long neck, compatible with protective roses
- numerical code on key bow




Supplied as standard:
- 3 keys
- Security Card
- Fixing roses
- Fixing screws
- Operating and maintenance instructions

Finishes:
- SUPPLIED AS STANDARD::
  - nickel-plated sanded brass (fin. 12)
- ON REQUEST:
  - polished brass (fin. 66)

Patents:
- Key:
  PCT/IT2013/000297-APA (Patent)
  No. 1276648 (Trade Mark)

AP4 S

Type	Description	For locks series	L	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570		12	1 00810 00 0	0,204	1	**1**	**0P510**	**00**	**0**	**12**	
	• Cylinder with nickel-plated anti-pulling and drill resistant protective rose			12	1 00810 00 0	0,325	1	**1**	**0P510**	**10**	**0**	**12**	
	• Tubular cylinder	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	50,0	12	1 00810 00 0	0,215	1	**1**	**0P210**	**55**	**0**	**12**	
	• Pair of cylinders with external tubular cylinder	1A631, 1A721, 1A731	50,0	12	1 00810 00 0	0,295	1	**1**	**0P150**	**00**	**0**	**12**	

Type	Description	For locks series	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of cylinders with external tubular cylinder	50121, 50126, 50141, 50161, 50171, 50421, 50461, 50471, 50521, 50561, 50571	50,0	12	1 00810 00 0	0,295	1	1	**0P116**	**00**	**0**	**12**	
		11631, 11731, 11931	50,0	12	1 00810 00 0	0,295	1	1	**0P120**	**00**	**0**	**12**	
	• Pair of cylinders	11670		12	1 00810 00 0	0,295	1	1	**0P156**	**00**	**0**	**12**	
	• Pair of cylinders with external tubular cylinder	11721, 11921	50,0	12	1 00810 00 0	0,295	1	1	**0P149**	**00**	**0**	**12**	









AP4 S



Technical features:
- CISA patented system: **key with mobile element**
- Security Card: protected key duplication
- Brass body
- Brass plugs
- Carbonitrided steel pins
- Carbonitrided steel drivers
- Phosphor bronze springs
- Keys:
  - flat reversible
  - in nickel silver alloy with mobile element
  - long neck, compatible with protective roses
  - numerical code on key bow

Supplied as standard:
- 3 keys
- Security Card
- Fixing roses
- Fixing screws
- Operating and maintenance instructions

Finishes:
- Nickel-plated sanded brass (fin. 12)

Patents.
- Key: PCT/IT2013/000297-APA (Patent) N° 1276648 (Trade Mark)

Type	Description	Door thickness	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers.	Spec.
	• Steel padlock plug • 2 keys • Pickled brass body • Complete with plate item 1.07573.08.0	12	1	00810 00 0	0,117	1	**0P610**	**00**	**0**		
	• Cylinder for outside access device 1.07078.28.0	12	1	00810 00 0	0,117	1	**0P610**	**10**	**0**	**12**	
	• Cylinder for outside access device 1.07078.29.0	12	1	00810 00 0	0,117	1	**0P610**	**11**	**0**	**12**	
	• Cylinder for Meroni Premi/Apri mechanism	12	1	00810 00 0	0,117	1	**0P610**	**12**	**0**	**12**	
 	• Key extraction to position (0) • Ring item 1.06021.10.0 • Deadbolt item 1.06414.20.0 or 1.06414.30.0 (to be ordered separately)	17	12	1 00810 00 0	0,117	1	**0P410**	**00**	**0**	**12**	

Type	Description	Door thickness	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Microswitch (7 A, 250 V) with welding terminals • Automatic return to key extraction position (0) • Ring item 1.06021.10.0	17	12	1 00810 00 0	0,117	1	**1**	**OP415**	**01**	**0**	**12**	
	• Microswitch (7 A, 250 V) with welding terminals • Automatic return to key extraction position (0) • Ring item 1.06021.10.0	17	12	1 00810 00 0	0,117	1	**1**	**OP415**	**03**	**0**	**12**	



EN 1303:15

KEY RELATED SECURITY	1	2	3	4	5	**6**
ATTACK RESISTANCE	0	A	B	**C**	D	
DURABILITY	1	2	3	4	5	**6**

Astral Tekno PRO

Technical features:
- CISA patented system
- BKP Resistance to bumping
- 10-pin key bitting system
- Security Card: protected key duplication
- **Brass body with cut for controlled snapping**
- Brass plugs
- Clutch-type DIN cam in self-lubricating sintered steel
- Hardened steel pins
- Hardened steel drivers
- Double side control steel pin
- Phosphor bronze and steel springs
- Patented key:
  - flat reversible
  - in nickel-plated brass
  - plastic key bow
  - long neck, compatible with protective roses

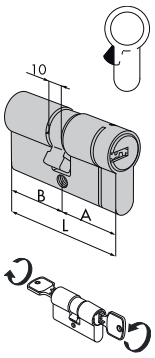
Supplied as standard:
- 3 keys
- Security Card
- Fixing screw
- Operating and maintenance Instructions

Finishes:
- SUPPLIED AS STANDARD:
  -nickel-plated brass (fin. 12)
- ON REQUEST:
  - polished brass (fin. 66)

Standards:
- In compliance with EN 1303:15
- Attack Resistance: grade C
- Key Related Security: grade 6
- Durability: grade 6

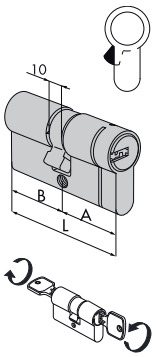


Certificates:
- Gost - Russia
- SKG**


Patents:
- Key:
  EP 1 867 810 B1
- BKP:
  PCT/WO 2007/074163 A1



- Clutching system double cylinder

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30		59,0	29,5	29,5	10	1 00690 00 0 00CL	0,235	1	**1**	**0M3T1**	**07**	**0**	**12**	
28 / 34		61,2	27,7	33,5	10	1 00690 00 0 00CL	0,235	1	**1**	**0M3T1**	**06**	**0**	**12**	
28 / 36		63,2	27,7	35,5	10	1 00690 00 0 00CL	0,243	1	**1**	**0M3T1**	**09**	**0**	**12**	
30 / 35		64,0	29,5	34,5	10	1 00690 00 0 00CL	0,238	1	**1**	**0M3T1**	**26**	**0**	**12**	
33 / 33		65,0	32,5	32,5	10	1 00690 00 0 00CL	0,258	1	**1**	**0M3T1**	**10**	**0**	**12**	
35 / 35		69,0	34,5	34,5	10	1 00690 00 0 00CL	0,272	1	**1**	**0M3T1**	**13**	**0**	**12**	
40 / 30		69,0	39,5	29,5	10	1 00690 00 0 00CL	0,272	1	**1**	**0M3T1**	**12**	**0**	**12**	
28 / 43		70,2	27,7	42,5	10	1 00690 00 0 00CL	0,272	1	**1**	**0M3T1**	**11**	**0**	**12**	
30 / 45		74,0	29,5	44,5	10	1 00690 00 0 00CL	0,274	1	**1**	**0M3T1**	**27**	**0**	**12**	
35 / 40		74,0	34,5	39,5	10	1 00690 00 0 00CL	0,274	1	**1**	**0M3T1**	**28**	**0**	**12**	
30 / 50		79,0	29,5	49,5	10	1 00690 00 0 00CL	0,290	1	**1**	**0M3T1**	**17**	**0**	**12**	
35 / 45		79,0	34,5	44,5	10	1 00690 00 0 00CL	0,290	1	**1**	**0M3T1**	**19**	**0**	**12**	
40 / 40		79,0	39,5	39,5	10	1 00690 00 0 00CL	0,290	1	**1**	**0M3T1**	**18**	**0**	**12**	
30 / 55		84,0	29,5	54,5	10	1 00690 00 0 00CL	0,304	1	**1**	**0M3T1**	**33**	**0**	**12**	
35 / 50		84,0	34,5	49,5	10	1 00690 00 0 00CL	0,304	1	**1**	**0M3T1**	**31**	**0**	**12**	
40 / 45		84,0	39,5	44,5	10	1 00690 00 0 00CL	0,304	1	**1**	**0M3T1**	**30**	**0**	**12**	
30 / 60		89,0	29,5	59,5	10	1 00690 00 0 00CL	0,320	1	**1**	**0M3T1**	**20**	**0**	**12**	
35 / 55		89,0	34,5	54,5	10	1 00690 00 0 00CL	0,320	1	**1**	**0M3T1**	**32**	**0**	**12**	
40 / 50		89,0	39,5	49,5	10	1 00690 00 0 00CL	0,320	1	**1**	**0M3T1**	**21**	**0**	**12**	
45 / 45		89,0	44,5	44,5	10	1 00690 00 0 00CL	0,320	1	**1**	**0M3T1**	**29**	**0**	**12**	
30 / 65		94,0	29,5	64,5	10	1 00690 00 0 00CL	0,330	1	**1**	**0M3T1**	**41**	**0**	**12**	
35 / 60		94,0	34,5	59,5	10	1 00690 00 0 00CL	0,330	1	**1**	**0M3T1**	**38**	**0**	**12**	
40 / 55		94,0	39,5	54,5	10	1 00690 00 0 00CL	0,330	1	**1**	**0M3T1**	**42**	**0**	**12**	
45 / 50		94,0	44,5	49,5	10	1 00690 00 0 00CL	0,330	1	**1**	**0M3T1**	**39**	**0**	**12**	
30 / 70		99,0	29,5	69,5	10	1 00690 00 0 00CL	0,340	1	**1**	**0M3T1**	**24**	**0**	**12**	
35 / 65		99,0	34,5	64,5	10	1 00690 00 0 00CL	0,350	1	**1**	**0M3T1**	**22**	**0**	**12**	
40 / 60		99,0	39,5	59,5	10	1 00690 00 0 00CL	0,350	1	**1**	**0M3T1**	**25**	**0**	**12**	
45 / 55		99,0	44,5	54,5	10	1 00690 00 0 00CL	0,340	1	**1**	**0M3T1**	**43**	**0**	**12**	
50 / 50		99,0	49,5	49,5	10	1 00690 00 0 00CL	0,340	1	**1**	**0M3T1**	**23**	**0**	**12**	
40 / 65		104,0	39,5	64,5	10	1 00690 00 0 00CL	0,365	1	**1**	**0M3T1**	**44**	**0**	**12**	
45 / 60		104,0	44,5	59,5	10	1 00690 00 0 00CL	0,365	1	**1**	**0M3T1**	**54**	**0**	**12**	

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Clutching system double cylinder													
30 / 75		104,0	29,5	74,5	10	1 00690 00 0 00CL	0,365	1	1	**0M3T1**	**56**	**0**	**12**	
35 / 70		104,0	34,5	69,5	10	1 00690 00 0 00CL	0,365	1	1	**0M3T1**	**49**	**0**	**12**	
55 / 50		104,0	54,5	49,5	10	1 00690 00 0 00CL	0,365	1	1	**0M3T1**	**64**	**0**	**12**	
35 / 75		109,0	34,5	74,5	10	1 00690 00 0 00CL	0,360	1	1	**0M3T1**	**57**	**0**	**12**	
30 / 80		109,0	29,5	79,5	10	1 00690 00 0 00CL	0,360	1	1	**0M3T1**	**37**	**0**	**12**	
45 / 65		109,0	44,5	64,5	10	1 00690 00 0 00CL	0,360	1	1	**0M3T1**	**45**	**0**	**12**	
40 / 70		109,0	39,5	69,5	10	1 00690 00 0 00CL	0,360	1	1	**0M3T1**	**35**	**0**	**12**	
50 / 60		109,0	49,5	59,5	10	1 00690 00 0 00CL	0,360	1	1	**0M3T1**	**36**	**0**	**12**	
55 / 55		109,0	54,5	54,5	10	1 00690 00 0 00CL	0,360	1	1	**0M3T1**	**70**	**0**	**12**	
30 / 85		114,0	29,5	84,5	10	1 00690 00 0 00CL	0,400	1	1	**0M3T1**	**77**	**0**	**12**	
50 / 65		114,0	49,5	64,5	10	1 00690 00 0 00CL	0,400	1	1	**0M3T1**	**65**	**0**	**12**	
55 / 60		114,0	54,5	59,5	10	1 00690 00 0 00CL	0,400	1	1	**0M3T1**	**71**	**0**	**12**	
40 / 75		114,0	39,5	74,5	10	1 00690 00 0 00CL	0,400	1	1	**0M3T1**	**59**	**0**	**12**	
45 / 70		114,0	44,5	69,5	10	1 00690 00 0 00CL	0,400	1	1	**0M3T1**	**61**	**0**	**12**	
30 / 90		119,0	29,5	89,5	10	1 00690 00 0 00CL	0,420	1	1	**0M3T1**	**52**	**0**	**12**	
40 / 80		119,0	39,5	79,5	10	1 00690 00 0 00CL	0,420	1	1	**0M3T1**	**60**	**0**	**12**	
60 / 60		119,0	59,5	59,5	10	1 00690 00 0 00CL	0,420	1	1	**0M3T1**	**40**	**0**	**12**	
50 / 70		119,0	49,5	69,5	10	1 00690 00 0 00CL	0,420	1	1	**0M3T1**	**66**	**0**	**12**	
30 / 100		129,0	29,5	99,5	10	1 00690 00 0 00CL	0,460	1	1	**0M3T1**	**53**	**0**	**12**	
	• Single cylinder with adjustable cam in 8 position													
30 / 10		39,5	29,5	10,0	10	1 00690 00 0 00CL	0,185	1	1	**0M324**	**02**	**0**	**12**	
35 / 10		44,5	34,5	10,0	10	1 00690 00 0 00CL	0,195	1	1	**0M324**	**07**	**0**	**12**	
40 / 10		49,5	39,5	10,0	10	1 00690 00 0 00CL	0,205	1	1	**0M324**	**03**	**0**	**12**	
45 / 10		54,5	44,5	10,0	10	1 00690 00 0 00CL	0,215	1	1	**0M324**	**08**	**0**	**12**	
50 / 10		49,5	39,5	10,0	10	1 00690 00 0 00CL	0,225	1	1	**0M324**	**04**	**0**	**12**	
60 / 10		69,5	59,5	10,0	10	1 00690 00 0 00CL	0,245	1	1	**0M324**	**05**	**0**	**12**	
65 / 10		74,5	64,5	10,0	10	1 00690 00 0 00CL	0,255	1	1	**0M324**	**21**	**0**	**12**	
70 / 10		79,5	69,5	10,0	10	1 00690 00 0 00CL	0,265	1	1	**0M324**	**06**	**0**	**12**	
80 / 10		89,5	79,5	10,0	10	1 00690 00 0 00CL	0,285	1	1	**0M324**	**20**	**0**	**12**	
95 / 10		104,5	94,5	10,0	10	1 00690 00 0 00CL	0,315	1	1	**0M324**	**13**	**0**	**12**	
	• Double cylinder with thumb turn shaft • ON REQUEST: Knobs series 06353, 06355, 06356, 06357													
30 / 30		59,0	29,5	29,5	10	1 00690 00 0 00CL	0,240	1	1	**0M3T2**	**07**	**0**	**12**	
30 / 35		64,0	29,5	34,5	10	1 00690 00 0 00CL	0,250	1	1	**0M3T2**	**26**	**0**	**12**	
35 / 30		64,0	34,5	29,5	10	1 00690 00 0 00CL	0,250	1	1	**0M3T2**	**81**	**0**	**12**	
30 / 40		69,0	29,5	39,5	10	1 00690 00 0 00CL	0,260	1	1	**0M3T2**	**82**	**0**	**12**	
35 / 35		69,0	34,5	34,5	10	1 00690 00 0 00CL	0,260	1	1	**0M3T2**	**13**	**0**	**12**	
40 / 30		69,0	39,5	29,5	10	1 00690 00 0 00CL	0,260	1	1	**0M3T2**	**12**	**0**	**12**	
35 / 40		74,0	34,5	39,5	10	1 00690 00 0 00CL	0,270	1	1	**0M3T2**	**28**	**0**	**12**	
30 / 45		74,0	29,5	44,5	10	1 00690 00 0 00CL	0,270	1	1	**0M3T2**	**27**	**0**	**12**	
40 / 35		74,0	39,5	34,5	10	1 00690 00 0 00CL	0,270	1	1	**0M3T2**	**83**	**0**	**12**	
45 / 30		74,0	44,5	29,5	10	1 00690 00 0 00CL	0,270	1	1	**0M3T2**	**91**	**0**	**12**	
30 / 50		79,0	29,5	49,5	10	1 00690 00 0 00CL	0,280	1	1	**0M3T2**	**17**	**0**	**12**	
35 / 45		79,0	34,5	44,5	10	1 00690 00 0 00CL	0,280	1	1	**0M3T2**	**19**	**0**	**12**	
40 / 40		79,0	39,5	39,5	10	1 00690 00 0 00CL	0,280	1	1	**0M3T2**	**18**	**0**	**12**	
40 / 45		84,0	39,5	44,5	10	1 00690 00 0 00CL	0,290	1	1	**0M3T2**	**30**	**0**	**12**	
30 / 60		89,0	29,5	59,5	10	1 00690 00 0 00CL	0,300	1	1	**0M3T2**	**20**	**0**	**12**	
40 / 50		89,0	39,5	49,5	10	1 00690 00 0 00CL	0,300	1	1	**0M3T2**	**21**	**0**	**12**	
45 / 45		89,0	44,5	44,5	10	1 00690 00 0 00CL	0,300	1	1	**0M3T2**	**29**	**0**	**12**	
45 / 50		94,0	44,5	49,5	10	1 00690 00 0 00CL	0,300	1	1	**0M3T2**	**39**	**0**	**12**	
40 / 60		99,0	39,5	59,5	10	1 00690 00 0 00CL	0,320	1	1	**0M3T2**	**25**	**0**	**12**	
50 / 50		99,0	49,5	49,5	10	1 00690 00 0 00CL	0,320	1	1	**0M3T2**	**23**	**0**	**12**	



- Double cylinder with adjustable thumb turn shaft
- To be combined with inside rose item 1.06458.20
- ON REQUEST: Knobs series 06353, 06355, 06356, 06357

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30		59,0	29,5	29,5	10	1 00690 00 0 00CL	0,284	1	**1**	**0M3T7**	**07**	**0**	**12**	
35 / 30		64,0	34,5	29,5	10	1 00690 00 0 00CL	0,294	1	**1**	**0M3T7**	**81**	**0**	**12**	
40 / 30		69,0	39,5	29,5	10	1 00690 00 0 00CL	0,304	1	**1**	**0M3T7**	**12**	**0**	**12**	
45 / 30		74,0	44,5	29,5	10	1 00690 00 0 00CL	0,314	1	**1**	**0M3T7**	**91**	**0**	**12**	
50 / 30		79,0	49,5	29,5	10	1 00690 00 0 00CL	0,324	1	**1**	**0M3T7**	**90**	**0**	**12**	
55 / 30		84,0	54,5	29,5	10	1 00690 00 0 00CL	0,334	1	**1**	**0M3T7**	**92**	**0**	**12**	
60 / 30		89,0	59,5	29,5	10	1 00690 00 0 00CL	0,344	1	**1**	**0M3T7**	**87**	**0**	**12**	
65 / 30		94,0	64,5	29,5	10	1 00690 00 0 00CL	0,354	1	**1**	**0M3T7**	**A3**	**0**	**12**	
70 / 30		99,0	69,5	29,5	10	1 00690 00 0 00CL	0,364	1	**1**	**0M3T7**	**88**	**0**	**12**	
80 / 30		109,0	79,5	29,5	10	1 00690 00 0 00CL	0,384	1	**1**	**0M3T7**	**93**	**0**	**12**	
90 / 30		119,0	89,5	29,5	10	1 00690 00 0 00CL	0,404	1	**1**	**0M3T7**	**C6**	**0**	**12**	
100 / 30		129,0	99,5	29,5	10	1 00690 00 0 00CL	0,424	1	**1**	**0M3T7**	**C7**	**0**	**12**	









Astral Tekno PRO






Technical features:
- Cisa patented system
- 10 pin (6 active, 4 passive) key bitting system
- Security Card: protected key duplication
- Brass body
- Brass plugs
- Self-lubricating DIN sintered steel clutch-type cam
- Casehardened steel pins
- Hardened steel pin drivers
- Double side control steel pin
- Phosphorous bronze and steel springs
- Patented key:
  - reversible flat key
  - nickel-plated brass key
  - plastic material head
  - long neck, compatible with protective roses




Supplied as standard:
- 3 keys
- Security Card
- Fixing screw
- Fixing roses
- Operating and maintenance Instructions

Finishes:
- STANDARD:
  -nickel-plated brass (fin. 12)
- ON REQUEST:
  - polished brass (fin. 66)

Certifications:
- Gost - Russia

Patents:
- Key: EP 1 867 810 B1

Type	Description	For locks series	L	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Rim cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570		10	1 00690 00 0 00CL	0,204	1	1	0M510	00	0	12	CL
	• Rim cylinder with plated tear and drill resistant rose			10	1 00690 00 0 00CL	0,325	1	1	0M510	10	0	12	CL
	• Round cylinder • For further lenght see item 07165	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	50,0	10	1 00690 00 0 00CL	0,160	1	1	0M210	50	0	12	CL
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	10	1 00690 00 0 00CL	0,267	1	1	0M150	00	0	12	CL
	• Cylinder set	50120, 50125, 50160, 50170, 50210, 50220		10	1 00690 00 0 00CL	0,267	1	1	0M112	00	0	12	CL
		11630		10	1 00690 00 0 00CL	0,267	1	1	0M114	00	0	12	CL

Type	Description	For locks series	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Cylinder set, with round external cylinder	50121, 50126, 50141, 50161, 50171, 50211, 50221, 50421, 50461, 50471, 50521, 50561, 50571		10	1 00690 00 0 00CL	0,267	1	1	0M116	00	0	12	CL
		11631, 11731, 11931		10	1 00690 00 0 00CL	0,267	1	1	0M120	00	0	12	CL
	• Cylinder set, with round external cylinder	11670		10	1 00690 00 0 00CL	0,267	1	1	0M156	00	0	12	CL
	• Cylinder set, with round external cylinder	11721, 11921	50,0	10	1 00690 00 0 00CL	0,267	1	1	0M149	00	0	12	CL
		11671, 11761, 11771	50,0	10	1 00690 00 0 00CL	0,267	1	1	0M155	00	0	12	CL







Astral Tekno PRO







Technical features:
- BKP Cisa patented system
- 10 pin (6 active, 4 passive) key bitting system
- Security Card: protected key duplication
- Brass casing
- Brass plugs
- Self-lubricating DIN sintered steel clutch-type cam
- Casehardened steel pins
- Hardened steel pin drivers
- Double side control steel pin
- Phosphorous bronze and steel springs
- Patented key:
  - reversible flat key
  - nickel-plated brass key
  - plastic material head
  - long neck, compatible with protective roses


Supplied as standard:
- 3 keys
- Security Card
- Fixing screw
- Operating and maintenance Instructions

Finishes:
- STANDARD:
  -nickel-plated brass (fin. 12)

Certifications:
Gost - Russia

Patents:
Key: EP 1 867 810 B1

Type	Description	Door thickness	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Steel plug for padlocks • 2 keys • Pickled brass body • Complete with plate item 1.07573.08.0		10	1 00690 00 0 00CL	0,106	1	1	0M610	00	0	00	CL
	• Cylinder for outside operation devices item 1.07078.28.0		10	1 00690 00 0 00CL	0,117	1	1	0M610	10	0	12	CL
	• Cylinder for outside operation devices item 1.07078.29.0		10	1 00690 00 0 00CL	0,117	1	1	0M610	11	0	12	CL
	• Cylinder for Meroni "Premiapri" (push-to-open) knobsets		10	1 00690 00 0 00CL	0,117	1	1	0M610	12	0	12	CL
	• Key extraction position (0) • Deadbolt item 1.06414.20.0 or 1.06414.30.0 (to order separately)	17	10	1 00690 00 0 00CL	0,150	1	1	0M410	00	0	12	CL
	• Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0)	17	10	1 00690 00 0 00CL	0,150	1	1	0M415	01	0	12	CL

Type	Description	Door thickness	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
	• Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0)	17	10	1 00690 00 0 00CL	0,150	1	**1**	**0M415 03 0 12 CL**



EN 1303:15

KEY RELATED SECURITY	1	2	3	4	5	**6**
ATTACK RESISTANCE	0	A	B	**C**	D	
DURABILITY	1	2	3	4	5	**6**

Astral S

Technical features:
- BKP (bumping resistant) registered patented
- 10 pins (6 actives, 4 passive) key bitting system
- **Brass body with dual-material SNAP RESISTANT core**
- brass body with segment pack extended through the entire length of the cylinder brass plugs
- self-lubricating sintered steel projecting DIN CAM
- pins and drivers in hardened steel
- phosphor bronze springs
- Flat reversible key
  - in a special brass alloy nickel-plated
  - numbered on key head

Supplied as standard:
- 3 keys
- Code Card
- Fixing screw
- Operating and Maintenance Instructions.

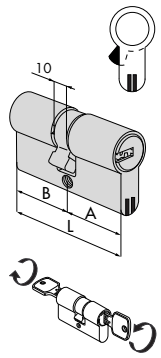
On request:
- Key with long neck (pers. CL), with personalised plastic piece and profile (pers. CP)

Finishes:
- Standard: sanded brass (fin. 00)
- On request:
  - nickel-plated brass (fin. 12)
  - polished brass (fin. 66)

Standards:
- Compliant with EN 1303:05
- Attack Resistance: grade C
- Key Related Security: grade 6
- Durability: grade 6



Certifications:
- ICIM EN 1303:15 16010C6C
- Gost - Russia
- SKG**

Patents:
- Snap system Europe EP1583878
- BKP: PCT/WO2007/074163A1



- Clutching systems double cylinders

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
30 / 30		59,0	29,5	29,5	10	1 00620 01 0	0,234	12	1	0A3S1 07 0
28 / 34		61,2	27,7	33,5	10	1 00620 01 0	0,234	12	1	0A3S1 06 0
28 / 36		63,2	27,7	35,5	10	1 00620 01 0	0,234	12	1	0A3S1 09 0
30 / 35		64,0	29,5	34,5	10	1 00620 01 0	0,243	12	1	0A3S1 26 0
33 / 33		65,0	32,5	32,5	10	1 00620 01 0	0,234	12	1	0A3S1 10 0
35 / 35		69,0	34,5	34,5	10	1 00620 01 0	0,234	12	1	0A3S1 13 0
40 / 30		69,0	39,5	29,5	10	1 00620 01 0	0,234	12	1	0A3S1 12 0
28 / 43		70,2	27,7	42,5	10	1 00620 01 0	0,234	12	1	0A3S1 11 0
30 / 45		74,0	29,5	44,5	10	1 00620 01 0	0,243	12	1	0A3S1 27 0
35 / 40		74,0	34,5	39,5	10	1 00620 01 0	0,243	12	1	0A3S1 28 0
30 / 50		79,0	29,5	49,5	10	1 00620 01 0	0,234	12	1	0A3S1 17 0
35 / 45		79,0	34,5	44,5	10	1 00620 01 0	0,234	12	1	0A3S1 19 0
40 / 40		79,0	39,5	39,5	10	1 00620 01 0	0,234	12	1	0A3S1 18 0
30 / 55		84,0	29,5	54,5	10	1 00620 01 0	0,304	12	1	0A3S1 33 0
35 / 50		84,0	34,5	49,5	10	1 00620 01 0	0,319	12	1	0A3S1 31 0
40 / 45		84,0	39,5	44,5	10	1 00620 01 0	0,319	12	1	0A3S1 30 0
43 / 43		85,0	42,5	42,5	10	1 00620 01 0	0,304	12	1	0A3S1 46 0
30 / 60		89,0	29,5	59,5	10	1 00620 01 0	0,304	12	1	0A3S1 20 0
35 / 55		89,0	34,5	54,5	10	1 00620 01 0	0,304	12	1	0A3S1 32 0
40 / 50		89,0	39,5	49,5	10	1 00620 01 0	0,319	12	1	0A3S1 21 0
45 / 45		89,0	44,5	44,5	10	1 00620 01 0	0,319	12	1	0A3S1 29 0
30 / 65		94,0	29,5	64,5	10	1 00620 01 0	0,319	6	1	0A3S1 41 0
35 / 60		94,0	34,5	59,5	10	1 00620 01 0	0,304	6	1	0A3S1 38 0
45 / 50		94,0	44,5	49,5	10	1 00620 01 0	0,304	6	1	0A3S1 39 0
30 / 70		99,0	29,5	69,5	10	1 00620 01 0	0,349	6	1	0A3S1 24 0
35 / 65		99,0	34,5	64,5	10	1 00620 01 0	0,319	6	1	0A3S1 22 0
40 / 60		99,0	39,5	59,5	10	1 00620 01 0	0,349	6	1	0A3S1 25 0
45 / 55		99,0	44,5	54,5	10	1 00620 01 0	0,349	6	1	0A3S1 43 0
50 / 50		99,0	49,5	49,5	10	1 00620 01 0	0,319	6	1	0A3S1 23 0
30 / 75		104,0	29,5	74,5	10	1 00620 01 0	0,234	6	1	0A3S1 56 0
35 / 70		104,0	34,5	69,5	10	1 00620 01 0	0,234	6	1	0A3S1 49 0
50 / 55		104,0	49,5	54,5	10	1 00620 01 0	0,234	6	1	0A3S1 64 0
30 / 80		109,0	29,5	79,5	10	1 00620 01 0	0,349	6	1	0A3S1 37 0
40 / 70		109,0	39,5	69,5	10	1 00620 01 0	0,349	6	1	0A3S1 35 0
50 / 60		109,0	49,5	59,5	10	1 00620 01 0	0,319	6	1	0A3S1 36 0
55 / 55		109,0	54,5	54,5	10	1 00620 01 0	0,319	6	1	0A3S1 70 0
30 / 85		114,0	29,5	84,5	10	1 00620 01 0	0,234	6	1	0A3S1 77 0
50 / 65		114,0	49,5	64,5	10	1 00620 01 0	0,234	6	1	0A3S1 65 0
40 / 75		114,0	39,5	74,5	10	1 00620 01 0	0,234	6	1	0A3S1 59 0

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Double cylinders with thumb turn shaft ON REQUEST: Knobs series 06353, 06355, 06356, 06357													
30 / 30		59,0	29,5	29,5	10	1 00620 01 0	0,275	12	**1**	**0A3S2**	**07**	**0**		
30 / 35		64,0	29,5	34,5	10	1 00620 01 0	0,264	12	**1**	**0A3S2**	**26**	**0**		
35 / 30		64,0	34,5	29,5	10	1 00620 01 0	0,264	12	**1**	**0A3S2**	**81**	**0**		
33 / 33		65,0	32,5	32,5	10	1 00620 01 0	0,264	12	**1**	**0A3S2**	**10**	**0**		
30 / 40		69,0	29,5	39,5	10	1 00620 01 0	0,264	12	**1**	**0A3S2**	**82**	**0**		
35 / 35		69,0	34,5	34,5	10	1 00620 01 0	0,264	12	**1**	**0A3S2**	**13**	**0**		
35 / 40		74,0	34,5	39,5	10	1 00620 01 0	0,294	12	**1**	**0A3S2**	**28**	**0**		
40 / 35		74,0	39,5	34,5	10	1 00620 01 0	0,294	12	**1**	**0A3S2**	**83**	**0**		
30 / 50		79,0	29,5	49,5	10	1 00620 01 0	0,318	6	**1**	**0A3S2**	**17**	**0**		
35 / 45		79,0	34,5	44,5	10	1 00620 01 0	0,318	6	**1**	**0A3S2**	**19**	**0**		
40 / 40		79,0	39,5	39,5	10	1 00620 01 0	0,318	6	**1**	**0A3S2**	**18**	**0**		
40 / 45		84,0	39,5	44,5	10	1 00620 01 0	0,324	6	**1**	**0A3S2**	**30**	**0**		
45 / 40		84,0	44,5	39,5	10	1 00620 01 0	0,324	6	**1**	**0A3S2**	**84**	**0**		
50 / 35		84,0	49,5	34,5	10	1 00620 01 0	0,324	6	**1**	**0A3S2**	**94**	**0**		
43 / 43		85,0	42,5	42,5	10	1 00620 01 0	0,324	6	**1**	**0A3S2**	**46**	**0**		
30 / 60		89,0	29,5	59,5	10	1 00620 01 0	0,324	6	**1**	**0A3S2**	**20**	**0**		
40 / 50		89,0	39,5	49,5	10	1 00620 01 0	0,324	6	**1**	**0A3S2**	**21**	**0**		
45 / 45		89,0	44,5	44,5	10	1 00620 01 0	0,324	6	**1**	**0A3S2**	**29**	**0**		
40 / 55		94,0	39,5	54,5	10	1 00620 01 0	0,367	6	**1**	**0A3S2**	**42**	**0**		
55 / 40		94,0	54,5	39,5	10	1 00620 01 0	0,367	6	**1**	**0A3S2**	**98**	**0**		
45 / 50		94,0	44,5	49,5	10	1 00620 01 0	0,367	6	**1**	**0A3S2**	**39**	**0**		
40 / 60		99,0	39,5	59,5	10	1 00620 01 0	0,370	6	**1**	**0A3S2**	**25**	**0**		
45 / 55		99,0	44,5	54,5	10	1 00620 01 0	0,370	6	**1**	**0A3S2**	**43**	**0**		
50 / 50		99,0	49,5	49,5	10	1 00620 01 0	0,370	6	**1**	**0A3S2**	**23**	**0**		
45 / 60		104,0	44,5	59,5	10	1 00620 01 0	0,398	6	**1**	**0A3S2**	**54**	**0**		
30 / 80		109,0	29,5	79,5	10	1 00620 01 0	0,400	6	**1**	**0A3S2**	**37**	**0**		
40 / 70		109,0	39,5	69,5	10	1 00620 01 0	0,400	6	**1**	**0A3S2**	**35**	**0**		
55 / 55		109,0	54,5	54,5	10	1 00620 01 0	0,400	6	**1**	**0A3S2**	**70**	**0**		
60 / 50		109,0	59,5	49,5	10	1 00620 01 0	0,400	6	**1**	**0A3S2**	**89**	**0**		
55 / 60		114,0	54,5	59,5	10	1 00620 01 0	0,415	6	**1**	**0A3S2**	**71**	**0**		
55 / 65		119,0	54,5	64,5	10	1 00620 01 0	0,430	6	**1**	**0A3S2**	**72**	**0**		
60 / 60		119,0	59,5	59,5	10	1 00620 01 0	0,430	6	**1**	**0A3S2**	**40**	**0**		
65 / 55		119,0	64,5	54,5	10	1 00620 01 0	0,430	6	**1**	**0A3S2**	**86**	**0**		
	• Double cylinders with adjustable thumb turn shaft • to be combined with inside rose item 1.06458.20 • ON REQUEST: Knobs series 06353, 06355, 06356, 06357													
30 / 30		59,0	29,5	29,5	10	1 00620 01 0	0,275	6	**1**	**0A3S7**	**07**	**0**		
35 / 30		64,0	34,5	29,5	10	1 00620 01 0	0,275	6	**1**	**0A3S7**	**81**	**0**		
40 / 30		69,0	39,5	29,5	10	1 00620 01 0	0,264	6	**1**	**0A3S7**	**12**	**0**		
45 / 30		74,0	44,5	29,5	10	1 00620 01 0	0,264	6	**1**	**0A3S7**	**91**	**0**		
50 / 30		79,0	49,5	29,5	10	1 00620 01 0	0,329	6	**1**	**0A3S7**	**90**	**0**		
55 / 30		84,0	54,5	29,5	10	1 00620 01 0	0,359	6	**1**	**0A3S7**	**92**	**0**		
60 / 30		89,0	59,5	29,5	10	1 00620 01 0	0,359	6	**1**	**0A3S7**	**87**	**0**		
70 / 30		99,0	69,5	29,5	10	1 00620 01 0	0,370	6	**1**	**0A3S7**	**88**	**0**		



EN 1303:15

KEY RELATED SECURITY	1	2	3	4	5	**6**
ATTACK RESISTANCE	0	**A**	B	C	D	
DURABILITY	1	2	3	4	5	**6**

Astral

Technical features:
- 10 pins key bitting system
- brass body
- brass plugs
- pins:
  - in wear resistant bronze
  - in hardened steel in first position
- drivers:
  - in brass
  - in hardened steel in first position
- phosphor bronze springs
- self-lubricating sintered steel projecting DIN cam
- KEY:
  - flat reversible keys
  - in nickel-plated brass
  - numbered on key bow


Supplied as standard:
- 3 keys
- Code Card
- Fixing screws

On request:
- Cylinders with long key (plastic bow), compatible with protective roses (pers. CL)

Finishes:
- STANDARD:
  - sanded brass (fin. 00)
- ON REQUEST:
  - nickel-plated brass (fin. 12)
  - polished brass (fin. 66)

Standards:
- Compliant with EN 1303:2015
- Attack Resistance: grade A
- Key Related Security: grade 6
- Durability: grade 6

Certifications:
- Gost - Russia
- SKG **






- Double cylinder

TO BE DISCONTINUED

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
28 / 28		55,4	27,7	27,7	10	1 00620 01 0	0,232	12	1	0A310	05	0		
30 / 30		59,0	29,5	29,5	10	1 00620 01 0	0,235	12	1	0A310	07	0		
28 / 32		59,2	27,7	31,5	10	1 00620 01 0	0,230	12	1	0A310	08	0		
28 / 34		61,2	27,7	33,5	10	1 00620 01 0	0,234	12	1	0A310	06	0		
30 / 35		64,0	29,5	34,5	10	1 00620 01 0	0,243	12	1	0A310	26	0		
33 / 33		65,0	32,5	32,5	10	1 00620 01 0	0,258	12	1	0A310	10	0		
35 / 35		69,0	34,5	34,5	10	1 00620 01 0	0,272	12	1	0A310	13	0		
40 / 30		69,0	39,5	29,5	10	1 00620 01 0	0,272	12	1	0A310	12	0		
28 / 43		70,2	27,7	42,5	10	1 00620 01 0	0,262	12	1	0A310	11	0		
30 / 45		74,0	29,5	44,5	10	1 00620 01 0	0,274	12	1	0A310	27	0		
35 / 40		74,0	34,5	39,5	10	1 00620 01 0	0,274	12	1	0A310	28	0		
30 / 50		79,0	29,5	49,5	10	1 00620 01 0	0,301	12	1	0A310	17	0		
35 / 45		79,0	34,5	44,5	10	1 00620 01 0	0,289	12	1	0A310	19	0		
40 / 40		79,0	39,5	39,5	10	1 00620 01 0	0,289	12	1	0A310	18	0		
30 / 55		84,0	29,5	54,5	10	1 00620 01 0	0,304	12	1	0A310	33	0		
35 / 50		84,0	34,5	49,5	10	1 00620 01 0	0,360	12	1	0A310	31	0		
40 / 45		84,0	39,5	44,5	10	1 00620 01 0	0,304	12	1	0A310	30	0		
30 / 60		89,0	29,5	59,5	10	1 00620 01 0	0,320	12	1	0A310	20	0		
35 / 55		89,0	34,5	54,5	10	1 00620 01 0	0,332	12	1	0A310	32	0		
40 / 50		89,0	39,5	49,5	10	1 00620 01 0	0,320	12	1	0A310	21	0		
45 / 45		89,0	44,5	44,5	10	1 00620 01 0	0,333	12	1	0A310	29	0		
30 / 65		94,0	29,5	64,5	10	1 00620 01 0	0,334	6	1	0A310	41	0		
35 / 60		94,0	34,5	59,5	10	1 00620 01 0	0,390	6	1	0A310	38	0		
40 / 55		94,0	39,5	54,5	10	1 00620 01 0	0,355	6	1	0A310	42	0		
45 / 50		94,0	44,5	49,5	10	1 00620 01 0	0,334	6	1	0A310	39	0		
30 / 70		99,0	29,5	69,5	10	1 00620 01 0	0,349	6	1	0A310	24	0		
35 / 65		99,0	34,5	64,5	10	1 00620 01 0	0,349	6	1	0A310	22	0		
40 / 60		99,0	39,5	59,5	10	1 00620 01 0	0,349	6	1	0A310	25	0		
45 / 55		99,0	44,5	54,5	10	1 00620 01 0	0,349	6	1	0A310	43	0		
50 / 50		99,0	49,5	49,5	10	1 00620 01 0	0,349	6	1	0A310	23	0		
30 / 80		109,0	29,5	79,5	10	1 00620 01 0	0,378	6	1	0A310	37	0		
40 / 70		109,0	39,5	69,5	10	1 00620 01 0	0,400	6	1	0A310	35	0		
50 / 60		109,0	49,5	59,5	10	1 00620 01 0	0,402	6	1	0A310	36	0		
55 / 55		109,0	54,5	54,5	10	1 00620 01 0	0,378	6	1	0A310	70	0		
55 / 60		114,0	54,5	59,5	10	1 00620 01 0	0,420	6	1	0A310	71	0		

CISA

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Single cylinder with adjustable cam in 8 position													
30 / 10		39,5	29,5	10,0	10	1 00620 01 0	0,186	12	**1**	**0A314**	**02**	**0**		
35 / 10		44,5	34,5	10,0	10	1 00620 01 0	0,201	12	**1**	**0A314**	**07**	**0**		
40 / 10		49,5	39,5	10,0	10	1 00620 01 0	0,199	12	**1**	**0A314**	**03**	**0**		
50 / 10		59,5	49,5	10,0	10	1 00620 01 0	0,227	12	**1**	**0A314**	**04**	**0**		
60 / 10		69,5	59,5	10,0	10	1 00620 01 0	0,257	12	**1**	**0A314**	**05**	**0**		
	• Double cylinder with thumb turn shaft • ON REQUEST: Knobs series 06353, 06355, 06356, 06357 TO BE DISCONTINUED													
30 / 30		59,0	29,5	29,5	10	1 00620 01 0	0,244	12	**1**	**0A312**	**07**	**0**		
35 / 30		64,0	34,5	29,5	10	1 00620 01 0	0,259	12	**1**	**0A312**	**81**	**0**		
33 / 33		65,0	32,5	32,5	10	1 00620 01 0	0,267	12	**1**	**0A312**	**10**	**0**		
30 / 40		69,0	29,5	39,5	10	1 00620 01 0	0,279	12	**1**	**0A312**	**82**	**0**		
35 / 35		69,0	34,5	34,5	10	1 00620 01 0	0,279	12	**1**	**0A312**	**13**	**0**		
40 / 30		69,0	39,5	29,5	10	1 00620 01 0	0,279	12	**1**	**0A312**	**12**	**0**		
30 / 45		74,0	29,5	44,5	10	1 00620 01 0	0,350	12	**1**	**0A312**	**27**	**0**		
30 / 50		79,0	29,5	49,5	10	1 00620 01 0	0,318	6	**1**	**0A312**	**17**	**0**		
40 / 40		79,0	39,5	39,5	10	1 00620 01 0	0,309	6	**1**	**0A312**	**18**	**0**		
45 / 35		79,0	44,5	34,5	10	1 00620 01 0	0,309	6	**1**	**0A312**	**85**	**0**		
45 / 40		84,0	44,5	39,5	10	1 00620 01 0	0,324	6	**1**	**0A312**	**84**	**0**		
40 / 50		89,0	39,5	49,5	10	1 00620 01 0	0,350	6	**1**	**0A312**	**21**	**0**		
45 / 45		89,0	44,5	44,5	10	1 00620 01 0	0,347	6	**1**	**0A312**	**29**	**0**		
40 / 55		94,0	39,5	54,5	10	1 00620 01 0	0,355	6	**1**	**0A312**	**42**	**0**		
45 / 55		99,0	44,5	54,5	10	1 00620 01 0	0,370	6	**1**	**0A312**	**43**	**0**		
50 / 50		99,0	49,5	49,5	10	1 00620 01 0	0,370	6	**1**	**0A312**	**23**	**0**		
45 / 60		104,0	44,5	59,5	10	1 00620 01 0	0,398	6	**1**	**0A312**	**54**	**0**		
55 / 50		104,0	54,5	49,5	10	1 00620 01 0	0,384	6	**1**	**0A312**	**64**	**0**		
60 / 50		109,0	59,5	49,5	10	1 00620 01 0	0,410	6	**1**	**0A312**	**89**	**0**		
	• Double cylinder with adjustable thumb turn shaft • To be combined with inside rose item 1.06458.20 • ON REQUEST: Knobs series 06353, 06355, 06356, 06357 TO BE DISCONTINUED													
30 / 30		59,0	29,5	29,5	10	1 00620 01 0	0,284	6	**1**	**0A317**	**07**	**0**		
35 / 30		64,0	34,5	29,5	10	1 00620 01 0	0,312	6	**1**	**0A317**	**81**	**0**		
40 / 30		69,0	39,5	29,5	10	1 00620 01 0	0,312	6	**1**	**0A317**	**12**	**0**		
50 / 30		79,0	49,5	29,5	10	1 00620 01 0	0,329	6	**1**	**0A317**	**90**	**0**		
60 / 30		89,0	59,5	29,5	10	1 00620 01 0	0,359	6	**1**	**0A317**	**87**	**0**		
70 / 30		99,0	69,5	29,5	10	1 00620 01 0	0,370	6	**1**	**0A317**	**88**	**0**		














Astral



Technical features:
- 10 (6 active + 4 passive) pins key bitting system
- brass body
- brass plug
- pins:
  - in wear resistant bronze
  - in hardened steel in first position
- drivers:
  - in brass
  - in hardened steel in first position
- phosphor bronze springs

KEY:
- flat reversible keys
- in nickel-plated brass
- numbered on key bow

Supplied as standard:
- 3 keys
- Code Card
- Fixing screws
- Fixing plates

Finishes:
- STANDARD:
  - sanded brass (fin. 00)
- ON REQUEST:
  - nickel-plated brass (fin. 12)
  - polished brass (fin. 66)

Type	Description	For locks series	L	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Rim cylinder	1A610, 11610, 50110, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54552, 54570		10	1 00620 01 0	0,204	6	1	0A510	00	0		
	• Rim cylinder with nickel-plated tear and drill resistant rose			10	1 00620 01 0	0,270	6	1	0A510	11	0		
	• Round cylinder • For further lenght see item 07165	1A611, 11611, 50111, 50131, 50181, 50411, 50481, 50511, 50581, 54316, 54341	50,0	10	1 00620 01 0	0,160	6	1	0A210	50	0		
	• Cylinder set	50120, 50125, 50160, 50170, 50210, 50220		10	1 00620 01 0	0,267	6	1	0A112	00	0		
		11630		10	1 00620 01 0	0,267	6	1	0A114	00	0		
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	10	1 00620 01 0	0,233	6	1	0A150	00	0		

Type	Description	For locks series	L	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Cylinder set, with round external cylinder	50121, 50126, 50141, 50161, 50171, 50211, 50221, 50421, 50461, 50471, 50521, 50561, 50571	50,0	10	1 00620 01 0	0,233	6	**1**	**0A116**	**00**		**0**	
		11631, 11731, 11931	50,0	10	1 00620 01 0	0,253	6	**1**	**0A120**	**00**		**0**	
		11721, 11921	50,0	10	1 00620 01 0	0,253	6	**1**	**0A149**	**00**		**0**	
		11671, 11761, 11771	50,0	10	1 00620 01 0	0,253	6	**1**	**0A155**	**00**		**0**	
	• Cylinder set	1A630		10	1 00620 01 0	0,267	6	**1**	**0A115**	**00**		**0**	

















Astral

Technical features:
- 10 pins key bitting system
- brass body
- brass plug
- pins:
  - in wear resistant bronze
  - in hardened steel in first position
- drivers:
  - in brass
  - in hardened steel in first position
- phosphor bronze springs

KEY:
- flat reversible keys
- in nickel-plated brass
- numbered on key bow

Supplied as standard:
- 3 keys
- Code Card
- Fixing screws
- Fixing plates

Finishes:
- Nickel-plated brass (fin. 12)

Type	Description	Door thickness	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Small cylinder for padlocks: series 28053 - 28353 - 28553 • 2 keys • Pickled brass body • Complete with plate		10	1 00620 01 0	0,106	6	1	0A610	00	0		
	• Cylinder for outside operation devices item 1.07078.28.0		10	1 00620 01 0	0,106	6	1	0A610	10	0		
	• Cylinder for outside operation devices item 1.07078.29.0		10	1 00620 01 0	0,106	6	1	0A610	11	0		
	• Vertical key extraction • Deadbolt item 1.06414.20.0 or item 1.06414.30.0 (to order separately)	17	10	1 00620 01 0	0,195	6	1	0A410	00	0		
	• Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0)	17	10	1 00620 01 0	0,140	6	1	0A415	01	0		
	• Microswitch (7 A, 250 V) with terminals to be welded • Automatic return to key extraction position (0)	17	10	1 00620 01 0	0,188	6	1	0A415	03	0		



EN 1303:15

KEY RELATED SECURITY	1	2	3	4	**5**	6
ATTACK RESISTANCE	**0**	A	B	C	D	
DURABILITY	1	2	3	4	5	**6**


Asix PRO

Technical features:
- Brass body
- Brass plugs
- DIN projecting cam in self-lubricating sintered steel
- Pins:
  - in wear resistant bronze
  - in hardened steel in the first position.
- Drivers:
  - in cylindrical mushroom-type brass
  - in carbonitrided steel in the first position.
- Phosphor bronze springs
- Keys:
  - flat reversible
  - long neck compatible with protective rose
  - in nickel-plated brass
- Numerical code on key bow

Supplied as standard:
- Fixing screws
- 3 keys


Finishes:
- SUPPLIED AS STANDARD:
  - nickel-plated sanded brass (fin. 12)

Standards:
- In compliance with EN 1303:2015
- Attack Resistance: grade 0
- Key Related Security: grade 5
- Durability: grade 6




- Double cylinder
- Configuration construction key 1+5

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30		59,0	29,5	29,5	6	1 00670 01 0 00SD	0,223	6	1	0E300	07	0	12	SD
28 / 32		59,2	27,7	31,5	6	1 00670 01 0 00SD	0,225	6	1	0E300	08	0	12	SD
40 / 30		69,0	39,5	29,5	6	1 00670 01 0 00SD	0,325	6	1	0E300	12	0	12	SD
35 / 35		69,0	34,5	34,5	6	1 00670 01 0 00SD	0,240	6	1	0E300	13	0	12	SD
30 / 50		79,0	29,5	49,5	6	1 00670 01 0 00SD	0,350	6	1	0E300	17	0	12	SD
40 / 40		79,0	39,5	39,5	6	1 00670 01 0 00SD	0,260	6	1	0E300	18	0	12	SD
35 / 45		79,0	34,5	44,5	6	1 00670 01 0 00SD	0,260	6	1	0E300	19	0	12	SD
30 / 60		89,0	29,5	59,5	6	1 00670 01 0 00SD	0,339	6	1	0E300	20	0	12	SD
40 / 50		89,0	39,5	49,5	6	1 00670 01 0 00SD	0,280	6	1	0E300	21	0	12	SD
50 / 50		99,0	49,5	49,5	6	1 00670 01 0 00SD	0,300	6	1	0E300	23	0	12	SD
30 / 70		99,0	29,5	69,5	6	1 00670 01 0 00SD	0,300	6	1	0E300	24	0	12	SD
40 / 60		99,0	39,5	59,5	6	1 00670 01 0 00SD	0,300	6	1	0E300	25	0	12	SD
30 / 35		64,0	29,5	34,5	6	1 00670 01 0 00SD	0,230	6	1	0E300	26	0	12	SD
30 / 45		74,0	29,5	44,5	6	1 00670 01 0 00SD	0,250	6	1	0E300	27	0	12	SD
35 / 40		74,0	34,5	39,5	6	1 00670 01 0 00SD	0,250	6	1	0E300	28	0	12	SD
45 / 45		89,0	44,5	44,5	6	1 00670 01 0 00SD	0,280	6	1	0E300	29	0	12	SD
40 / 45		84,0	39,5	44,5	6	1 00670 01 0 00SD	0,270	6	1	0E300	30	0	12	SD
35 / 50		84,0	34,5	49,5	6	1 00670 01 0 00SD	0,270	6	1	0E300	31	0	12	SD
30 / 55		84,0	29,5	54,5	6	1 00670 01 0 00SD	0,270	6	1	0E300	33	0	12	SD
40 / 70		109,0	39,5	69,5	6	1 00670 01 0 00SD	0,320	6	1	0E300	35	0	12	SD
50 / 60		109,0	49,5	59,5	6	1 00670 01 0 00SD	0,320	6	1	0E300	36	0	12	SD



- Single cylinder with 8-position adjustable cam Item 1 0E304 18 0 fixed cam
- Supplied in KA version
- Configuration construction key 1+2

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
25 / 10		34,5	24,5	10,0	6	1 00670 01 0 00SD	0,150	6	1	0E304	18	0	12	NV
40 / 40		79,0	39,5	39,5	6	1 00670 01 0 00SD	0,150	6	1	0E304	18	0	12	NV KA
30 / 10		39,5	29,5	10,0	6	1 00670 01 0 00SD	0,164	6	1	0E304	02	0	12	NV
30 / 10		39,5	29,5	10,0	6	1 00670 01 0 00SD	0,160	6	1	0E304	02	0	12	NV KA
40 / 10		49,5	39,5	10,0	6	1 00670 01 0 00SD	0,160	6	1	0E304	03	0	12	NV KA
35 / 10		44,5	34,5	10,0	6	1 00670 01 0 00SD	0,170	6	1	0E304	07	0	12	NV KA



- Double cylinder with adjustable shaft, pre-set for thumb turn
- Configuration construction key 1+5
- For use with inside escutcheon item 1.06458.20
- ON REQUEST:
  Thumb turns item 06353, 06355, 06356, 06357

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30		59,0	29,5	29,5	6	1 00670 01 0 00SD	0,260	6	**1**	**0E307**	**07**	**0**	**12**	**SD**
35 / 30		64,0	34,5	29,5	6	1 00670 01 0 00SD	0,270	6	**1**	**0E307**	**81**	**0**	**12**	**SD**
40 / 30		69,0	39,5	29,5	6	1 00670 01 0 00SD	0,280	6	**1**	**0E307**	**12**	**0**	**12**	**SD**
45 / 30		74,0	44,5	29,5	6	1 00670 01 0 00SD	0,290	6	**1**	**0E307**	**91**	**0**	**12**	**SD**
50 / 30		79,0	49,5	29,5	6	1 00670 01 0 00SD	0,370	6	**1**	**0E307**	**90**	**0**	**12**	**SD**
60 / 30		89,0	59,5	29,5	6	1 00670 01 0 00SD	0,340	6	**1**	**0E307**	**87**	**0**	**12**	**SD**
70 / 30		99,0	69,5	29,5	6	1 00670 01 0 00SD	0,360	6	**1**	**0E307**	**88**	**0**	**12**	**SD**





EN 1303:15

KEY RELATED SECURITY 1 2 3 4 **5** 6
ATTACK RESISTANCE **0** A B C D
DURABILITY 1 2 3 4 5 **6**


Asix

Technical features:
- brass body
- brass plugs
- self-lubricating sintered steel projecting DIN cam
- pins:
  - in wear resistant bronze
  - in hardened steel in first position
- drivers:
  - in brass
  - in hardened steel in first position
- phosphor bronze springs
- self-lubricating sintered steel projecting cam, DIN-compatible
- KEY:
  - flat reversible keys
  - in nickel-plated brass
  - long key for protective roses compatibility
  - numerical coding on the head

Supplied as standard:
- 3 keys
- Fixing screw

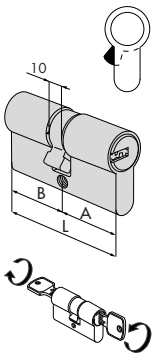
Finishes:
- STANDARD: sanded brass (fin. 00)
- ON REQUEST: nickel-plated brass (fin. 12)

Standards:
- Compliant with EN 1303:2015
- Attack Resistance: grade 0
- Key Related Security: grade 5
- Durability: grade 6




- Double cylinder

Type	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
28 / 28	55,4	27,7	27,7	6	1 00670 01 0	0,216	6	1	0E300	05	0
30 / 30	59,0	29,5	29,5	6	1 00670 01 0	0,223	6	1	0E300	07	0
28 / 32	59,2	27,7	31,5	6	1 00670 01 0	0,225	6	1	0E300	08	0
28 / 34	61,2	27,7	33,5	6	1 00670 01 0	0,230	6	1	0E300	06	0
28 / 36	63,2	27,7	35,5	6	1 00670 01 0	0,242	6	1	0E300	09	0
30 / 35	64,0	29,5	34,5	6	1 00670 01 0	0,233	6	1	0E300	26	0
33 / 33	65,0	32,5	32,5	6	1 00670 01 0	0,242	6	1	0E300	10	0
35 / 35	69,0	34,5	34,5	6	1 00670 01 0	0,267	6	1	0E300	13	0
40 / 30	69,0	39,5	29,5	6	1 00670 01 0	0,258	6	1	0E300	12	0
28 / 43	70,2	27,7	42,5	6	1 00670 01 0	0,275	6	1	0E300	11	0
30 / 45	74,0	29,5	44,5	6	1 00670 01 0	0,264	6	1	0E300	27	0
35 / 40	74,0	34,5	39,5	6	1 00670 01 0	0,264	6	1	0E300	28	0
30 / 50	79,0	29,5	49,5	6	1 00670 01 0	0,279	6	1	0E300	17	0
35 / 45	79,0	34,5	44,5	6	1 00670 01 0	0,279	6	1	0E300	19	0
40 / 40	79,0	39,5	39,5	6	1 00670 01 0	0,279	6	1	0E300	18	0
30 / 55	84,0	29,5	54,5	6	1 00670 01 0	0,294	6	1	0E300	33	0
35 / 50	84,0	34,5	49,5	6	1 00670 01 0	0,294	6	1	0E300	31	0
40 / 45	84,0	39,5	44,5	6	1 00670 01 0	0,294	6	1	0E300	30	0
30 / 60	89,0	29,5	59,5	6	1 00670 01 0	0,323	6	1	0E300	20	0
35 / 55	89,0	34,5	54,5	6	1 00670 01 0	0,310	6	1	0E300	32	0
40 / 50	89,0	39,5	49,5	6	1 00670 01 0	0,310	6	1	0E300	21	0
45 / 45	89,0	44,5	44,5	6	1 00670 01 0	0,310	6	1	0E300	29	0
30 / 65	94,0	29,5	64,5	6	1 00670 01 0	0,324	6	1	0E300	41	0
35 / 60	94,0	34,5	59,5	6	1 00670 01 0	0,324	6	1	0E300	38	0
40 / 55	94,0	39,5	54,5	6	1 00670 01 0	0,341	6	1	0E300	42	0
45 / 50	94,0	44,5	49,5	6	1 00670 01 0	0,324	6	1	0E300	39	0
30 / 70	99,0	29,5	69,5	6	1 00670 01 0	0,339	6	1	0E300	24	0
35 / 65	99,0	34,5	64,5	6	1 00670 01 0	0,339	6	1	0E300	22	0
40 / 60	99,0	39,5	59,5	6	1 00670 01 0	0,339	6	1	0E300	25	0
45 / 55	99,0	44,5	54,5	6	1 00670 01 0	0,339	6	1	0E300	43	0
50 / 50	99,0	49,5	49,5	6	1 00670 01 0	0,339	6	1	0E300	23	0
50 / 55	104,0	49,5	54,5	6	1 00670 01 0	0,368	6	1	0E300	64	0
30 / 75	104,0	29,5	74,5	6	1 00670 01 0	0,339	6	1	0E300	56	0
35 / 70	104,0	34,5	69,5	6	1 00670 01 0	0,353	6	1	0E300	49	0
40 / 65	104,0	39,5	64,5	6	1 00670 01 0	0,353	6	1	0E300	44	0
45 / 60	104,0	44,5	59,5	6	1 00670 01 0	0,353	6	1	0E300	54	0
45 / 65	109,0	44,5	64,5	6	1 00670 01 0	0,291	6	1	0E300	45	0
30 / 80	109,0	29,5	79,5	6	1 00670 01 0	0,368	6	1	0E300	37	0
40 / 70	109,0	39,5	69,5	6	1 00670 01 0	0,368	6	1	0E300	35	0
50 / 60	109,0	49,5	59,5	6	1 00670 01 0	0,368	6	1	0E300	36	0
55 / 55	109,0	54,5	54,5	6	1 00670 01 0	0,368	6	1	0E300	70	0
45 / 70	114,0	44,5	69,5	6	1 00670 01 0	0,390	6	1	0E300	61	0
45 / 75	119,0	44,5	74,5	6	1 00670 01 0	0,353	6	1	0E300	62	0
60 / 60	119,0	59,5	59,5	6	1 00670 01 0	0,368	6	1	0E300	40	0







- Clutch-type double cylinder

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
30 / 30		59,0	29,5	29,5	6	1 00670 01 0	0,225	6 1	0E301	07 0
28 / 34		61,2	27,7	33,5	6	1 00670 01 0	0,225	6 1	0E301	06 0
28 / 36		63,2	27,7	35,5	6	1 00670 01 0	0,225	6 1	0E301	09 0
30 / 35		64,0	29,5	34,5	6	1 00670 01 0	0,225	6 1	0E301	26 0
33 / 33		65,0	32,5	32,5	6	1 00670 01 0	0,225	6 1	0E301	10 0
35 / 35		69,0	34,5	34,5	6	1 00670 01 0	0,225	6 1	0E301	13 0
40 / 30		69,0	39,5	29,5	6	1 00670 01 0	0,225	6 1	0E301	12 0
28 / 43		70,2	27,7	42,5	6	1 00670 01 0	0,225	6 1	0E301	11 0
30 / 45		74,0	29,5	44,5	6	1 00670 01 0	0,225	6 1	0E301	27 0
35 / 40		74,0	34,5	39,5	6	1 00670 01 0	0,225	6 1	0E301	28 0
30 / 50		79,0	29,5	49,5	6	1 00670 01 0	0,225	6 1	0E301	17 0
40 / 40		79,0	39,5	39,5	6	1 00670 01 0	0,225	6 1	0E301	18 0
30 / 55		84,0	29,5	54,5	6	1 00670 01 0	0,225	6 1	0E301	33 0
35 / 50		84,0	34,5	49,5	6	1 00670 01 0	0,225	6 1	0E301	31 0
40 / 45		84,0	39,5	44,5	6	1 00670 01 0	0,225	6 1	0E301	30 0
30 / 60		89,0	29,5	59,5	6	1 00670 01 0	0,225	6 1	0E301	20 0
35 / 55		89,0	34,5	54,5	6	1 00670 01 0	0,225	6 1	0E301	32 0
40 / 50		89,0	39,5	49,5	6	1 00670 01 0	0,225	6 1	0E301	21 0
45 / 45		89,0	44,5	44,5	6	1 00670 01 0	0,225	6 1	0E301	29 0
30 / 65		94,0	29,5	64,5	6	1 00670 01 0	0,225	6 1	0E301	41 0
35 / 60		94,0	34,5	59,5	6	1 00670 01 0	0,225	6 1	0E301	38 0
40 / 55		94,0	39,5	54,5	6	1 00670 01 0	0,225	6 1	0E301	42 0
45 / 50		94,0	44,5	49,5	6	1 00670 01 0	0,225	6 1	0E301	39 0
30 / 70		99,0	29,5	69,5	6	1 00670 01 0	0,225	6 1	0E301	24 0
35 / 65		99,0	34,5	64,5	6	1 00670 01 0	0,225	6 1	0E301	22 0
40 / 60		99,0	39,5	59,5	6	1 00670 01 0	0,225	6 1	0E301	25 0
45 / 55		99,0	44,5	54,5	6	1 00670 01 0	0,225	6 1	0E301	43 0
50 / 50		99,0	49,5	49,5	6	1 00670 01 0	0,225	6 1	0E301	23 0
30 / 80		109,0	29,5	79,5	6	1 00670 01 0	0,225	6 1	0E301	37 0
40 / 70		109,0	39,5	69,5	6	1 00670 01 0	0,225	6 1	0E301	35 0
50 / 60		109,0	49,5	59,5	6	1 00670 01 0	0,225	6 1	0E301	36 0
55 / 55		109,0	54,5	54,5	6	1 00670 01 0	0,225	6 1	0E301	70 0
55 / 60		114,0	54,5	59,5	6	1 00670 01 0	0,225	6 1	0E301	71 0



- Single cylinder with 8 position adjustable cam
- Item 1.0E304.18.0 fixed 27° protruding cam

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
25 / 10		34,5	24,5	10,0	5	1 00670 01 0	0,164	6 1	0E304	18 0
30 / 10		39,5	29,5	10,0	6	1 00670 01 0	0,164	6 1	0E304	02 0
35 / 10		44,5	34,5	10,0	6	1 00670 01 0	0,179	6 1	0E304	07 0
37 / 10		46,5	36,5	10,0	6	1 00670 01 0	0,185	6 1	0E304	10 0
40 / 10		49,5	39,5	10,0	6	1 00670 01 0	0,195	6 1	0E304	03 0
45 / 10		54,5	44,5	10,0	6	1 00670 01 0	0,207	6 1	0E304	08 0
50 / 10		59,5	49,5	10,0	6	1 00670 01 0	0,222	6 1	0E304	04 0
60 / 10		69,5	59,5	10,0	6	1 00670 01 0	0,252	6 1	0E304	05 0
65 / 10		74,5	64,5	10,0	6	1 00670 01 0	0,267	6 1	0E304	21 0
70 / 10		79,5	69,5	10,0	6	1 00670 01 0	0,282	6 1	0E304	06 0
80 / 10		89,5	79,5	10,0	6	1 00670 01 0	0,312	6 1	0E304	20 0
90 / 10		103,5	93,5	10,0	6	1 00620 01 0	0,357	6 1	0E304	13 0

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Double cylinder with thumb turn shaft • ON REQUEST: Knobs series 06353, 06354, 06355, 06356, 06357	**30 / 30**	59,0	29,5	29,5	6	1 00670 01 0	0,239	6	1	0E302	07	0	
		30 / 35	64,0	29,5	34,5	6	1 00670 01 0	0,254	6	1	0E302	26	0	
		35 / 30	64,0	34,5	29,5	6	1 00670 01 0	0,254	6	1	0E302	81	0	
		30 / 40	69,0	29,5	39,5	6	1 00670 01 0	0,274	6	1	0E302	82	0	
		35 / 35	69,0	34,5	34,5	6	1 00670 01 0	0,265	6	1	0E302	13	0	
		40 / 30	69,0	39,5	29,5	6	1 00670 01 0	0,274	6	1	0E302	12	0	
		35 / 40	74,0	34,5	39,5	6	1 00670 01 0	0,289	6	1	0E302	28	0	
		30 / 50	79,0	29,5	49,5	6	1 00670 01 0	0,304	6	1	0E302	17	0	
		35 / 45	79,0	34,5	44,5	6	1 00670 01 0	0,304	6	1	0E302	19	0	
		40 / 40	79,0	39,5	39,5	6	1 00670 01 0	0,304	6	1	0E302	18	0	
		40 / 45	84,0	39,5	44,5	6	1 00670 01 0	0,319	6	1	0E302	30	0	
		45 / 40	84,0	44,5	39,5	6	1 00670 01 0	0,319	6	1	0E302	84	0	
		43 / 43	85,0	42,5	42,5	6	1 00670 01 0	0,321	6	1	0E302	46	0	
		30 / 60	89,0	29,5	59,5	6	1 00670 01 0	0,334	6	1	0E302	20	0	
		45 / 45	89,0	44,5	44,5	6	1 00620 01 0	0,334	6	1	0E302	29	0	
		40 / 50	89,0	39,5	49,5	6	1 00670 01 0	0,334	6	1	0E302	21	0	
		40 / 55	94,0	39,5	54,5	6	1 00670 01 0	0,355	6	1	0E302	42	0	
		45 / 50	94,0	44,5	49,5	6	1 00670 01 0	0,355	6	1	0E302	39	0	
		45 / 55	99,0	44,5	54,5	6	1 00670 01 0	0,365	6	1	0E302	43	0	
		50 / 50	99,0	49,5	49,5	6	1 00670 01 0	0,365	6	1	0E302	23	0	
		45 / 60	104,0	44,5	59,5	6	1 00670 01 0	0,379	6	1	0E302	54	0	
		55 / 50	104,0	54,5	49,5	6	1 00670 01 0	0,379	6	1	0E302	64	0	
		50 / 60	109,0	49,5	59,5	6	1 00620 01 0	0,395	6	1	0E302	36	0	
		60 / 60	119,0	59,5	59,5	6	1 00670 01 0	0,425	6	1	0E302	40	0	
	• Nickel-plated double cylinder series with special cam 90° for series 46305 locks • 3 keys • Fixing screw	**30 / 30**	59,0	29,5	29,5	6	1 00670 01 0	0,225	6	1	0E303	07	0	12
	• Nickel-plated single cylinder series with special cam 90° for series 46305 locks • 3 keys • Fixing screw	**30 / 10**	39,5	29,5	10,0	6	1 00670 01 0	0,164	6	1	0E305	02	0	12
	• Double cylinder with adjustable thumb turn shaft • To be combined with inside rose item 1.06458.20 • ON REQUEST: Knobs series 06353, 06355, 06356, 06357	**30 / 30**	59,0	29,5	29,5	6	1 00670 01 0	0,284	6	1	0E307	07	0	
		40 / 30	69,0	39,5	29,5	6	1 00670 01 0	0,312	6	1	0E307	12	0	
		35 / 30	64,0	34,5	29,5	6	1 00670 01 0	0,294	6	1	0E307	81	0	
		45 / 30	74,0	44,5	29,5	6	1 00670 01 0	0,320	6	1	0E307	91	0	
		50 / 30	79,0	49,5	29,5	6	1 00670 01 0	0,329	6	1	0E307	90	0	
		60 / 30	89,0	59,5	29,5	6	1 00670 01 0	0,359	6	1	0E307	87	0	
		70 / 30	99,0	69,5	29,5	6	1 00670 01 0	0,370	6	1	0E307	88	0	











Technical features:
- brass body
- brass plugs
- pins:
  - in wear-resistant bronze
  - in hardened steel in first position
- drivers:
  - in brass, mushroom-type anti-picking and cylindrical
  - in hardened steel in first position
- phosphor bronze springs
- KEY:
  - flat reversible keys
  - in nickel-plated brass
  - numerical coding on the head

Supplied as standard:
- 3 keys
- Fixing screws

Finishes:
- STANDARD:
  - sanded brass (fin. 00)
- ON REQUEST:
  - nickel-plated brass (fin. 12)

Asix

Type	Description	For locks series	L	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Rim cylinder	1A610		6	1 00670 01 0	0,182	6	1 **0E500 00 0**
	• Round cylinder • For further lenght see item 07165	1A611	50,0	6	1 00670 01 0	0,170	6	1 **0E200 50 0**
	• Cylinder set, with round external cylinder	11721, 11921	50,0	6	1 00670 01 0	0,255	6	1 **0E149 00 0**
	• Cylinder set	1A630		6	1 00670 01 0	0,250	6	1 **0E115 00 0**
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	6	1 00670 01 0	0,255	6	1 **0E150 00 0**

Type	Description	For locks series	Key item L	Pins		Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Cylinder for padlocks series 28000 • 2 keys		6	1 00670 01 0		0,117	6	1	0E600	00	0		
	• Cylinder for external control item 1.07078.28.0 • Ground brass		6	1 00670 01 0		0,117	6	1	0E600	10	0		
	• Cylinder for external control item 1.07078.29.0 • Ground brass		6	1 00670 01 0		0,117	6	1	0E600	11	0		



EN 1303:15

KEY RELATED SECURITY	1	2	3	4	5	**6**
ATTACK RESISTANCE	0	A	B	C	**D**	
DURABILITY	1	2	3	4	5	**6**

C3000 S

Technical features:
- CYLINDER:
- BKP resistance to pumping, patented system
- Security Card: protected key duplication
- Brass body with dual-material **SNAP RESISTANT** core
- Brass plugs
- Carbonitrided steel pins
- Variable shape hardened steel drivers
- Phosphor bronze and steel springs
- Clutch-type DIN cam in self-lubricating sintered steel

KEY:
- protected by trademark
- paracentrical keyway
- in nickel silver alloy
- long neck, compatible with protective roses
- numerical code on key bow

Supplied as standard:
- 3 keys
- Security Card
- Fixing screws
- Operating and maintenance instructions

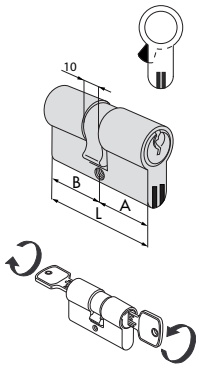
Finishes:
SUPPLIED AS STANDARD:
- nickel-plated sanded brass (fin. 12)

ON REQUEST:
- polished brass (fin. 66)

Standards:
- In compliance with EN 1303:2015
- Attack Resistance: grade D
- Key Related Security: grade 6
- Durability: grade 6


Certificates:
- SKG***

Patents:
- Key: 3D Trade Mark 1 236 248 and Community Design registered at no. 2669630
- BKP: PCT/WO2007/074163 A1
- Snap Resistant system: EP1583878




- Double cylinder with clutch system

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
30 / 30		59,0	29,5	29,5	6	1 00430 00 1	0,235	1	1	0N3S1 07 0 12
30 / 35		64,0	29,5	34,5	6	1 00430 00 1	0,235	1	1	0N3S1 26 0 12
35 / 35		69,0	34,5	34,5	6	1 00430 00 1	0,235	1	1	0N3S1 13 0 12
40 / 30		69,0	39,5	29,5	6	1 00430 00 1	0,235	1	1	0N3S1 12 0 12
30 / 45		74,0	29,5	44,5	6	1 00430 00 1	0,235	1	1	0N3S1 27 0 12
35 / 40		74,0	34,5	39,5	6	1 00430 00 1	0,235	1	1	0N3S1 28 0 12
30 / 50		79,0	29,5	49,5	6	1 00430 00 1	0,235	1	1	0N3S1 17 0 12
35 / 45		79,0	34,5	44,5	6	1 00430 00 1	0,235	1	1	0N3S1 19 0 12
40 / 40		79,0	39,5	39,5	6	1 00430 00 1	0,235	1	1	0N3S1 18 0 12
30 / 55		84,0	29,5	54,5	6	1 00430 00 1	0,235	1	1	0N3S1 33 0 12
35 / 50		84,0	34,5	49,5	6	1 00430 00 1	0,235	1	1	0N3S1 31 0 12
40 / 45		84,0	39,5	44,5	6	1 00430 00 1	0,235	1	1	0N3S1 30 0 12
30 / 60		89,0	29,5	59,5	6	1 00430 00 1	0,235	1	1	0N3S1 20 0 12
35 / 55		89,0	34,5	54,5	6	1 00430 00 1	0,235	1	1	0N3S1 32 0 12
40 / 50		89,0	39,5	49,5	6	1 00430 00 1	0,235	1	1	0N3S1 21 0 12
45 / 45		89,0	44,5	44,5	6	1 00430 00 1	0,235	1	1	0N3S1 29 0 12
30 / 65		94,0	29,5	64,5	6	1 00430 00 1	0,235	1	1	0N3S1 41 0 12
35 / 60		94,0	34,5	59,5	6	1 00430 00 1	0,235	1	1	0N3S1 38 0 12
40 / 55		94,0	39,5	54,5	6	1 00430 00 1	0,235	1	1	0N3S1 42 0 12
45 / 50		94,0	44,5	49,5	6	1 00430 00 1	0,235	1	1	0N3S1 39 0 12
30 / 70		99,0	29,5	69,5	6	1 00430 00 1	0,235	1	1	0N3S1 24 0 12
35 / 65		99,0	34,5	64,5	6	1 00430 00 1	0,235	1	1	0N3S1 22 0 12
40 / 60		99,0	39,5	59,5	6	1 00430 00 1	0,235	1	1	0N3S1 25 0 12
45 / 55		99,0	44,5	54,5	6	1 00430 00 1	0,235	1	1	0N3S1 43 0 12
30 / 30		59,0	29,5	29,5	6	1 00430 00 1	0,235	1	1	0N3S1 23 0 12
40 / 65		104,0	39,5	64,5	6	1 00430 00 1	0,235	1	1	0N3S1 44 0 12
45 / 60		104,0	44,5	59,5	6	1 00430 00 1	0,235	1	1	0N3S1 54 0 12
30 / 75		104,0	29,5	74,5	6	1 00430 00 1	0,235	1	1	0N3S1 56 0 12
55 / 50		104,0	54,5	49,5	6	1 00430 00 1	0,235	1	1	0N3S1 64 0 12
35 / 70		104,0	34,5	69,5	6	1 00430 00 1	0,235	1	1	0N3S1 49 0 12
35 / 75		109,0	34,5	74,5	6	1 00430 00 1	0,235	1	1	0N3S1 57 0 12
30 / 80		109,0	29,5	79,5	6	1 00430 00 1	0,235	1	1	0N3S1 37 0 12
40 / 70		109,0	39,5	69,5	6	1 00430 00 1	0,235	1	1	0N3S1 35 0 12
50 / 60		109,0	49,5	59,5	6	1 00430 00 1	0,235	1	1	0N3S1 36 0 12
55 / 55		109,0	54,5	54,5	6	1 00430 00 1	0,235	1	1	0N3S1 70 0 12
30 / 85		114,0	29,5	84,5	6	1 00430 00 1	0,235	1	1	0N3S1 77 0 12
50 / 65		114,0	49,5	64,5	6	1 00430 00 1	0,235	1	1	0N3S1 65 0 12
55 / 60		114,0	54,5	59,5	6	1 00430 00 1	0,235	1	1	0N3S1 71 0 12
40 / 75		114,0	39,5	74,5	6	1 00430 00 1	0,235	1	1	0N3S1 59 0 12
45 / 70		114,0	44,5	69,5	6	1 00430 00 1	0,235	1	1	0N3S1 61 0 12
30 / 90		119,0	29,5	89,5	6	1 00430 00 1	0,235	1	1	0N3S1 52 0 12
40 / 80		119,0	39,5	79,5	6	1 00430 00 1	0,235	1	1	0N3S1 60 0 12
60 / 60		119,0	59,5	59,5	6	1 00430 00 1	0,235	1	1	0N3S1 40 0 12
50 / 70		119,0	49,5	69,5	6	1 00430 00 1	0,235	1	1	0N3S1 66 0 12
30 / 100		129,0	29,5	99,5	6	1 00430 00 1	0,235	1	1	0N3S1 53 0 12




- Single cylinder with 14-position adjustable cam

Type	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 10	39,5	29,5	10,0	6	1 00430 00 1	0,186	1	1	0N324	02	0	12	
33 / 10	42,5	32,5	10,0	6	1 00430 00 1	0,186	1	1	0N324	09	0	12	
35 / 10	44,5	34,5	10,0	6	1 00430 00 1	0,186	1	1	0N324	07	0	12	
40 / 10	49,5	39,5	10,0	6	1 00430 00 1	0,186	1	1	0N324	03	0	12	
45 / 10	54,5	44,5	10,0	6	1 00430 00 1	0,186	1	1	0N324	08	0	12	
50 / 10	59,5	49,5	10,0	6	1 00430 00 1	0,186	1	1	0N324	04	0	12	
60 / 10	69,5	59,5	10,0	6	1 00430 00 1	0,186	1	1	0N324	05	0	12	
70 / 10	79,5	69,5	10,0	6	1 00430 00 1	0,186	1	1	0N324	06	0	12	



- Double cylinder with adjustable shaft
- ON REQUEST Thumb turns 06353, 06355, 06356, 06357 series

Type	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30	59,0	29,5	29,5	6	1 00430 00 1	0,244	1	1	0N3S2	07	0	12	
30 / 35	64,0	29,5	34,5	6	1 00430 00 1	0,244	1	1	0N3S2	26	0	12	
35 / 30	64,0	34,5	29,5	6	1 00430 00 1	0,244	1	1	0N3S2	81	0	12	
33 / 33	65,0	32,5	32,5	6	1 00430 00 1	0,244	1	1	0N3S2	10	0	12	
30 / 40	69,0	29,5	39,5	6	1 00430 00 1	0,244	1	1	0N3S2	82	0	12	
35 / 35	69,0	34,5	34,5	6	1 00430 00 1	0,244	1	1	0N3S2	13	0	12	
40 / 30	69,0	39,5	29,5	6	1 00430 00 1	0,244	1	1	0N3S2	12	0	12	
35 / 40	74,0	34,5	39,5	6	1 00430 00 1	0,244	1	1	0N3S2	28	0	12	
30 / 45	74,0	29,5	44,5	6	1 00430 00 1	0,244	1	1	0N3S2	27	0	12	
40 / 35	74,0	39,5	34,5	6	1 00430 00 1	0,244	1	1	0N3S2	83	0	12	
45 / 30	74,0	44,5	29,5	6	1 00430 00 1	0,244	1	1	0N3S2	91	0	12	
30 / 50	79,0	29,5	49,5	6	1 00430 00 1	0,244	1	1	0N3S2	17	0	12	
35 / 45	79,0	34,5	44,5	6	1 00430 00 1	0,244	1	1	0N3S2	19	0	12	
40 / 40	79,0	39,5	39,5	6	1 00430 00 1	0,244	1	1	0N3S2	18	0	12	
45 / 35	79,0	44,5	34,5	6	1 00430 00 1	0,244	1	1	0N3S2	85	0	12	
40 / 45	84,0	39,5	44,5	6	1 00430 00 1	0,244	1	1	0N3S2	30	0	12	
45 / 40	84,0	44,5	39,5	6	1 00430 00 1	0,244	1	1	0N3S2	84	0	12	
50 / 35	84,0	49,5	34,5	6	1 00430 00 1	0,244	1	1	0N3S2	94	0	12	
30 / 60	89,0	29,5	59,5	6	1 00430 00 1	0,244	1	1	0N3S2	20	0	12	
40 / 50	89,0	39,5	49,5	6	1 00430 00 1	0,244	1	1	0N3S2	21	0	12	
45 / 45	89,0	44,5	44,5	6	1 00430 00 1	0,244	1	1	0N3S2	29	0	12	
40 / 55	94,0	39,5	54,5	6	1 00430 00 1	0,244	1	1	0N3S2	42	0	12	
55 / 40	94,0	54,5	39,5	6	1 00430 00 1	0,244	1	1	0N3S2	98	0	12	
45 / 50	94,0	44,5	49,5	6	1 00430 00 1	0,244	1	1	0N3S2	39	0	12	
40 / 60	99,0	39,5	59,5	6	1 00430 00 1	0,244	1	1	0N3S2	25	0	12	
45 / 55	99,0	44,5	54,5	6	1 00430 00 1	0,244	1	1	0N3S2	43	0	12	
50 / 50	99,0	49,5	49,5	6	1 00430 00 1	0,244	1	1	0N3S2	23	0	12	
55 / 55	104,0	54,5	54,5	6	1 00430 00 1	0,244	1	1	0N3S2	70	0	12	
40 / 65	104,0	39,5	64,5	6	1 00430 00 1	0,244	1	1	0N3S2	44	0	12	
45 / 60	104,0	44,5	59,5	6	1 00430 00 1	0,244	1	1	0N3S2	54	0	12	
55 / 50	104,0	54,5	49,5	6	1 00430 00 1	0,244	1	1	0N3S2	64	0	12	
30 / 80	109,0	29,5	79,5	6	1 00430 00 1	0,244	1	1	0N3S2	37	0	12	
40 / 70	109,0	39,5	69,5	6	1 00430 00 1	0,244	1	1	0N3S2	35	0	12	
50 / 60	109,0	49,5	59,5	6	1 00430 00 1	0,244	1	1	0N3S2	36	0	12	
60 / 50	109,0	59,5	49,5	6	1 00430 00 1	0,244	1	1	0N3S2	89	0	12	
35 / 80	114,0	34,5	79,5	6	1 00430 00 1	0,244	1	1	0N3S2	58	0	12	
55 / 60	114,0	54,5	59,5	6	1 00430 00 1	0,244	1	1	0N3S2	71	0	12	
45 / 70	114,0	44,5	69,5	6	1 00430 00 1	0,244	1	1	0N3S2	61	0	12	
50 / 65	114,0	49,5	64,5	6	1 00430 00 1	0,244	1	1	0N3S2	65	0	12	
55 / 65	119,0	54,5	64,5	6	1 00430 00 1	0,244	1	1	0N3S2	72	0	12	
65 / 55	119,0	64,5	54,5	6	1 00430 00 1	0,244	1	1	0N3S2	86	0	12	
60 / 60	119,0	59,5	59,5	6	1 00430 00 1	0,244	1	1	0N3S2	40	0	12	



- Double cylinder with adjustable shaft, pre-set for thumb turn
- To use with inside escutcheon item 1.06458.20
- On request:
  Thumb turns item
  06353, 06355, 06356, 06357

Type	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30	59,0	29,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**07**	**0**	**12**	
35 / 30	64,0	34,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**81**	**0**	**12**	
40 / 30	69,0	39,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**12**	**0**	**12**	
45 / 30	74,0	44,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**91**	**0**	**12**	
50 / 30	79,0	49,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**90**	**0**	**12**	
55 / 30	84,0	54,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**92**	**0**	**12**	
60 / 30	89,0	59,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**87**	**0**	**12**	
65 / 30	94,0	64,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**A3**	**0**	**12**	
70 / 30	99,0	69,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**88**	**0**	**12**	
80 / 30	110,0	79,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**93**	**0**	**12**	
90 / 30	120,0	89,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**C6**	**0**	**12**	
100 / 30	130,0	99,5	29,5	6	1 00430 00 1	0,275	1	**1**	**0N3S7**	**C7**	**0**	**12**	



EN 1303:15	KEY RELATED SECURITY	1	2	3	4	5	**6**
	ATTACK RESISTANCE	0	**A**	B	C	D	
	DURABILITY	1	2	3	4	5	**6**

C3000

Technical features:
CYLINDER :
- BKP resistance to pumping, patented system
- Security Card: protected key duplication
- Brass plugs
- Carbonitrided steel pins
- Variable shape hardened steel drivers
- Phosphor bronze and steel springs
- DIN cam in self-lubricating sintered steel

KEY:
- protected by trademark
- paracentrical keyway
- in nickel silver alloy
- long neck, compatible with protective roses
- numerical code on key bow


Supplied as standard:
- 3 keys
- Security Card
- Fixing screws
- Operating and maintenance instructions

Finishes:
- SUPPLIED AS STANDARD:
  - nickel-plated sanded brass (fin. 12)
- ON REQUEST:
  - polished brass (fin. 66)

Standards:
- In compliance with EN 1303:2015
- Attack Resistance: grade A
- Key Related Security: grade 6
- Durability: grade 6


Certificates:
SKG**

Patents:
- Key: Marchi 3D n° 1 236 248 e Modello di Design Comunitario depositato n°2669630
- BKP: PCT/WO2007/074163 A1




- Double cylinder

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand	Fin.	Pers.	Spec.
30 / 30		59,0	29,5	29,5	6	1 00430 00 1	0,235	12	1	0N310	07	0	12
30 / 35		64,0	29,5	34,5	6	1 00430 00 1	0,238	12	1	0N310	26	0	12
33 / 33		65,0	32,5	32,5	6	1 00430 00 1	0,238	12	1	0N310	10	0	12
35 / 35		69,0	34,5	34,5	6	1 00430 00 1	0,272	12	1	0N310	13	0	12
40 / 30		69,0	39,5	29,5	6	1 00430 00 1	0,272	12	1	0N310	12	0	12
30 / 45		74,0	29,5	44,5	6	1 00430 00 1	0,274	12	1	0N310	27	0	12
35 / 40		74,0	34,5	39,5	6	1 00430 00 1	0,274	12	1	0N310	28	0	12
30 / 50		79,0	29,5	49,5	6	1 00430 00 1	0,289	12	1	0N310	17	0	12
35 / 45		79,0	34,5	44,5	6	1 00430 00 1	0,289	12	1	0N310	19	0	12
40 / 40		79,0	39,5	39,5	6	1 00430 00 1	0,289	12	1	0N310	18	0	12
30 / 55		84,0	29,5	54,5	6	1 00430 00 1	0,304	12	1	0N310	33	0	12
35 / 50		84,0	34,5	49,5	6	1 00430 00 1	0,304	12	1	0N310	31	0	12
40 / 45		84,0	39,5	44,5	6	1 00430 00 1	0,304	12	1	0N310	30	0	12
30 / 60		89,0	29,5	59,5	6	1 00430 00 1	0,320	12	1	0N310	20	0	12
35 / 55		89,0	34,5	54,5	6	1 00430 00 1	0,320	12	1	0N310	32	0	12
40 / 50		89,0	39,5	49,5	6	1 00430 00 1	0,320	12	1	0N310	21	0	12
45 / 45		89,0	44,5	44,5	6	1 00430 00 1	0,320	12	1	0N310	29	0	12
30 / 65		94,0	29,5	64,5	6	1 00430 00 1	0,330	6	1	0N310	41	0	12
35 / 60		94,0	34,5	59,5	6	1 00430 00 1	0,330	6	1	0N310	38	0	12
40 / 55		94,0	39,5	54,5	6	1 00430 00 1	0,330	6	1	0N310	42	0	12
45 / 50		94,0	44,5	49,5	6	1 00430 00 1	0,330	6	1	0N310	39	0	12
30 / 70		99,0	29,5	69,5	6	1 00430 00 1	0,340	6	1	0N310	24	0	12
35 / 65		99,0	34,5	64,5	6	1 00430 00 1	0,340	6	1	0N310	22	0	12
40 / 60		99,0	39,5	59,5	6	1 00430 00 1	0,340	6	1	0N310	25	0	12
45 / 55		99,0	44,5	54,5	6	1 00430 00 1	0,349	6	1	0N310	43	0	12
50 / 50		99,0	49,5	49,5	6	1 00430 00 1	0,340	6	1	0N310	23	0	12
30 / 75		104,0	29,5	74,5	6	1 00430 00 1	0,340	6	1	0N310	56	0	12
35 / 70		104,0	34,5	69,5	6	1 00430 00 1	0,340	6	1	0N310	49	0	12
55 / 50		104,0	54,5	49,5	6	1 00430 00 1	0,340	6	1	0N310	64	0	12
40 / 65		104,0	39,5	64,5	6	1 00430 00 1	0,235	6	1	0N310	44	0	12
45 / 60		104,0	44,5	59,5	6	1 00430 00 1	0,235	6	1	0N310	54	0	12
30 / 80		109,0	29,5	79,5	6	1 00430 00 1	0,360	6	1	0N310	37	0	12
40 / 70		109,0	39,5	69,5	6	1 00430 00 1	0,360	6	1	0N310	35	0	12
50 / 60		109,0	49,5	59,5	6	1 00430 00 1	0,360	6	1	0N310	36	0	12
55 / 55		109,0	54,5	54,5	6	1 00430 00 1	0,360	6	1	0N310	70	0	12
35 / 75		109,0	34,5	74,5	6	1 00430 00 1	0,235	6	1	0N310	57	0	12
45 / 65		109,0	44,5	64,5	6	1 00430 00 1	0,289	6	1	0N310	45	0	12
50 / 65		114,0	49,5	64,5	6	1 00430 00 1	0,370	6	1	0N310	65	0	12
55 / 60		114,0	54,5	59,5	6	1 00430 00 1	0,370	6	1	0N310	71	0	12
40 / 75		114,0	39,5	74,5	6	1 00430 00 1	0,370	6	1	0N310	59	0	12
45 / 75		114,0	44,5	74,5	6	1 00430 00 1	0,289	6	1	0N310	61	0	12
30 / 85		114,0	29,5	84,5	6	1 00430 00 1	0,235	6	1	0N310	77	0	12
30 / 90		119,0	29,5	89,5	6	1 00430 00 1	0,410	6	1	0N310	52	0	12
40 / 80		119,0	39,5	79,5	6	1 00430 00 1	0,380	6	1	0N310	60	0	12
60 / 60		119,0	59,5	59,5	6	1 00430 00 1	0,380	6	1	0N310	40	0	12




- Single cylinder with 14-position adjustable cam

Type	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 10	39,5	29,5	10,0	6	1 00430 00 1	0,186	12	1	ON314	02	0	12	
33 / 10	42,5	32,5	10,0	6	1 00430 00 1	0,195	12	1	ON314	09	0	12	
35 / 10	44,5	34,5	10,0	6	1 00430 00 1	0,200	12	1	ON314	07	0	12	
40 / 10	49,5	39,5	10,0	6	1 00430 00 1	0,210	12	1	ON314	03	0	12	
45 / 10	54,5	44,5	10,0	6	1 00430 00 1	0,220	12	1	ON314	08	0	12	
50 / 10	59,5	49,5	10,0	6	1 00430 00 1	0,225	12	1	ON314	04	0	12	
60 / 10	69,5	59,5	10,0	6	1 00430 00 1	0,235	12	1	ON314	05	0	12	
70 / 10	79,5	69,5	10,0	6	1 00430 00 1	0,245	12	1	ON314	06	0	12	



- Double cylinder pre-set for thumb turn installation
- On request: thumb turns series: 06353, 06355, 06356, 06357

Type	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30	59,0	29,5	29,5	6	1 00430 00 1	0,244	12	1	ON312	07	0	12	
30 / 35	64,0	29,5	34,5	6	1 00430 00 1	0,259	12	1	ON312	26	0	12	
35 / 30	64,0	34,5	29,5	6	1 00430 00 1	0,259	12	1	ON312	81	0	12	
33 / 33	65,0	32,5	32,5	6	1 00430 00 1	0,259	12	1	ON312	10	0	12	
30 / 40	69,0	29,5	39,5	6	1 00430 00 1	0,279	12	1	ON312	82	0	12	
35 / 35	69,0	34,5	34,5	6	1 00430 00 1	0,279	12	1	ON312	13	0	12	
40 / 30	69,0	39,5	29,5	6	1 00430 00 1	0,279	12	1	ON312	12	0	12	
35 / 40	74,0	34,5	39,5	6	1 00430 00 1	0,294	12	1	ON312	28	0	12	
30 / 45	74,0	29,5	44,5	6	1 00430 00 1	0,294	12	1	ON312	27	0	12	
40 / 35	74,0	39,5	34,5	6	1 00430 00 1	0,294	12	1	ON312	83	0	12	
45 / 30	74,0	44,5	29,5	6	1 00430 00 1	0,294	12	1	ON312	91	0	12	
30 / 50	79,0	29,5	49,5	6	1 00430 00 1	0,309	6	1	ON312	17	0	12	
35 / 45	79,0	34,5	44,5	6	1 00430 00 1	0,309	6	1	ON312	19	0	12	
40 / 40	79,0	39,5	39,5	6	1 00430 00 1	0,309	6	1	ON312	18	0	12	
45 / 35	79,0	44,5	34,5	6	1 00430 00 1	0,309	6	1	ON312	85	0	12	
40 / 45	84,0	39,5	44,5	6	1 00430 00 1	0,324	6	1	ON312	30	0	12	
45 / 40	84,0	44,5	39,5	6	1 00430 00 1	0,324	6	1	ON312	84	0	12	
30 / 60	89,0	29,5	59,5	6	1 00430 00 1	0,344	6	1	ON312	20	0	12	
40 / 50	89,0	39,5	49,5	6	1 00430 00 1	0,344	6	1	ON312	21	0	12	
45 / 45	89,0	44,5	44,5	6	1 00430 00 1	0,344	6	1	ON312	29	0	12	
40 / 55	94,0	39,5	54,5	6	1 00430 00 1	0,364	6	1	ON312	42	0	12	
55 / 40	94,0	54,5	39,5	6	1 00430 00 1	0,364	6	1	ON312	98	0	12	
45 / 50	94,0	44,5	49,5	6	1 00430 00 1	0,364	6	1	ON312	39	0	12	
40 / 60	99,0	39,5	59,5	6	1 00430 00 1	0,384	6	1	ON312	25	0	12	
45 / 55	99,0	44,5	54,5	6	1 00430 00 1	0,384	6	1	ON312	43	0	12	
50 / 50	99,0	49,5	49,5	6	1 00430 00 1	0,384	6	1	ON312	23	0	12	
45 / 60	104,0	44,5	59,5	6	1 00430 00 1	0,394	6	1	ON312	54	0	12	
55 / 50	104,0	54,5	49,5	6	1 00430 00 1	0,394	6	1	ON312	64	0	12	
30 / 80	109,0	29,5	79,5	6	1 00430 00 1	0,410	6	1	ON312	37	0	12	
40 / 70	109,0	39,5	69,5	6	1 00430 00 1	0,410	6	1	ON312	35	0	12	
50 / 60	109,0	49,5	59,5	6	1 00430 00 1	0,410	6	1	ON312	36	0	12	



- Double cylinder with adjustable shaft, pre-set for thumb turn
- To use with inside escutcheon item 1.06458.20
- On request: thumb turns series: 06353, 06355, 06356, 06357

Type	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
30 / 30	59,0	29,5	29,5	6	1 00430 00 1	0,275	6	1	ON317	07	0	12	
35 / 30	64,0	34,5	29,5	6	1 00430 00 1	0,285	6	1	ON317	81	0	12	
40 / 30	69,0	39,5	29,5	6	1 00430 00 1	0,295	6	1	ON317	12	0	12	
45 / 30	74,0	44,5	29,5	6	1 00430 00 1	0,305	6	1	ON317	91	0	12	
50 / 30	79,0	49,5	29,5	6	1 00430 00 1	0,315	6	1	ON317	90	0	12	
55 / 30	84,0	54,5	29,5	6	1 00430 00 1	0,325	6	1	ON317	92	0	12	
60 / 30	89,0	59,5	29,5	6	1 00430 00 1	0,335	6	1	ON317	87	0	12	
65 / 30	94,0	64,5	29,5	6	1 00430 00 1	0,345	6	1	ON317	A3	0	12	
70 / 30	99,0	69,5	29,5	6	1 00430 00 1	0,355	6	1	ON317	88	0	12	
80 / 30	110,0	79,5	29,5	6	1 00430 00 1	0,375	1	1	ON317	93	0	12	









C3000

Technical features:
CYLINDER:
- Security Card: protected key duplication
- Brass plugs
- Carbonitrided steel pins
- Variable shape hardened steel drivers
- Phosphor bronze and steel springs





KEY:
- protected by trademark
- paracentrical keyway
- in nickel silver alloy
- long neck, compatible with protective roses
- numerical code on key bow

Supplied as standard:
- 3 keys
- Security Card
- Fixing screws
- Operating and maintenance instructions

Finishes:
- SUPPLIED AS STANDARD:
  - nickel-plated sanded brass (fin. 12)
- ON REQUEST:
  - polished brass (fin. 66)

Certificates:
- SKG**

Patents:
- Key: 3D Trade Mark 1 236 248 and Community Design registered at no. 2669630

Type	Description	For locks series	L	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Cylinder	1A610, 11610, 50010, 50130, 50180, 50330, 54310, 54315, 54340, 54510, 54550, 54570		6	1 00430 00 1	0,204	6	1	ON510	00	0	12	
	• Tubular cylinder	1A611, 11611, 50111, 50131, 50181, 50481, 54316, 54341	55,0	6	1 00430 00 1	0,160	6	1	ON210	55	0	12	
	• Pair of cylinders with external tubular cylinder	50121, 50126, 50141, 50161, 50171, 50211, 50211, 50221, 50421, 50451, 50471, 50521, 50571	50,0	6	1 00430 00 1	0,267	6	1	ON116	00	0	12	
		11721, 11921	55,0	6	1 00430 00 1	0,267	6	1	ON149	00	0	12	
	• Pair of cylinders with external tubular cylinder	1A631, 1A721, 1A731	55,0	6	1 00430 00 1	0,267	6	1	ON150	00	0	12	











C3000

Technical features:

CYLINDER
- CISA patented system
- Security Card: protected key duplication
- Brass body
- Brass plugs
- Carbonitrided steel pins
- Variable shape hardened steel drivers
- Phosphor bronze and steel springs




KEY:
- protected by trademark
- paracentrical keyway
- in nickel silver alloy
- long neck, compatible with protective roses
- numerical code on key bow

Supplied as standard:
- 3 keys
- Security Card
- Fixing screws
- Operating and maintenance instructions

Finishes:
- SUPPLIED AS STANDARD:
  - nickel-plated sanded brass (fin. 12)

Certificates:
- SKG**

Patents:
- Key: 3D Trade Mark 1 236 248 and Community Design registered at no. 2669630

Type	Description	For locks series	L	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
 	• Key extraction to position (0) • Deadbolt item 1.06414.20.0 or 1.06414.30.0 (to be ordered separately)		17	6	1 00430 00 1	0,150	6	1	0N410	00	0	12	
	• Steel padlock plug • 2 keys • Pickled brass body • Complete with plate item 1.07573.08.0			6	1 00430 00 1	0,106	6	1	0N610	00	0		



EN 1303:15							
	KEY RELATED SECURITY	1	2	3	**4**	5	6
	ATTACK RESISTANCE	**0**	A	B	C	D	
	DURABILITY	1	2	3	4	5	**6**


C2000

Technical features:
- brass body
- brass plugs
- self-lubricating sintered steel projecting cam, DIN-compatible
- pins:
  - in brass
  - in hardened steel in first position
- drivers:
  - in brass
  - in hardened steel in first position
- phosphor bronze springs
- KEY:
- nickel-plated brass
- long key for protective roses compatibility
- Numerical code on paracentrical key bow

Supplied as standard:
- 3 keys
- Fixing screw


Finishes:
- STANDARD:
  sanded brass (fin. 00)
- ON REQUEST:
  nickel-plated brass (fin. 12)
  polished brass (66)

Standards:
- Compliant with EN 1303:2015
- Attack Resistance: grade 0
- Key Related Security: grade 4
- Durability: grade 6




- Double cylinder

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
22 / 22		43,4	21,7	21,7	3	1 01070 01 1	0,172	12	1	0G300	02	0		
22 / 27		48,4	21,7	26,7	3	1 01070 01 1	0,192	12	1	0G300	03	0		
25 / 25		49,8	24,9	24,9	4	1 01070 05 1	0,189	12	1	0G300	04	0		
27 / 27		53,0	26,5	26,5	4	1 01070 05 1	0,200	12	1	0G300	05	0		
27 / 33		59,0	26,5	32,5	4	1 01070 05 1	0,216	12	1	0G300	06	0		
30 / 30		59,0	29,5	29,5	5	1 01070 10 1	0,216	12	1	0G300	07	0		
30 / 33		62,0	29,5	32,5	5	1 01070 10 1	0,212	12	1	0G300	08	0		
27 / 37		63,0	26,5	36,5	4	1 01070 05 1	0,237	12	1	0G300	09	0		
30 / 35		64,0	29,5	34,5	5	1 01070 10 1	0,233	12	1	0G300	26	0		
33 / 33		65,0	32,5	32,5	5	1 01070 10 1	0,233	12	1	0G300	10	0		
27 / 43		69,0	26,5	42,5	4	1 01070 05 1	0,250	12	1	0G300	11	0		
30 / 40		69,0	29,5	39,5	5	1 01070 10 1	0,250	12	1	0G300	12	0		
35 / 35		69,0	34,5	34,5	5	1 01070 10 1	0,250	12	1	0G300	13	0		
30 / 43		72,0	29,5	42,5	5	1 01070 10 1	0,258	6	1	0G300	14	0		
37 / 37		73,0	36,5	36,5	5	1 01070 10 1	0,266	6	1	0G300	15	0		
30 / 45		74,0	29,5	44,5	5	1 01070 10 1	0,266	6	1	0G300	27	0		
35 / 40		74,0	34,5	39,5	5	1 01070 10 1	0,266	6	1	0G300	28	0		
27 / 53		79,0	26,5	52,5	4	1 01070 05 1	0,283	6	1	0G300	16	0		
30 / 50		79,0	29,5	49,5	5	1 01070 10 1	0,291	6	1	0G300	17	0		
35 / 45		79,0	34,5	44,5	5	1 01070 10 1	0,283	6	1	0G300	19	0		
40 / 40		79,0	39,5	39,5	5	1 01070 10 1	0,285	6	1	0G300	18	0		
30 / 55		84,0	29,5	54,5	5	1 01070 10 1	0,300	6	1	0G300	33	0		
35 / 50		84,0	34,5	49,5	5	1 01070 10 1	0,300	6	1	0G300	31	0		
40 / 45		84,0	39,5	44,5	5	1 01070 10 1	0,300	6	1	0G300	30	0		
43 / 43		85,0	42,5	42,5	5	1 01070 10 1	0,303	6	1	0G300	46	0		
30 / 60		89,0	29,5	59,5	5	1 01070 10 1	0,316	6	1	0G300	20	0		
35 / 55		89,0	34,5	54,5	5	1 01070 10 1	0,325	6	1	0G300	32	0		
40 / 50		89,0	39,5	49,5	5	1 01070 10 1	0,316	6	1	0G300	21	0		
45 / 45		89,0	44,5	44,5	5	1 01070 10 1	0,325	6	1	0G300	29	0		
35 / 60		94,0	34,5	59,5	5	1 01070 10 1	0,312	6	1	0G300	38	0		
45 / 50		94,0	44,5	49,5	5	1 01070 10 1	0,312	6	1	0G300	39	0		
40 / 55		94,0	39,5	54,5	5	1 01070 10 1	0,330	6	1	0G300	42	0		
30 / 65		94,0	29,5	64,5	5	1 01070 10 1	0,350	6	1	0G300	41	0		
30 / 70		99,0	29,5	69,5	5	1 01070 10 1	0,350	6	1	0G300	24	0		
35 / 65		99,0	34,5	64,5	5	1 01070 10 1	0,312	6	1	0G300	22	0		
40 / 60		99,0	39,5	59,5	5	1 01070 10 1	0,350	6	1	0G300	25	0		
45 / 55		99,0	44,5	54,5	5	1 01070 10 1	0,312	6	1	0G300	43	0		
50 / 50		99,0	49,5	49,5	5	1 01070 10 1	0,350	6	1	0G300	23	0		
45 / 60		104,0	44,5	59,5	5	1 01070 10 1	0,350	6	1	0G300	54	0		
35 / 70		104,0	34,5	69,5	5	1 01070 10 1	0,350	6	1	0G300	49	0		
40 / 65		104,0	39,5	64,5	5	1 01070 10 1	0,172	6	1	0G300	44	0		
30 / 80		109,0	29,5	79,5	5	1 01070 10 1	0,350	6	1	0G300	37	0		
40 / 70		109,0	39,5	69,5	5	1 01070 10 1	0,360	6	1	0G300	35	0		




• Double cylinder

Type	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
50 / 60	109,0	49,5	59,5	5	1 01070 10 1	0,360	6	1	**0G300**	**36**	**0**		
45 / 75	119,0	44,5	74,5	6	1 00430 00 1	0,235	6	1	**0N310**	**62**	**0**	**12**	
55 / 55	109,0	54,5	54,5	5	1 01070 10 1	0,360	6	1	**0G300**	**70**	**0**		
45 / 65	109,0	44,5	64,5	5	1 01070 10 1	0,212	6	1	**0G300**	**45**	**0**		
35 / 75	109,0	34,5	74,5	5	1 01070 10 1	0,360	6	1	**0G300**	**57**	**0**		
50 / 55	104,0	49,5	54,5	5	1 01070 10 1	0,172	6	1	**0G300**	**64**	**0**		
30 / 75	104,0	29,5	74,5	5	1 01070 10 1	0,172	6	1	**0G300**	**56**	**0**		
35 / 80	114,0	34,5	79,5	5	1 01070 10 1	0,172	6	1	**0G300**	**58**	**0**		
40 / 75	114,0	39,5	74,5	5	1 01070 10 1	0,172	6	1	**0G300**	**59**	**0**		
45 / 70	114,0	44,5	69,5	5	1 01070 10 1	0,212	6	1	**0G300**	**61**	**0**		
50 / 65	114,0	49,5	64,5	5	1 01070 10 1	0,172	6	1	**0G300**	**65**	**0**		
30 / 85	114,0	29,5	84,5	5	1 01070 10 1	0,216	6	1	**0G300**	**77**	**0**		
60 / 60	119,0	59,5	59,5	5	1 01070 10 1	0,390	6	1	**0G300**	**40**	**0**		
30 / 90	119,0	29,5	89,5	5	1 01070 10 1	0,390	6	1	**0G300**	**52**	**0**		
40 / 80	119,0	39,5	79,5	5	1 01070 10 1	0,390	6	1	**0G300**	**60**	**0**		
50 / 70	119,0	49,5	69,5	5	1 01070 10 1	0,212	6	1	**0G300**	**66**	**0**		
45 / 75	119,0	44,5	74,5	5	1 01070 10 1	0,390	6	1	**0G300**	**62**	**0**		
70 / 70	139,0	69,5	69,5	5	1 01070 10 1	0,440	6	1	**0G300**	**50**	**0**		
30 / 100	129,0	29,5	99,5	5	1 01070 10 1	0,430	6	1	**0G300**	**53**	**0**		






• Clutching system double cylinder


Type	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
27 / 27	53,0	26,5	26,5	4	1 01070 05 1	0,202	12	1	**0G301**	**05**	**0**		
27 / 33	59,0	26,5	32,5	4	1 01070 05 1	0,222	12	1	**0G301**	**06**	**0**		
30 / 30	59,0	29,5	29,5	5	1 01070 10 1	0,222	12	1	**0G301**	**07**	**0**		
27 / 37	63,0	26,5	36,5	4	1 01070 05 1	0,232	12	1	**0G301**	**09**	**0**		
30 / 35	64,0	29,5	34,5	5	1 01070 10 1	0,232	12	1	**0G301**	**26**	**0**		
27 / 43	69,0	26,5	42,5	4	1 01070 05 1	0,252	12	1	**0G301**	**11**	**0**		
35 / 35	69,0	34,5	34,5	5	1 01070 10 1	0,252	12	1	**0G301**	**13**	**0**		
30 / 40	69,0	29,5	39,5	5	1 01070 10 1	0,252	12	1	**0G301**	**12**	**0**		
35 / 40	74,0	34,5	39,5	5	1 01070 10 1	0,252	6	1	**0G301**	**28**	**0**		
40 / 45	84,0	39,5	44,5	5	1 01070 10 1	0,252	6	1	**0G301**	**30**	**0**		



• Single cylinder with adjustable cam in 8 position


Type	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
25 / 10	34,5	24,5	10,0	4	1 01070 05 1	0,146	12	1	**0G304**	**18**	**0**		
30 / 10	39,5	29,5	10,0	5	1 01070 10 1	0,155	12	1	**0G304**	**02**	**0**		
33 / 10	42,5	32,5	10,0	5	1 01070 10 1	0,165	12	1	**0G304**	**09**	**0**		
35 / 10	44,5	34,5	10,0	5	1 01070 10 1	0,170	12	1	**0G304**	**07**	**0**		
37 / 10	46,5	36,5	10,0	5	1 01070 10 1	0,175	12	1	**0G304**	**10**	**0**		
40 / 10	49,5	39,5	10,0	5	1 01070 10 1	0,191	12	1	**0G304**	**03**	**0**		
43 / 10	52,5	42,5	10,0	5	1 01070 10 1	0,195	12	1	**0G304**	**11**	**0**		
50 / 10	59,5	49,5	10,0	5	1 01070 10 1	0,215	12	1	**0G304**	**04**	**0**		
55 / 10	64,5	54,5	10,0	5	1 01070 10 1	0,245	12	1	**0G304**	**35**	**0**		
60 / 10	69,5	59,5	10,0	5	1 01070 10 1	0,245	12	1	**0G304**	**05**	**0**		
64 / 10	73,5	63,5	10,0	5	1 01070 10 1	0,255	6	1	**0G304**	**21**	**0**		
70 / 10	79,5	69,5	10,0	5	1 01070 10 1	0,275	6	1	**0G304**	**06**	**0**		
80 / 10	89,5	79,5	10,0	5	1 01070 10 1	0,305	6	1	**0G304**	**20**	**0**		
94 / 10	103,5	93,5	10,0	5	1 01070 10 1	0,355	6	1	**0G304**	**13**	**0**		

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Double cylinder with thumb turn shaft • ON REQUEST: Knobs series 06353, 06355, 06356, 06357													
30 / 30		59,0	29,5	29,5	5	1 01070 10 1	0,237	6	1	0G302	07	0		
30 / 35		64,0	29,5	34,5	5	1 01070 10 1	0,250	6	1	0G302	26	0		
35 / 30		64,0	34,5	29,5	5	1 01070 10 1	0,250	6	1	0G302	81	0		
33 / 33		65,0	32,5	32,5	5	1 01070 10 1	0,255	6	1	0G302	10	0		
30 / 40		69,0	29,5	39,5	5	1 01070 10 1	0,270	6	1	0G302	82	0		
35 / 35		69,0	34,5	34,5	5	1 01070 10 1	0,270	6	1	0G302	13	0		
40 / 30		69,0	39,5	29,5	5	1 01070 10 1	0,270	6	1	0G302	12	0		
35 / 40		74,0	34,5	39,5	5	1 01070 10 1	0,285	6	1	0G302	28	0		
40 / 35		74,0	39,5	34,5	5	1 01070 10 1	0,285	6	1	0G302	83	0		
30 / 50		79,0	29,5	49,5	5	1 01070 10 1	0,300	6	1	0G302	17	0		
35 / 45		79,0	34,5	44,5	5	1 01070 10 1	0,300	6	1	0G302	19	0		
40 / 40		79,0	39,5	39,5	5	1 01070 10 1	0,300	6	1	0G302	18	0		
45 / 35		79,0	44,5	34,5	5	1 01070 10 1	0,300	6	1	0G302	85	0		
40 / 45		84,0	39,5	44,5	5	1 01070 10 1	0,315	6	1	0G302	30	0		
45 / 40		84,0	44,5	39,5	5	1 01070 10 1	0,315	6	1	0G302	84	0		
43 / 43		85,0	42,5	42,5	5	1 01070 10 1	0,318	6	1	0G302	46	0		
30 / 60		89,0	29,5	59,5	5	1 01070 10 1	0,330	6	1	0G302	20	0		
40 / 50		89,0	39,5	49,5	5	1 01070 10 1	0,330	6	1	0G302	21	0		
45 / 45		89,0	44,5	44,5	5	1 01070 10 1	0,330	6	1	0G302	29	0		
40 / 55		94,0	39,5	54,5	5	1 01070 10 1	0,350	6	1	0G302	42	0		
45 / 50		94,0	44,5	49,5	5	1 01070 10 1	0,350	6	1	0G302	39	0		
45 / 55		99,0	44,5	54,5	5	1 01070 10 1	0,360	6	1	0G302	43	0		
50 / 50		99,0	49,5	49,5	5	1 01070 10 1	0,360	6	1	0G302	23	0		
45 / 60		104,0	44,5	59,5	5	1 01070 10 1	0,375	6	1	0G302	54	0		
55 / 50		104,0	54,5	49,5	5	1 01070 10 1	0,375	6	1	0G302	64	0		
30 / 80		109,0	29,5	79,5	5	1 01070 10 1	0,390	6	1	0G302	37	0		
40 / 70		109,0	39,5	69,5	5	1 01070 10 1	0,390	6	1	0G302	35	0		
50 / 60		109,0	49,5	59,5	5	1 01070 10 1	0,390	6	1	0G302	36	0		
60 / 50		109,0	59,5	49,5	5	1 01070 10 1	0,390	6	1	0G302	89	0		
55 / 60		114,0	54,5	59,5	5	1 01070 10 1	0,400	6	1	0G302	71	0		
55 / 65		119,0	54,5	64,5	5	1 01070 10 1	0,420	6	1	0G302	72	0		
60 / 60		119,0	59,5	59,5	5	1 01070 10 1	0,420	6	1	0G302	40	0		
65 / 55		119,0	64,5	54,5	5	1 01070 10 1	0,420	6	1	0G302	86	0		
	• Double cylinder with adjustable thumb turn shaft • To be combined with inside rose item 1.06458.20 ON REQUEST: Knobs series 06353, 06355, 06356, 06357													
30 / 30		59,0	29,5	29,5	5	1 01070 10 1	0,260	6	1	0G307	07	0		
35 / 30		64,0	34,5	29,5	5	1 01070 10 1	0,270	6	1	0G307	81	0		
40 / 30		69,0	39,5	29,5	5	1 01070 10 1	0,272	6	1	0G307	12	0		
45 / 30		74,0	44,5	29,5	5	1 01070 10 1	0,287	6	1	0G307	91	0		
50 / 30		79,0	49,5	29,5	5	1 01070 10 1	0,300	6	1	0G307	90	0		
60 / 30		89,0	59,5	29,5	5	1 01070 10 1	0,320	6	1	0G307	87	0		
70 / 30		99,0	69,5	29,5	5	1 01070 10 1	0,340	6	1	0G307	88	0		
	• Nickel-plated single cylinder with special cam 90° for series 46305 locks • 3 keys • Fixing screws													
30 / 30		59,0	29,5	29,5	5	1 01070 10 1	0,216	12	1	0G303	07	0	12	

Type	Description	Comm. dim.	L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Nickel-plated single cylinder with special cam 90° for series 46305 locks • 3 keys • Fixing screws	**30 / 10**	39,5	29,5	10,0	5		0,155	12	**1**	**0G305**	**02**	**0**	**12**	

HOTEL FUNCTION CYLINDER C2000






EN 1303:15							
	KEY RELATED SECURITY	1	2	3	**4**	5	6
	ATTACK RESISTANCE	**0**	A	B	C	D	
	DURABILITY	1	2	3	4	5	**6**

Technical features:
- Casing, keys and main elements made from brass
- Emergency key for hotel function
- Keyed Alike or master key system (to be defined) (see the On Request optional section)
- cylinder body numbering as standard

Supplied as standard:
- 3 customer type keys
- Fixing screw
- Inside thumb turn


Finishes:
- STANDARD: painted polished brass (fin. 66)
- ON REQUEST: Nickel-plated sanded brass (fin. 12

Standards:
- Compliant with standard EN 1303: 2015
  - Key Related Security: class 4
  - Attack Resistance: class 0
  - Durability: class 6



- Double cylinder with installed thumb turn
- Industrial packaging

Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
30 / 30		59,0	29,5	29,5	5	1 01070 10 1	0,237	6	1	**0G308 07 0 66**
30 / 35		64,0	29,5	34,5	5	1 01070 10 1	0,237	6	1	**0G308 26 0 66**
35 / 30		64,0	34,5	29,5	5	1 01070 10 1	0,237	6	1	**0G308 81 0 66**
33 / 33		65,0	32,5	32,5	5	1 01070 10 1	0,237	6	1	**0G308 10 0 66**
35 / 35		69,0	34,5	34,5	5	1 01070 10 1	0,237	6	1	**0G308 13 0 66**
40 / 30		69,0	39,5	29,5	5	1 01070 10 1	0,237	6	1	**0G308 12 0 66**
30 / 45		74,0	29,5	44,5	5	1 01070 10 1	0,237	6	1	**0G308 27 0 66**
45 / 30		74,0	44,5	29,5	5	1 01070 10 1	0,237	6	1	**0G308 91 0 66**
30 / 50		79,0	29,5	49,5	5	1 01070 10 1	0,237	6	1	**0G308 17 0 66**
35 / 45		79,0	34,5	44,5	5	1 01070 10 1	0,237	6	1	**0G308 19 0 66**
45 / 35		79,0	44,5	34,5	5	1 01070 10 1	0,237	6	1	**0G308 85 0 66**
40 / 45		84,0	39,5	44,5	5	1 01070 10 1	0,237	6	1	**0G308 30 0 66**
35 / 45		84,0	34,5	44,5	5	1 01070 10 1	0,237	6	1	**0G308 31 0 66**
43 / 43		85,0	42,5	42,5	5	1 01070 10 1	0,237	6	1	**0G308 46 0 66**
30 / 60		69,0	29,5	59,5	5	1 01070 10 1	0,237	6	1	**0G308 20 0 66**
40 / 50		89,0	39,5	49,5	5	1 01070 10 1	0,237	6	1	**0G308 21 0 66**
45 / 45		89,0	44,5	44,5	5	1 01070 10 1	0,237	6	1	**0G308 29 0 66**
55 / 35		89,0	54,5	34,5	5	1 01070 10 1	0,237	6	1	**0G308 97 0 66**
35 / 60		94,0	34,5	59,5	5	1 01070 10 1	0,237	6	1	**0G308 38 0 66**
60 / 35		94,0	59,5	34,5	5	1 01070 10 1	0,237	6	1	**0G308 A1 0 66**
45 / 55		99,0	44,5	54,5	5	1 01070 10 1	0,237	6	1	**0G308 43 0 66**
55 / 45		99,0	54,8	44,5	5	1 01070 10 1	0,237	6	1	**0G308 99 0 66**
60 / 45		104,0	59,5	44,5	5	1 01070 10 1	0,237	6	1	**0G308 A6 0 66**
30 / 80		109,0	29,5	79,5	5	1 01070 10 1	0,237	6	1	**0G308 37 0 66**
60 / 50		109,0	59,5	49,5	5	1 01070 10 1	0,237	6	1	**0G308 89 0 66**
55 / 65		119,0	44,5	64,5	5	1 01070 10 1	0,237	6	1	**0G308 72 0 66**
65 / 55		119,0	64,5	54,5	5	1 01070 10 1	0,237	6	1	**0G308 86 0 66**



- MK-EME Key

							0,014	1	1	**01310 25 0 00 00 MK**







Technical features:
- brass body
- brass plugs
- pins:
  - in brass
- drivers:
  - in brass, mushroom-type anti-picking and cylindrical
- phosphor bronze springs
- KEY
  - nickel-plated brass
  - long key for protective roses compatibility
- Numerical coding on the head.

Supplied as standard:
- 3 keys
- Fixing screw

Finishes:
- STANDARD:
  - sanded brass (fin. 00)
- ON REQUEST:
  - nickel-plated brass (fin. 12)
  - polished brass (fin. 66)



C2000

Type	Description	For locks series	L	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Rim cylinder	1A610		5	1 01070 10 1	0,182	6	1	0G500	00	0		
	• Round cylinder	1A611	105,0	5	1 01070 10 1	0,193	6	1	0G200	05	0		
			55,0	5	1 01070 10 1	0,168	6	1	0G200	55	0		
			65,0	5	1 01070 10 1	0,165	6	1	0G200	65	0		
			75,0	5	1 01070 10 1	0,174	6	1	0G200	75	0		
			85,0	5	1 01070 10 1	0,185	6	1	0G200	85	0		
			95,0	5	1 01070 10 1	0,182	6	1	0G200	95	0		
	• Cylinder set	1A630		5	1 01070 10 1	0,250	6	1	0G115	00	0		
	• Cylinder set, with round external cylinder	1A631, 1A721, 1A731	55,0	5	1 01070 10 1	0,255	6	1	0G150	00	0		



Technical features:
- brass body
- brass plugs
- self-lubricating sintered steel projecting DIN cam

Finishes:
- STANDARD:
  sanded brass (fin. 00)
- ON REQUEST:
  nickel-plated brass (fin. 12)







Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Double cylinder for bathroom doors with thumb turn shaft • No keys ON REQUEST: Knobs series 06353, 06355, 06356, 06357	**27 / 27**	53,0	26,5	26,5		0,180	6	1	**0G325**	**05**	**0**		
		27 / 33	59,0	26,5	32,5		0,200	6	1	**0G325**	**C8**	**0**		
		30 / 30	59,0	29,5	29,5		0,200	6	1	**0G325**	**07**	**0**		
		33 / 33	65,0	32,5	32,5		0,220	6	1	**0G325**	**10**	**0**		
		35 / 35	69,0	34,5	34,5		0,240	6	1	**0G325**	**13**	**0**		
		40 / 30	69,0	39,5	29,5		0,240	6	1	**0G325**	**12**	**0**		
	• Single cylinder with thumb turn shaft ON REQUEST: Knobs series 06353, 06355, 06356, 06357	**30 / 10**	39,5	23,5	10,0		0,138	6	1	**0G359**	**02**	**0**		
		33 / 10	42,5	32,5	10,0		0,151	6	1	**0G359**	**09**	**0**		
		35 / 10	44,5	34,5	10,0		0,130	6	1	**0G359**	**07**	**0**		
		37 / 10	46,5	36,5	10,0		0,138	6	1	**0G359**	**10**	**0**		
		40 / 10	49,5	39,5	10,0		0,151	6	1	**0G359**	**03**	**0**		
		43 / 10	52,5	42,5	10,0		0,130	6	1	**0G359**	**11**	**0**		



Technical features:
- brass body
- brass plug
- pins in wear resistant bronze
- drivers in brass, cylindrical and mushroom-like for an antipicking function
- phosphor bronze springs
- KEY: nickel-plated brass

Supplied as standard:
- 3 keys
- Fixing screws
- Fixing plates

Finishes:
- STANDARD:
  satin brass (fin. 00)
- ON REQUEST:
  nickel-plated brass (fin. 12)
  polished brass (fin. 66)







Type	Description	For locks series	L	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Rim cylinder	13010		6	1 01210 00 2	0,238	6	1 02520	00	0			
	• Rim cylinder	11610, 50110, 50130, 50180, 54570		5	1 01310 00 1	0,180	6	1 02550	25	0			
	• Cylinder set	50120, 50125, 50160, 50170, 50210, 50220		5	1 01310 00 1	0,250	6	1 02102	00	0			
		11630		5	1 01310 00 1	0,255	6	1 02104	00	0			
		11670		5	1 01310 00 1	0,262	6	1 02146	00	0			
	• Cylinder set, with round external cylinder	50121, 50126, 50141, 50161, 50171, 50211, 50221, 50421, 50461, 50471, 50521, 50561, 50571	50,0	5	1 01310 00 1	0,256	6	1 02106	00	0			
		11631, 11731, 11931	50,0	5	1 01310 00 1	0,256	6	1 02110	00	0			
		11721, 11921	50,0	5	1 01310 00 1	0,269	6	1 02139	00	0			
		11823	70,0	5	1 01310 00 1	0,252	6	1 02142	00	0			
		11671, 11761, 11771	50,0	5	1 01310 00 1	0,267	6	1 02145	00	0			
	• Cylinder for roll-up shutter locks • Finish: polished brass only (fin. 66)	41410, 41420, 41421	10,0	3	1 01320 00 2	0,089	6	1 02544	10	0			
		41010, 41110, 41111	14,0	3	1 01310 00 2	0,104	6	1 02544	14	0			
		41210, 41220, 41221, 41230, 41231, 41310, 41311, 41320	15,0	4	1 01310 00 2	0,120	6	1 02544	15	0			
	• Cylinder for gate locks • Finish: polished brass only (fin. 66)	42010, 42020, 42030, 42110, 42120, 42210, 42310, 42410, 42420, 42510		4	1 01330 00 1	0,180	6	1 02156	00	0			








Technical features:
- brass body
- pins in wear resistant bronze
- drivers in brass, cylindrical and mushroom-like for an antipicking function
- phosphor bronze springs
- KEY: nickel-plated brass

Supplied as standard:
- 2 or 3 keys
- Fixing screws
- Fixing plates

Finishes:
- Various finishes according to the cylinder type

Type	Description	Door thickness	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Cross-key cylinder complete with 19 mm adaptor • For locks series 16000, 46000 • Short key version	6	1 00210 00 0	0,119	12	1	02400	10	0			
	• Cross-key cylinder complete with 19 mm adaptor • For locks series 16000, 46000 • Long key version	6	1 00211 00 0	0,132	12	1	02400	11	0			
	• Cylinder for outside operation devices item 1.07077.28.0 • Sanded brass	5	1 01310 00 1	0,120	6	1	02649	10	0			
	• Cylinder for outside operation devices item 1.07078.29.0 • Sanded brass	5	1 01310 00 1	0,118	6	1	02649	11	0			
	• 3 keys • Belt sanded brass TO BE DISCONTINUED	4	1 01320 00 1	0,280	6	1	44010	02	0			
	• 3 keys • Belt sanded brass TO BE DISCONTINUED	4	1 01320 00 1	0,280	6	1	44011	02	0			
	• 2 keys • polished brass TO BE DISCONTINUED	4	1 01420 00 1	0,110	6	1	72010	00	0			




Type	Description	Door thickness	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• 2 keys • Belt sanded brass • Key removed in vertical position • Cam item 06411 or 06412, to be ordered separately	11	3	1 01420 00 1	0,078	12	1 72210	16	0			
		15	4	1 01420 00 1	0,087	12	1 72210	20	0			
		20	4	1 01420 00 1	0,097	12	1 72210	25	0			
		25	4	1 01420 00 1	0,108	12	1 72210	30	0			
	• MARINE TYPE • 2 keys • Chrome -plated brass • Key removed in vertical position • Cam item 1.06412.51.0, specify with order	11	3	1 01420 00 1	0,077	12	1 72215	16	0			
		15	4	1 01420 00 1	0,085	12	1 72215	20	0			
		20	4	1 01420 00 1	0,094	12	1 72215	25	0			
		25	4	1 01420 00 1	0,105	12	1 72215	30	0			
	• 3 keys • Nickel-plated brass • Vertical key extraction • Deadbolt to choose from items 1.06414.20.0 and 1.06414.30.0 (specify in order)	17	5	1 01310 00 1	0,135	6	1 72250	26	0			
	• 3 keys • Nickel-plated brass • Microswitch (7 A,250 V) with terminals to be welded • Automatic return to key extraction position (0)	17	5	1 01310 00 1	0,145	6	1 72251	01	0			
	• 3 keys • Nickel-plated brass • Microswitch (7 A,250 V) with terminals to be welded • Automatic return to key extraction position (0)	17	5	1 01310 00 1	0,144	6	1 72251	03	0			















Technical features:
- brass body
- brass plugs
- pins in wear resistant bronze
- drivers in brass, cylindrical and mushroom-like for an antipicking function
- phosphor bronze springs
- self-lubricating sintered steel cam
- KEY: nickel-plated brass








Supplied as standard:
- 3 keys
- Fixing screw


Finishes:
- STANDARD: sanded brass (fin. 00)
- ON REQUEST: nickel-plated brass (fin. 12)


Type	Description	Comm. dim. L	A	B	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Double cylinder													
		20 / 20	41,4	20,7	20,7	3	1 01425 00 1	0,120	12	**1**	**08210**	**01**	**0**	
		28 / 28	55,4	27,7	27,7	5	1 01410 00 1	0,168	12	**1**	**08210**	**02**	**0**	
		30 / 30	60,0	30,0	30,0	5	1 01410 00 1	0,180	12	**1**	**08210**	**05**	**0**	
		28 / 35	62,7	27,7	35,0	5	1 01410 00 1	0,187	12	**1**	**08210**	**06**	**0**	
		30 / 40	70,0	30,0	40,0	5	1 01410 00 1	0,204	12	**1**	**08210**	**12**	**0**	
		35 / 35	70,0	35,0	35,0	5	1 01410 00 1	0,205	12	**1**	**08210**	**13**	**0**	
		28 / 45	72,7	27,7	45,0	5	1 01410 00 1	0,210	6	**1**	**08210**	**14**	**0**	
		28 / 53	80,7	27,7	53,0	5	1 01410 00 1	0,233	6	**1**	**08210**	**16**	**0**	
		40 / 40	80,0	40,0	40,0	5	1 01410 00 1	0,231	6	**1**	**08210**	**18**	**0**	
	• Single cylinder													
		28 / 10	38,0	27,7	10,3	5	1 01410 00 1	0,124	12	**1**	**08220**	**02**	**0**	
	• Thumb turn double cylinder • Black nylon knob													
		28 / 28	55,4	27,7	27,7	5	1 01410 00 1	0,183	6	**1**	**08230**	**02**	**0**	
		35 / 28	62,7	35,0	27,7	5	1 01410 00 1	0,190	6	**1**	**08230**	**06**	**0**	

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Belt sanded brass rose to be used with European profile cylinders		0,009	100	**1 06010 00 0**
	• Belt sanded brass rose to be used with European profile cylinders		0,008	100	**1 06011 00 0**
	• Belt sanded brass rose to be used with European profile cylinders		0,009	100	**1 06012 00 0**
	• Belt sanded brass rose to be used with rim cylinders (diameter 25 mm.)		0,010	100	**1 06018 25 0**
	• Belt sanded brass rose to be used with oval cylinders	82000	0,007	100	**1 06027 00 0**

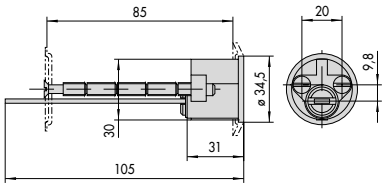
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Polished brass rose to be used with European profile cylinders		0,024	100	1 06043 00 0
	• Aluminium knob, black lacquered		0,038	6	1 06353 00 0 44
	• Aluminium knob, gold bronze anodised		0,040	6	1 06353 00 0 60
	• Aluminium knob, aluminium anodised		0,037	6	1 06353 00 0 62
	• Aluminium knob, dark brown bronze anodised		0,040	6	1 06353 00 0 64
	• Chrome-plated sanded brass knob for pre-set cylinders		0,060	6	1 06354 00 0 23
	• Chrome-plated painted brass knob for pre-set cylinders		0,060	6	1 06354 00 0 68
	• Nickel-plated brass knob		0,051	6	1 06355 00 0 12
	• Laquered polished brass knob		0,060	6	1 06355 00 0 66
	• Nickel-plated brass knobs		0,180	6	1 06356 00 0 12
	• Laquered polished brass knob		0,183	6	1 06356 00 0 66
	• Nickel-plated brass knobs		0,062	6	1 06357 00 0 12
	• Laquered polished brass knob		0,165	6	1 06357 00 0 66
	• Zinc-plated steel cam	72210	0,012	12	1 06411 01 0
			0,012	12	1 06411 02 0
			0,014	12	1 06411 03 0
			0,016	12	1 06411 04 0

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc-plated steel cam	72210	0,014	12	1 06412 01 0
			0,013	12	1 06412 02 0
			0,016	12	1 06412 03 0
			0,017	12	1 06412 04 0
	• Zinc-plated steel cam	72215	0,013	12	1 06412 51 0
	• Zinc-plated steel cam	72350	0,007	12	1 06413 01 0
			0,008	12	1 06413 02 0
			0,009	12	1 06413 03 0
			0,010	12	1 06413 04 0
	• Zinc-plated steel cam	72350	0,008	12	1 06414 01 0
			0,009	12	1 06414 02 0
			0,010	12	1 06414 03 0
			0,011	12	1 06414 04 0
	• Zinc plated steel cam	0A410, 0M410, 0N410, 0P410, 72250	0,019	12	1 06414 20 0
	• Zinc plated steel cam	0L410	0,018	12	1 06414 25 0
	• Zinc plated steel cam	0A410, 0M410, 0N410, 0P410, 72250	0,010	12	1 06414 30 0


Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers.	Spec.
	• Cylinder spacer kit • L = 36 mm. • Total cylinder length 60 mm	0G200, 0A210, 0L210, 0N210, 0M210, 0P210	0,030	12	1	07165	00	0	
	• Cylinder spacer kit • L = 46 mm. • Total cylinder length 70 mm	0G200, 0A210, 0L210, 0N210, 0M210, 0P210	0,038	12	1	07165	01	0	
	• Cylinder spacer kit • L = 56 mm. • Total cylinder length 80 mm	0G200, 0A210, 0L210, 0N210, 0M210, 0P210	0,045	12	1	07165	02	0	
	• Cylinder spacer kit • L = 66 mm. • Total cylinder length 90 mm	0G200, 0A210, 0L210, 0N210, 0M210, 0P210	0,050	12	1	07165	03	0	
	• Cylinder spacer kit • L = 76 mm. • Total cylinder length 100 mm	0G200, 0A210, 0L210, 0N210, 0M210, 0P210	0,052	12	1	07165	04	0	



02400

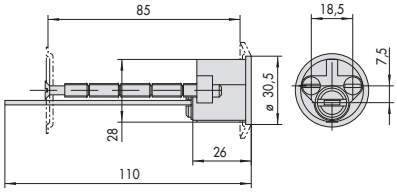


1.02520.00




0A210, 0L210, 0E200, 0G200,
0M210, 0N210, 0P210

1




1.0A510.00, 1.0L510.00, 1.0E500.00, 1.0G500.00,
1.0M510.00, 1.0N510.00, 1.0P510.00

4



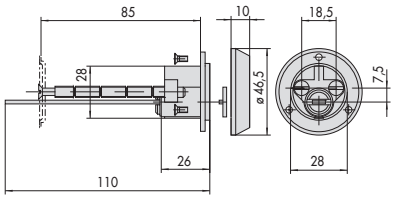
	S	A	L
1.02544.10	5,5	13	10
1.02544.14	6,5	16	14
1.02544.15	5,5	18	15

7



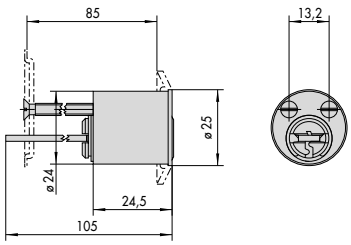
1.02649.01, 1.02650.01, 1.0A610.00,
1.0L610.00, 1.0E600.00, 1.0M610.00,
1.0N610.00, 1.0P610.00

2




1.0A510.11, 1.0L510.10,
1.0M510.10, 1.0P510.10

5



1.02550.25

8




08210


3

6

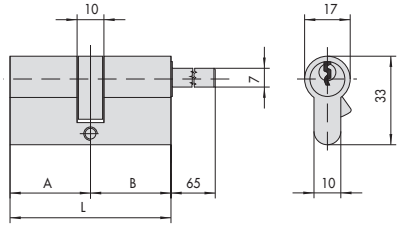
9



1.08220.02




08730, 0A314, 0E304, 0G304, 0E305, 0G305, 0L314, 0M324, 0N314, 0N324, 0P314



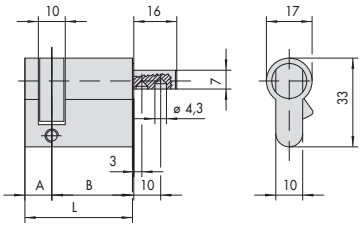
0A3S7, 0A317, 0G307, 0L3S7, 0M3T7, 0N317, 0N3S7, 0P3S7

10



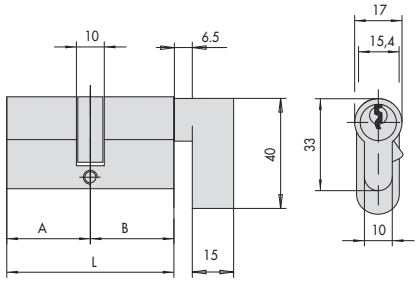
08230

13



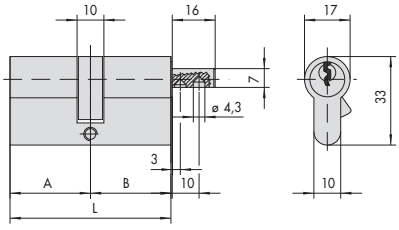
0G359

16



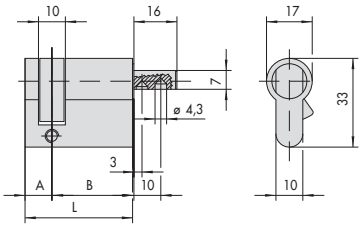
0G308

11




0A3S2, 0A312, 0E302, 0G302, 0G325
0L3S2, 0M3T2, 0N312, 0N3S2

14



0G359

17

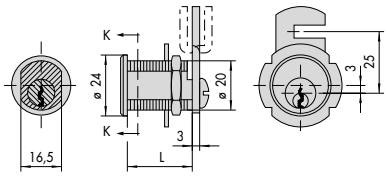


08710, 0A3S1, 0A310, 0G300, 0G301, 0G303, 0L3S1, 0E300, 0E301, 0M3T1, 0N310, 0N3S1, 0P3S1

12

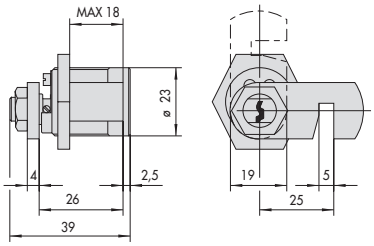
15

18



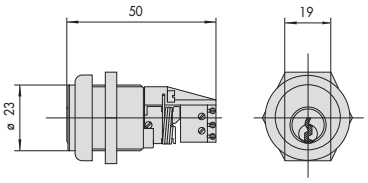
	L
1.72210.16 - 1.72215.16	16,5
1.72210.20 - 1.72215.20	20
1.72210.25 - 1.72215.25	25
1.72210.30 - 1.72215.30	30

19



1.72250.26, 1.0A410.00, 1.0L410.00, 1.0M410.00, 1.0N410.00, 1.0P410.00

20



72251, 0A415, 0L415, 0M415, 0P415

21

Padlocks



RS3 steel padlocks 129
AP4 steel padlocks 130
Astral Tekno steel padlocks 131
C3000 steel padlocks 132
Astral steel padlocks 133
LIM steel padlocks 134
Padlocks for european profile cylinder 135
Marine Type padlocks 136
Brass padlocks 137
CISA Locking Line padlocks with steel sleeve 138
Rectangular brass padlocks CISA Locking Line 139
Marine Type padlocks CISA Locking Line 140
CISA Locking Line brass padlocks 141
CISA Locking Line padlocks with combination lock 143
Spare parts for padlocks 144
Accessories for padlocks 145
Spare parts for padlocks 147

CISA®

Steel padlocks

WITH AP4, ASTRAL TEKNO, AND C3000 CYLINDERS.

Attack and weather resistant



Protected key duplication







Technical features:
- Security Card: protected duplication
- Carbonitrided solid steel body, with chemical nickel-plating corrosion treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced
- KEY
  - flat reversible keys, with incorporated mobile element
  - in nickel silver alloy
  - numbered on key bow

Supplied as standard:
- 2 keys
- SECURITY CARD

RS3


Type	Description	A	C	D	L	S	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Key removable in locked position only	55	25,0	11,0	25,0	25,0	15	1 00800 00 0	0,553	6	1	28059	55	0	00	CL
		55	25,0	11,0	45,0	25,0	15	1 00800 00 0	0,586	6	1	28059	56	0	00	CL
		70	31,0	14,0	25,0	26,0	15	1 00800 00 0	0,854	6	1	28059	70	0	00	CL
		70	31,0	14,0	65,0	26,0	15	1 00800 00 0	0,954	6	1	28059	72	0	00	CL
		66	20,0	10,0	11,0	25,0	15	1 00800 00 0	0,677	6	1	28559	66	0	00	CL
		75	27,0	12,0	13,5	28,0	15	1 00800 00 0	0,843	6	1	28559	75	0	00	CL
		84	36,0	12,0	17,5	28,0	15	1 00800 00 0	0,995	6	1	28559	84	0	00	CL
		84	36,0	14,0	17,5	28,0	15	1 00800 00 0	0,974	6	1	28559	85	0	00	CL



Technical features:
- Security Card: protected duplication
- Solid body in carbonitrided steel with corrosion resistant chemical nickel plating
- Hardened steel shackle with chemical nickel plating
- Cylinder protection plate in carbonitrided steel with chemical nickel plating
- Replaceable cylinder
- Keys:
  - flat reversible
  - **in nickel silver alloy, with mobile element**
  - numerical code on key bow


Supplied as standard:
- Code Card
- 2 keys

AP4



- Key removable in locked position only

Type	Description	A	C	D	L	S	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		55	25,0	11,0	25,0	25,0	11	1 00810 00 0	0,565	6	1	2805P	55	0		
		55	25,0	11,0	45,0	25,0	11	1 00810 00 0	0,601	6	1	2805P	56	0		
		55	26,0	11,0	65,0	25,0	11	1 00810 00 0	0,610	6	1	2805P	57	0		
		70	31,0	14,0	25,0	26,0	11	1 00810 00 0	0,880	6	1	2805P	70	0		
		70	31,0	14,0	45,0	26,0	11	1 00810 00 0	0,927	6	1	2805P	71	0		
		70	31,0	14,0	65,0	26,0	11	1 00810 00 0	0,954	6	1	2805P	72	0		




		66	20,0	10,0	11,0	25,0	11	1 00810 00 0	0,685	6	1	2855P	66	0		
		66	18,0	14,0	17,5	28,0	11	1 00810 00 0	0,837	6	1	2855P	67	0		
		75	27,0	12,0	13,5	28,0	11	1 00810 00 0	0,852	6	1	2855P	75	0		
		84	36,0	12,0	17,5	28,0	11	1 00810 00 0	0,970	6	1	2855P	84	0		
		84	36,0	14,0	17,5	28,0	11	1 00810 00 0	0,983	6	1	2855P	85	0		



Technical features:
- Security Card: protected duplication
- Solid body in carbonitrided steel with corrosion resistant chemical nickel plating
- Hardened steel shackle with chemical nickel plating
- Cylinder protection plate in carbonitrided steel with chemical nickel plating
- Replaceable cylinder
  Keys:
  - flat reversible
  - numerical code on key bow


Supplied as standard:
- Security Card
- 2 keys

Astral Tekno



- Key removable in locked position only

A	C	D	L	S	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
55	25,0	11,0	25,0	25,0	10	1 00690 00 0 00	0,565	6	1	2805M 55 0
55	25,0	11,0	45,0	25,0	10	1 00690 00 0 00	0,601	6	1	2805M 56 0
55	26,0	11,0	65,0	25,0	10	1 00690 00 0 00	0,610	6	1	2805M 57 0
70	31,0	14,0	25,0	26,0	10	1 00690 00 0 00	0,880	6	1	2805M 70 0
70	31,0	14,0	45,0	26,0	10	1 00690 00 0 00	0,927	6	1	2805M 71 0
70	31,0	14,0	65,0	26,0	10	1 00690 00 0 00	0,954	6	1	2805M 72 0



A	C	D	L	S	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
66	20,0	10,0	11,0	25,0	10	1 00690 00 0 00	0,685	6	1	2855M 66 0
66	18,0	14,0	17,5	28,0	10	1 00690 00 0 00	0,852	6	1	2855M 67 0
75	27,0	12,0	13,5	28,0	10	1 00690 00 0 00	0,852	6	1	2855M 75 0
84	36,0	12,0	17,5	28,0	10	1 00690 00 0 00	0,970	6	1	2855M 84 0
84	36,0	14,0	17,5	28,0	10	1 00690 00 0 00	0,983	6	1	2855M 85 0




Technical features:
- Security Card: protected duplication
- Solid body in carbonitrided steel with corrosion resistant chemical nickel plating
- Hardened steel shackle with chemical nickel plating
- Cylinder protection plate in carbonitrided steel with chemical nickel plating
- Replaceable cylinder

Keys:
- numerical code on key bow


Supplied as standard:
- Security Card
- 2 keys

C3000



- Key removable in locked position only

Type	Description	A	C	D	L	S	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		55	25,0	11,0	25,0	25,0	6	1 00430 00 1	0,565	6	1	2805N	55	0		
		55	25,0	11,0	45,0	25,0	6	1 00430 00 1	0,601	6	1	2805N	56	0		
		55	26,0	11,0	65,0	25,0	6	1 00430 00 1	0,610	6	1	2805N	57	0		
		70	31,0	14,0	25,0	26,0	6	1 00430 00 1	0,880	6	1	2805N	70	0		
		70	31,0	14,0	45,0	26,0	6	1 00430 00 1	0,927	6	1	2805N	71	0		
		70	31,0	14,0	65,0	26,0	6	1 00430 00 1	0,954	6	1	2805N	72	0		



		66	20,0	10,0	11,0	25,0	6	1 00430 00 1	0,685	6	1	2855N	66	0		
		66	18,0	14,0	17,5	28,0	6	1 00430 00 1	0,837	6	1	2855N	67	0		
		75	27,0	12,0	13,5	28,0	6	1 00430 00 1	0,852	6	1	2855N	75	0		
		84	36,0	12,0	17,5	28,0	6	1 00430 00 1	0,970	6	1	2855N	84	0		
		84	36,0	14,0	17,5	28,0	6	1 00430 00 1	0,983	6	1	2855N	85	0		








Astral


Technical features:
- Carbonitrided solid steel body, with chemical anti-corrosion nickel-plating treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced
- KEY:
- flat reversible keys
- numbered on key bow

Supplied as standard:
- 2 keys
- Code Card



- Key removable in locked position only

A	C	D	L	S	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
55	25,0	11,0	45,0	25,0	10	1 00620 01 0	0,586	6	1	28053	56	0		
70	31,0	14,0	25,0	26,0	10	1 00620 01 0	0,854	6	1	28053	70	0		
70	31,0	14,0	45,0	26,0	10	1 00620 01 0	0,903	6	1	28053	71	0		
70	31,0	14,0	65,0	26,0	10	1 00620 01 0	0,954	6	1	28053	72	0		






A	C	D	L	S	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
66	20,0	10,0	11,0	25,0	10	1 00620 01 0	0,677	6	1	28553	66	0		
66	18,0	14,0	17,5	28,0	10	1 00620 01 0	0,837	6	1	28553	67	0		
75	27,0	12,0	13,5	28,0	10	1 00620 01 0	0,843	6	1	28553	75	0		
84	36,0	12,0	17,5	28,0	10	1 00620 01 0	0,955	6	1	28553	84	0		
84	36,0	14,0	17,5	28,0	10	1 00620 01 0	0,983	6	1	28553	85	0		



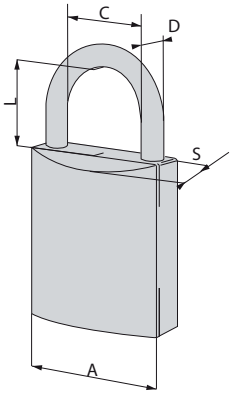
Technical features:
- Carbonitrided solid steel body, with chemical anti-corrosion nickel-plating treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- **The removable cylinder can be either rekeyed or replaced**
- Carbonitrided steel plug protection plate
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- Desmopan impact resistant protection device (for the 28050 series)
- LIM patented key profile

Supplied as standard:
- 2 keys

Type	Description	A	C	D	L	S	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hard Fin.	Pers. Spec.
	• Key removable in locked position only	55	25,0	11,0	25,0	25,0	5	1 00401 00 1	0,565	6	1	28050	55	0
		55	25,0	11,0	45,0	25,0	5	1 00401 00 1	0,601	6	1	28050	56	0
		55	26,0	11,0	65,0	25,0	5	1 00401 00 1	0,610	6	1	28050	57	0
		70	31,0	14,0	25,0	26,0	5	1 00401 00 1	0,880	6	1	28050	70	0
		70	31,0	14,0	45,0	26,0	5	1 00401 00 1	0,927	6	1	28050	71	0
		70	31,0	14,0	65,0	26,0	5	1 00401 00 1	0,954	6	1	28050	72	0
	• Clam packing	55	25,0	11,0	25,0	25,0	5	1 00401 00 1	0,578	6	1	28055	55	0
		55	25,0	11,0	45,0	25,0	5	1 00401 00 1	0,608	6	1	28055	56	0
		55	26,0	11,0	65,0	25,0	5	1 00401 00 1	0,636	6	1	28055	57	0
		70	31,0	14,0	25,0	26,0	5	1 00401 00 1	0,870	6	1	28055	70	0
		70	31,0	14,0	45,0	26,0	5	1 00401 00 1	0,929	6	1	28055	71	0
		70	31,0	14,0	65,0	26,0	5	1 00401 00 1	0,971	6	1	28055	72	0
		66	20,0	10,0	11,0	25,0	5	1 00401 00 1	0,685	6	1	28550	66	0
		66	18,0	14,0	17,5	28,0	5	1 00401 00 1	0,837	6	1	28550	67	0
		75	27,0	12,0	13,5	28,0	5	1 00401 00 1	0,852	6	1	28550	75	0
		84	36,0	12,0	17,5	28,0	5	1 00401 00 1	0,970	6	1	28550	84	0
		84	36,0	14,0	17,5	28,0	5	1 00401 00 1	0,983	6	1	28550	85	0
	• Clam packing	66	20,0	10,0	11,0	25,0	5	1 00401 00 1	0,745	6	1	28555	66	0
		66	18,0	14,0	17,5	28,0	5	1 00401 00 1	0,855	6	1	28555	67	0
		75	27,0	12,0	13,5	28,0	5	1 00401 00 1	0,905	6	1	28555	75	0
		84	36,0	12,0	17,5	28,0	5	1 00401 00 1	1,018	6	1	28555	84	0
		84	36,0	14,0	17,5	28,0	5	1 00401 00 1	1,009	6	1	28555	85	0




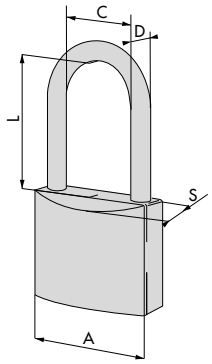
Technical features:
- Brass monoblock body
- Special steel shackle
- Compatibility with European profile single cylinder (30/10 mm) to be purchased separately

Type	Description	A	C	D	L	S	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Designed to match the following cylinders: - Asix item 1.0E304.02.0 - RS3 S item 1.0L314.02.0.66CL - C2000 item1.0G304.02.0 - Astral Tekno item1.0M314.02.0.66CL item 1.0N324.02.0.66 • AP4S item 1.0P314.02.0.33 • C3000 1 item1.0N314.02.0	55	27,0	9,5	39,0	27,5			0,550	6	1	26810	55	0		



Technical features:
- Chrome-plated solid brass body
- Stainless steel shackle
- Shackle double-locking system
- CISA patented anti-tampering protection device for the bolts
- Picking resistant chrome-plated brass plate
- Item 1.26020.50/60 with LIM patented key profile


Supplied as standard:
- 2 keys

Type	Description	A	C	D	L	S	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Standard shackle	30	17,0	5,0	17,0	14,5	4	1 01430 00 1	0,098	12	1	**26020**	**30**	**0**		
		40	24,0	6,0	23,0	16,5	5	1 01410 00 1	0,175	12	1	**26020**	**40**	**0**		
		50	29,5	8,0	27,5	17,5	5	1 01310 10 1	0,295	6	1	**26022**	**50**	**0**		
		60	35,0	10,0	37,5	20,0	5	1 01310 10 1	0,462	6	1	**26022**	**60**	**0**		
	• Long shackle	40	24,0	6,0	40,0	16,5	5	1 01410 00 1	0,182	12	1	**26021**	**40**	**0**		



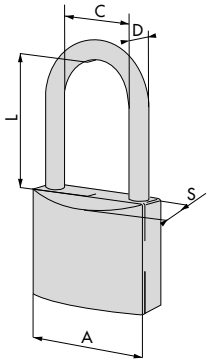
Technical features:
- Belt sanded solid brass body
- Nickel-plated, carbonitrided steel shackle
- Version with brass shackle also available
- Shackle double-locking system (item 1.22010.15/20 excluded)
- Picking resistant brass plate

Supplied as standard:
- 2 keys



- Standard shackle

Type	Description	A	C	D	L	S	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		15	8,5	3,0	11,0	9,0	3	1 01510 00 1	0,022	12	1	22010	15	0		
		20	12,0	3,5	13,0	12,5	4	1 01440 00 1	0,038	12	1	22010	20	0		
		25	13,5	4,5	15,0	12,5	4	1 01440 00 1	0,065	12	1	22010	25	0		
		30	17,0	5,0	17,0	14,5	4	1 01430 00 1	0,095	12	1	22010	30	0		
		40	24,0	6,0	23,0	16,5	5	1 01410 00 1	0,172	12	1	22010	40	0		
		50	29,5	8,0	27,5	17,5	5	1 01310 00 1	0,292	6	1	22010	50	0		
		60	35,0	10,0	37,5	20,0	5	1 01310 00 1	0,435	6	1	22010	60	0		



- Long shackle


Type	Description	A	C	D	L	S	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		20	12,0	3,5	22,0	12,5	4	1 01440 00 1	0,053	12	1	22011	20	0		
		30	17,0	5,0	24,0	14,5	4	1 01430 00 1	0,098	12	1	22011	30	0		
		30	17,0	5,0	65,0	14,5	4	1 01430 00 1	0,111	12	1	22011	31	0		
		40	24,0	6,0	40,0	16,5	5	1 01410 00 1	0,183	12	1	22011	40	0		
		40	24,0	6,0	63,5	16,5	5	1 01410 00 1	0,191	12	1	22011	41	0		
		50	29,5	8,0	80,0	17,5	5	1 01310 00 1	0,345	6	1	22011	50	0		
		50	29,5	8,0	127,0	17,5	5	1 01310 00 1	0,381	6	1	22011	52	0		



Technical features:
- Brass solid body with nickel-plated hardened steel sleeve
- Nickel-plated hardened steel shackle
- Carbonitrided steel cylinder protection plate (item 1.21810.80.0)

Supplied as standard:
- 2 keys

CISA® Locking Line


Type	Description	A	C	D	L	S	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		66	33,0	10,0	14,0	22,7	5	1 01040 04 1	0,598	3	1	**21810**	**65**	**0**		
		77	37,0	12,0	17,0	29,2	5	1 01040 05 1	0,843	3	1	**21810**	**80**	**0**		



Technical features:
- Belt sanded solid brass body
- Nickel-plated hardened steel shackle with tear-resistant end

Supplied as standard:
- 2 keys

CISA® Locking Line




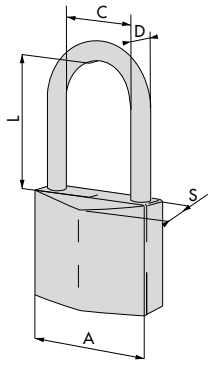
Type	Description	A	C	D	L	S	Pins	Key item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		52	15,0	7,9	13,5	14,7	4	1 01040 03 1	0,197	6	1	21	61	0	50	0
		63	19,0	10,0	14,0	18,5	5	1 01040 04 1	0,330	6	1	21	61	0	63	0
		70	22,0	12,0	13,5	20,0	5	1 01040 04 1	0,439	6	1	21	61	0	70	0
		90	35,0	12,0	18,2	22,5	5	1 01040 05 1	0,728	6	1	21	61	0	90	0



Technical features:
- Chrome-plated solid brass body
- Stainless steel shackle
- Shackle double-locking system

Supplied as standard:
- 2 keys

CISA Locking Line


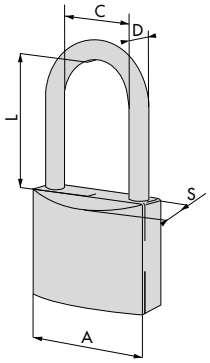
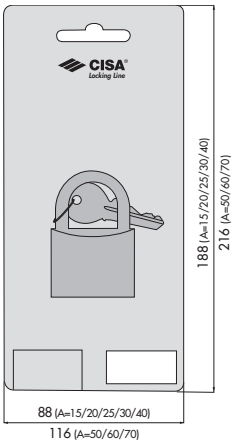
Type	Description	A	C	D	L	S	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Standard shackle	29	14,5	4,7	13,8	12,8	4	1 01040 03 1	0,085	12	1	21710	30	0		
		40	19,5	6,3	22,5	13,5	4	1 01040 03 1	0,153	12	1	21710	40	0		
		50	28,2	7,1	26,0	14,8	5	1 01040 04 1	0,233	6	1	21710	50	0		
		60	31,3	7,9	32,2	16,1	5	1 01040 04 1	0,326	6	1	21710	60	0		
	• Long shackle	40	19,5	6,3	40,0	13,5	4	1 01040 03 1	0,162	12	1	21711	40	0		

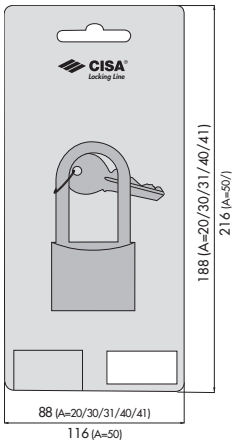


Technical features:
- Belt sanded solid brass body
- Nickel-plated, carbonitrided steel shackle
- Shackle double-locking system (item 1.21010.20/25.0 excluded)

Supplied as standard:
- 2 keys

CISA® Locking Line

Type	Description	A	C	D	L	S	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Standard shackle	20	9,6	3,5	11,3	10,4	3	1 01040 01 1	0,039	12	1	21010	20	0		
		25	13,5	3,9	13,1	12,0	4	1 01040 02 1	0,062	12	1	21010	25	0		
		30	16,2	4,7	16,9	13,8	4	1 01040 03 1	0,095	12	1	21010	30	0		
		40	22,1	6,3	22,4	13,8	5	1 01040 04 1	0,158	12	1	21010	40	0		
		50	27,9	7,9	28,7	17,0	5	1 01040 05 1	0,272	6	1	21010	50	0		
		60	33,5	9,5	34,7	17,2	5	1 01040 05 1	0,407	6	1	21010	60	0		
		70	39,0	11,0	36,0	18,0	5	1 01040 05 1	0,560	6	1	21010	70	0		
	• Long shackle	30	16,2	4,7	24,0	13,8	4	1 01040 03 1	0,097	12	1	21011	30	0		
		40	22,1	6,3	40,0	13,8	5	1 01040 04 1	0,165	12	1	21011	40	0		
		50	27,9	7,9	80,0	17,0	5	1 01040 05 1	0,317	6	1	21011	50	0		
	• Standard shackle • Shrink-wrapped cardboard package	20	9,6	3,5	11,3	10,4	3	1 01040 01 1	0,039	6	1	21090	20	0		
		25	13,5	3,9	13,1	12,0	4	1 01040 02 1	0,062	6	1	21090	25	0		
		30	16,2	4,7	16,9	13,8	4	1 01040 02 1	0,095	6	1	21090	30	0		
		40	22,1	6,3	22,4	13,8	5	1 01040 03 1	0,158	6	1	21090	40	0		
		50	27,9	7,9	28,7	17,0	5	1 01040 05 1	0,272	6	1	21090	50	0		
		60	33,5	9,5	34,7	17,2	5	1 01040 05 1	0,407	6	1	21090	60	0		



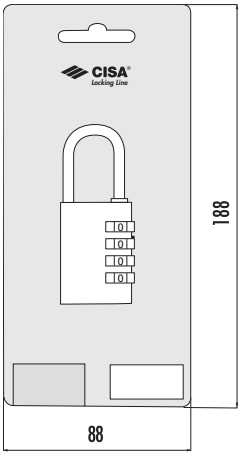
- Long shackle
- Shrink-wrapped cardboard package











Type	Description	A	C	D	L	S	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		30	16,2	4,7	16,9	13,8	4	1 01040 03 1	0,097	6	1	21091	30	0		
		40	22,1	6,3	40,0	13,8	5	1 01040 04 1	0,165	6	1	21091	40	0		
		50	27,9	7,9	80,0	17,0	5	1 01040 05 1	0,317	6	1	21091	50	0		










Technical features:
- Brass monoblock body
- Nickel-plated carbonitrided steel shackle
- 3 disc system (1,000 combinations) for size 20/30
- 4 disc system (10,000 combinations) for size 40

CISA® Locking Line

Type	Description	A	C	D	L	S	Pins	Key item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Shrink-wrapped cardboard package	20	9,0	3,0	21,5	14,0			0,055	6	1	21190	20	0		
		30	14,0	5,0	25,0	15,0			0,115	6	1	21190	30	0		
		40	22,0	6,0	26,0	18,0			0,235	6	1	21190	40	0		

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Hardened steel cylinder protection plate • For padlocks: series 28050 dim. 55, 56, 57 280SN	0,045	3	1	07586	04	0		
	• Hardened steel cylinder protection plate • For padlocks: series 28050 dim. 70, 71, 72 280SN	0,045	3	1	07586	05	0		
	• Hardened steel cylinder protection plate • For padlocks: series 28052 dim. 55, 56, 57	0,036	3	1	07586	06	1		
	• Hardened steel cylinder protection plate • For padlocks: series 28053 dim. 55, 56, 57 280SP, 280SM	0,045	3	1	07586	08	0		
	• Hardened steel cylinder protection plate • For padlocks: series 28053 dim. 70, 71, 72 280SP, 280SM	0,045	3	1	07586	09	0		
	• Hardened steel cylinder protection plate • For padlocks: series 28057 dim. 55, 56, 57 series 28353 dim. 62	0,045	3	1	07586	10	0		
	• Hardened steel cylinder protection plate • For padlocks: series 2855N	0,010	3	1	07589	02	0		
	• Hardened steel cylinder protection plate • For padlocks: series 28552	0,045	3	1	07589	03	1		
	• Hardened steel cylinder protection plate • For padlocks: series 285SP, 285SN	0,003	3	1	07589	04	0		
	• Hardened steel cylinder protection plate • For padlocks: series 28559	0,045	3	1	07589	05	0		

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc plated steel padlock hasp set		0,526	6	**1 06300 14 0**
	• Zinc plated steel padlock hasp set		0,515	6	**1 06300 18 0**
	• Zinc plated padlock tie	1 21610 50 0, 1 21610 63 0, 1 21810 65 0, 1 26509 70 0, 1 28550 66 0, 1 2855M 66 0, 1 2855P 66 0, 1 28553 66 0, 1 28055M 66 0, 1 288559 66 0	0,451	4	**1 06301 50 0**
	• Zinc plated padlock tie	1 21610 50 0, 1 21610 63 0, 1 21810 65 0, 1 28550 66 0, 1 28553 66 0, 1 2855M 66 0, 1 2855N 66 0 1 2855P 66 0, 1 28559 66 0	0,591	4	**1 06301 60 0**
	• Zinc plated steel hasp for rolling doors, with flat bottom rail and removable dust cover	1 21610 90 0, 1 21810 80 0, 1 26509 94 0, 1 28550 84 0, 1 28550 85 0, 1 28553 84 0, 1 28553 85 0 1 2855M 84 0, 1 2855M 85 0, 1 2855N 84 0, 1 2855N 85 0, 1 2855P 84 0, 1 2855P 85 0, 1 28559 84 0, 1 28559 85 0	1,430	1	**1 06302 25 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
	• Zinc plated steel hasp for rolling doors, with flat bottom rail and removable dust cover	1 21610 90 0, 1 21810 80 0, 1 26509 94 0, 1 28550 84 0, 1 28550 85 0, 1 28553 84 0, 1 28553 85 0, 1 2855M 84 0, 1 2855M 85 0, 1 2855N 84 0, 1 2855N 85 0, 1 2855P 84 0, 1 2855P 85 0, 1 28559 84 0, 1 28559 85 0	1,490	1	**1 06302 60 0**			
	• Zinc plated steel hasp for up and over doors, with removable dust cover	1 21810 80 0, 1 28550 85 0, 1 28553 85 0, 1 2855M 85 0, 1 2855N 85 0, 1 2855P 85 0, 1 28559 85 0	2,520	1	**1 06303 00 0**			

HARDENED STEEL PADLOCKS in **"UNASSEMBLED"** version **(suffix 91)**, **supplied without cylinder and drill resistant plates**

- Steel padlocks in **"UNASSEMBLED"** version **(suffix 91)** are supplied without cylinder and without the cylinder or padlock drill resistant plate.
  When ordering the padlock cylinder, you have to specify separately the relevant padlock drill resistant plate (**the cylinder drill resistant plate is supplied as standard**).

PADLOCK SERIES	DRILL RESISTANT PLATE	CYLINDER "LIM" CYLINDER "C3000" **item 1 02650 01 0 item 1 0K610 00 0**	CYLINDER "SP" **item 1 02652 01 0**	CYLINDER "ASIX" CYLINDER "ASTRAL" **item 1 0E600 00 0 item 1 0A610 00 0**	CYLINDER "ASTRAL TEKNO" CYLINDER "AP4" **item 1 0M610 00 0 item 1 0P610 00 0**	CYLINDER "RS3 S" **item 1 0L610 00 0**
28000 (Dim. 55/56/67) **28300** (Dim. 62)	For cylinder 	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard
	For padlock 	item 1 07586 04 0	item 1 07586 06 1/2	item 1 07586 08 0	item 1 07586 08 0	item 1 07586 10 0
28000 (Dim. 70/71/72/73)	For cylinder 	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard
	For padlock 	item 1 07586 05 0	item 1 07586 07 1/2	item 1 07586 09 0	item 1 07586 09 0	item 1 07586 11 0
28500 (Dim. 66/67/75/84/85)	For cylinder 	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard	Supplied as standard
	For padlock 	item 1 07589 02 0	item 1 07589 03 1/2	item 1 07589 04 0	item 1 07589 04 0	item 1 07589 05 0

N.B. For plates to be coupled to "SP" cylinders you have to state the hand. In this case, to avoid possible doubts, you also have to state the key code in the description (this can be taken from the 3 first figures on the key head).

Ex: 1 02652 01 0 + 1 07589 03 1 with SP key code. **102**: ("SP" cylinder complete with cylinder drill resistant plate and padlocks drill resistant plate, for right handed (1) keys, for padlocks item 1 28550 66 0 00 91).

ALLEGION

CISA

Locks for steel doors



Cylinder electric rim locks - ElettriKa 151
Booster, Coil set Bticino, device 153
Cylinder electric rim locks 154
Cylinder rim locks for shutters 156
Cylinder mortice locks for gates 159
Cylinder mortice locks rolling-shutter and railings 162
Cylinder mortice locks for shutters 163
Cylinder mortice locks 165
Cylinder rim locks 168
Multithrow cylinder rim locks 170
Cylinder mortice locks 171
Cylinder mortice locks, mid-rail type H=64 mm 172
Double-bit key mortice locks 173
Double-bit key mortice locks 175
Accessories for metal lock 178
Dimensional drawings 187

Elettrika

THE ELECTRIC LOCK FOR THE SAFE CLOSING OF YOUR DOORS AND GATES



CISA ELETTRIKA

The CISA “Elettrika” electric lock is the ideal solution per managing the opening and closing of all kinds of doors and gates, guaranteeing high resistance to forced entry.

Main features and benefits:

Rotary hook deadbolt for increased resistance to forced entry.

Self-adjustable floor striker ensuring perfect closure over time.

Steel casing to protect the lock.

Electric release system for increased resistance to vibrations and impact strength.



Elettrika

Technical features:
- Painted protective steel case
- Metal striker with stainless steel swinging pin
- Rotary hook deadbolt in extruded aluminium
- 12V ac CE power supply
- Current absorption 3 A
- Non-handed and with a variable backset from 50 to 80 mm

Supplied as standard:
- Striker
- Instruction sheet
- Fixing screws
- 2 spacers for the striker
- 3 keys item 1.01070.10.1







On request:
- Booster device item 1.07022.00.0
- Booster plus device item 1.07022.10.0
- Coil set BTicino device item 1.07025.10.0
- Microswitch device item 1.07023.00.0
- Lighted indicator kit item 1.07126.01.0


Certification:
- ELETTRIKA is certified according to the European standard prEN 14846:08:






| 3 | X | 2 | 0 | 0 | M | 6 | 0 | 2 |

- Security degree 6
(2,000 Kg lateral push resistance)

Hand:
0 = Non-handed

Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Back plate for lock and striker to be welded	 Art. 1 0G150 00 0 Fin.12	50÷80	2,750	1	1	1A721	00	0			
	• Version with BTicino coil item 1.07025.10.0		50÷80	2,710	1	1	1A721	00	0	00	PA	
	• Version with Booster item 1.07022.00.0		50÷80	2,710	1	1	1A721	00	0	00	PB	
	• Version with Booster Plus item 1.07022.10.0		50÷80	2,710	1	1	1A721	00	0	00	PC	
	• Galvanized version • Welding plate and striker spacer	 Art. 1 0G150 00 0 Fin.12	50÷80	2,800	1	1	1A721	00	0	79		
	• Back plate for lock and striker to be welded • Inner push-button • Hold open device	 Art. 1 0G150 00 0 Fin.12	50÷80	2,800	1	1	1A731	00	0			
	• Version with BTicino coil item 1.07025.10.0		50÷80	2,800	1	1	1A731	00	0	00	PA	
	• Version with Booster item 1.07022.00.0		50÷80	2,800	1	1	1A731	00	0	00	PB	
	• Version with Booster Plus item 1.07022.10.0		50÷80	2,800	1	1	1A731	00	0	00	PC	
	• Galvanized version • Welding plate and striker spacer • Inside button • Hold-open device • Galvanized protective case	 Art. 1 0G150 00 0 Fin.12	50÷80	2,800	1	1	1A731	00	0	79		

Type	Description	Cylinder	Throws	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Inner push-button • SUPPLIED AS STANDARD: Striker Weld plate Weld striker spacer Strike spacer set (2pcs) Fixing screws Keys item 1.01070.10.1 Instruction sheet	 Art. 1 0G200 55 0 Fin.12	50÷80		2,780	1	1	1A611	00	0	00	DF

Type	Description	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Booster device may be combined with ElettriKa rim lock to have the following function: Tension adaptor for tension different from 12 V ac (12 Vdc - 24 Vac - 24Vdc) Electrical input reduction Undersized power supply Electric hold open device (ElettriKa only) • Supplied as standard: Fixing screws Instructions sheet • Please note: Booster device may be combined also with all electric locks (electric striker escluded)	0,085	1	**1 07022 00 0**
	• Booster Plus device may be combined with ElettriKa rim lock to have the following function: Electronic opening timer with 5 different options (120 sec default) Door condition signal Electric hold open device Tension adaptor for tension different from 12 V ac (12 Vdc - 24 Vac - 24Vdc) Electrical imput reduction Undersized power supply • Supplied as standard: Pin to deactivate hold open catch Fixing screws Instructions sheet • ON REQUEST: Open door indicator item 1.07126.01.0	0,185	1	**1 07022 10 0**
	• Coil for BTicino intercomunication system audio Swing ref. 344702-03-04 Video intercomunication system video Swing ref. 344802-03-04 combined with ElettriKa rim lock give door control signal • Supplied as standard: Fixing screws Instructions sheet	0,092	1	**1 07025 10 0**
	• Microswitch Give a signal to oiperate ration motor may be installed directly on the Elettrika rim lock • Supplied as standard: instruction sheet	0,007	1	**1 07023 00 0**
	• Open door indicator	0,005	1	**1 07126 01 0**



Technical features:
- Zinc-plated steel case and striker
- Dead-locking latch
- 12 V ac CE
- Current absorption 2,5 A
- External cylinder length: 55 mm.

Supplied as standard:
- Striker
- Instruction sheet
- Fixing screws (except series 11921-11931)
- 3 keys item 1.01070.10.1 (C2000 key bow)









On request:
- Booster module item 1.07022.00.0

Certifications:
- This electric lock series is certified according to the European standard EN 14846:08:











| 3 | C | 2 | 0 | 0 | L | 3 | 0 | 2 |

Security degree 3
(500 Kg lateral push resistance and 200 Kg front push resistance)

Hand:
1 = R.H. inwards
2 = L.H. inwards
3 = R.H. outwards
4 = L.H. outwards

Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Protective back plate • Spacer	 1 02139 00 0	50	2,140	1	1	11721	50	1			
			50	2,140	1	1	11721	50	2			
			60	2,140	1	1	11721	60	1			
			60	2,140	1	1	11721	60	2			
			70	2,140	1	1	11721	70	1			
			70	2,140	1	1	11721	70	2			
			80	2,140	1	1	11721	80	1			
			80	2,140	1	1	11721	80	2			
	• Protective back plate • Spacer • Push-button • Hold-open device	 1 02110 00 0	50	2,180	1	1	11731	50	1			
			50	2,180	1	1	11731	50	2			
			60	2,180	1	1	11731	60	1			
			60	2,180	1	1	11731	60	2			
			70	2,180	1	1	11731	70	1			
			70	2,180	1	1	11731	70	2			
			80	2,180	1	1	11731	80	1			
			80	2,180	1	1	11731	80	2			
	• Manual throw deadbolt • Protective back plate • Spacer	 1 02145 00 0	2	50	2,200	1	1	11761	50	1		
			2	50	2,218	1	1	11761	50	2		
			2	60	2,290	1	1	11761	60	1		
			2	60	2,290	1	1	11761	60	2		
			2	70	2,280	1	1	11761	70	1		
			2	70	2,222	1	1	11761	70	2		
			2	80	2,230	1	1	11761	80	1		
			2	80	2,250	1	1	11761	80	2		
	• Manual throw deadbolt • Protective back plate • Spacer • Push-button	 1 02145 00 0	2	50	2,205	1	1	11771	50	1		
			2	50	2,205	1	1	11771	50	2		
			2	60	2,280	1	1	11771	60	1		
			2	60	2,280	1	1	11771	60	2		
			2	70	2,210	1	1	11771	70	1		
			2	70	2,210	1	1	11771	70	2		
			2	80	2,231	1	1	11771	80	1		
			2	80	2,251	1	1	11771	80	2		

CISA

Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• For automated and up-and-over gates • Protective back plate • External cylinder length: 70 mm.	 1 02142 00 0	80	2,100	1	1	11823	80	1			
			80	2,100	1	1	11823	80	2			
		 1 02139 00 0	50	1,450	1	1	11921	50	1			
			50	1,450	1	1	11921	50	2			
			60	1,559	1	1	11921	60	1			
			60	1,472	1	1	11921	60	2			
			70	1,472	1	1	11921	70	1			
			70	1,476	1	1	11921	70	2			
			80	1,470	1	1	11921	80	1			
			80	1,475	1	1	11921	80	2			
	• Push-button • Hold-open device	 1 02110 00 0	50	1,475	1	1	11931	50	1			
			50	1,475	1	1	11931	50	2			
			60	1,550	1	1	11931	60	1			
			60	1,472	1	1	11931	60	2			
			70	1,475	1	1	11931	70	1			
			70	1,478	1	1	11931	70	2			
			80	1,470	1	1	11931	80	1			
			80	1,472	1	1	11931	80	2			
	• FOR OUTWARD OPENING GATES	 1 02139 00 0	50	1,539	1	1	11921	50	3			
			50	1,538	1	1	11921	50	4			
			60	1,614	1	1	11921	60	3			
			60	1,534	1	1	11921	60	4			
			70	1,533	1	1	11921	70	3			
			70	1,538	1	1	11921	70	4			
			80	1,539	1	1	11921	80	3			
			80	1,534	1	1	11921	80	4			
	• FOR OUTWARD OPENING GATES • Push-button • Hold-open device	 1 02110 00 0	50	1,536	1	1	11931	50	3			
			50	1,530	1	1	11931	50	4			
			60	1,532	1	1	11931	60	3			
			60	1,532	1	1	11931	60	4			
			70	1,530	1	1	11931	70	3			
			70	1,534	1	1	11931	70	4			
			80	1,532	1	1	11931	80	3			
			80	1,532	1	1	11931	80	4			











Technical features:
- Zinc-plated steel case
- Steel deadbolts with 25 mm travel (for the series 41600,41620 and 41650, 24 mm travel)
- Brass cylinder




Supplied as standard:
- 3 keys
- ITEMS 41010 - 41110 - 41111:
  inside: 1 key item 1.01310.00.2
  outside: 2 keys item 1.01330.00.1
- ITEMS 41210 - 41220 - 41221 - 41230 - 41231 - 41310 - 41311 - 41320:
  inside: 1 key item 1.01310.00.2
  outside: 2 keys item 1.01320.00.1
- ITEMS 41410 - 41420 - 41421:
  inside: 1 key item 1.01320.00.2
  outside: 2 keys item 1.01330.00.1
- ITEMS 41510 - 41525 - 41526:
  2 keys item 1.01060.10.0
- ITEMS 41600 - 41650:
  2 keys item 1.01070.10.1
- Cylinder fixing screw (series 41620)

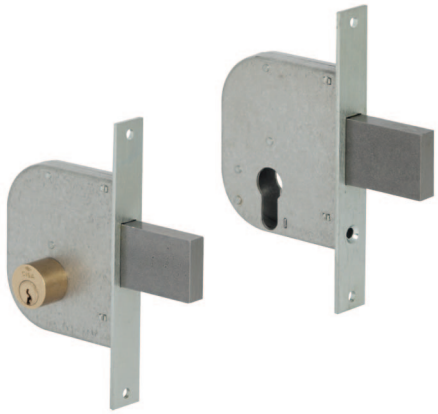
Hand:

0 = Non-handed
1 = R.H.
2 = L.H

Type	Description	Cylinder	L	A	B	S	Throws	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Central application	1 02544 14 0	160	55	11,5	13,0	2	80	0,508	2	1	41010	80	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,551	2	1	41210	78	0	
		1 02544 15 0	155	55	9,5	17,0	2	78	0,540	2	1	41320	78	0	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,518	2	1	41410	78	0	
	• Lateral application • Series 41230 with cranked deadbolt	1 02544 14 0	120	55	11,5	15,0	2	78	0,420	2	1	41110	60	1	
		1 02544 14 0	120	55	11,5	13,0	2	60	0,424	2	1	41110	60	2	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,530	2	1	41220	78	1	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,530	2	1	41220	78	2	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,527	2	1	41230	78	1	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,527	2	1	41230	78	2	
		1 02544 15 0	155	55	9,5	17,0	2	78	0,512	2	1	41310	78	1	
		1 02544 15 0	155	55	9,5	17,0	2	78	0,512	2	1	41310	78	2	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,490	2	1	41420	78	1	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,498	2	1	41420	78	2	
	• Set of side locks (1pc RH lock, 1pc LH lock) • Series 41230 with cranked deadbolt	1 02544 14 0	120	55	11,5	13,0	2	60	0,848	1	1	41110	60	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,060	1	1	41220	78	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,054	1	1	41230	78	0	
		1 02544 15 0	155	55	9,5	17,0	2	78	1,024	1	1	41310	78	0	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,996	1	1	41420	78	0	
	• Set of side locks (1pc RH lock, 1pc LH lock) • KA execution (KA) • 3 keys per each set • Series 41231 with cranked deadbolt	1 02544 14 0	120	55	11,5	13,0	2	60	0,800	1	1	41111	60	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,060	1	1	41221	78	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,054	1	1	41231	78	0	
		1 02544 15 0	155	55	9,5	17,0	2	78	1,024	1	1	41311	78	0	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,940	1	1	41421	78	0	

Type	Description	Cylinder	L	A	B	S	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Deadbolt stroke 25 mm • Central lock • Straight deadbolt • 2 pins dia. 9 mm		155	55	5,5	15,0	2	78	0,525	12	1	41510	78	0		
	• Version with fixing plate assembled • Central application • Straight deadbolt • 2 pins dia. 9 mm		155	55	5,5	15,0	2	78	0,518	12	1	41510	78	0	00	ZQ
	• Lateral application • Bent deadbolt • 1 pins dia. 9 mm		155	55	5,5	15,0	2	78	0,445	12	1	41525	78	1		
			155	55	5,5	15,0	2	78	0,490	12	1	41525	78	2		
	• Set of side locks (1pc RH lock, 1pc LH lock) • Bent deadbolt • 2 pins dia. 9 mm		155	55	5,5	15,0	2	78	0,800	6	1	41525	78	0		
	• Set of side locks (1pc RH lock, 1pc LH lock) • Bent deadbolt • Keyed alike (KA) • 3 keys per pair • 2 pins dia. 9 mms		155	55	5,5	15,0	2	78	0,875	6	1	41526	78	0		

Type	Description	Cylinder	L	A	B	S	Throws	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• FOR SWING DOORS • Top lock • OPERATION: from the inside and the outside: opening via the handle, from the outside: key locking, from the inside: lever unlocking • ON REQUEST: KA (Keyed Alike) system		155	55		15,0	1		0,462	12	1	**41600**	**00**		**0**		
	• FOR SWING DOORS • Top lock • **European profile cylinders to order separately** • OPERATION: from the inside and the outside: opening via the handle, from the outside: key locking, from the inside: lever unlocking • ON REQUEST: Cylinder fixing screws		155	55		15,0	1		0,383	12	1	**41620**	**00**		**0**		
	• FOR EXTENSIBLE GATES • Top and bottom locks • European profile cylinders to order separately • OPERATION: from the outside: with key only • ON REQUEST: KA (Keyed Alike) system		102	26	22,0	16,0	2	68	0,300	12	1	**41650**	**00**		**0**		









Technical features:
- Zinc-plated steel case
- Zinc-plated steel faceplate
- Steel deadbolt








Supplied as standard:
- Cylinder fixing screws
  (for versions with European profile cylinders)







Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Latch with built-in deadbolt • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1		22	50	0,789	2	1	42010	50	0	
	• Latch with built-in deadbolt	1		22	50	0,609	2	1	42012	50	0	
	• deadbolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	2		22	50	0,735	2	1	42020	50	0	
	• deadbolt only	2		22	50	0,550	2	1	42022	50	0	
	• Non-handed • Latch with built-in deadbolt • Inside knob • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1		22	50	0,804	2	1	42030	50	0	
	• Non-handed • Latch with built-in deadbolt • Inside knob	1		22	50	0,607	2	1	42032	50	0	

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Latch-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1			22	30	0,657	2	1	42110	30	0	
	• Latch-bolt only			22	30	0,470	2	1	42112	30	0	
	• Latch-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1		22	30	0,620	2	1	42120	30	0	
	• deadbolt only	1		22	30	0,425	2	1	42122	30	0	
	• Latch with dead-locking device • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1		42	22	30	0,713	2	1	42210	30	0	
	• Latch with dead-locking device • Through spindle		42	22	30	0,520	2	1	42212	30	0	
	• Latch with dead-locking device • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	42	22	50	0,832	2	1	42310	50	0	
	• Latch with dead-locking device • Through spindle	1	42	22	50	0,650	2	1	42312	50	0	

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Latch and deadbolt (the latch is withdrawn by key and handle) • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	57	22	30	0,853	2	1	42410	30	0		
	• Latch and deadbolt (the latch is withdrawn by key and handle) • Through spindle	1	57	22	30	0,671	2	1	42412	30	0		
	• Latch and deadbolt (the latch is withdrawn by key and handle) • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	2	57	22	30	0,724	2	1	42420	30	0		
	• Latch and deadbolt (the latch is withdrawn by key and handle) • Through spindle	2	57	22	30	0,538	2	1	42422	30	0		
	• Latch and deadbolt (the latch is withdrawn by key and handle) • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	2	57	22	50	1,018	2	1	42510	50	0		
	• Latch and deadbolt (the latch is withdrawn by key and handle) • Through spindle	2	57	22	50	0,825	2	1	42512	50	0		



Technical features:
- Steel case
- Steel faceplate
- Lamellar steel deadbolt protected by single throw armour plating
- Deadbolt resistance equivalent to Grade 3 Security of the European Standard EN 12209:03
  - Side load resistance: 1,000 kg (equivalent to highest grade according to the above Standard)
  - Resistance to blows from below: 400 kg
- Suitable for doors certified to EN 1627:2011 up to WK/RC 2 resistance class
- 13 mm driving gears stroke for additional locking points
- Spindle for operating the deadbolt and driving gears

Supplied as standard:
- Cylinder fixing screws



Finishes:
- Zinc-plated case
- Zinc-plated faceplate
- Zinc-plated deadbolt

Hand:
0 = Non-handed

Cylinder to be ordered separately



0G303, 0G305, 0E303, 0E305

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Latch bolt only • CAN BE USED WITH THE FOLLOWING ACCESSORIES: European profile cylinders with special cam: Item 1.0G305.02.0.12 (C2000 single cylinder) Item 1.0G303.07.0.12 (C2000 double cylinder) Item 1.0E305.02.0.12 (ASIX single cylinder) Item 1.0E303.07.0.12 (ASIX double cylinder) Handle item 1.06003.00.0 Handle with edge cover item 1.06004.00.0 Striker item 1.06232.21.0 Adjustable striker item 1.06232.22.0 Screwed extension bolts item 1.07088.03.0	1	59	25	19,7	0,590	24	1	46305	19	0	
		1	59	25	25,7	0,672	24	1	46305	25	0	
		1	59	25	31	0,780	24	1	46305	30	0	
	• Deadbolt only • Pin key cylinder complete with 2 pieces item 1.00210.00.0 (KA 1 version, key included) • CAN BE USED WITH THE FOLLOWING ACCESSORIES: Handle item 1.06003.01.0 Handle with edge cover item 1.06004.01.0 Striker item 1.06232.21.0 Adjustable striker item 1.06232.22.0 Extension bolts item 1.07088.03.0	1	59	25	19,7	0,709	24	1	46307	19	0	
		1	59	25	25,7	0,804	24	1	46307	25	0	



Technical features:
- Zinc-plated steel case
- Zinc-plated steel faceplate
- Pre-set for additional locking points

Operation:
- The handle operates both the swinging deadbolt and the extension bolt, bringing them in the locking position; the key blocks the handle

Supplied as standard:
- Pair of threaded bushings (M8) item 1.06290.10.0
- Pair of bushings for quick-lock system (series 46303)
- Cylinder fixing screws
- Instruction sheet

Certifications:
- This lock series is certified to EN 12209:16 grade 3 Security (500 Kg side load and 400 Kg upward force)
- Suitable for doors certified to EN 1627:2011 up to resistance class WK/RC 2

- Series 46800, 46803
  | 3 | C | 9 | 0 | 0 | F | 3 | B |


- Series 46875, 46878
  | 3 | C | 9 | 0 | 0 | F | - | B |


Hand:
0 = Non-handed

Cylinder to be ordered separately





Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Nickel-plated deadbolt • Inside steel rose item 1.06092.00.0 • Pre-set for additional locking points with threaded bushings • ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.21.0	1	85	25	25	0,590	12	1	46800	25	0		
		1	85	25	30	0,610	12	1	46800	30	0		
		1	85	25	35	0,630	12	1	46800	35	0		
	• Nickel-plated deadbolt • Inside steel rose item 1.06092.00.0 • Pre-set for additional locking points with quick-lock bushings • ON REQUEST: Extension bolts item 1.07088.04.0.00.CG (without tips) or item 1.07088.04.0 (with dia. 10 mm pins) Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.21.0	1	85	25	25	0,590	12	1	46803	25	0		
		1	85	25	30	0,610	12	1	46803	30	0		
		1	85	25	35	0,630	12	1	46803	35	0		
	• Nickel-plated deadbolt • Cross-key cylinder with 3 keys • Inside steel rose item 1.06002.00.0 • Pre-set for additional locking points with threaded bushings • ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.21.0	1	85	25	25	0,710	12	1	46802	25	0		
		1	85	25	30	0,730	12	1	46802	30	0		
		1	85	25	35	0,750	12	1	46802	35	0		

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Nickel-plated metal hook, 7.5 mm gap • Inside steel rose item 1.06092.00.0 • Zinc plated steel striker item 1.06232.21.0 • Pre-set for additional locking points with threaded bushings • ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0	1	85	25	25	0,650	12	1	46865	25	0	
		1	85	25	30	0,670	12	1	46865	30	0	
		1	85	25	35	0,690	12	1	46865	35	0	
	• Top/bottom locking point • Inside steel rose item 1.06092.00.0 • Pre-set for additional locking points with threaded bushings • ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0		85	25	25	0,570	12	1	46875	25	0	
			85	25	30	0,590	12	1	46875	30	0	
			85	25	35	0,610	12	1	46875	35	0	
	• Top/bottom locking point • Inside steel escutcheon item 1 06092.00.0 • Pre-set for additional locking points with quick-lock bushings • ON REQUEST: Quick-lock bolt extension rods item 1.07088.04.0.00.CG (without pins) or item 1.07088.04.0 (with dia 10 mm pins) Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0		85	25	25	0,570	12	1	46878	25	0	
			85	25	30	0590	12	1	46878	30	0	
			85	25	35	0,610	12	1	46878	35	0	



Technical features:
- Zinc-plated steel case
- Zinc-plated steel faceplate
- Nickel-plated deadbolt
- Reversible latch bolt (where present)
- Current absorption 3,1 A
- Power supply 12V ac cc

Supplied as standard:
- Cylinder fixing screws
- Instruction sheet

On request:
- Protective rose for cylinder, item 1.06460.00.0

Certification:
- This lock series is certified according to the European standard EN 12209:16

46820, 46823, 46815, 46825 series
|3|C|9|0|0|F|3|B|



46870, 46873 series
|3|C|9|0|0|F|-|B|




- Security degree 3 (500 Kg lateral push resistance and 400 Kg upward push resistance)


- Suitable for doors certified to EN 1627:2011 up to WK/RC 2 resistance class

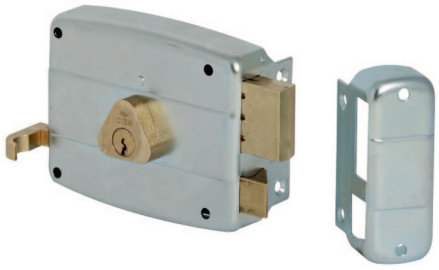
Hand:
0 = Non-handed

Cylinder to be ordered separately

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• deadbolt and latch • 10.5 to 16.5 mm. adjustable latch and piston • Set of steel roses item 1.06092.00.0 • Pre-set for additional locking points • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded pivots for fixing extension bolts • ON REQUEST: Extension bolts item 1.06441.15.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.20.0	1	85	25	25	0,931	12	1	16325	25	0		
		1	85	25	30	0,967	12	1	16325	30	0		
		1	85	25	35	0,950	12	1	16325	35	0		
	• Nickel-plated deadbolt and latchbolt, 11 to 17 mm adjustable reversible latchbolt • Set of steel roses item 1.06092.00.0 • ON REQUEST: Striker item 1.06232.20.0 Cross-key cylinder item 1.02400.10.0	1	85	25	25	0,630	12	1	46815	25	0		
		1	85	25	30	0,650	12	1	46815	30	0		
		1	85	25	35	0,670	12	1	46815	35	0		
	• Nickel-plated deadbolt • Set of steel roses item 1.06092.00.0 • Pre-set for additional locking points with threaded bushings • ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.21.0	1		25	25	0,550	12	1	46820	25	0		
		1		25	30	0,570	12	1	46820	30	0		
		1		25	35	0,590	12	1	46820	35	0		

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Nickel-plated deadbolt • Cross-key cylinder with 3 keys • Pre-set for additional locking points with threaded bushings • Set of nylon rose item 1.06002.00.0 • ON REQUEST: Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.21.0	1		25	25	0,670	12	1	46822	25	0	
		1		25	30	0,690	12	1	46822	30	0	
		1		25	35	0,710	12	1	46822	35	0	
	• Nickel-plated deadbolt • Inside steel escutcheon item 1.06092.00.0 • Pre-set for additional locking points with quick-lock bushings • ON REQUEST: Quick-lock bolt extension rods item 1.07088.04.0.00.CG (without pins) or item 1.07088.04.0 (with dia 10 mm pins) Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.21.0	1		25	25	0,550	12	1	46823	25	0	
		1		25	30	0,570	12	1	46823	30	0	
		1		25	35	0,590	12	1	46823	35	0	
	• Nickel-plated deadbolt and latchbolt, 11 to 17 mm adjustable reversible latchbolt • Set of steel rose item 1.06092.00.0 • Pre-set for additional locking points with threaded bushings • ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.20.0	1	85	25	25	0,650	12	1	46825	25	0	
		1	85	25	30	0,670	12	1	46825	30	0	
		1	85	25	35	0,690	12	1	46825	35	0	
	• Nickel-plated deadbolt and latchbolt, 11 to 17 mm adjustable reversible latchbolt • Cross-key cylinder with 3 keys • Set of nylon rose item 1.06002.00.0 • Pre-set for additional locking points with threaded bushings • ON REQUEST: Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.20.0	1	85	25	25	0,770	12	1	46827	25	0	
		1	85	25	30	0,762	12	1	46827	30	0	
		1	85	25	35	0,810	12	1	46827	35	0	

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Nickel-plated laminar steel hook, 7.5 mm gap • Inside steel escutcheon item 1.06092.00.0 • Pre-set for additional locking points with threaded bushings • Striker item1.06232.21.0 • ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0	1	25	25	0,610	12	1	46860	25	0		
		1	25	30	0,630	12	1	46860	30	0		
		1	25	35	0,650	12	1	46860	35	0		
	• Top/bottom locking point • Inside steel escutcheon item 1.06092.00.0 • Pre-set for additional locking points with threaded bushings • ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0	1	25	25	0,530	12	1	46870	25	0		
		1	25	30	0,550	12	1	46870	30	0		
		1	25	35	0,570	12	1	46870	35	0		
	• Top/bottom locking point • Inside steel escutcheon item 1.06092.00.0 • Pre-set for additional locking points with quick-lock bushings • ON REQUEST: Extension bolts item 1.07088.03.0 Cylinder with pin key item 1.02400.10.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0	1	25	25	0,530	12	1	46873	25	0		
		1	25	30	0,550	12	1	46873	30	0		
		1	25	35	0,570	12	1	46873	35	0		
















Technical features:
- Zinc-plated steel case and striker, painted amaranth red item 1.50171.60.1.00.66 1.50171.60.2.00.66
- Brass latch and deadbolt
- Brass draw-back pull and knob
- External cylinder length 50mm

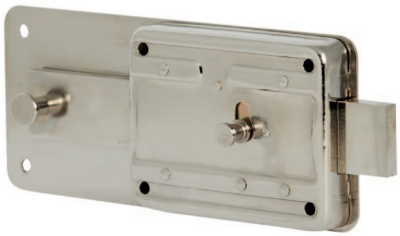
Supplied as standard:
- Striker
- Fixing screws
- 3 keys item 1.01070.10.1 (C2000 key bow)

On request:
- Protective back plate and striker spacer item 1.07061.10.0

Hand:
1 = R.H. inwards
2 = L.H. inwards

Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• With fixing tongue • Inside draw-back pull	 1 02106 00 0	2	60	1,130	1	1	50421	60	1		
			2	60	1,130	1	1	50421	60	2		
			2	70	1,200	1	1	50421	70	1		
			2	70	1,120	1	1	50421	70	2		
	• With fixing tongue • Inside draw-back pull	 1 02106 00 0	2	50	0,965	1	1	50461	50	1		
			2	50	0,975	1	1	50461	50	2		
	• With fixing tongue • Through spindle	 1 02106 00 0	2	60	1,230	1	1	50471	60	1		
			2	60	1,250	1	1	50471	60	2		
	• With fixing tongue • Inside knob • Through spindle	 1 02552 50 0	2	60	1,150	1	1	50481	60	1		
			2	60	1,160	1	1	50481	60	2		
	• Amaranth red lacquered case and striker • With tongue • Through spindle	 1 02106 00 0	2	60	1,240	1	1	50171	60	1	00	66
			2	60	1,240	1	1	50171	60	2	00	66



Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Without fixing tongue • Inside draw-back pull	 1 02106 00 0	2	60	1,090	1	1	50521	60	1		
			2	60	1,120	1	1	50521	60	2		
			2	70	1,160	1	1	50521	70	1		
			2	70	1,160	1	1	50521	70	2		
	• Without fixing tongue • Through spindle	 1 02106 00 0	2	60	1,050	1	1	50571	60	1		
			2	60	1,050	1	1	50571	60	2		



Technical features:
- Nickel-plated steel case and plate
- Nickel-plated ground steel deadbolt
- Nickel-plated steel thumb turns
- Nickel-plated cylinder length 50mm

Supplied as standard:
- 3 keys item 1.01070.10.1

Hand:
1 = R.H. inwards

Type	Description	Cylinder	Throws	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Deadbolt only	 0G200	6	50	1,125	12	1	55254	50	1		
			6	60	1,160	12	1	55254	60	1		
	• Deadbolt with built-in latchbolt	 0G200	6	50	0,950	12	1	55274	50	1		
			6	60	0,950	12	1	55274	60	1		



Technical features:
- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel deadbolt
- Pre-set for protective roses



Supplied as standard:
- Inside steel escutcheon item 1.06075.00.0
- Cylinder fixing screws
- Instruction sheet

On request:
- Zinc-plated, steel striker item 1.06232.00.0
- Protective rose for cylinder, item 1.06460-50/51/60-0

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Case height 82 mm.	3		25	52	0,600	12	1	56	01	3	0
		3		25	60	0,657	12	1	56	01	6	0
		3		25	70	0,697	12	1	56	01	7	0
	• Case height 82 mm. • Pre-set for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0	3		25	60	0,720	12	1	56	01	6	0
		3		25	70	0,792	12	1	56	01	7	0






Technical features:
- Galvanized steel case, height 64 mm
- Galvanized steel faceplate
- Adjustable latchbolt, 11 to 17 mm
- 3-throw deadbolt, 11 mm
- Square spindle, 8 mm
- Cylinder fixing via lock internal screw

Supplied as standard:
- Threaded fixing pins for bushings and extension bolts, item 1.06449.05.0
- Pair of steel roses item 1.06075.00.0
- Pair of threaded bushings (M8) item 1.06290.05.0
- Instruction sheet
- Fixing screws

On request:
- Adjustable metal striker plates
- Modular roller assembly item 1.06168.00.0
- Nylon rose item 1.06141.56.0 ensuring interchangeability with series 57300
- Cylinder protective rose item 06460.05.50/51/60.0

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Galvanized steel faceplate 25x3 mm • Reversible latch and deadbolt • ON REQUEST: "MODULAR" roller assembly item 1.06168.00.0 Floor striker item 1.06086.00/02.0 Zinc-plated steel striker item 1.06232.01.0 or item 1.06232.00.0 Cylinder protective rose item 106460.05/50/51/60 Rose for locks series 57300 item 1.06141.56.0 or item 1.06473.00.0 Extension bolts item 1.06441.15.0 Extension bolts with screws item 1.07088.03/05.0	3	67	25	90	0,930	12	1	**56358**	**90**		**0**	
		3	67	25	100	0,930	12	1	**56358**	**10**		**0**	
	• Galvanized steel faceplate 25x3 mm • Deadbolt only • ON REQUEST: Floor striker item 1.06086.00/02.0 Zinc-plated steel striker item 1.06232.00.0 Cylinder protective rose item 106460.05/50/51/60 Extension bolts item 1.06441.15.0 Extension bolts with screws item 1.07088.03/05.0	3	-	25	110	0,995	12	1	**56378**	**11**		**0**	
	• MODULAR roller assembly for locks series 56358					0,040	12	1	**06168**	**00**		**0**	









Technical features:
- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel deadbolt

Supplied as standard:
- Inside steel escutcheon item 1.06124.02.0
- Instruction sheet

On request:
- Zinc-plated steel striker item 1.06232.00.0

Hand:
0 = Non-handed

Type	Description	Key item	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Case height 82 mm. • 2 keys	 1 00100 00 1	4	25	52	0,788	12	1	57013	50	0	00	30	
			4	25	60	0,833	12	1	57013	60	0	00	30	
			4	25	70	0,868	12	1	57013	70	0	00	30	
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	25	52	0,760	12	1	57013	52	0	00	30	
			4	25	60	0,812	12	1	57013	62	0	00	30	
			4	25	70	0,833	12	1	57013	72	0	00	30	
	• Case height 82 mm. • 2 keys • Pre-set for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0	 1 00100 00 1	4	25	60	0,940	12	1	57016	60	0			
			4	25	70	0,982	12	1	57016	70	0			
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	25	60	0,925	12	1	57016	62	0			
			4	25	70	0,963	12	1	57016	72	0			
	• Case height 82 mm. • 2 keys • deadbolt with 3 locking points	 1 00100 00 1	4	25	60	0,754	12	1	57030	60	0			
			4	25	70	0,780	12	1	57030	70	0			
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	25	60	0,735	12	1	57030	62	0			
			4	25	70	0,773	12	1	57030	72	0			



Type	Description	Key item	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Case height 82 mm. • 2 keys • deadbolt with 3 locking points • Pre-set for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0	 1 00100 00 1	4	25	60	0,848	12	1	57035	60	0			
			4	25	70	0,919	12	1	57035	70	0			
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	25	60	0,838	12	1	57035	62	0			
			4	25	70	0,870	12	1	57035	72	0			
	• Case height 93 mm. • 2 keys	 1 00100 00 1	2	22	40	0,520	12	1	57223	40	0			
			2	22	45	0,540	12	1	57223	45	0			
			2	22	50	0,560	12	1	57223	50	0			
			2	22	60	0,592	12	1	57223	60	0			
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	2	22	40	0,506	12	1	57223	42	0			
			2	22	45	0,524	12	1	57223	47	0			
			2	22	50	0,545	12	1	57223	52	0			
			2	22	60	0,578	12	1	57223	62	0			
	• Case height 93 mm. • 2 keys • Pre-set for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0	 1 00100 00 1	2	25	45	0,670	12	1	57226	45	0			
			2	25	50	0,687	12	1	57226	50	0			
			2	25	60	0,730	12	1	57226	60	0			
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	2	25	45	0,657	12	1	57226	47	0			
			2	25	50	0,664	12	1	57226	52	0			
			2	25	60	0,708	12	1	57226	62	0			









Technical features:
- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel deadbolt
- Picking resistant protection plate
- Nickel-plated latch or reversible latch/bolt
- Electrical and mechanical versions are interchangeable
- Power supply 12V ac cc
- Current absorption 1,7 A


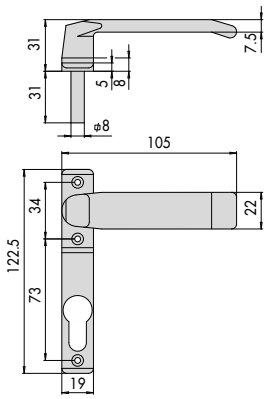
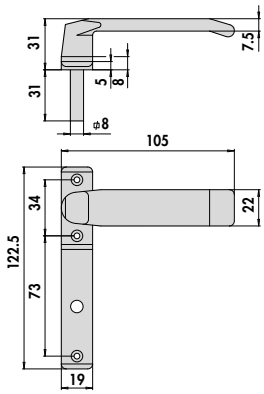
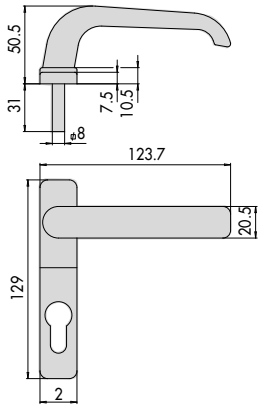
Supplied as standard:
- Instruction sheet





Hand:
0 = Non-handed






Type	Description	Key item	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Case height 78 mm. • 2 keys • deadbolt and latch • Adjustable latch and piston • Dead-locking latch • Hold-open device • Pair of steel roses item 1.06124.02.0 • ON REQUEST: Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4	67	25	90	1,220	12	1	17353	90	0	
	• Case height 78 mm. • 2 keys • deadbolt and latch • Adjustable latch and piston • Dead-locking latch • Hold-open device • Pair of steel roses item 1.06124.02.0 • Pre-set for additional locking points • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded rods for fixing extension bolts • ON REQUEST: Extension bolts item 1.06441.15.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4	67	25	90	1,312	12	1	17358	90	0	










Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Case height 82 mm. • 2 keys • deadbolt and latch • Inside steel rose item 1.06124.02.0 • ON REQUEST: Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	70	1,000	12	1	57313	73	0		
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	67	25	70	1,016	12	1	57313	72	0		
	• Case height 82 mm. • 2 keys • deadbolt and latch • Inside steel rose item 1.06124.02.0 • Pre-set for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	70	1,100	12	1	57318	73	0		
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	67	25	70	1,100	12	1	57318	72	0		
	• Case height 82 mm. • 2 keys • deadbolt only • Inside steel rose item 1.06124.02.0 • Pre-set for extension bolts • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4		25	70	0,990	12	1	57336	70	0		
	• Case height 78 mm. • 2 keys • deadbolt and latch • Adjustable latch bolt • Inside steel rose item 1.06124.02.0 • ON REQUEST: Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	90	1,100	12	1	57353	90	0		








Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Case height 78 mm. • 2 keys • deadbolt and latch • Adjustable latch • Inside steel rose item 1.06124.02.0 • Pre-set for extension bolts • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded rods for fixing bushings and extension bolts • ON REQUEST: Extension bolts item 1.06441.15.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	90	1,225	12	1	57358	90	0		
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	67	25	90	1,225	12	1	57358	92	0		
	• Case height 78 mm. • 2 keys • Deadbolt only • Inside steel rose item 1.06124.02.0 • Pre-set for extension bolts • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded rods for fixing bushings and extension bolts • ON REQUEST: Extension bolts item 1.06441.15.0 Extension bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4		25	90	1,096	12	1	57378	90	0		








Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Black nylon rose	02400	0,001	100	1 **06002 00 0**
	• Black nylon, low handle, charged with 20% glass fibres, specifically for the 46305 series locks • 3 fastening screws	46305	0,100	12	1 **06003 00 0**
	• Handle, in 20 % fiber glass reinforced black nylon, for use with locks series 46307 • 3 fixing screws	46307	0,100	12	1 **06003 01 0**
	• Black nylon, low handle, charged with 20% glass fibres, specifically for the 46305 series locks • 3 fastening screws	46305	0,112	12	1 **06004 00 0**







Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Handle and edge cover in 20% fiber glass reinforced black nylon, for use with locks series 46307 • 3 fixing screws	46307	0,120	12	**1 06004 01 0**
	• Lock shutter accessory		0,100	12	**1 06005 00 0**
	• Zinc plated steel rose	42012, 42022, 42032, 42112, 42122, 42212, 42312, 42412, 42422, 42512, 56013, 56016, 56358, 56378	0,020	100	**1 06075 00 0**
	• Brass floor striker diameter 11 mm. • FOR: extension bolts with rods diameter 10 mm.	1 06415 00 0, 1 06441 15 0, 1 07088 03 0, 1 07088 04 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57019, 57020, 57024, 57033, 57055, 57215, 57217, 57255, 57259, 57265, 57296, 57831, 57837, 57851, 57857	0,016	12	**1 06086 00 0**







Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: Internal extension bolts with 8 mm. diameter rods multi-point locks series 46445 Extension bolt for Multitop item 1.06449.11.0	1 06415 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0, 1 07088 04 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57020, 57033, 57215, 57217, 57255, 57265, 57296, 57831, 57851	0,020	12	**1 06086 02 0**
	• Zinc plated steel rose	16325, 42012, 42022, 42032, 42112, 42122, 42212, 42412, 42422, 42512, 46800, 46803, 46815, 46820, 46823, 46825, 46860, 46865, 46870, 46873, 46875, 46878	0,014	100	**1 06092 00 0**
	• Zinc plated steel rose	17353, 17358, 57013, 57016, 57030, 57035, 57223, 57226, 57313, 57318, 57333, 57336, 57353, 57358, 57378	0,043	12	**1 06124 00 0**
	• Zinc plated steel rose	17353, 17358, 57013, 57016, 57030, 57035, 57223, 57226, 57313, 57318, 57333, 57336, 57353, 57358, 57378	0,020	12	**1 06124 02 0**
	• Nylon rose, to be use for interchangeability with lock series 57300		0,004	12	**1 06141 56 0**




Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Noise proof bushes for bolts diameter 8.5 mm. (2 pieces) diameter 10 mm. (1 piece)	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,004	25	**1 06147 00 0**
	• Zinc plated steel striker	17353, 17358, 56013, 56016, 56358, 56378, 57013, 57016, 57030, 57035, 57223, 57226, 57333, 57336	0,055	25	**1 06232 00 0**
	• Zinc plated steel striker	56358, 57313, 57318, 57353, 57358, 57378	0,056	25	**1 06232 01 0**
	• Zinc-plated steel faceplate	46215, 46217, 46225, 46227, 46815, 46825, 46827	0,086	25	**1 06232 20 0**
	• Zinc plated steel striker	46305, 46307, 46800, 46802, 46803, 46820, 46822, 46823, 46860, 46865	0,056	25	**1 06232 21 0**
	• Adjustable zinc-plated steel striker • 2 fastening screws	46305, 46307	0,038	25	**1 06232 22 0**
	• Coppia boccole filettate (M8) in metallo	1 06441 20 0, 16325, 17358, 56358, 56378, 57358, 57378	0,050	12	**1 06290 05 0**
	• Set of threaded bushes (M8) in metal	19225, 49225, 49228, 49250	0,050	12	**1 06290 06 0**
	• Pair of threaded steel bushings (M8), anti-unscrewing	56016, 57016, 57035, 57226, 57318, 57336	0,025	12	**1 06290 10 0**

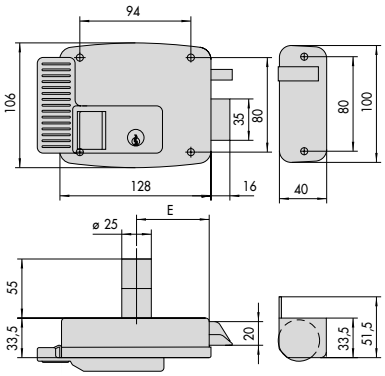
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc plated steel saw resistant tip, 10 mm. • Side push resistance KN 15	1 06415 00 0, 1 06416 00 0, 1 06441 15 0, 1 07088 04 0	0,056	12	**1 06291 00 0**
	• Zinc plated hardened steel tip, dia. 10 mm. • Side push resistance KN 25	1 06415 00 0, 1 06416 00 0, 1 06441 15 0, 1 07088 03 0 1 07088 04 0	0,054	12	**1 06291 05 0**
	• Zinc plated steel pin connector	1 06415 00 0, 1 06416 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0 1 07088 04 0	0,016	12	**1 06291 20 0**
	• Zinc plated hardened steel tip, dia. 14 mm	1 07088 05 0	0,100	12	**1 06291 07 0**
	• Zinc plated extension bolts • SUPPLIED AS STANDARD: Pair of bolts dia. 8 mm. Pair of tips dia. 10 mm. item 1.06291.05.0 (2 pieces)	52526, 56016, 56255, 57015, 57016, 57019, 57033, 57035, 57215, 57217, 57225, 57226, 57255, 57256, 57265, 57296, 57318, 57336	0,533	12	**1 06415 00 0**
	• Zinc plated extension bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2)	16325, 17358, 56358, 56378, 57358, 57378	0,530	12	**1 06441 15 0**
	• Internal rose • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome(fin. 18) Shotgun grey (fin. 46) Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64)	06460, 06461, 06480, 06485	0,116	12	**1 06473 00 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Nylon contact set complete with spacers: 2 mm. (Pcs. 4)	11000, 12000, 13000	0,035	6	**1 06510 00 0**
	• Zinc plated roller striker	11721, 11731, 11921, 11931	0,183	6	**1 07018 00 1**
			0,182	6	**1 07018 00 2**
	• Zinc plated striker	11921, 11931	0,172	6	**1 07018 00 3**
			0,183	6	**1 07018 00 4**
	• Striker set including: slide anchoring plate screws	11610, 11630, 11921, 11931	0,100	1	**1 07018 10 3**
			0,100	1	**1 07018 10 4**
	• Zinc plated roller striker	11761, 11771	0,198	6	**1 07020 00 1**
			0,198	6	**1 07020 00 2**
	• Striker	1A721, 1A731	0,200	6	**1 07021 00 0**
	• 1 mm spacer for striker	1A721, 1A731	0,025	6	**1 07021 01 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers.	Spec.
	• Backplate for lock and striker to be welded	1A721, 1A731	0,435	6	1	07021	05	0	
	• Coil set • 12V ac CE	1A610, 1A611, 1A630, 1A631, 1A721, 1A731	0,092	6	1	07025	00	0	
	• Zinc plated steel protective box for outside cylinder		0,200	10	1	07056	00	0	
	• Protective back plate, striker spacer and zinc plated steel screws	11721, 11726, 11731, 11736, 11761, 11771, 11921, 11931	0,645 0,645	12 12	1 1	07061	00	1 2	
	• Protective back plate, striker spacer and zinc plated steel screws	50411, 50421, 50471, 50481, 50511, 50521, 50571, 50581	0,635	12	1	07061	10	0	
	• Zinc plated extension bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2)	16325, 17358, 46305, 46307, 46800, 46802, 46820, 46822, 46825, 46827, 46865, 46875, 46860, 46870, 56016, 56378, 57016, 57035, 57226, 57318, 57336, 57358, 57378	0,567	12	1	07088	03	0	

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc-plated internal bolt extension rods with screw • SUPPLIED AS STANDARD: - Rod diameter 8 mm.	16325, 17358, 46305, 46307, 46800, 46802, 46820, 46822, 46825, 46827, 46865, 46875, 46860, 46870, 56016, 56378, 57016, 57035, 57226, 57318, 57336, 57358, 57378	0,263	50	**1 07088 03 0 DZ**
	• Quick-lock internal extension bolts • SUPPLIED AS STANDARD: pair of 8 mm diameter bolts • Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2)		0,575	12	**1 07088 04 0**
	• Quick-lock internal extension bolts • SUPPLIED AS STANDARD: pair of 8 mm diameter bolts • ON REQUEST: tip set (2 pcs)	46303, 46323, 56358	0,430	12	**1 07088 04 0 00 CG**
	• Zinc plated extension bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 14 mm. item 1.06291.07.0 (Pcs. 2)	16325, 17358, 46300, 46302, 46305, 46307, 46320, 46322, 46325, 46327, 46365, 46375, 56016, 56358, 57016, 57035, 57226, 57318, 57336, 57358, 57378	0,575	12	**1 07088 05 0**
	• Coil set • 12 V ac • Black nylon support	11610, 11611, 11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,087 0,087	6 6	**1 07118 00 1** **1 07118 00 2**
	• Coil set • 24 V ac • Black nylon support	11610, 11611, 11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,075 0,082	6 6	**1 07118 01 1** **1 07118 01 2**

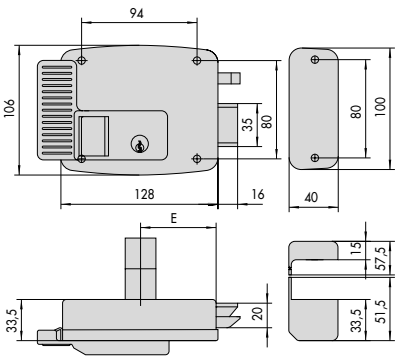
Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Adjustable coil set • 12 V ac • Blue nylon support	11610, 11611, 11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,075	6	1	07120	00	1		
			0,074	6	1	07120	00	2		
	• Adjustable coil set • 24 V ac • Blue nylon support	11610, 11611, 11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,075	6	1	07120	01	1		
			0,075	6	1	07120	01	2		
	• Set of coils • 12 V ac CE	17352, 17353, 17357, 17358	0,035	6	1	07128	00	0		



11721, 11731,11921, 11931

E = 50 - 60 - 70 - 80

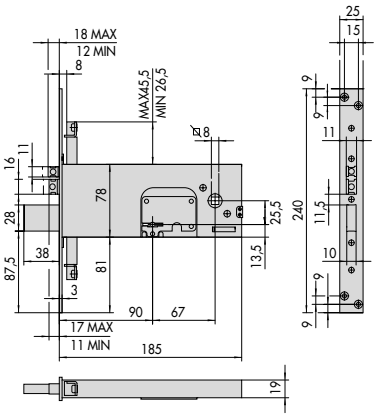
1



11921, 11926, 11931, 11936

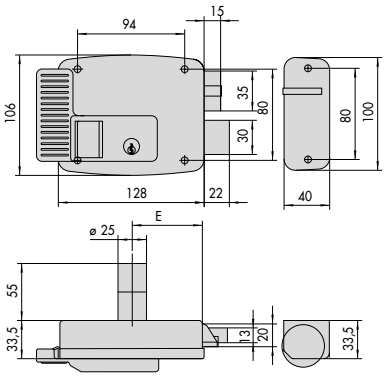
E = 50 - 60 - 70 - 80

4



1.17358.90

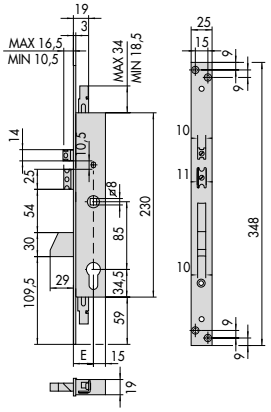
7



11761, 11771

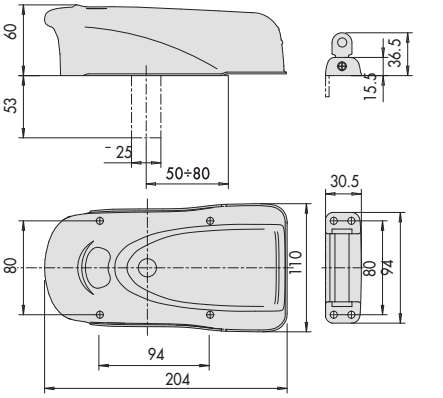
E = 50 - 60 - 70 - 80

2



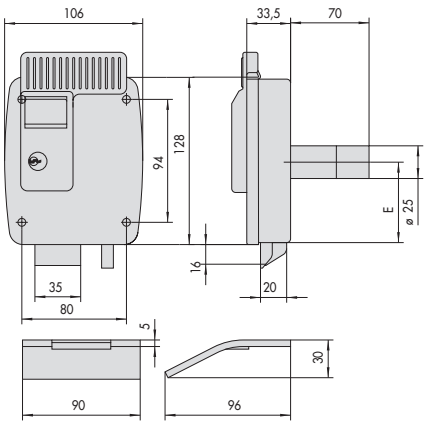
16325
E = 25 - 30 - 35

5



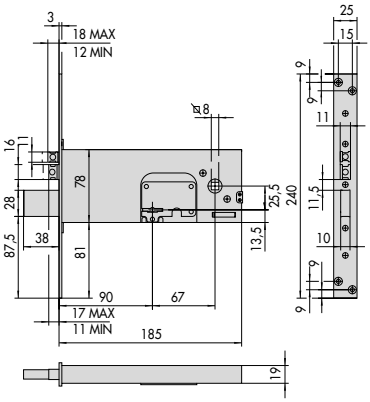
1A610, 1A611, 1A630, 1A631, 1A721, 1A731

8



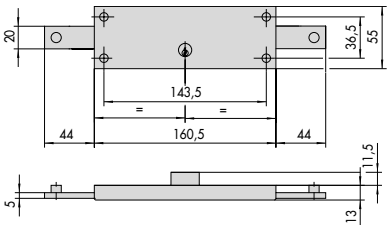
1.11823.80

3




1.17353.90

6



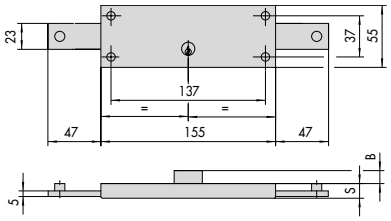
1.41010.80

9




1.41110.60, 1.41111.60

10




	S	B
1.41210.78	20	6,5
1.41320.78	17	9,5
1.41410.78	15	6
1.41510.78	15	5,5

11



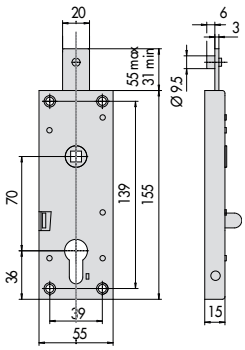
	S	B	A	C
1.41220.78	20	6,5		
1.41221.78	20	6,5		
1.41230.78	20	6,5		
1.41231.78	20	6,5		
1.41310.78	17	9,5		
1.41311.78	17	9,5		
1.41420.78	15	6		
1.41421.78	15	8,5		
1.41525.78	15	5,5	5	31
1.41526.78	15	5,5	5	31

12



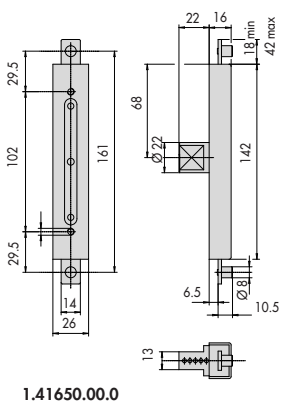
1.41600.00.0

13



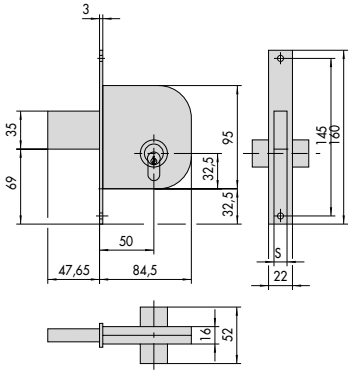
1.41620.00.0

14



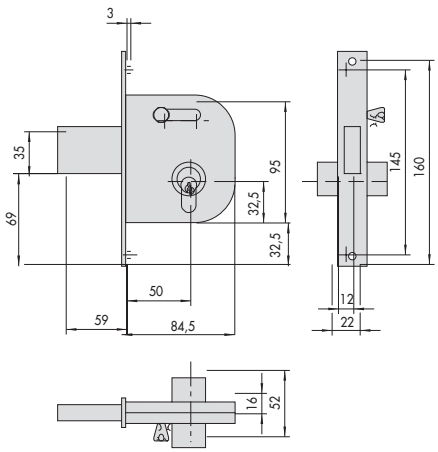
1.41650.00.0

15



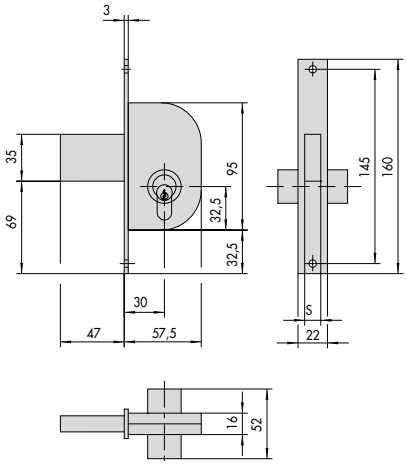
	S
1.42010.50, 1.42012.50	12
1.42020.50, 1.42022.50	9

16



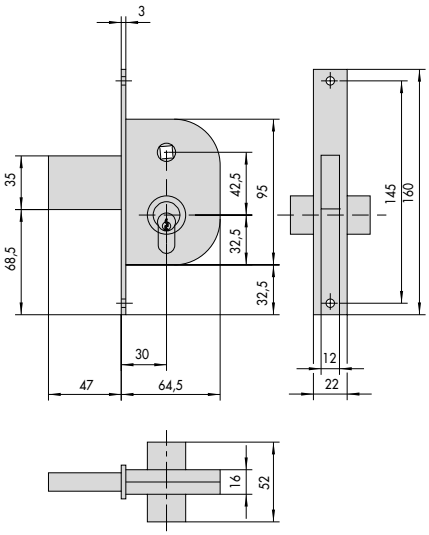
1.42030.50, 1.42032.50

17



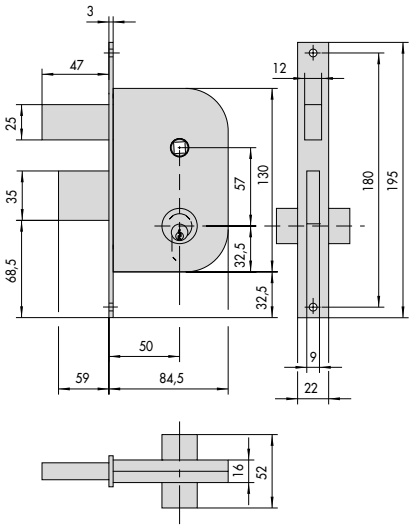
	S
1.42110.30, 1.42112.30	12
1.42120.30, 1.42122.30	9

18



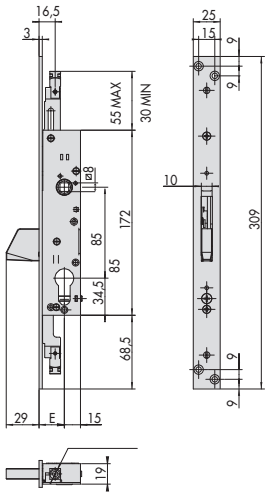
1.42210.30, 1.42212.30

19



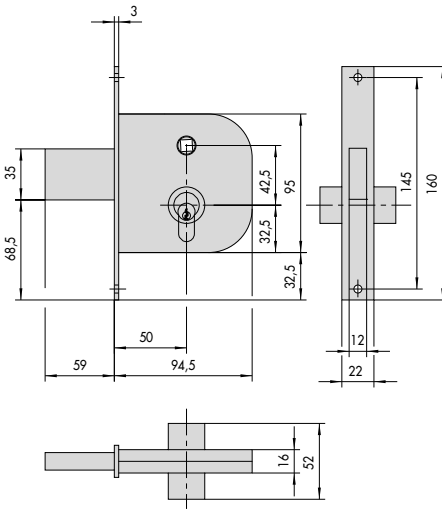
1.42510.50, 1.42512.50

22




46800, 46802, 46820, 46822 (M8)
46803, 46823 (aggancio rapido)
E = 25 - 30 - 35

25



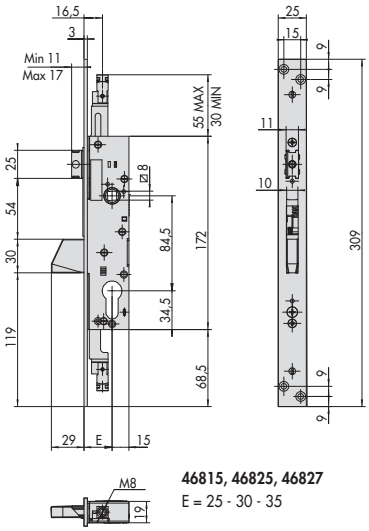
1.42310.50, 1.42312.50

20



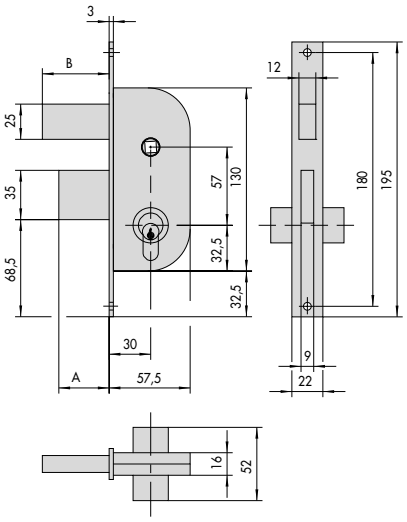
45100 - 45110
E = 30 - 35 - 40 - 45 - 50 - 60

23



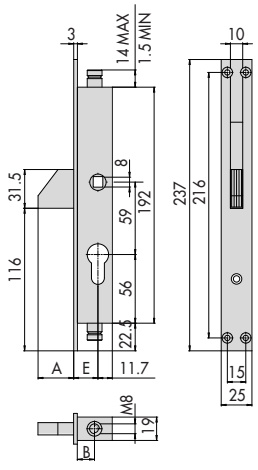
46815, 46825, 46827
E = 25 - 30 - 35

26



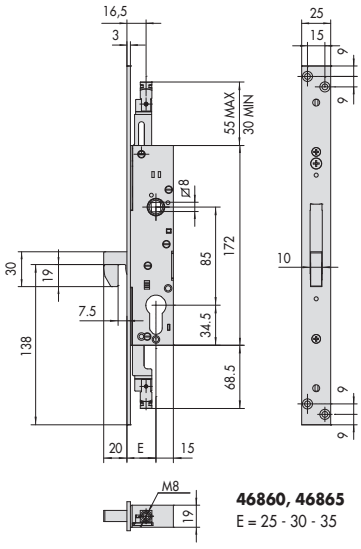
	A	B
1.42410.30, 1.42412.30	47	47
1.42420.30, 1.42422.30	28	24

21



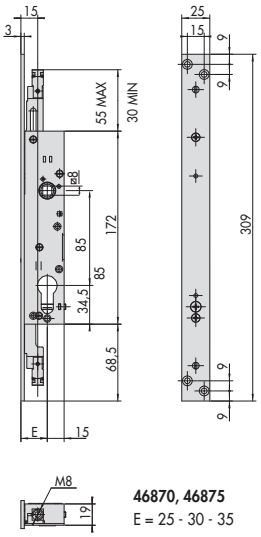
	E	A	B
1.46305.19.0	19,7	29	14
1.46305.25.0	25,7	23	20
1.46305.30.0	31,7	22	26,5
1.46307.19.0	19,7	29	14
1.46307.25.0	25,7	23	20

24



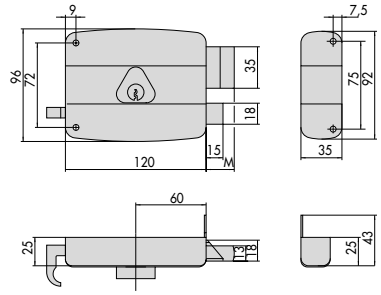
46860, 46865
E = 25 - 30 - 35

27



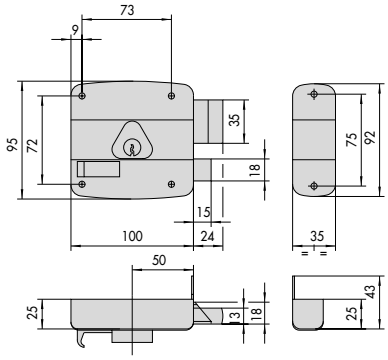
46870, 46875
E = 25 - 30 - 35

28



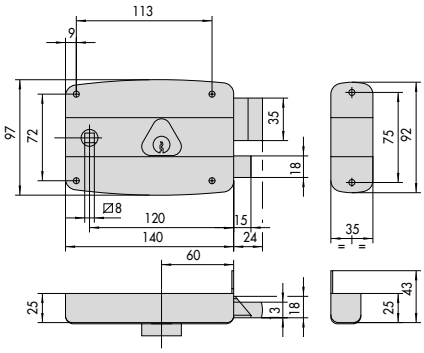
1.50421.60

29



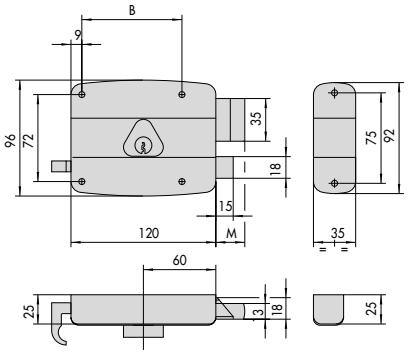
1.50461.50

30



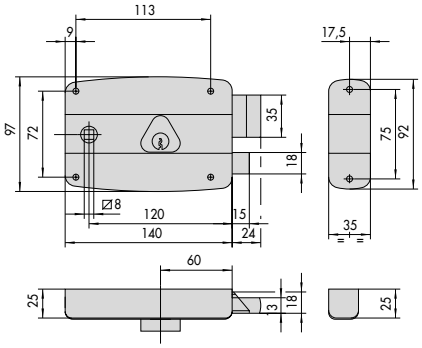
1.50171.60, 1.50471.60, 1.50481.60

31




1.50521.60

32



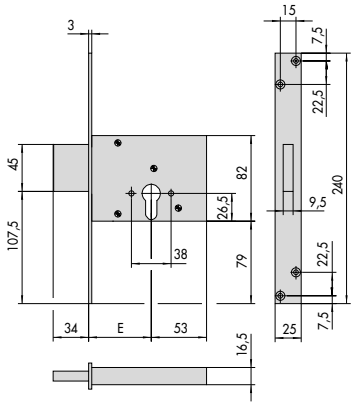
1.50571.60

33



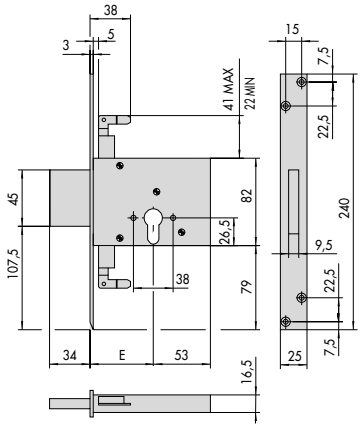
55254, 55274

34



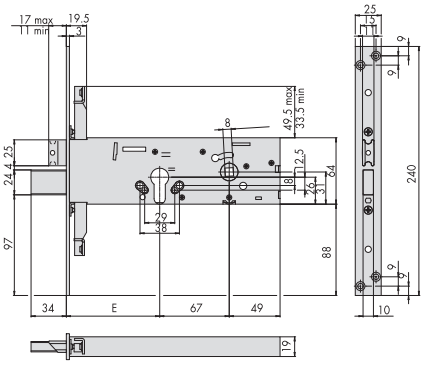
56013
E = 52 - 60 - 70

35



56016
E = 60 - 70

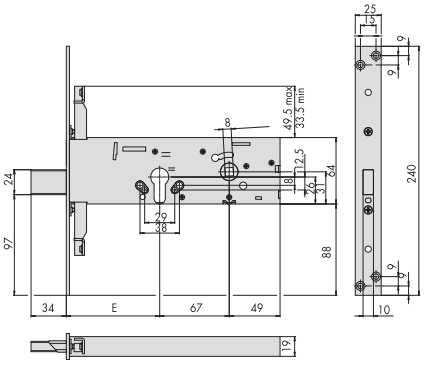
36



56358

E = 90

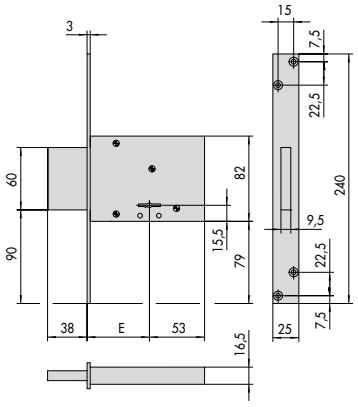
37



56378

E = 90

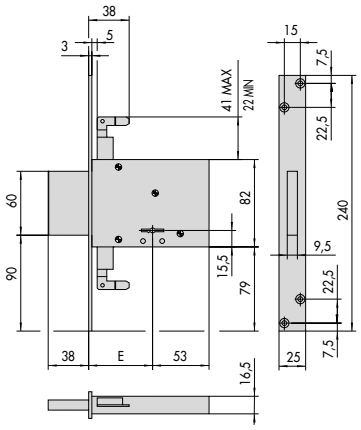
38



57013

E = 52 - 60 - 70

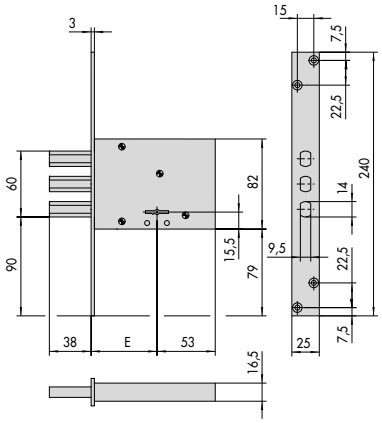
39



57016

E = 60 - 70

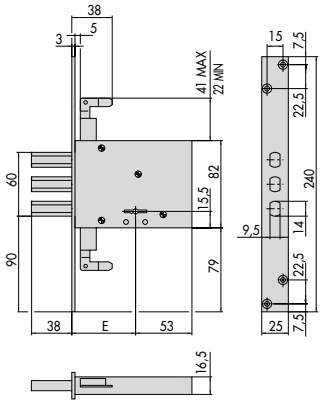
40



57030

E = 60 - 70

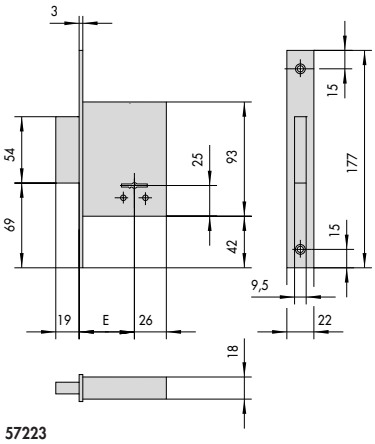
41



57035

E = 60 - 70

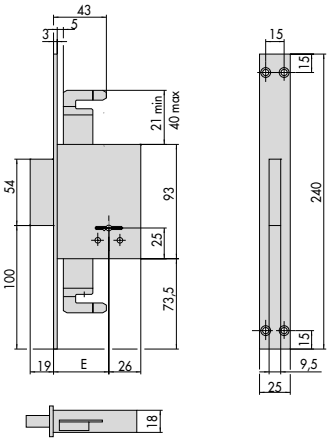
42



57223

E = 40 - 45 - 50 - 60

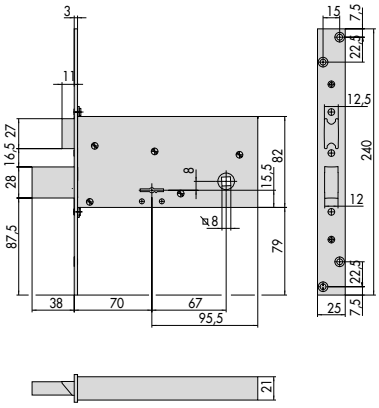
43



57226

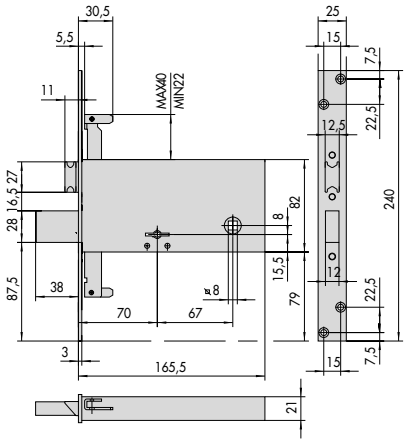
E = 45 - 50 - 60

44

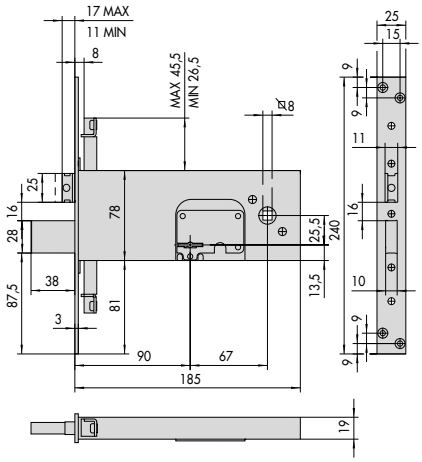


57313

45

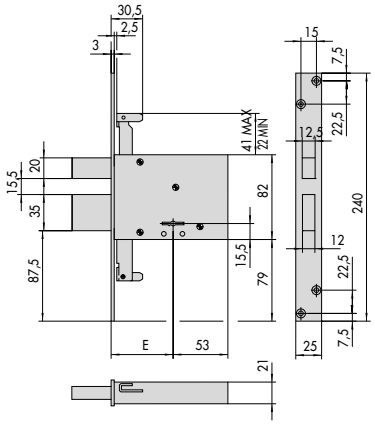


57318



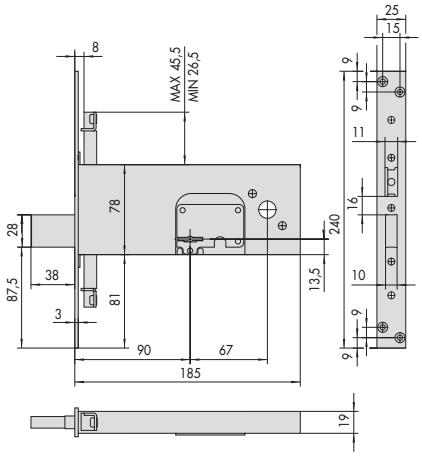
57358, 57378

46



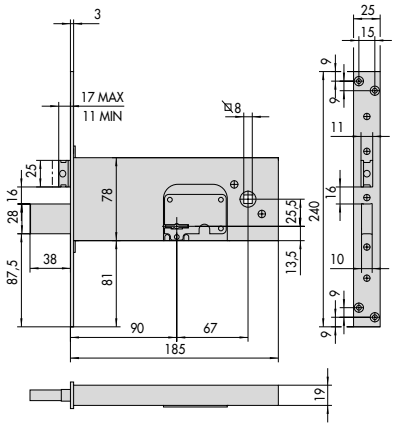
1.57336.70

49



57378

47



1.57353.90

48

50





ALLEGION

CISA

Locks for aluminium doors



Multitop Matic automatic security 195
Cisa Motor for Multitop Matic locks 198
Automatic security Multitop Matic 199
Cylinder gear mortice locks Multitop Pro 200
Cylinder multipoint gear mortice locks Multitop PRO ... 202
Multipoint gear mortice lock, with cylinder MultitopMAX. 210
Cylinder multipoint gear mortice locks 3 SCROCCHI 215
Cylinder multipoint mortice locks with swing bolt 218
Cylinder mortice locks for shutters 223
Cylinder mortice locks with swing bolt 224
Cylinder mortice locks, mid-rail type H=64 mm 230
Double-bit key mortice locks,mid-rail type E = 70 mm . 231
Double-bit key mortice locks, mid-rail type E = 90-100 mm .. 233
Kits for additional locking points 236
Euro profile cylinder mortice locks 241
Oval shaped cylinder mortice locks 243
Cylinder mortice locks, mid-rail type H = 44-64-77 mm 247
Cylinder mortice locks, mid-rail type H = 82 mm 250
Electric strikers for mortice locks 252
Adjustable metal striker with cam 254
Adjustable metal striker 258
Accessories for aluminium locks 265
Nylon striker 278
Dimensional drawings 293





CISA®

MULTITOP AUTOMATIC

Automatic security,
no more worries.









- **AUTOMATIC LOCKING, ALWAYS SECURE**
- **3 LATCHBOLTS ALWAYS ENGAGED**
- **INTERCHANGEABILITY OF THE RECESSES ON THE PROFILE**
- **HANDLE LOCK FUNCTION**
- **CISA MOTOR**

Peace of mind lives here.

The door is securely locked without using the keys thanks to automatic engagement of the deadbolts.

The new locking system for aluminium and steel doors:
When the door is shut, the 3 latchbolts and the 3 hooks engage automatically.
By adding the CISA MOTOR accessory, the door can be opened electrically from a distance.

cisa.com
allegion.com

ALLEGION™



Multitop MATIC

Technical features:
- Gear-operated system
- 3 adjustable latchbolts
- Adjustable "automatic reset" sensor
- Lateral locking point hooks in hardened steel
- Case in zinc-plated pressure die-cast metal
- Zinc-plated steel cover

Supplied as standard:
- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instructions sheet

On request:
- CISA MOTOR accessory for motorised opening (item 1.E0000.00.0)
- Hold open device (item 1.06120.00.0)
- Euro profile cylinder
- Adjustable metal strikers (see special vademecum)
- Cylinder protective rose item 1.06460.05.0
- Top extension bolt kit 1.06444.86/87/96.0

Standards:
- Grade 6 Security to prEN15685:14 (mechanical) and EN14846:08 (mechanical + CISA MOTOR)
- Grade 7 using protective plates item 06436.12/13.0
- Suitable for doors certified to EN1627:11 up to resistance class WK/RC4

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
—	• "Flat" adjustable faceplate 24 x 3 mm. In stainless steel, 2300 mm high. - top adjustment 350 mm. - lower adjustment 150 mm. • 10 to 16 mm adjustable central lock deadlocking latchbolt. • 9 to 15 mm adjustable lateral locking point 2 latchbolts. • 9 to 15 mm adjustable "automatic reset" sensor. • ON REQUEST - CISA MOTOR item 1.E0000.00.0 - Hold open device item 1.06120.00.0 - Top extension bolt kit for doors up to 3000 mm item 1.06444.96.0 - Cylinder protective rose item 1.06460.05.0 - Drill resistant plates for grade 7 pr EN 15685:14 item 1.06436.12/13.0	3	1	85	24	35	3,430	1	1	4A000	35	0			
		3	1	85	24	40	3,490	1	1	4A000	40	0			
		3	1	85	24	45	3,550	1	1	4A000	45	0			
		3	1	92	24	35	3,430	1	1	4A010	35	0			
		3	1	92	24	40	3,490	1	1	4A010	40	0			
		3	1	92	24	45	3,550	1	1	4A010	45	0			



• MATCHING ADJUSTABLE METAL STRIKERS

• Central lock item.:	Lateral locking points (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.67/68.0	1.06465.57/58.0
1.06463.82.0	1.06465.72.0
1.06463.83.0	1.06465.73.0
1.06463.84.0	1.06465.74.0
1.06463.85.0	1.06465.75.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0



Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• U-shaped adjustable faceplate 24 x 5 mm. In stainless steel, 2300 mm high. - top adjustment 350 mm. - bottom adjustment 150 mm. • 10 to 16 mm adjustable central lock deadlocking latchbolt. • 9 to 15 mm adjustable lateral locking point 2 latchbolts. • 9 to 15 mm adjustable "automatic reset" sensor. • ON REQUEST - CISA MOTOR item 1.E0000.00.0 - Hold open device item 1.06120.00.0 - Top extension bolt kit for doors up to 3000 mm item 1.06444.86.0 - Cylinder protective rose item 1.06460.05.0 - Protective plates item 1.06436.12/13.0	3	1	85	24	35	3,430	1	1	4A100	35	0		
		3	1	85	24	40	3,490	1	1	4A100	40	0		
		3	1	85	24	45	3,550	1	1	4A100	45	0		
		3	1	92	24	35	3,430	1	1	4A110	35	0		
		3	1	92	24	40	3,490	1	1	4A110	40	0		
		3	1	92	24	45	3,550	1	1	4A110	45	0		
	• U-shaped adjustable faceplate 24 x 7 mm. • In stainless steel, 2300 mm high. - top adjustment 350 mm. - bottom adjustment 150 mm. • 10 to 16 mm adjustable central lock deadlocking latchbolt. • 9 to 15 mm adjustable lateral locking point 2 latchbolts. • 9 to 15 mm adjustable "automatic reset" sensor. • 2 hooks in hardened steel.	3	1	85	24	35	3,430	1	1	4A200	35	0		
		3	1	85	24	40	3,490	1	1	4A200	40	0		
		3	1	85	24	45	3,550	1	1	4A200	45	0		
		3	1	92	24	35	3,430	1	1	4A210	35	0		
		3	1	92	24	40	3,490	1	1	4A210	40	0		
		3	1	92	24	45	3,550	1	1	4A210	45	0		

• ON REQUEST
- CISA MOTOR item 1.E0000.00.0
- Hold open device item 1.06120.00.0
- Top extension bolt kit for doors up to 3000 mm item 1.06444.87.0
- Cylinder protective rose item 1.06460.05.0
- Drill resistant plates for grade 7 pr EN 15685:14 item 1.06436.12/13.0

• MATCHING ADJUSTABLE METAL STRIKERS

• Central lock item.:	Lateral locking points (2pcs) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.67/68.0	1.06465.57/58.0
1.06463.82.0	1.06465.72.0
1.06463.83.0	1.06465.73.0
1.06463.84.0	1.06465.74.0
1.06463.85.0	1.06465.75.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0



Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Hold open device for 4A000 series Multitop MATIC locks, 2 different modes: - hold open (withdrawn latchbolts and deadbolts); - semi-automatic function (only with withdrawn deadbolts)..						0,020	12	1	06120	00	0	
	• Top extension bolt kit for doors up to 3000 mm. • U-shaped adjustable faceplate 24 x 5 mm in STAINLESS steel, 700 mm high. • For series items: 4A100, 4A110		1		24		0,900	1	1	06444	86	0	
	• Top extension bolt kit for doors up to 3000 mm. • U-shaped adjustable faceplate 24 x 7 mm in STAINLESS steel, 700 mm high. • For series items: 4A200, 4A210		1		24		0,900	1	1	06444	87	0	
	• Top extension bolt kit for doors up to 3000 mm. • "Flat" adjustable faceplate 24 x 3 mm in STAINLESS steel, 700 mm high. • For series items: 4A000, 4A010		1		24		0,900	1	1	06444	96	0	
	• Lock protective plate MULTITOP MATIC, series 4A000, to increase drill resistance (grade 7 prEN 15685: 14).						0,100	6	1	06436	12	0	
	• Protective plate for lateral locking points, MULTITOP MATIC, series 4A000, to increase drill resistance (grade 7 prEN 15685: 14).						0,100	6	1	06436	13	0	



Technical features:
- Case thickness 15.5 mm
- CE 12V DC voltage
- Absorbed current 2A
- Sound signal to indicate open or closed status (deadbolt status)
- Sound signal to indicate any installation error
- If the "handle lock" function is activated, the motor is automatically switched off
- In the event of a power failure, it is still possible to open the door with the keys

Supplied as standard:
- Power supply cable item 1.07030.40.0 (L=4 m)
- 2 fixing screws
- Instructions sheet

On request:
- Signal light to indicate open or closed status (item 1.07126.01/02.0)
- Service cable. (item 07030.41.0)
- Power supply (item 07060.10.0)

Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• CISA MOTOR for installation on all multipoint Multitop • MATIC locks. • It allows remote electric opening - CE 12V DC voltage - Absorbed current 2A	4A010, 4A100, 4A110, 4A200, 4A210	0,400	1	**1 E0000 00 0**
	• Power supply cable (L=4 m).		0,600	12	**1 07030 40 0**
	• Service cable USB programming cable to set the time in which the motor must remain active for opening		0,600	1	**1 07030 41 0**
	• Power supply: - Input: 100÷240 Vac - 50/60 Hz - 0.7 A - Output: 12 Vdc - 2.5 A - Output Class 2 - UL LIsted Certificated		0,500	1	**1 07060 10 0**
	• Green LED		0,005	6	**1 07126 01 0**
	• Red LED		0,005	6	**1 07126 02 0**



Technical features:
- Gear-operated system
- Adjustable central lock deadlocking latchbolt.
- Adjustable "automatic reset" sensor.
- Case in zinc-plated pressure die-cast metal
- Zinc-plated steel cover

Supplied as standard:
- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instructions sheet

On request:
- Euro profile cylinder
- Adjustable metal strikers (see special vademecum)
- Cylinder protective rose item 1.06460.05.0

Standards:
- Grade 6 Security to prEN15685:14

Hand:
A = Non-handed

Cylinder to be ordered separately

Multitop MATIC

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
—	• "Flat" adjustable faceplate 24 x 3 mm. in stainless steel, • Deadbolt and latchbolt • 10 to 16 mm adjustable central lock deadlocking latchbolt. • 9 to 15 mm adjustable "automatic reset" sensor. ON REQUEST - Cylinder protective rose item 1.06460.05.0	1	85	24	35	0,840	1	1	4A300	35	0		
		1	85	24	40	0,900	1	1	4A300	40	0		
		1	85	24	45	0,960	1	1	4A300	45	0		
		1	92	24	35	0,840	1	1	4A310	35	0		
		1	92	24	40	0,900	1	1	4A310	40	0		
		1	92	24	45	0,960	1	1	4A310	45	0		



• MATCHING ADJUSTABLE METAL STRIKERS
1.06463.05.0
1.06463.16.0
1.06463.67/68.0
1.06463.67/68.0
1.06463.82.0
1.06463.83.0
1.06463.84.0
1.06463.85.0
1.06461.07.0
1.06461.17.0
1.06461.30.0
1.06461.35.0



Multitop PRO

Technical features:
- Gear-operated system
- Case thickness 15.5 mm
- Off-phase prevention system
- Zinc-plated die-cast alloy case
- Zinc-plated steel case cover
- Latch interchangeable with nickel-plated roller and deadbolt
- Reversible latch or latch/piston
- Pre-set for additional locking points

Supplied as standard:
- Pair of nylon roses item 1.06012.01.0
- Pair of under-faceplate nylon spacers item 1.06141.65.0
- Threaded pins for fixing of extension bolts
- Lock and cylinder fixing screws
- Instruction sheet



On request:
- Special striker plates (see Vademecum)
- "Modular" roller assembly item 1.06000.00.0
- Cylinder protective rose item 1.06460.05.0
- Mechanical control button item 1.06110.15.0
- Threaded bushing for extension bolt item 1.06290.06.0

Certification:
- This lock series is certified according to the European standard EN 12209:16 (mechanical) e EN 14846:08 (electric) - Security class 6 (1000 Kg side thrust and 600 Kg front thrust resistance)
- Suitable for doors certified to EN 1627:2011 up to WK/RC 4 resistance class




Hand:
0 = Non-handed

Cylinder to be ordered separately
0E300 (ASIX) series



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Stainless steel faceplate 22x3 mm • Deadbolt and latchbolt • Adjustable latch and deadbolt from 10.5 to 16.5 mm. "deadlocking" • CE 12V ac voltage • Absorbed current 3.1 A Certification EN 14846:08 |3|X|9|0|0|M|-|0|2|		85	22	25	0,980	1	1	19205	25	0		
			85	22	30	1,040	1	1	19205	30	0		
			85	22	35	1,100	1	1	19205	35	0		
			85	22	40	1,160	1	1	19205	40	0		
	• Stainless steel faceplate 22x3 mm • Deadbolt and latchbolt • Adjustable latch and deadbolt from 10.5 to 16.5 mm. "deadlocking" • CE 12V ac voltage • Absorbed current 3.1 A Certification EN 14846:08 |3|X|9|0|0|M|6|0|2| • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 Internal extension bolts item 1.06441.20.0 Pair of external bolt connectors item 1.06442.00.0 Extension bolts operated by internal rods item 1.06443.31.0 Extension bolts operated by external rods item 1.06443.36.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0	2	85	22	25	1,010	1	1	19225	25	0		
		2	85	22	30	1,070	1	1	19225	30	0		
		2	85	22	35	1,000	1	1	19225	35	0		
		2	85	22	40	1,190	1	1	19225	40	0		

CISA

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Stainless steel faceplate 22x3 mm • Deadbolt and latch • 11 to 17 mm adjustable latch Certification EN 12209:16 |3|X|9|0|0|G|6|H|	2	85	22	25	0,720	12	1	49225	25	0	
		2	85	22	30	0,780	12	1	49225	30	0	
		2	85	22	35	0,840	12	1	49225	35	0	
		2	85	22	40	0,900	12	1	49225	40	0	
		2	92	22	25	0,720	12	1	49228	25	0	
		2	92	22	30	0,780	12	1	49228	30	0	
		2	92	22	35	0,840	12	1	49228	35	0	
		2	92	22	40	0,900	12	1	49228	40	0	
	• ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 Internal extension bolts item 1.06441.20.0 Pair of external bolt connectors item 1.06442.00.0 Extension bolts operated by internal rods item 1.06443.31.0 Extension bolts operated by external rods item 1.06443.36.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0											
	• Modular roller for locks 49225 and 49228 series adjustable from 2.5 to 15.5 mm • Supplied as standard: nylon inserts item 1.06141.70/71/86.0					0,060	12	1	06000	00	0	
	• Stainless steel faceplate 22x3 mm • Deadbolt and roller • Adjustable roller from 2.5 to 15.5 mm. Certification EN 12209:16 |3|C|9|0|0|G|6|H|	2		22	25	0,720	12	1	49250	25	0	
		2		22	30	0,780	12	1	49250	30	0	
		2		22	35	0,840	12	1	49250	35	0	
		2		22	40	0,900	12	1	49250	40	0	
	Internal ragged extension bolts item. 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 Internal extension bolts item 1.06441.20.0 Pair of external bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.31.0 extension bolts operated by external rods item 1.06443.36.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0 • Inserts for strike plates for locks 49250 series: item 1.06141.70.0 for item 1.06463.16/17/34/35.0 item 1.06141.71.0 for item1.06463.05/31/32/33.0 item 1.06141.86.0 for item 1.06461.30/35.0 • ADJUSTABLE METAL STRIKER • Central cylinder item: divertor (pc.2) item 1.06463.05.0 1.06465.05.0 1.06463.16.0 1.06465.06.0 1.06463.17.0 1.06465.07.0 1.06463.31.0 1.06465.21.0 1.06463.32.0 1.06465.22.0 1.06463.33.0 1.06465.23.0 1.06463.34.0 1.06465.24.0 1.06463.35.0 1.06465.25.0 1.06461.07.0 1.06461.12.0 1.06461.17.0 1.06461.22.0 1.06461.30.0 1.06461.34.0 1.06461.35.0 1.06461.39.0											



Multitop PRO

Technical features:
- Gear-operated system
- Case 15.5 mm thick
- Off-phase prevention system
- Zinc-plated die-cast alloy case
- Zinc-plated steel case cover
- Latch interchangeable with nickel-plated roller and deadbolt
- 4th and 5th locking point pre-setting

Supplied as standard:
- Set of nylon roses 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

On request:
- Special striker plates (see Vademecum)
- "MODULAR" roller item 1.06000.00.0
- Cylinder protective rose item 1.06460.05.0
- Mechanical control button item 1.06110.15.0
- Extension bolts for 4th and 5th locking points item 1.06449.10 - 1.06449.11
- Threaded pin for extension bolts with external rods item 1.06449.05.0

Certification:
- This lock series is certified according to the European standard pr EN 15685:14 - (mechanically operated locks) e EN 14846:08 (electrically operated locks) - grade 6 Security (1,000 Kg side load and 600 Kg front thrust)
- Grade 7 Security with a drill-resistant plate series 06436
- Suitable for doors certified to EN 1627:2011 up to resistance class WK/RC 4

Hand:
0 = Non-handed

Cylinder to be ordered separately
0E300 (ASIX) series







Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• **85 MM CENTRE DISTANCE** • Black painted steel U-shaped adjustable faceplate 24x7 mm, 2300 mm. • top adjustment 350 mm. • bottom adjustment 150 mm. • 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking" • 3 lateral deadbolts • Faceplate cover nylon plugs • CE 12 V ac voltage • Absorbed current 3.1 A • ON REQUEST: • Top extension kit for doors up to 3000 mm high item 1.06444.47.0	3	2	85	24	25	3,520	1	1	19426	25	0		
		3	2	85	24	30	3,580	1	1	19426	30	0		
		3	2	85	24	35	3,640	1	1	19426	35	0		
		3	2	85	24	40	3,700	1	1	19426	40	0		
	• Black painted steel U-shaped adjustable faceplate 24x5 mm, 2300 mm. • top adjustment 350 mm. • bottom adjustment 150 mm. • 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking" • 3 lateral deadbolts • CE 12 V ac voltage • Absorbed current 3.1 A • ON REQUEST: • Top extension kit for doors up to 3000 mm high item 1.06444.46.0	3	2	85	24	25	3,520	1	1	19436	25	0		
		3	2	85	24	30	3,580	1	1	19436	30	0		
		3	2	85	24	35	3,640	1	1	19436	35	0		
		3	2	85	24	40	3,700	1	1	19436	40	0		
	• Black painted steel U-shaped adjustable faceplate 24x7 mm, 2300 mm. • top adjustment 350 mm. • bottom adjustment 150 mm. • 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking" • 3 lateral deadbolts • CE 12 V ac voltage • Absorbed current 3.1 A • ON REQUEST: • Top extension kit for doors up to 3000 mm high item 1.06444.67.0	3	2	85	24	25	3,520	1	1	19626	25	0		
		3	2	85	24	30	3,580	1	1	19626	30	0		
		3	2	85	24	35	3,640	1	1	19626	35	0		
		3	2	85	24	40	3,700	1	1	19626	40	0		
	• Black painted steel U-shaped adjustable faceplate 24x5 mm, 2300 mm. • top adjustment 350 mm. • bottom adjustment 150 mm. • 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking" • 3 lateral deadbolts • CE 12 V ac voltage • Absorbed current 3.1 A • ON REQUEST: • Top extension kit for doors up to 3000 mm high item 1.06444.66.0	3	2	85	24	25	3,520	1	1	19636	25	0		
		3	2	85	24	30	3,580	1	1	19636	30	0		
		3	2	85	24	35	3,640	1	1	19636	35	0		
		3	2	85	24	40	3,700	1	1	19636	40	0		

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
							Kg							



- **92 MM CENTRE DISTANCE**
- Stainless steel U-shaped adjustable faceplate 24x5 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- CE 12 V ac voltage
- Absorbed current 3.1 A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.66.0


3	2	92	24	25	3,520	3	1	**19638**	**25**	**0**
3	2	92	24	30	3,580	3	1	**19638**	**30**	**0**
3	2	92	24	35	3,640	3	1	**19638**	**35**	**0**
3	2	92	24	40	3,700	3	1	**19638**	**40**	**0**

- ADJUSTABLE METAL STRIKER

for central lock:	for divertor (pc.2)
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

EN 14846:08 Certification

| 3 | X | 9 | 0 | 0 | M | 6/7 | 0 | 2 |

Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	**• 85 MM CENTRE DISTANCE** • Black painted U-shaped adjustable faceplate 24x7 mm, 2300 mm. • top adjustment 350 mm. - bottom adjustment 150 mm. • Adjustable latch from 11 to 17 mm. • 3 side deadbolts • Faceplate nylon covers • ON REQUEST: • Top extension kit for doors up to 3000 mm high item 1.06444.47.0	3	2	85	24	25	3,310	1	1	49426	25	0		
		3	2	85	24	30	3,370	1	1	49426	30	0		
		3	2	85	24	35	3,430	1	1	49426	35	0		
		3	2	85	24	40	3,490	1	1	49426	40	0		
	• Black painted U-shaped adjustable faceplate 24x5 mm, 2300 mm. • top adjustment 350 mm. - bottom adjustment 150 mm. • 11 to 17 mm adjustable latch. • 3 lateral deadbolts • ON REQUEST: • Top extension kit for doors up to 3000 mm high item 1.06444.46.0	3	2	85	24	25	3,310	1	1	49436	25	0		
		3	2	85	24	30	3,370	1	1	49436	30	0		
		3	2	85	24	35	3,430	1	1	49436	35	0		
		3	2	85	24	40	3,490	1	1	49436	40	0		
	• Stainless steel U-shaped adjustable faceplate 24x7 mm, 2300 mm. • top adjustment 350 mm. - bottom adjustment 150 mm. • 11 to 17 mm adjustable latch. • 3 lateral deadbolts • ON REQUEST: • Top extension kit for doors up to 3000 mm high item 1.06444.67.0	3	2	85	24	25	3,310	1	1	49626	25	0		
		3	2	85	24	30	3,370	1	1	49626	30	0		
		3	2	85	24	35	3,430	1	1	49626	35	0		
		3	2	85	24	40	3,490	1	1	49626	40	0		
	• Stainless steel U-shaped adjustable faceplate 24x5 mm, 2300 mm. • top adjustment 350 mm. - bottom adjustment 150 mm. . • 11 to 17 mm adjustable latch. • 3 lateral deadbolts • ON REQUEST: • Top extension kit for doors up to 3000 mm high item 1.06444.66.0	3	2	85	24	25	3,520	1	1	49636	25	0		
		3	2	85	24	30	3,580	1	1	49636	30	0		
		3	2	85	24	35	3,640	1	1	49636	35	0		
		3	2	85	24	40	3,700	1	1	49636	40	0		
	92 MM CENTRE DISTANCE • Stainless steel U-shaped adjustable faceplate 24x5 mm, 2300 mm. • top adjustment 350 mm. - bottom adjustment 150 mm. • 11 to 17 mm adjustable latch. • 3 lateral deadbolts • ON REQUEST: Top extension kit for doors up to 3000 mm high item 1.06444.66.0	3	2	92	24	25	3,310	1	1	49638	25	0		
		3	2	92	24	30	3,370	1	1	49638	30	0		
		3	2	92	24	35	3,430	1	1	49638	35	0		
		3	2	92	24	40	3,490	1	1	49638	40	0		
	• Modular roller for locks 49000 series adjustable from 2.5 to 15.5 mm • Supplied as standard: nylon inserts item 1.06141.70/71/86.0						0,060	12	1	06000	00	0		

• ADJUSTABLE METAL STRIKER

• for central lock:	for divertor (pc.2)
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

prEN 15685:14 Certification

| 3 | X | 9 | A | 0 | G | 6/7 | 0 | 1 | 3 |



• 85 MM CENTRE DISTANCE

- Black painted steel U-shaped adjustable faceplate 24x3 mm, 2300 mm.
  top adjustment 350 mm.
  bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- Faceplate cover nylon plugs
- CE 12V ac voltage
- Absorbed current 3.1A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.56.0

Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	24	25	3,520	1	1	19526	25	0		
3	2	85	24	30	3,580	1	1	19526	30	0		
3	2	85	24	35	3,640	1	1	19526	35	0		
3	2	85	24	40	3,700	1	1	19526	40	0		

- Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- CE 12V ac voltage
- Absorbed current 3.1A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.76.0

Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	24	25	3,520	1	1	19726	25	0		
3	2	85	24	30	3,580	1	1	19726	30	0		
3	2	85	24	35	3,640	1	1	19726	35	0		
3	2	85	24	40	3,700	1	1	19726	40	0		

92 MM CENTRE DISTANCE

- Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm.
- top adjustment 350 mm.
- bottom adjustment 150 mm.
- 10.5 to 16.5 adjustable latch and deadbolt. "deadlocking"
- 3 lateral deadbolts
- CE 12V ac voltage
- Absorbed current 3.1A
- ON REQUEST:
- Top extension kit for doors up to 3000 mm high item 1.06444.76.0


Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	92	24	25	3,520	3	1	19728	25	0		
3	2	92	24	30	3,580	3	1	19728	30	0		
3	2	92	24	35	3,640	3	1	19728	35	0		
3	2	92	24	40	3,700	3	1	19728	40	0		

- ADJUSTABLE METAL STRIKER

for central lock:	for divertor (pc.2)
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

EN 14846:08 Certification

| 3 | X | 9 | 0 | 0 | M | 6/7 | 0 | 2 |

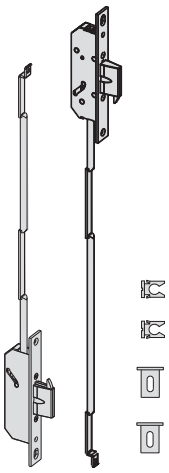

Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	**• 85 MM CENTRE DISTANCE**													
	• Black painted steel U-shaped adjustable faceplate 24x3 mm, 2300 mm. • top adjustment 350 mm. • bottom adjustment 150 mm. • 11 to 17 mm adjustable latch. • 3 lateral deadbolts • Faceplate cover nylon plugs • ON REQUEST: • Top extension kit for doors up to 3000 mm high item 1.06444.56.0	3	2	85	24	25	3,310	1	1	49526	25	0		
		3	2	85	24	30	3,370	1	1	49526	30	0		
		3	2	85	24	35	3,430	1	1	49526	35	0		
		3	2	85	24	40	3,490	1	1	49526	40	0		
	• Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm. • top adjustment 350 mm. • bottom adjustment 150 mm. • 11 to 17 mm adjustable latch. • 3 lateral deadbolts • ON REQUEST: • Top extension kit for doors up to 3000 mm high item 1.06444.76.0	3	2	85	24	25	3,310	1	1	49726	25	0		
		3	2	85	24	30	3,370	1	1	49726	30	0		
		3	2	85	24	35	3,430	1	1	49726	35	0		
		3	2	85	24	40	3,490	1	1	49726	40	0		
	92 MM CENTRE DISTANCE • Stainless steel flat adjustable faceplate 24x3 mm, 2300 mm. • top adjustment 350 mm. • bottom adjustment 150 mm. • 11 to 17 mm adjustable latch. • 3 lateral deadbolts • ON REQUEST: • Top extension kit for doors up to 3000 mm high item 1.06444.76.0	3	2	92	24	25	3,310	1	1	49728	25	0		
		3	2	92	24	30	3,370	1	1	49728	30	0		
		3	2	92	24	35	3,430	1	1	49728	35	0		
		3	2	92	24	40	3,490	1	1	49728	40	0		
	• Modular roller for locks 49000 series adjustable from 2.5 to 15.5 mm • Supplied as standard: nylon inserts item 1.06141.70/71/86.0						0,060	12	1	06000	00	0		

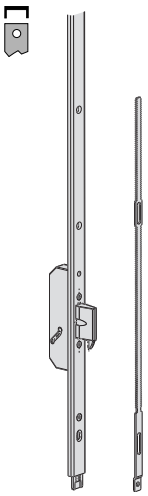
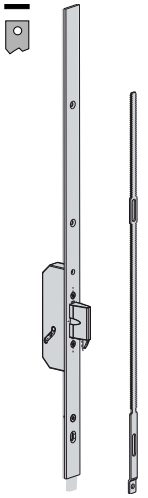

• ADJUSTABLE METAL STRIKER

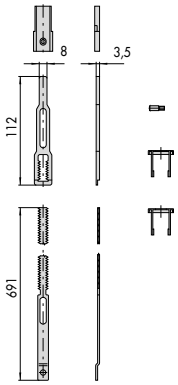

• for central lock:	for divertor (pc.2)
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

prEN 15685:14 Certification

| 3 | X | 9 | A | 0 | G | 6/7 | 0 | 1 | 3 |

Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of lateral extension bolts operated by internal rods • Horizontally sliding deadbolts with hardened steel inserts and hook bolt • STAINLESS STEEL faceplate 22x3 mm • Pre-set for 4th and 5th locking points • Closed case • SUPPLIED AS STANDARD: - Set of rods dia. 8 mm. - Set of faceplate spacers item 1.06141.65.0 - Rod guide item 1.06224.00.0 (2 pcs) • ON REQUEST: - Special strike plates (see Vademecum) - Internal straight extension bolts item 1.06441.10.0 for 4th and 5th locking points - Threaded pin item 1.06449.05.0 for fixing 4th and 5th locking point rods						1,000	1	1	06443	31	0		
	• Pair of lateral extension bolts operated by external rods • Horizontally sliding deadbolts with hardened steel inserts and hook bolt • STAINLESS STEEL faceplate 22x3 mm • Pre-set for 4th and 5th locking points • Closed case • SUPPLIED AS STANDARD: - Set of external bolt connectors - Set of threaded pins ON REQUEST: - Special strike plates (see Vademecum) - Threaded pin item 1.06449.05.0 for fixing 4th and 5th locking point external extension bolts - External bolt connectors item 1.06442.00.0						0,766	1	1	06443	36	0		

Type	Description		Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Top extension kit for doors up to 3000 mm high • BLACK PAINTED STEEL U-shaped adjustable faceplate 24x5 mm, 700 mm	19436, 49436	2		24		0,900	1	1	**06444**	**46**	**0**			
	• Top extension kit for doors up to 3000 mm high • BLACK PAINTED STEEL U-shaped adjustable faceplate 24x5 mm, 700 mm	19426, 49426	2		24		0,900	1	1	**06444**	**47**	**0**			
	• Top extension kit for doors up to 3000 mm high • STAINLESS STEEL U-shaped adjustable faceplate 24x5 mm, 700 mm	19636, 19638, 49636, 49638	2		24		0,900	1	1	**06444**	**66**	**0**			
	• Top extension kit for doors up to 3000 mm high • STAINLESS STEEL U-shaped adjustable faceplate 24x7 mm, 700 mm	19626, 49626	2		24		0,900	1	1	**06444**	**67**	**0**			
	• Top extension kit for doors up to 3000 mm high • BLACK PAINTED STEEL flat adjustable faceplate 24x3 mm, 700 mm	19526, 49526	2		24		0,900	1	1	**06444**	**56**	**0**			
	• Top extension kit for doors up to 3000 mm high • STAINLESS STEEL flat adjustable faceplate 24x3 mm, 700 mm	19726, 19728, 49726, 49728	2		24		0,900	1	1	**06444**	**76**	**0**			
	• Threaded pin for fixing additional extension bolts for 4th and 5th locking points						0,002	50	1	**06449**	**05**	**0**			

Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Additional TOP extension bolt for installation with locks with 24x7 mm U-shaped faceplate for 19000 and 49000 series						0,187	6	1	06449	10	0	
	• Additional FLOOR extension bolt for installation with locks with 24x7 mm U-shaped faceplate for 19000 and 49000 series						0,135	6	1	06449	11	0	



MultitopMAX


Technical features:
- Operated by gear mechanism
- Case thickness 15.5 mm
- Closed case
- Latchbolt interchangeable with roller
- Case in pressure die-cast metal
- Steel cover
- Top and bottom adjustable faceplate
- 11 to 17 mm adjustable latchbolt
- 2.5 to 15.5 mm adjustable roller
- 10.5 to 16.5 mm adjustable latchbolt and deadbolt (electric versions)
- Latchbolt with anti-burglary device (electric versions)
- 10 mm thick hooks with 25 mm protrusion
- Protective plate for grade 7 item 1.06436.10/11.0
- Microswitch can be installed on the divertor case
- 8 mm square spindle
- DIN holes to fix handle plate
- CE 12V AC (electric versions)

Supplied as standard:
- Pair of nylon protective roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

On request:
- Modular roller assembly item 1.06000.00.0
- Adjustable metal strikes (see special Vademecum)
- Cylinder protective rose item 1.06460.05.0
- Button item 1.06110.15.0 (electric locks)
- Pair of electric contacts item 1.06511.00.0


Certifications:
- European Standard pr EN 15685:14 (mechanical) and EN 14846:08 (electric)
- Grade 6 Security
- Grade 7 Security using protective plates for the lock and divertors series 06436
- Suitable for EN 1627:2011 certified doors up to resistance class WK/RC4

Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• CENTRE DISTANCE 85 MM • 'U'-shaped adjustable faceplate 24 x 5 mm. In stainless steel, height 2300 mm. - top adjustment 350 mm. - bottom adjustment 150 mm. • 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt. • 4 hooks with hardened STEEL INSERTS. • CE 12V AC voltage • Certification EN 14846:08 |3|X|9|0|0|M|6/7|0|2|	3	2	85	24	25	3,520	1	1	19656	25	0		
		3	2	85	24	30	3,580	1	1	19656	30	0		
		3	2	85	24	35	3,640	1	1	19656	35	0		
		3	2	85	24	40	3,700	1	1	19656	40	0		



• ADJUSTABLE METAL STRIKER

• Central cylinder item:	divertor (pc.2) item
1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0



- CENTRE DISTANCE 85 MM
- Stainless steel 'U'-shaped adjustable faceplate 24 x 5 mm, height 2300 mm.
  - top adjustment 350 mm.
  - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened STEEL INSERTS.

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	24	25	3,310	1	1	49656	25	0		
3	2	85	24	30	3,370	1	1	49656	30	0		
3	2	85	24	35	3,430	1	1	49656	35	0		
3	2	85	24	40	3,490	1	1	49656	40	0		

CENTRE DISTANCE 92 MM

- Stainless steel 'U'-shaped adjustable faceplate 24 x 5 mm, height 2300 mm.
  - top adjustment 350 mm.
  - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with HARDENED STEEL INSERTS

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	92	24	25	3,310	1	1	49658	25	0		
3	2	92	24	30	3,370	1	1	49658	30	0		
3	2	92	24	35	3,430	1	1	49658	35	0		
3	2	92	24	40	3,490	1	1	49658	40	0		


Certification pr EN 15685:14

| 3 | X | 9 | A | 0 | G | 6/7 | 0 | 6 | 3 |

- ADJUSTABLE METAL STRIKER
- Central cylinder item: divertor (pc.2) item

1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

"MODULAR" ROLLER ASSEMBLY:
- item 1.06000.00.0 (roller inserts supplied as standard)



- CENTRE DISTANCE 85 MM
- Stainless steel "flat" adjustable faceplate 24 x 3 mm, height 2300 mm.
  - top adjustment 350 mm.
  - bottom adjustment 150 mm.
- 10.5 to 16.5 mm adjustable deadlocking latchbolt and deadbolt.
- 4 hooks with hardened STEEL INSERTS.
- CE 12V AC voltage
- Absorbed current 3.1 A


Certification EN 14846:08

|3|X|9|0|0|M|6/7|0|2|

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	24	25	3,520	1	1	19746	25	0		
3	2	85	24	30	3,580	1	1	19746	30	0		
3	2	85	24	35	3,640	1	1	19746	35	0		
3	2	85	24	40	3,700	1	1	19746	40	0		

- ADJUSTABLE METAL STRIKER
- Central cylinder item: divertor (pc.2) item

1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0



- CENTRE DISTANCE 85 MM
- Stainless steel "flat" adjustable faceplate 24 x 3 mm, height 2300 mm.
  - top adjustment 350 mm.
  - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened STEEL INSERTS

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
3	2	85	24	25	3,310	1	1	49746	25	0	
3	2	85	24	30	3,370	1	1	49746	30	0	
3	2	85	24	35	3,430	1	1	49746	35	0	
3	2	85	24	40	3,490	1	1	49746	40	0	

CENTRE DISTANCE 92 MM

- Stainless steel "flat" adjustable faceplate 24 x 3 mm, height 2300 mm.
  - top adjustment 350 mm.
  - bottom adjustment 150 mm.
- 11 to 17 mm adjustable latchbolt.
- 4 hooks with hardened STEEL INSERTS.

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
3	2	92	24	25	3,310	1	1	49748	25	0	
3	2	92	24	30	3,370	1	1	49748	30	0	
3	2	92	24	35	3,430	1	1	49748	35	0	
3	2	92	24	40	3,490	1	1	49748	40	0	

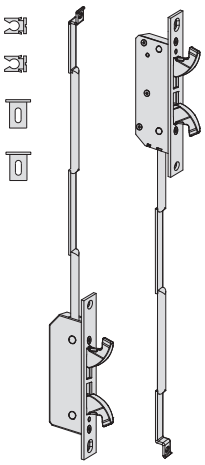



Certification pr EN 15685:14

| 3 | X | 9 | A | 0 | G | 6/7 | 0 | 6 | 3 |

- ADJUSTABLE METAL STRIKER
- Central cylinder item: divertor (pc.2) item

1.06463.05.0	1.06465.05.0
1.06463.16.0	1.06465.06.0
1.06463.17.0	1.06465.07.0
1.06463.31.0	1.06465.21.0
1.06463.32.0	1.06465.22.0
1.06463.33.0	1.06465.23.0
1.06463.34.0	1.06465.24.0
1.06463.35.0	1.06465.25.0
1.06461.07.0	1.06461.12.0
1.06461.17.0	1.06461.22.0
1.06461.30.0	1.06461.34.0
1.06461.35.0	1.06461.39.0

"MODULAR" ROLLER ASSEMBLY:
- item 1.06000.00.0 (roller inserts supplied as standard)

Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of lateral locking points operated by internal rods • 4 hooks with hardened STEEL INSERTS. • Stainless steel faceplate 22 x 3 mm • Closed case • SUPPLIED AS STANDARD: - Pair of rods diameter 8 mm. - Pair of faceplate spacers item 1.06141.65.0 - Rod guide item 1.06224.00.0 (2 pcs) • ON REQUEST: Special strikes (see Vademecum)						1,000	1	1	06443	41	0		
	• Pair of lateral locking points operated by external rods • 4 hooks with hardened STEEL INSERTS • Stainless steel faceplate 22 x 3 mm • Closed case • SUPPLIED AS STANDARD: - Pair of external bolt controls - Pair of faceplate spacers item 1.06141.65.0 - Pair of threaded pins • ON REQUEST: Special strikes (see Vademecum)						0,766	1	1	06443	46	0		
	• Lock protective plate to increase drill resistance (grade 7 prEN 15685 : 14) for 19000 and 49000 series						0,100	6	1	06436	10	0		
	• Divertors protective plate to increase drill resistance (grade 7 prEN 15685 : 14) for series 19000 and 49000						0,100	6	1	06436	11	0		
	• Microswitch to be used with divertors of locks 19000 and 49000 series						0,020	1	1	06195	08	0		



3 SCROCCHI

Technical features:
- Case thickness 15.5 mm
- Closed case
- Steel case and cover
- Top and bottom adjustable faceplate
- Three 11-mm thick latchbolts
- 8-mm thick deadbolts with 20 mm protrusion
- 8 mm square spindle
- DIN holes to fix handle plate

Supplied as standard:
- Pair of nylon protective roses item 1.06012.01.0
- Cylinder and rose fixing screws
- Instruction sheet
- Nylon faceplate cover plugs

On request:
- Adjustable metal strikes (see special Vademecum)

Finishes:
- Zinc-plated cases and covers
- Zinc-plated steel faceplate with corrosion resistance up to 480 hours
- Zinc-plated latchbolt and deadbolts

Standards:
- Grade 3 Security in compliance with pr EN15685:14.
- The lock can be CE-certified by German institutes (Rosenheim) because it is always locked in 3 points without having to engage the throws.




- 3 LATCHBOLTS
- 'U'-shaped adjustable faceplate 24 x 6 mm.
  In ZINC-PLATED steel, height 2300 mm.
  - top adjustment 350 mm.
  - bottom adjustment 150 mm.
- 3 lateral latchbolts

- ADJUSTABLE METAL STRIKER
- for central lock (pc.1) + for divertor (pc.2)

item	Profile
1.06461.03.1/2	"steel" profile
1.06461.04.1/2	for divertor
1.06461.27.1/2	"R" type profile (overlapping)
1.06461.23.0	"European groove" profile








Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		3	2	92	24	35	3,800	1	1	48	81	6	35	0
		3	2	92	24	40	3,820	1	1	48	81	6	40	0

Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
—	• 3 LATCHBOLTS • "Flat" adjustable faceplate 24 x 3 mm. In ZINC-PLATED steel, height 2300 mm. - top adjustment 350 mm. - bottom adjustment 150 mm. • 3 lateral latchbolts	3	2	92	24	35	3,800	1	1	**48916**	**35**	**0**	
		3	2	92	24	40	3,820	1	1	**48916**	**40**	**0**	



• ADJUSTABLE METAL STRIKER
• for central lock (pc.1) + for divertor (pc.2)

item	Profile
1.06461.03.1/2	"steel" profile
1.06461.04.1/2	for divertor
1.06461.27.1/2	"R" type profile (overlapping)
1.06461.23.0	"European groove" profile

Type	Description	For locks series	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Zinc-plated steel strike kit 24 x 3 mm RH for "steel" profile • SUPPLIED AS STANDARD - Strike for central lock 1 pc - Strike for divertors 2 pcs	48816, 48916	0,310	6	1	06461	03	1		
	• Zinc-plated steel strike kit 24 x 3 mm LH for "steel" profile • SUPPLIED AS STANDARD - Strike for central lock 1 pc - Strike for divertors 2 pcs	48816, 48916	0,310	6	1	06461	03	2		
	• Zinc-plated steel 'U'-shaped strike kit 24 x 6 mm RH for "door" profile • SUPPLIED AS STANDARD: - Strike for central lock 1 pc - Strike for divertors 2 pcs	48816, 48916	0,310	6	1	06461	04	1		
	• Zinc-plated steel 'U'-shaped strike kit 24 x 6 mm LH for "door" profile • SUPPLIED AS STANDARD: - Strike for central lock 1 pc - Strike for divertors 2 pcs	48816, 48916	0,310	6	1	06461	04	2		
	• Reversible stainless steel strike kit for "European groove" profile • SUPPLIED AS STANDARD - Strike for central lock 1 pc - Strike for divertors 2 pcs	48816, 48916	0,310	6	1	06461	23	0		
	• Zinc-plated steel strike kit RH for "R" type profile (overlapping) • SUPPLIED AS STANDARD: - Strike for central lock 1 pc - Strike for divertors 2 pcs 2	48816, 48916	0,310	6	1	06461	27	1		
	• Zinc-plated steel strike kit LH for "R" type profile (overlapping) • SUPPLIED AS STANDARD: - Strike for central lock 1 pc - Strike for divertors 2 pcs 2	48816, 48916	0,310	6	1	06461	27	2		
	• REPLACING ITEM 1.06461.23.0 • Reversible strike kit for "European groove" profile • SUPPLIED AS STANDARD - Strike for central lock 1 pc - Strike for divertors 2 pcs 2 - Stainless steel - Lateral adjustment 2.5 mm - Nylon cover	48816, 48916	0,310	6	1	06461	43	0		




Technical features:
- Zinc-plated steel case
- Nickel-plated latch, roller and deadbolt
- Latch or reversible latch/bolt (where this is provided for)
- Voltage 12 V ac CE
- Current absorption 3,1A


Supplied as standard:
- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

On request:
- Special striker plates (see Vademecum)
- Cylinder with pin key series 02400
- Cylinder protective rose item 1.06460.00.0
- Mechanical control button item 1.06110.10.0

Certification:
- This lock series is certified according to the European standard pr EN 15685:14 (mechanical) e EN14846:08 (electric)
  - Security class 4 (700 Kg side thrust and 500 Kg front thrust resistance)

Hand:
0 = Non-handed

Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Black painted steel adjustable U-shaped faceplate 24 x 7 mm, 2,600 mm. upper adjustment 650 mm. lower adjustment 150 mm. • 10.5 to 16.5 adjustable latch bolt and bolt • 3 lateral deadbolts • Faceplate cover nylon plugs • 12 V ca CE	3	1	85	24	25	3,500	1	1	16425	25	0		
		3	1	85	24	30	3,500	1	1	16425	30	0		
		3	1	85	24	35	3,500	1	1	16425	35	0		
	• Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 2.300 mm. upper adjustment 350 mm. lower adjustment 150 mm. • 10.5 to 16.5 mm. adjustable latch and piston • 3 lateral deadbolts • 12 V ca CE Certification EN 14846:08 |3|X|8|A|0|F|4|0|0|	3	1	85	24	25	3,780	1	1	16625	25	0		
		3	1	85	24	30	3,800	1	1	16625	30	0		
		3	1	85	24	35	3,820	1	1	16625	35	0		




- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm.
  upper adjustment 650 mm.
  lower adjustment 150 mm.
- 3 lateral deadbolts
- Nylon faceplate cover plugs

Certification pr EN 15685:14

|3|C|8|A|0|F|4|0|0|

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
3	1		24	25	3,600	1	**1 46420 25 0**
3	1		24	30	3,620	1	**1 46420 30 0**
3	1		24	35	3,640	1	**1 46420 35 0**



- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm.
  upper adjustment 650 mm.
  lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch and piston
- 3 lateral deadbolts
- Nylon faceplate cover plugs



Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
3	1	85	24	25	3,500	1	**1 46425 25 0**
3	1	85	24	30	3,500	1	**1 46425 30 0**
3	1	85	24	35	3,500	1	**1 46425 35 0**


- Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 2.300 mm.
  upper adjustment 350 mm.
  lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral deadbolts

Certification pr EN 15685:14

|3|C|8|A|0|F|4|0|0|

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
3	1	85	24	25	3,000	1	**1 46625 25 0**
3	1	85	24	30	3,000	1	**1 46625 30 0**
3	1	85	24	35	3,640	1	**1 46625 35 0**

Type	Description	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 150 mm. • 11 to 17 mm. adjustable latch and piston • 1 lateral deadbolt • Vertical extension bolts • Nylon faceplate cover plugs	1	1	85	24	25	3,500	1	1	46445	25	0		
		1	1	85	24	30	3,500	1	1	46445	30	0		
		1	1	85	24	35	3,240	1	1	46445	35	0		
	• Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 150 mm. • 2.5 to 16.5 mm. adjustable roller • 3 lateral deadbolts • Nylon faceplate cover plugs	3	1		24	25	3,600	1	1	46450	25	0		
		3	1		24	30	3,500	1	1	46450	30	0		
		3	1		24	35	3,640	1	1	46450	35	0		
	• Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 2.300 mm. upper adjustment 350 mm. lower adjustment 150 mm. • 2.5 to 16.5 mm. adjustable roller • 3 lateral deadbolts Certification pr EN 15685:14 |3|C|8|A|0|F|4|0|0|	3	1		24	25	3,600	1	1	46650	25	0		
		3	1		24	30	3,620	1	1	46650	30	0		
		3	1		24	35	3,640	1	1	46650	35	0		



- Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm.
  upper adjustment 650 mm.
  lower adjustment 150 mm.
- 10.5 to 16.5 mm. adjustable latch and piston
- 3 lateral deadbolts
- Nylon faceplate cover plug


Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	1	85	24	25	3,500	1	1	16525	25	0		
3	1	85	24	30	3,500	1	1	16525	30	0		
3	1	85	24	35	3,500	1	1	16525	35	0		

- Stainless steel adjustable flat faceplate 24 x 7 mm., 2.300 mm.
  upper adjustment 350 mm.
  lower adjustment 150 mm.
- 10.5 to 16.5 mm. adjustable latch and piston
- 3 lateral deadbolts

Certification EN 14846:08

| 3 | X | 8 | A | 0 | F | 4 | 0 | 0 |

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	1	85	24	25	3,780	1	1	16725	25	0		
3	1	85	24	30	3,800	1	1	16725	30	0		
3	1	85	24	35	3,820	1	1	16725	35	0		




- Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm.
  upper adjustment 650 mm.
  lower adjustment 150 mm.
- 3 lateral deadbolts
- Nylon faceplate cover plugs

Certification pr EN 15685:14

| 3 | C | 8 | A | 0 | F | 4 | 0 | 0 |

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	1		24	25	3,600	1	1	46520	25	0		
3	1		24	30	3,620	1	1	46520	30	0		
3	1		24	35	3,640	1	1	46520	35	0		



- Black lacquered steel adjustable flat faceplate
  24 x 3 mm., 2.600 mm.
  upper adjustment 650 mm.
  lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral deadbolts
- Nylon faceplate cover plugs


Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	1	85	24	25	3,600	1	1	46525	25	0		
3	1	85	24	30	3,500	1	1	46525	30	0		
3	1	85	24	35	3,500	1	1	46525	35	0		

- Stainless steel adjustable flat faceplate
  24 x 3 mm., 2.300 mm.
  upper adjustment 350 mm.
  lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral deadbolts

Certification pr EN 15685:14

|3|X|8|A|0|F|4|0|0|

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	1	85	24	25	3,600	1	1	46725	25	0		
3	1	85	24	30	3,620	1	1	46725	30	0		
3	1	85	24	35	3,640	1	1	46725	35	0		



- Black lacquered steel adjustable flat faceplate
  24 x 3 mm., 2.600 mm.
  upper adjustment 650 mm.
  lower adjustment 150 mm.
- 2.5 to 16.5 mm. adjustable roller
- 3 lateral deadbolts
- Nylon faceplate cover plugs

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	1		24	25	3,500	1	1	46550	25	0		
3	1		24	30	3,500	1	1	46550	30	0		
3	1		24	35	3,500	1	1	46550	35	0		

- Stainless steel adjustable flat faceplate
  24 x 3 mm., 2.300 mm.
  upper adjustment 350 mm.
  lower adjustment 150 mm.
- 2.5 to 16.5 mm. adjustable roller
- 3 lateral deadbolts

Certification pr EN 15685:14

|3|C|8|A|0|F|4|0|0|

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	1		24	25	3,600	1	1	46750	25	0		
3	1		24	30	3,620	1	1	46750	30	0		
3	1		24	35	3,640	1	1	46750	35	0		



Technical features:
- Zinc-plated steel case.
- Stainless steel faceplate
- Can be fitted with additional locking points
- Spindle for operating the deadbolt and reloading pins, which can be locked by key




Supplied as standard:
- Set of nylon roses item 1.06012.01.0
- Set of faceplate spacers item 1.06141.65.0
- Threaded pins for fixing the extension bolts
- Lock and cylinder fixing screws
- Instruction sheet

On request:
- Specific striker (see Vademecum)
- Cylinder protective rose item 1.06460.00.0

Hand:
0 = Non-handed

Cylinder to be ordered separately
0E300
(ASIX) series



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Nickel-plated deadbolt • ON REQUEST: Cross-key cylinder item 1.02400.10.0 Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0	1	85	22	25	0,620	1	1	46200	25	0	
		1	85	22	30	0,640	1	1	46200	30	0	
		1	85	22	35	0,610	1	1	46200	35	0	
	• Nickel-plated hook • Stainless steel striker item 1.06459.01.0 • ON REQUEST: Cross-key cylinder item 1.02400.10.0 Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0	1	85	22	25	0,650	1	1	46265	25	0	
		1	85	22	30	0,670	1	1	46265	30	0	
		1	85	22	35	0,693	1	1	46265	35	0	
	• No frontal closure • ON REQUEST: Cross-key cylinder item 1.02400.10.0 Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0		85	22	25	0,570	1	1	46275	25	0	
			85	22	30	0,540	1	1	46275	30	0	
			85	22	35	0,560	1	1	46275	35	0	



Technical features:
- Zinc-plated steel case
- Stainless steel faceplate
- Nickel-plated latch, roller, bolt and hook bolt
- Latch or reversible latch/bolt (if this is provided for)
- Current absorption 3,1A
- Voltage 12 V ac CE

Supplied as standard:
- Set of faceplate spacers item 1.06141.65.0
- Lock and cylinder fixing screws
- Instruction sheet




On request:
- Special striker plates (see Vademecum)
- Cylinder protective rose item 1.06460.00.0
- Cylinder with pin key series 02400
- Mechanical control button item 1.06110.10.0
- Threaded bushing item 1.06290.05 for extension bolt

Certification:
- This lock series is certified according to the European standard EN 12209:16 - Security class 3 (500 Kg side thrust and 400 Kg front thrust resistance)
- Suitable for doors certified to EN1627:2011 up to WK/RC 2 resistance class





Hand:
0 = Non-handed

Cylinder to be ordered separately
0E300 (ASIX) series









Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Only latch • 10.5 to 16.5 mm. adjustable latch and piston • Set of nylon roses item 1.06012.01.0 Certification EN 12209:16 |3|X|8|0|0|F|-|H|		85	22	25	0,764	1	1	16205	25	0	
			85	22	30	0,788	1	1	16205	30	0	
			85	22	35	0,833	1	1	16205	35	0	
	• deadbolt and latch • 10.5 to 16.5 mm. adjustable latch and piston • Set of nylon roses item 1.06012.01.0	1	85	22	25	0,798	1	1	16215	25	0	
		1	85	22	30	0,843	1	1	16215	30	0	
		1	85	22	35	0,883	1	1	16215	35	0	
	• Cross-key cylinder with 3 keys • deadbolt and latch • 10.5 to 16.5 mm. adjustable latch and piston • Set of nylon roses item 1.06002.00.0	1	85	22	25	0,907	1	1	16217	25	0	
		1	85	22	30	0,953	1	1	16217	30	0	
		1	85	22	35	0,988	1	1	16217	35	0	

CISA





Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt and latch • 10.5 to 16.5 mm. adjustable latch and piston • Set of nylon roses item 1.06012.01.0 • Pre-set for additional locking points • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 Internal extension bolts item 1.06441.20.0 Pair of external bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 Certification EN 12209:16 (For 16215 - 16225) | 3 | X | 8 | 0 | 0 | F | 3 |	1	85	22	25	0,863	1	1 16225 25 0				
		1	85	22	30	0,908	1	1 16225 30 0				
		1	85	22	35	0,953	1	1 16225 35 0				
	• Cross-key cylinder with 3 keys • deadbolt and latch • 10.5 to 16.5 mm. adjustable latch and piston • Pre-set for additional locking points • Set of nylon roses item 1.06002.00.0 • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 Internal extension bolts item 1.06441.20.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0	1	85	22	25	0,953	1	1 16227 25 0				
		1	85	22	30	1,014	1	1 16227 30 0				
		1	85	22	35	1,059	1	1 16227 35 0				
	• deadbolt only • Set of nylon roses item 1.06012.01.0	1		22	25	0,575	12	1 46210 25 0				
		1		22	30	0,605	12	1 46210 30 0				
		1		22	35	0,560	12	1 46210 35 0				
	• AS ABOVE • U-shaped faceplate 24x5 mm • Pair of spacers 3 and 5 mm	1		24	25	0,545	12	1 46213 25 0				
		1		24	30	0,575	12	1 46213 30 0				
		1		24	35	0,560	12	1 46213 35 0				
	• Cross-key cylinder with 3 keys • deadbolt only • Set of nylon roses item 1.06002.00.0	1		22	25	0,650	12	1 46212 25 0				
		1		22	30	0,670	12	1 46212 30 0				
		1		22	35	0,690	12	1 46212 35 0				

CISA



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• deadbolt only • Pre-set for additional locking points • Set of nylon roses item 1.06012.01.0 • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 Internal extension bolts item 1.06441.20.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0	1		22	25	0,630	12	1	46220	25	0		
		1		22	30	0,650	12	1	46220	30	0		
		1		22	35	0,680	12	1	46220	35	0		
	• Cross-key cylinder with 3 keys • deadbolt only • Pre-set for additional locking points • Set of nylon roses item 1.06002.00.0 • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 Internal extension bolts item 1.06441.20.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0 Certification EN 12209:16 (for 46210 - 46213 - 46220 - 46240 - 46260 - 46270) |3|C|8|0|0|F|3|H|	1		22	25	0,695	12	1	46222	25	0		
		1		22	30	0,690	12	1	46222	30	0		
		1		22	35	0,710	12	1	46222	35	0		
	• deadbolt and latch • 11 to 17 mm. adjustable latch • Set of nylon roses item 1.06012.01.0 • ON REQUEST: (SERIES 46215): Stainless steel faceplate 25x3 mm with aligned fixing holes (pers. VV)	1	85	22	25	0,640	12	1	46215	25	0		
		1	85	22	30	0,604	12	1	46215	30	0		
		1	85	22	35	0,690	12	1	46215	35	0		
		1	92	22	25	0,610	12	1	46219	25	0		
		1	92	22	30	0,646	12	1	46219	30	0		
		1	92	22	35	0,670	12	1	46219	35	0		
	• AS ABOVE • U-shaped faceplate 24x5 mm • Pair of spacers 3 and 5 mm	1	92	24	25	0,610	12	1	46218	25	0		
		1	92	24	30	0,630	12	1	46218	30	0		
		1	92	24	35	0,660	12	1	46218	35	0		

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Cross-key cylinder with 3 keys • deadbolt and latch • 11 to 17 mm. adjustable latch • Set of nylon roses item 1.06002.00.0	1	85	22	25	0,730	12	**1**	**46217**	**25**	**0**		
		1	85	22	30	0,740	12	**1**	**46217**	**30**	**0**		
		1	85	22	35	0,770	12	**1**	**46217**	**35**	**0**		
	• deadbolt and latch • 11 to 17 mm. adjustable latch bolt • Pre-set for additional locking points • Set of nylon roses item 1.06012.01.0 • Threaded pivots for fixing extension bolts • ON REQUEST: Internal cranked extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 Internal extension bolts item 1.06441.20.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0 Stainless steel faceplate 25x3 mm with aligned fixing holes (pers. V V) Certification EN 12209:16 (for 46215 - 46218 - 46219 - 46225) |3|X|8|0|0|F|3|H|	1	85	22	25	0,680	12	**1**	**46225**	**25**	**0**		
		1	85	22	30	0,725	12	**1**	**46225**	**30**	**0**		
		1	85	22	35	0,730	12	**1**	**46225**	**35**	**0**		
	• Cross-key cylinder with 3 keys • deadbolt and latch • 11 to 17 mm. adjustable latch • Pre-set for additional locking points • Set of nylon roses item 1.06002.00.0 • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0	1	85	22	25	0,750	12	**1**	**46227**	**25**	**0**		
		1	85	22	30	0,790	12	**1**	**46227**	**30**	**0**		
		1	85	22	35	0,790	12	**1**	**46227**	**35**	**0**		

CISA

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• deadbolt and roller • 2.5 to 16.5 mm. adjustable roller • Set of nylon roses item 1.06012.01.0 • ON REQUEST: Stainless steel faceplate 25x3 mm with aligned fixing holes (pers. V V)	1	22	25	0,600	12	1	46230	25	0		
		1	22	30	0,640	12	1	46230	30	0		
		1	22	35	0,665	12	1	46230	35	0		
	• AS ABOVE • U-shaped faceplate 24x5 mm • Pair of spacers 3 and 5 mm	1	24	25	0,600	12	1	46233	25	0		
		1	24	30	0,610	12	1	46233	30	0		
		1	24	35	0,635	12	1	46233	35	0		
	• deadbolt and roller • 2.5 to 16.5 mm. adjustable roller • Pre-set for additional locking points • Set of nylon roses item 1.06012.01.0 • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 Internal extension bolts item 1.06441.20.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0 Certification EN 12209:16 (For 46230 - 46233 - 46250) |3|C|8|0|0|F|3|H|	1	22	25	0,660	12	1	46250	25	0		
		1	22	30	0,690	12	1	46250	30	0		
		1	22	35	0,715	12	1	46250	35	0		
	• Cross-key cylinder with 3 keys • deadbolt and latch • 2.5 to 16.5 mm. adjustable roller • Pre-set for additional locking points • Set of nylon roses item 1.06002.00.0 • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0	1	22	25	0,730	12	1	46252	25	0		
		1	22	30	0,760	12	1	46252	30	0		
		1	22	35	0,790	12	1	46252	35	0		
	• Laminar steel hook • Set of nylon roses item 1.06012.01.0 • Zinc plated steel strikier item 1.06459.01.0	1	22	25	0,610	12	1	46240	25	0		
		1	22	30	0,640	12	1	46240	30	0		
		1	22	35	0,660	12	1	46240	35	0		

CISA®

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Laminar steel hook • Pre-set for additional locking points • Set of nylon roses item 1.06012.01.0 • Threaded pivots for fixing extension bolts • Zinc plated steel striker item 1.06459.01.0 • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0	1		22	25	0,655	12	1	46260	25	0	
		1		22	30	0,650	12	1	46260	30	0	
		1		22	35	0,740	12	1	46260	35	0	
	• No frontal closure • Pre-set for additional locking points • Set of nylon roses item 1.06012.01.0 • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 Internal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0			22	25	0,580	12	1	46270	25	0	
				22	30	0,580	12	1	46270	30	0	
				22	35	0,605	12	1	46270	35	0	





Technical features:
- Galvanized steel case, height 64 mm
- Stainless steel faceplate
- Nickel-plated adjustable latchbolt, 11 to 17 mm
- Nickel-plated 3-throw deadbolt, 11 mm
- Square spindle, 8 mm
- Cylinder fixing via lock internal screw

Supplied as standard:
- Threaded pins for additional lock fixing
- Pair of nylon roses item 1.06012.01.0
- Pair of below-faceplate nylon spacers item 1.06141.65.0
- Rose and lock fixing screws
- Instruction sheets

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
	• Stainless steel faceplate 32x3 mm • Reversible latch and deadbolt • ON REQUEST: Adjustable metal strikers (see vademecum) "MODULAR" roller assembly item 1.06168-00-0 Internal cranked extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 Pair of external bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00/21.0 extension bolts operated by external rods item 1.06443.05/26.0 CInternal extension rods hook side deadbolts item 1.06443.41.0 External extension rods hook side deadbolts item 1.06443.46.0 Cylinder protective rose item 1.06460-05/50/51/60 Rose for locks series 57300 item 1.06141-56-0 or item 1.06473.00.0	3	67	22	90	0,995	12	1	56357	90	0
		3	67	22	100	0,995	12	1	56357	10	0
	• "MODULAR" roller assembly for locks series 56357					0,040	12	1	06168	00	0








Technical features:
- Case height 82 mm
- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel deadbolt
- Nickel-plated, reversible latch and roller
- Drill resistant protection plate

Supplied as standard:
- 3 keys item 1.00100.00.0 or item 1.00102.00.0
- Set of escutcheon fixing screws: length 60 mm for the version with key item 1.00100.00.0 length 75 mm for the version with key item 1.00102.00.0
- Nylon faceplate spacer
- Lock fixing screws
- Instruction sheet

On request:
- Specific striker (see Vademecum)

Hand:
0 = Non-handed

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt and latch	 1 00100 00 1	4	67	25	70	1,150	12	1	57312	73	0	
	• Deadbolt and latch • Pre-set for additional locking points • ON REQUEST: Internal ragged extension bolts item 1.06451.00.0 Internal straight extension bolts item 1.06451.10.0 External bolt connectors item 1.06452.05.0 extension bolts operated by internal rods item 1.06453.05.0	 1 00100 00 1	4	67	25	70	1,226	12	1	57317	73	0	
		 1 00102 00 1	4	67	25	70	1,230	12	1	57317	71	0	
	• Deadbolt and roller • 2 to 14.5 mm. adjustable roller	 1 00100 00 1	4		25	70	1,025	12	1	57320	73	0	

Type	Description	Key item	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Deadbolt and roller • 2 to 14.5 mm. adjustable roller • Pre-set for additional locking points • ON REQUEST: Internal ragged extension bolts item 1.06451.00.0 Internal straight extension bolts item 1.06451.10.0 External bolt connectors item 1.06452.05.0 extension bolts operated by internal rods item 1.06453.05.0	 1 00100 00 1	4	25	70	1,080	12	1	**57325**	**73**	**0**			
		 1 00102 00 1	4	25	70	1,100	12	1	**57325**	**71**	**0**			
	• Deadbolt only • Pre-set for additional locking points • ON REQUEST: Internal ragged extension bolts item 1.06451.00.0 Internal straight extension bolts item 1.06451.10.0 External bolt connectors item 1.06452.05.0 extension bolts operated by internal rods item 1.06453.05.0	 1 00100 00 1	4	25	70	1,140	12	1	**57335**	**73**	**0**			










Technical features:
- Case height 78 mm
- Zinc-plated case
- Stainless steel faceplate
- Nickel-plated steel deadbolt
- Nickel-plated roller and reversible latch
- Drill resistant protection plate
- Electrical and mechanical versions are interchangeable
- Current absorption 1,7 A
- Voltage 12 V ac CE


Supplied as standard:
- 3 keys item 1.00100.00.0 or item 1.00102.00.0
- Set of nylon key guide escutcheons item 1.06123.03.0
- Rose fastening screws:
  length 60 mm for the version with key item 1.00100.00.0
  length 75 mm for the version with key item 1.00102.00.0
- Set of nylon faceplate spacers item 1.06141.65.0
- Threaded extension bolts connectors
- Lock fixing screws
- Instruction sheet



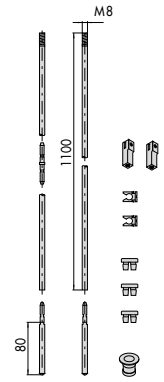
On request:
- Specific striker
- Mechanical control button item 1.06110.15.0


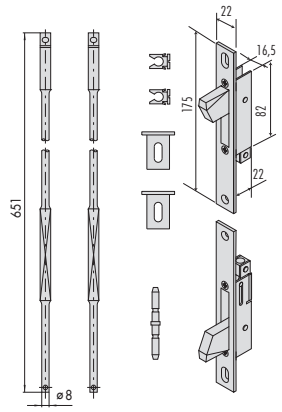
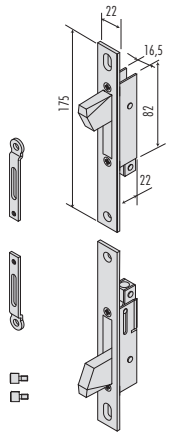
Hand:
0 = Non-handed

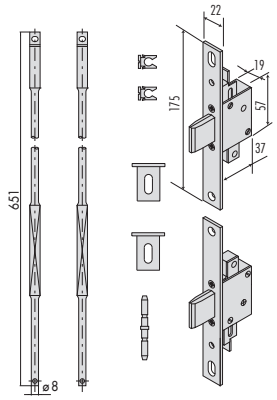
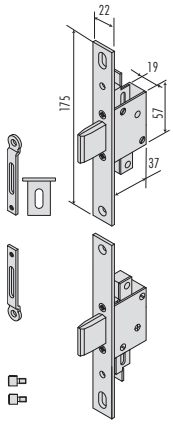

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
	• Deadbolt and latch • 12 to 18 mm. adjustable latch and piston • Dead-locking latch • Hold-open latch	 1 00100 00 1	4	67	22	90	1,330	1	1	17352	90	0
			4	67	22	100	1,385	1	1	17352	10	0
	• Deadbolt and latch • 12 to 18 mm. adjustable latch and piston • Dead-locking latch • Hold-open latch • Pre-set for additional locking points • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0	 1 00100 00 1	4	67	22	90	1,400	1	1	17357	90	0
			4	67	22	100	1,463	1	1	17357	10	0
		 1 00102 00 1	4	67	22	90	1,410	1	1	17357	91	0
			4	67	22	100	1,450	1	1	17357	11	0
	• Deadbolt and latch • 11 to 17 mm. adjustable latch	 1 00100 00 1	4	67	22	90	1,210	12	1	57352	90	0
			4	67	22	100	1,316	12	1	57352	10	0




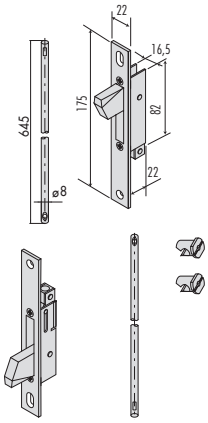
Type	Description	Key item	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Deadbolt and latch • 11 to 17 mm. adjustable latch • Pre-set for additional locking points • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0	 1 00100 00 1	4	67	22	90	1,275	12	1	**57357**	**90**	**0**		
			4	67	22	100	1,340	12	1	**57357**	**10**	**0**		
		 1 00100 00 1	4	67	22	90	1,305	12	1	**57357**	**91**	**0**		
			4	67	22	100	1,355	12	1	**57357**	**11**	**0**		
	• Deadbolt and roller • 2 to 14.5 mm. adjustable roller	 1 00100 00 1	4		22	90	1,145	12	1	**57360**	**90**	**0**		
			4		22	100	1,120	12	1	**57360**	**10**	**0**		
	• Deadbolt and roller • 2 to 14.5 mm. adjustable roller • Pre-set for additional locking points • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0	 1 00100 00 1	4		22	90	1,225	12	1	**57365**	**90**	**0**		
			4		22	100	1,250	12	1	**57365**	**10**	**0**		
		 1 00100 00 1	4		22	90	1,230	12	1	**57365**	**91**	**0**		
			4		22	100	1,250	12	1	**57365**	**11**	**0**		
	• Deadbolt only	 1 00100 00 1	4		22	90	1,129	12	1	**57370**	**90**	**0**		
			4		22	100	1,168	12	1	**57370**	**10**	**0**		


Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Deadbolt only • Pre-set for additional locking points • Threaded pivots for fixing extension bolts • ON REQUEST: Internal ragged extension bolts item 1.06441.00.0 Internal straight extension bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 extension bolts operated by internal rods item 1.06443.00.0 extension bolts operated by external rods item 1.06443.05.0	 1 00100 00 1	4	22	90	1,185	12	**1**	**57375**	**90**		**0**	
			4	22	100	1,250	12	**1**	**57375**	**10**		**0**	

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Zinc plated cranked internal extension bolts • SUPPLIED AS STANDARD: Set of 8 mm. diameter rods Hardened steel tip 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0	16225, 16227, 17357, 19225, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 49225, 49228, 49250, 56357, 57357, 57365, 57375, 56378	0,610	12	1	06441	00	0		
	• Zinc plated straight internal extension bolts • SUPPLIED AS STANDARD: Set of 8 mm. diameter rods Hardened steel tip 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0	16225, 16227, 17357, 19225, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 49225, 49228, 49250, 57357, 57365, 57375, 56378	0,566	12	1	06441	10	0		
	• Zinc plated straight internal extension bolts with screws • SUPPLIED AS STANDARD: Set of 8 mm. diameter rods Hardened steel tip 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Set of threaded bushes (M8) item 1.06290.05.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0	16225, 16227, 17357, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46270, 56378, 57357, 57365, 57375	0,630	12	1	06441	20	0		

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Set of controls for external extension bolts	16225, 16227, 17357, 19225, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 49225, 49228, 49250, 56357, 57357, 57365, 57375	0,020	12	**1**	**06442**	**00**			**0**
	• Set of lateral extension bolts operated by internal rods • Swing bolts • 22 x 3 mm. stainless steel faceplate • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Set of faceplate spacers item 1.06141.65.0 Guide rods item 1.06224.00.0 (2 pcs) • Pin connector item 1.06291.20.0 • ON REQUEST: Special striker (see Vademecum) Personalised internal extension bolts item 1.06449.00.0	16225, 16227, 17357, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 56357, 57357, 57365, 57375, 56378	0,854	1	**1**	**06443**	**00**			**0**
	• Set of lateral extension bolts operated by external rods • Swing bolts • 22 x 3 mm. stainless steel faceplate • SUPPLIED AS STANDARD: set of external bolt connectors Set of threaded rods • ON REQUEST: Special striker (see Vademecum)	16225, 16227, 17357, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46265, 46270, 46275, 56357, 57357, 57365, 57375, 56378	0,513	1	**1**	**06443**	**05**			**0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Pair of lateral extension bolts operated by internal rods • Horizontally sliding deadbolts with hardened steel inserts and hook bolt • STAINLESS STEEL faceplate 22x3 mm • Pre-set for 4th and 5th locking points • SUPPLIED AS STANDARD: - Set of rods dia. 8 mm. - Set of faceplate spacers item 1.06141.65.0 - Rod guide item 1.06224.00.0 (2 pcs) - Joining pin item 1.06291.20.0 ON REQUEST: - Special strike plates (see Vademecum) - Internal straight extension bolts item 1.06441.10.0 for 4th and 5th locking points - Threaded pin for bolt extension rods fixing item 1.06449.05.0 - Custom internal bolt extension rods item 1.06449.00.0	56357, 56378	1,060	1	**1 06443 21 0**
	• Pair of lateral extension bolts operated by external rods • Horizontally sliding deadbolts with hardened steel inserts and hook bolt • STAINLESS STEEL faceplate 22x3 mm • Pre-set for 4th and 5th locking points • SUPPLIED AS STANDARD: - Set of external bolt connectors - Set of threaded pins ON REQUEST: - Special strike plates (see Vademecum) - Threaded pin item 1.06449.05.0 for fixing 4th and 5th locking point external extension bolts	56357, 56378	0,766	1	**1 06443 26 0**
	• Internal extension bolts for personalising lateral locking point distance • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Set of pins for fixing rods to lateral extension bolts	1 06443 00 0, 1 06443 21 0, 1 06443 31 0, 1 06443 41 0	0,495	12	**1 06449 00 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc-plated cranked internal extension bolts • SUPPLIED AS STANDARD: Set of 8 mm diameter bolts Set of 8 mm diameter tips item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Set of rod guide clips item 1.06224.00.0 (2 pcs) Noise-proof bushings item 1.06147.00.0	57317, 57325, 57335	0,620	12	**1 06451 00 0**
	• Zinc plated internal straight extension bolts • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Hardened steel tip diameter 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0	57317, 57325, 57335	0,575	12	**1 06451 10 0**
	• Set of controls for external extension bolts	57317, 57325, 57335	0,034	12	**1 06452 05 0**
	• Set of lateral extension bolts operated by internal rods • Swing bolts • 25 x 3 mm. stainless steel faceplate • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Guide rods item 1.06224.00.0 (2 pcs) • ON REQUEST: Special striker (see Vademecum) Personalised internal rod extension bolts item 1.06419.10.0	57317, 57325, 57335	0,865	1	**1 06453 05 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Set of zinc plated internal extension bolts with screws • SUPPLIED AS STANDARD: Set of rods diameter 8 mm. Hardened steel tip diameter 8 mm. item 1.06291.06.0 (2 pcs) Floor striker item 1.06086.01.0 Joining pin item 1.06291.20.0 Guide rods item 1.06224.00.0 (2 pcs) Noise proof bushes item 1.06147.00.0 Set of threaded bushes item 1.06290.00.0	57317, 57325, 57335	0,604	12	1	07088	00	0		



Technical features:
- Zinc-plated case
- Zinc-plated stainless steel faceplate (fin.20)
- Nickel-plated roller and deadbolt
- Nickel-plated reversible latch
- Adjustable latch (44660, 44650, 44665 series)
- Aligned deadbolt 10mm thick
- Case cover to protect against dirt and chips



Supplied as standard:
- Cylinder fixing screws
- Instruction sheet




On request:
- Specific striker (see Vademecum)

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Adjustable latch bolt 10÷16 mm • Zinc-plated faceplate 22x3	1	85	22	21	0,400	12	1	44650	20	0		
		1	85	22	25	0,430	12	1	44650	25	0		
		1	85	22	30	0,460	12	1	44650	30	0		
		1	85	22	35	0,450	12	1	44650	35	0		
	• Adjustable latch bolt 10÷16 mm • Stainless steel faceplate 22x3	1	85	22	21	0,400	12	1	44650	20	0	20	
		1	85	22	25	0,430	12	1	44650	25	0	20	
		1	85	22	30	0,460	12	1	44650	30	0	20	
		1	85	22	35	0,490	12	1	44650	35	0	20	
	REPLACING 44620 SERIES • Deadbolt and 10÷16 mm adjustable latch (backset 21 mm 10÷13 mm) • Zinc-plated faceplate 22x3	1	85	22	21	0,407	12	1	44660	20	0		
		1	85	22	25	0,431	12	1	44660	25	0		
		1	85	22	30	0,470	12	1	44660	30	0		
		1	85	22	35	0,505	12	1	44660	35	0		
	• Deadbolt and 10÷16 mm adjustable latch (backset 21 mm 10÷13 mm) • Stainless steel faceplate 22x3	1	85	22	21	0,407	12	1	44660	20	0	20	
		1	85	22	25	0,431	12	1	44660	25	0	20	
		1	85	22	30	0,470	12	1	44660	30	0	20	
		1	85	22	35	0,505	12	1	44660	35	0	20	
	REPLACING 44625 SERIES • Deadbolt and 10÷16 mm adjustable latchbolt (for 21 mm backset, 10 to13 mm) • Zinc-plated faceplate 22x3 • Non-centrally positioned deadbolt • Deadbolt thickness 8.5 mm.	2	85	22	21	0,420	12	1	44665	20	0		
		2	85	22	25	0,446	12	1	44665	25	0		
		2	85	22	30	0,486	12	1	44665	30	0		
		2	85	22	35	0,518	12	1	44665	35	0		
	REPLACING 44630 SERIES • Deadbolt and 2.5÷14.5 mm adjustable latch • Zinc-plated faceplate 22x3	1		22	21	0,368	12	1	44670	20	0		
		1		22	25	0,394	12	1	44670	25	0		
		1		22	30	0,470	12	1	44670	30	0		
		1		22	35	0,463	12	1	44670	35	0		

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	REPLACING 44640 SERIES • Latch only • Zinc-plated faceplate 22x3	1	22	21	0,334	12	1	44680	20	0		
		1	22	25	0,357	12	1	44680	25	0		
		1	22	30	0,396	12	1	44680	30	0		
		1	22	35	0,435	12	1	44680	35	0		
	• Zinc-plated steel faceplate • Laminated steel hook bolt • Zinc-plated steel flat strike plate item.1.07028.00.0	1	20	30	0,315	1	1	45110	30	0		
		1	20	35	0,325	1	1	45110	35	0		
		1	20	40	0,330	1	1	45110	40	0		
		1	20	45	0,365	1	1	45110	45	0		
		1	20	50	0,370	1	1	45110	50	0		
		1	20	60	0,405	1	1	45110	60	0		
	• Brass faceplate • Laminated steel hook bolt • Brass flat strike plate item 1.07028.10.0 • ON REQUEST: Fin. 12 (nickel-plated)	1	20	30	0,315	1	1	45100	30	0		
		1	20	35	0,325	1	1	45100	35	0		
		1	20	40	0,330	1	1	45100	40	0		
		1	20	45	0,365	1	1	45100	45	0		
		1	20	50	0,370	1	1	45100	50	0		
		1	20	60	0,405	1	1	45100	60	0		






Technical features:
- Zinc-plated case
- Zinc-plated faceplate
- Brass latch, roller and bolt
- Current absorption 1,4 A
- Voltage 12 V ac CE

Supplied as standard:
- Cylinder fixing screws
- Instruction sheet (if this is provided for)





On request:
- Specific striker (see Vademecum)



Hand:
0 = Non-handed
1 = R.H. inwards
2 = L.H. inwards





Cylinder to be ordered separately

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Dead-locking latch			16	15	0,360	1	1	14020	15	1	
				16	15	0,355	1	1	14020	15	2	
				16	18	0,371	1	1	14020	18	1	
				16	18	0,365	1	1	14020	18	2	
	• Dead-locking latch			20	15	0,381	1	1	14021	15	1	
				20	15	0,381	1	1	14021	15	2	
				20	18	0,394	1	1	14021	18	1	
				20	18	0,394	1	1	14021	18	2	
	• Nickel-plated faceplate • Nickel-plated deadbolt only • Nickel-plated steel flat striker item 1.07027.00.0	1		20	16	0,265	1	1	44210	16	0	
	• Case height 85 mm. • Cylinder activated non-handed latch			16	15	0,140	1	1	44217	15	0	
	• Case height 85 mm. • Cylinder activated non-handed latch			20	15	0,150	1	1	44218	15	0	

CISA®

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• 4.5 mm. extra protruding deadbolt and non-handed latch • Latch can be activated by key	1	69	14	25	0,365	1	1	44219	25	0		
		1	69	14	30	0,410	1	1	44219	30	0		
	• deadbolt and non-handed latch • Latch can be activated by key except for locks with E=15 and 18	1	69	16	15	0,290	1	1	44220	15	0		
		1	69	16	18	0,310	1	1	44220	18	0		
		1	69	16	25	0,350	1	1	44220	25	0		
		1	69	16	30	0,390	1	1	44220	30	0		
		1	69	16	35	0,425	1	1	44220	35	0		
	• deadbolt and non-handed latch • Latch can be activated by key	1	69	14	35	0,450	1	1	44220	35	0	00	EN
	• deadbolt and non-handed latch • Latch can be activated by key except for locks with E=15 and 18	1	69	20	15	0,305	1	1	44221	15	0		
		1	69	20	18	0,328	1	1	44221	18	0		
		1	69	20	25	0,360	1	1	44221	25	0		
		1	69	20	30	0,405	1	1	44221	30	0		
		1	69	20	35	0,430	1	1	44221	35	0		
	• 4.5 mm. extra protruding deadbolt and non-handed latch • Latch can be activated by key except for locks with E=25	2	69	14	25	0,390	1	1	44224	25	0		
		2	69	14	30	0,434	1	1	44224	30	0		
	• deadbolt and non-handed latch • Latch can be activated by key except for locks with E=15-18-25	2	69	16	15	0,318	1	1	44225	15	0		
		2	69	16	18	0,335	1	1	44225	18	0		
		2	69	16	25	0,374	1	1	44225	25	0		
		2	69	16	30	0,416	1	1	44225	30	0		
		2	69	16	35	0,454	1	1	44225	35	0		
	• ABITHAL PROFILE ROUND VERSION • deadbolt and non-handed latch • Latch can be activated by key	2	69	14	35	0,450	1	1	44225	35	0	00	EN
	• deadbolt and non-handed latch • Latch can be activated by key except for locks with E=15-18-25	2	69	20	15	0,336	1	1	44226	15	0		
		2	69	20	18	0,355	1	1	44226	18	0		
		2	69	20	25	0,385	1	1	44226	25	0		
		2	69	20	30	0,433	1	1	44226	30	0		
		2	69	20	35	0,465	1	1	44226	35	0		
	• Case height 85 mm. • Handle activated non-handed latch			16	15	0,170	1	1	44227	15	0		
	• Case height 85 mm. • Handle activated non-handed latch			20	15	0,180	1	1	44228	15	0		
	• Adjustable deadbolt and roller	1		16	15	0,265	1	1	44230	15	0		
		1		16	18	0,292	1	1	44230	18	0		
		1		16	25	0,340	1	1	44230	25	0		
		1		16	30	0,375	1	1	44230	30	0		
		1		16	35	0,408	1	1	44230	35	0		
	• Adjustable deadbolt and roller	1		20	15	0,293	1	1	44231	15	0		
		1		20	18	0,313	1	1	44231	18	0		
		1		20	25	0,359	1	1	44231	25	0		
		1		20	30	0,391	1	1	44231	30	0		
		1		20	35	0,426	1	1	44231	35	0		

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Adjustable deadbolt and roller	2		16	15	0,300	1	1	44235	15	0	
		2		16	18	0,320	1	1	44235	18	0	
		2		16	25	0,366	1	1	44235	25	0	
		2		16	30	0,398	1	1	44235	30	0	
		2		16	35	0,434	1	1	44235	35	0	
	• Adjustable deadbolt and roller	2		20	18	0,340	1	1	44236	18	0	
		2		20	25	0,415	1	1	44236	25	0	
		2		20	30	0,419	1	1	44236	30	0	
		2		20	35	0,454	1	1	44236	35	0	
	• Case height 70 mm. • Adjustable roller			16	15	0,135	1	1	44237	15	0	
	• Case height 70 mm. • Adjustable roller			20	15	0,145	1	1	44238	15	0	
	• deadbolt only	1		16	15	0,180	1	1	44240	15	0	
		1		16	18	0,199	1	1	44240	18	0	
		1		16	25	0,234	1	1	44240	25	0	
		1		16	30	0,261	1	1	44240	30	0	
		1		16	35	0,290	1	1	44240	35	0	
	• deadbolt only	1		20	15	0,195	1	1	44241	15	0	
		1		20	18	0,211	1	1	44241	18	0	
		1		20	25	0,246	1	1	44241	25	0	
		1		20	30	0,273	1	1	44241	30	0	
		1		20	35	0,300	1	1	44241	35	0	
	• deadbolt only (without protrusion)	2		20	15	0,175	1	1	44242	15	0	

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• deadbolt only	2		16	15	0,210	1	1	44245	15	0	
		2		16	18	0,225	1	1	44245	18	0	
		2		16	25	0,256	1	1	44245	25	0	
		2		16	30	0,286	1	1	44245	30	0	
		2		16	35	0,315	1	1	44245	35	0	
	• deadbolt only	2		20	15	0,220	1	1	44246	15	0	
		2		20	18	0,239	1	1	44246	18	0	
		2		20	25	0,274	1	1	44246	25	0	
		2		20	30	0,300	1	1	44246	30	0	
		2		20	35	0,329	1	1	44246	35	0	
	• Nickel-plated laminar steel • Zinc plated steel flat striker item 1.07028.00.0	1		20	16	0,255	1	1	45010	16	0	
	• Nickel-plated laminated steel hook with throw • Nickel-plated steel guide pin • Zinc plated steel flat striker item 1.07028.05.0	1		20	16	0,260	1	1	45012	16	0	
	• Nickel-plated laminated steel hook with latch bolt • Dead locking latch • Nickel-plated steel guide pin • Zinc plated steel flat striker item 1.07028.05.0	1		20	16	0,260	1	1	45027	16	0	



Technical features:
- Zinc-plated case
- Zinc-plated faceplate
- Brass latch, roller and deadbolt
- Latch or reversible latch/bolt (where this is provided for)
- Electrical and mechanical versions are interchangeable
- Current absorption 3,1 A
- Voltage 12 V ac CE




Supplied as standard:
- Cylinder fixing screws
- Instruction sheet






On request:
- Specific striker (see Vademecum)
- Mechanical control button item 1.06110.10.0 (electrical versions)

Hand:
0 = Non-handed






Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Case height 77 mm. • Dead-locking latch only • Hold-open latch		67	16	70	0,560	1	1	14350	70	0	
			67	16	80	0,595	1	1	14350	80	0	
			67	16	90	0,627	1	1	14350	90	0	
	• Case height 77 mm. • Dead-locking latch only • Hold-open latch		67	20	70	0,580	1	1	14351	70	0	
			67	20	80	0,633	1	1	14351	80	0	
			67	20	90	0,643	1	1	14351	90	0	
	• Case height 77 mm. • Dead-locking latch only • Hold-open latch • 4.5 mm. extra protruding latch and pin		67	14,7	70	0,576	1	1	14352	70	0	
			67	14,7	80	0,608	1	1	14352	80	0	
	• Case height 77 mm. • Dead-locking latch only • Hold-open latch		67	16	70	0,562	1	1	14450	70	0	
			67	16	80	0,594	1	1	14450	80	0	
			67	16	90	0,629	1	1	14450	90	0	
	• Case height 77 mm. • Dead-locking latch only • Hold-open latch		67	20	70	0,580	1	1	14451	70	0	
			67	20	80	0,608	1	1	14451	80	0	
			67	20	90	0,645	1	1	14451	90	0	
	• Case height 77 mm. • Dead-locking latch only • Hold-open latch • 4.5 mm. extra protruding latch and pin		67	14,7	70	0,577	1	1	14452	70	0	
			67	14,7	80	0,609	1	1	14452	80	0	
			67	14,7	90	0,642	1	1	14452	90	0	
	• Case height 77 mm. • Dead-locking latch and deadbolt	2	67	16	70	0,612	1	1	14460	70	0	
		2	67	16	80	0,656	1	1	14460	80	0	
		2	67	16	90	0,709	1	1	14460	90	0	
	• Case height 77 mm. • Dead-locking latch and deadbolt	2	67	20	70	0,627	1	1	14461	70	0	
		2	67	20	80	0,665	1	1	14461	80	0	
		2	67	20	90	0,722	1	1	14461	90	0	
	• Case height 77 mm. • Dead-locking latch and deadbolt • 4.5 mm. extra protruding latch, pin and deadbolt	2	67	14,7	70	0,624	1	1	14462	70	0	
		2	67	14,7	80	0,670	1	1	14462	80	0	
		2	67	14,7	90	0,721	1	1	14462	90	0	

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Case height 64 mm. • Dead-locking latch only • Hold-open latch		67	16	70	0,547	1	1	14510	70	0	
			67	16	80	0,580	1	1	14510	80	0	
			67	16	90	0,600	1	1	14510	90	0	
	• Case height 64 mm. • Dead-locking latch only • Hold-open latch		67	20	70	0,564	1	1	14511	70	0	
			67	20	80	0,580	1	1	14511	80	0	
			67	20	90	0,600	1	1	14511	90	0	
	• Case height 64 mm. • Dead-locking latch only • Hold-open latch • 4.5 mm. extra protruding latch and pin		67	14,7	70	0,554	1	1	14512	70	0	
			67	14,7	80	0,580	1	1	14512	80	0	
			67	14,7	90	0,600	1	1	14512	90	0	
	• Case height 44 mm. • Latch with incorporated deadbolt	1	67	16	60	0,400	12	1	44150	60	0	
		2	67	16	70	0,415	12	1	44150	70	0	
		2	67	16	80	0,445	12	1	44150	80	0	
		2	67	16	90	0,470	12	1	44150	90	0	
	• Case height 44 mm. • Latch with incorporated deadbolt	1	67	20	60	0,423	12	1	44151	60	0	
		2	67	20	70	0,445	12	1	44151	70	0	
		2	67	20	80	0,460	12	1	44151	80	0	
		2	67	20	90	0,490	12	1	44151	90	0	
	• Case height 44 mm. • 4.5 mm. extra protruding latch with incorporated deadbolt	2	67	14,7	70	0,438	12	1	44152	70	0	
		2	67	14,7	80	0,455	12	1	44152	80	0	
		2	67	14,7	90	0,475	12	1	44152	90	0	
	• Case height 64 mm. • Latch with incorporated deadbolt	1	67	16	60	0,521	12	1	44155	60	0	
		2	67	16	70	0,550	12	1	44155	70	0	
		2	67	16	80	0,570	12	1	44155	80	0	
		2	67	16	90	0,590	12	1	44155	90	0	
	• Case height 64 mm. • Latch with incorporated deadbolt	1	67	20	60	0,531	12	1	44156	60	0	
		2	67	20	70	0,576	12	1	44156	70	0	
		2	67	20	80	0,590	12	1	44156	80	0	
		2	67	20	90	0,610	12	1	44156	90	0	
	• Case height 44 mm. • Adjustable roller with incorporated deadbolt	1		16	60	0,384	12	1	44160	60	0	
		2		16	70	0,413	12	1	44160	70	0	
		2		16	80	0,450	12	1	44160	80	0	
		2		16	90	0,470	12	1	44160	90	0	
	• Case height 44 mm. • Adjustable roller with incorporated deadbolt	1		20	60	0,404	12	1	44161	60	0	
		2		20	70	0,420	12	1	44161	70	0	
		2		20	80	0,450	12	1	44161	80	0	
		2		20	90	0,470	12	1	44161	90	0	
	• Case height 77 mm. • deadbolt only	2		16	70	0,521	1	1	44350	70	0	
	• Case height 77 mm. • deadbolt only	2		20	70	0,529	1	1	44351	70	0	

CISA®

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Case height 77 mm. • deadbolt only	2		16	70	0,516	1	1	44450	70	0		
	• Case height 77 mm. • deadbolt only	2		20	70	0,533	1	1	44451	70	0		
	• Case height 77 mm. • deadbolt and latch • Latch bolt is withdrawn by the handle	2	67	16	70	0,590	1	1	44360	70	0		
		2	67	16	80	0,598	1	1	44360	80	0		
		2	67	16	90	0,621	1	1	44360	90	0		
	• Case height 77 mm. • deadbolt and latch • Latch bolt is withdrawn by the handle	2	67	20	70	0,585	1	1	44361	70	0		
		2	67	20	80	0,609	1	1	44361	80	0		
		2	67	20	90	0,641	1	1	44361	90	0		
	• Case height 77 mm. • 4.5 mm. extra protruding deadbolt and latch • Latch bolt is withdrawn by the handle	2	67	14,7	70	0,582	1	1	44362	70	0		
		2	67	14,7	80	0,613	1	1	44362	80	0		
		2	67	14,7	90	0,642	1	1	44362	90	0		
	• Case height 77 mm. • deadbolt and latch	2	67	16	70	0,568	1	1	44460	70	0		
		2	67	16	80	0,590	1	1	44460	80	0		
		2	67	16	90	0,628	1	1	44460	90	0		
	• Case height 77 mm. • deadbolt and latch	2	67	20	70	0,583	1	1	44461	70	0		
		2	67	20	80	0,611	1	1	44461	80	0		
		2	67	20	90	0,630	1	1	44461	90	0		
	• Case height 77 mm. • 4.5 mm. extra protruding deadbolt and latch	2	67	14,7	70	0,587	1	1	44462	70	0		
		2	67	14,7	80	0,605	1	1	44462	80	0		
		2	67	14,7	90	0,639	1	1	44462	90	0		
	• Case height 77 mm. • Adjustable deadbolt and roller	2		16	70	0,576	1	1	44370	70	0		
		2		16	80	0,579	1	1	44370	80	0		
		2		16	90	0,610	1	1	44370	90	0		
	• Case height 77 mm. • Adjustable deadbolt and roller	2		20	70	0,568	1	1	44371	70	0		
		2		20	80	0,590	1	1	44371	80	0		
		2		20	90	0,624	1	1	44371	90	0		
	• Case height 77 mm. • Adjustable deadbolt and roller	2		16	70	0,542	1	1	44470	70	0		
		2		16	80	0,583	1	1	44470	80	0		
		2		16	90	0,607	1	1	44470	90	0		
	• Case height 77 mm. • Adjustable deadbolt and roller	2		20	70	0,559	1	1	44471	70	0		
		2		20	80	0,601	1	1	44471	80	0		
		2		20	90	0,620	1	1	44471	90	0		



Technical features:
- Case height 82 mm
- Zinc-plated case
- Zinc-plated faceplate
- Brass latch, roller and bolt
- Electrical versions are interchangeable with item 44115/6 and item 44145/6
- Current absorption 1,3 A
- Voltage 12 V ac CE





Supplied as standard:
- Cylinder fixing screws
- Instruction sheet (if this is provided for)




On request:
- Specific striker (see Vademecum)
- Mechanical control button item 1.06110.10.0

Hand:
0 = Non-handed
1 = R.H. inwards
2 = L.H. inwards

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Dead-locking latch		48	16	58	0,530	12	1	14	010	60	1
			48	16	58	0,530	12	1	14	010	60	2
			48	20	58	0,550	12	1	14	011	60	1
			48	20	58	0,565	12	1	14	011	60	2
	• Dead-locking latch • Hold-open latch		48	16	58	0,556	12	1	14	012	60	1
			48	16	58	0,556	12	1	14	012	60	2
	• Dead-locking latch • Low impact piston spring • Hold-open latch		48	16	58	0,557	12	1	14	017	60	1
			48	16	58	0,557	12	1	14	017	60	2
	• deadbolt only	2		16	58	0,485	12	1	44	110	60	0
		2		20	58	0,485	12	1	44	111	60	0
	• deadbolt only • Interchangeable with 14010 series	2		16	58	0,475	12	1	44	115	60	0
		2		20	58	0,485	12	1	44	116	60	0
	• deadbolt and non-handed latch	2	48	16	58	0,553	12	1	44	120	60	0
		2	48	20	58	0,570	12	1	44	121	60	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• deadbolt and adjustable roller	2		16	58	0,517	12	**1**	**44130**	**60**	**0**		
		2		20	58	0,530	12	**1**	**44131**	**60**	**0**		
	• Non-handed latch-bolt • Latch-bolt with incorporated deadbolt	1	48	16	58	0,500	12	**1**	**44140**	**60**	**0**		
		1	48	20	58	0,510	12	**1**	**44141**	**60**	**0**		
	• Non-handed latch-bolt • Latch-bolt with incorporated deadbolt • Interchangeable with series 14010	1	48	16	58	0,500	12	**1**	**44145**	**60**	**0**		
		1	48	20	58	0,515	12	**1**	**44146**	**60**	**0**		








Technical features:
- Rated voltage 12-24V ac and 12-24V dc CE.
- Long lipped ZAL stainless alloy casing
- Steel or stainless steel interchangeable faceplates

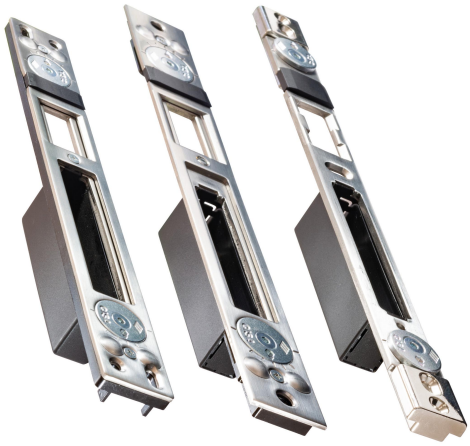
Supplied as standard:
- Faceplate fixing screws
- Faceplate spacer (series 05020, 05021, 05005.00.0.20)

On request:
- Booster module item 1.07022.00.0

Hand:
0 = Non-handed
1 = R.H. inwards
L.H. outwards
2 = L.H. inwards
R.H. outwards

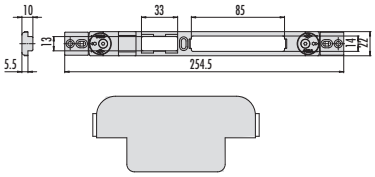
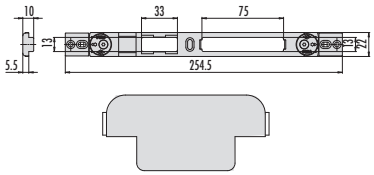
Type	Description	Faceplate	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Electric striker casing • Voltage 12V ac CE - Current absorption 0,7 A • Hold open catch mechanism • Hold open device		0,185	12	1	15100	00	0		
	• Electric striker casing • Voltage 12V ac CE - Current absorption 0,7A • Hold open catch mechanism		0,185	12	1	15101	00	0		
	• Electric striker casing • Voltage 12V ac/dc CE - Current absorption 0,7A • Hold open device		0,170	12	1	15102	00	0		
	• Electric striker casing • Voltage 12V ac/dc CE - Current absorption 0,7A		0,185	12	1	15110	00	0		
	• Electric striker casing • Voltage 24V ac CE - Current absorption 0,4A • Hold open catch mechanism • Hold open device		0,185	12	1	15120	00	0		
	• Electric striker casing • Voltage 24V ac CE - Current absorption 0,4A • Hold open catch mechanism		0,185	12	1	15121	00	0		
	• Electric striker casing • Voltage 24V ac/dc CE- Current absorption 0,4A • Hold open device		0,185	12	1	15122	00	0		
	• Electric striker casing • Voltage 24V ac/dc CE- Current absorption 0,4A		0,185	12	1	15130	00	0		
	• Electric striker casing • Live coils: opening is only obtained if power supply is cut • Voltage 12V dc CE - Current absorption 0,20A		0,185	12	1	15140	00	0		
	• Electric striker casing • Live coils: opening is only obtained if power supply is cut • Voltage 24V dc CE - Current absorption 0,12A		0,185	12	1	15150	00	0		



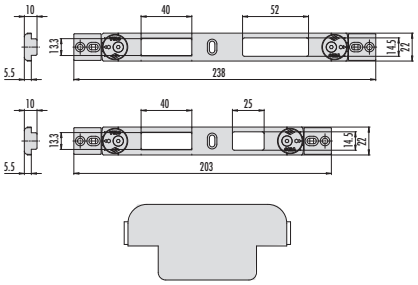
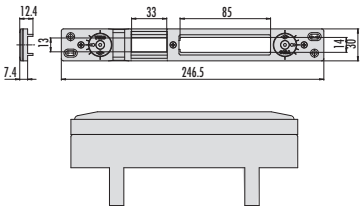
Type	Description	Facaplate	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Electric striker casing • Voltage 12V ac CE - Current absorption 0,7A • Inside hold open catch mechanism • Hold open device		0,185	12	1 15160 00 0
	• Electric striker casing • Voltage 12V dc CE - Current absorption 0,25A		0,185	12	1 15170 00 0
	• Electric striker casing without coil • Hold open device		0,170	12	1 15180 00 0
	• Electric strike body • 1 microswitch for latch position • Adjustable long lip • Voltage 10/24V AC/DC EC • Absorbed current 0.24 A at 10 V DC		0,280	12	1 15200 00 0
	• Square corner steel flat faceplate compatible with latch only locks • FINISHES gold fin. 06 silver fin. 07 nickel-plated fin. 12 brass lacquered fin. 38 satin-finished stainless steel fin. 20	25 25 25 25 25	0,070 0,070 0,070 0,070 0,070	6 6 6 6 6	1 05005 00 0 06 1 05005 00 0 07 1 05005 00 0 12 1 05005 00 0 20 1 05005 00 0 38
	• Square corner steel flat faceplate • For use with latch locks 44600, 46000, 49000, 57300 series • SUPPLIED AS STANDARD spacer of nylon item 1.06141.84.0 (2 pair 3mm)	25	0,098	6	1 05020 00 0
	• Square corner steel flat faceplate • For use with latch locks 44600, 46000, 49000, 57300 series • SUPPLIED AS STANDARD spacer of nylon item 1.06141.85.0 (2 pair 3 mm)	34 34	0,085 0,085	6 6	1 05021 00 1 1 05021 00 2

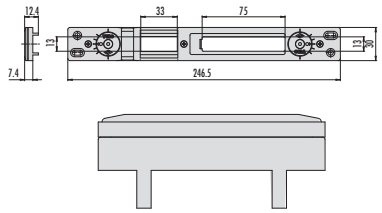

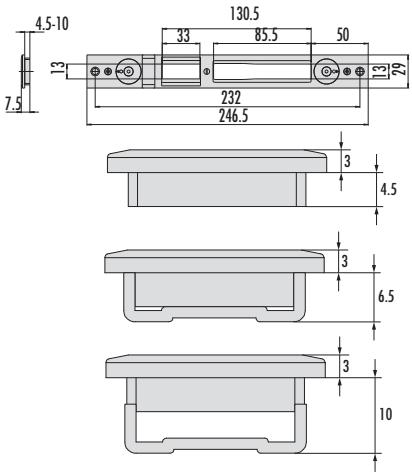


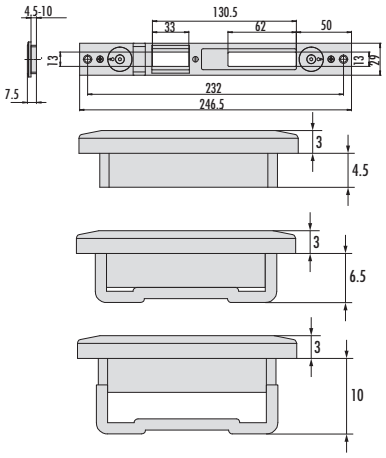
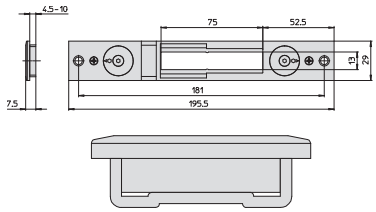
Technical features:
- The adjustment mechanism with cam has no protrusions (CISA patent)
- Highly precise lateral adjustment of 2.5 mm using the graduated scale
- The thickness of the "Door" version can be easily adjusted from 4.5 to 10 mm.
- nylon cover to conceal the deadbolt hole on the profile

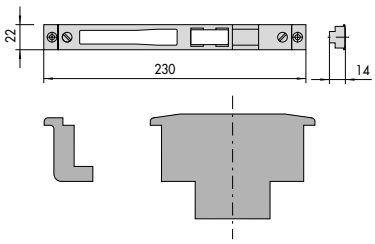
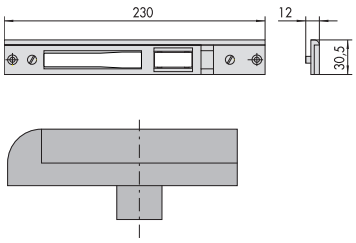


Finish:
- painted black and stainless steel

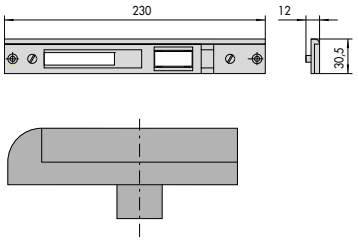
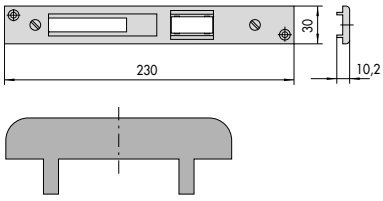
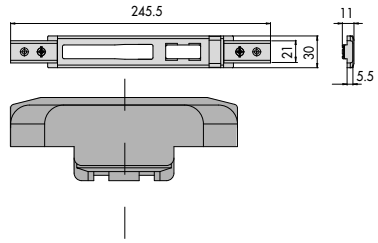

Type	Description	For series/item	Unit weight	Pieces	ITEM
	• REPLACES ITEM 1.06463.22.0 • Painted black • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use • Nylon insert ITEM 1.06141.71.0	16000 46000	0,140	12	**1 06463 72 0**
	• REPLACES ITEM 1.06463.23.0 • Stainless steel • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use • Nylon insert ITEM 1.06141.71.0		0,129	12	**1 06463 73 0**
	• Replaces ITEM 1.06463.32.0 • Painted black • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.71.0	19000, 49000 43200, 43700 43800, 4A000 4A010, 4A100 4A120, 4A200 4A210	0,145	12	**1 06463 82 0**
	• REPLACES ITEM 1.06463.33.0 • Stainless steel • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.71.0	19000, 49000 43200, 43700 43800, 4A000 4A010, 4A100 4A120, 4A200 4A210	0,141	12	**1 06463 83 0**

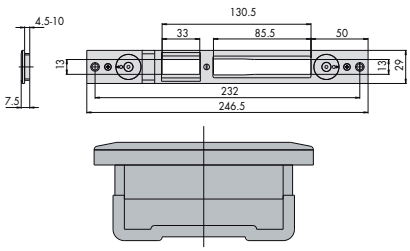
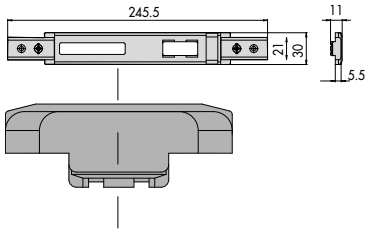

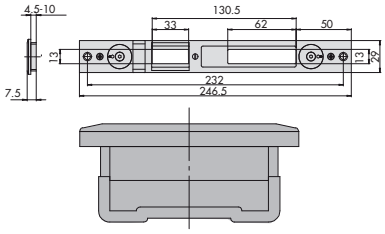
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Replaces ITEM 1.06465.22.0 • Painted black • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.71.0	1.06443.00.21/31 1.06443.00.0.26/36 1.06443.00.0 1 06443.05.0 17300, 56300 57300, 43200 43700, 43800 19000, 49000 16000, 46000 4A000, 4A010 4A110, 4A120 4A200, 4A210	0,112	12	**1 06465 72 0**
	• Replaces ITEM 1.06465.23.0 • Stainless steel • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.71.0	1.06443.00.21/31 1.06443.00.0.26/36 1.06443.00.0 1 06443.05.0 17300, 56300 57300, 43200 43700, 43800 19000, 49000 16000, 46000 4A000, 4A010 4A110, 4A120 4A200, 4A210	0,112	12	**1 06465 73 0**
	• Replaces ITEM 1.06465.42.0 • Painted black • Lateral adjustment 2.5 mm	mid-rail locks: deadbolt only or electric latch only	0,104	12	**1 06465 52 0**
	• REPLACES ITEM 1.06461.23.0 • Striker kit • for "European groove" profile and supplied as standard: Striker for central lock (1 pc) Striker for divertors (2 pcs) • Stainless steel • Lateral adjustment 2.5 mm • Nylon cover	mid-rail locks: deadbolt only or electric latch only	0,104	12	**1 06461 43 0**
	• REPLACES ITEM 1.06463.07.0 e 1.06463.21.0 • Painted black • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	16000 46000	0,213	12	**1 06463 57 0**
	• Stainless steel • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	16000 46000	0,160	12	**1 06463 58 0**




Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• REPLACES ITEM 1.06463.17.0 e 1.06463.31.0 • Painted black • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	19000, 49000 43200, 43700 43800, 4A000 4A010, 4A100 4A120, 4A200 4A210	0,160	12	1 06463 67 0
	• REPLACES ITEM 1.06463.31.0.12 • Stainless steel • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	19000, 49000 43200, 43700 43800, 4A000 4A010, 4A100 4A120, 4A200 4A210	0,160	12	1 06463 68 0
	• REPLACES ITEM 1.06465.07.0 e 1.06465.21.0 • Painted black • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	1.06443.00. 21/31 1.06443.00.0. 26/36 1.06443.00.0 1 06443.05.0 17300, 56300 57300, 43200 43700, 43800 19000, 49000 16000, 46000 4A000, 4A010 4A110, 4A120 4A200, 4A210	0,183	12	1 06465 57 0
	• REPLACES ITEM 1.06465.21.0.12 • Stainless steel • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	1.06443.00. 21/31 1.06443.00.0. 26/36 1.06443.00.0 1 06443.05.0 17300, 56300 57300, 43200 43700, 43800 19000, 49000 16000, 46000 4A000, 4A010 4A110, 4A120 4A200, 4A210	0,117	12	1 06465 58 0
	• REPLACES ITEM 1.06463.24.0 • Painted black • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	16000 46000	0,150	12	1 06463 74 0
	• REPLACES ITEM 1.06463.25.0 • Stainless steel • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	16000 46000	0,150	12	1 06463 75 0

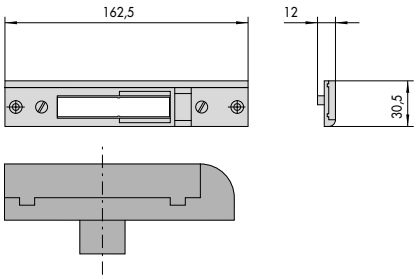
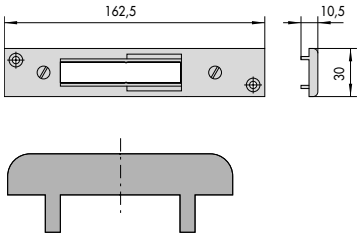

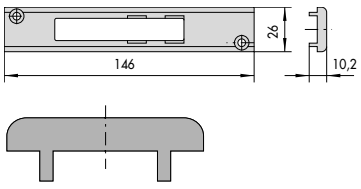
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• REPLACES ITEM 1.06463.34.0 • Replaces ITEM 1.06463.34.0 • Painted black • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	19000, 49000 43200, 43700 43800, 4A000 4A010, 4A100 4A120, 4A200 4A210	0,187	12	**1 06463 84 0**
	• REPLACES ITEM 1.06463.35.0 • Stainless steel • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	19000, 49000 43200, 43700 43800, 4A000 4A010, 4A100 4A120, 4A200 4A210	0,158	12	**1 06463 85 0**
	• REPLACES ITEM 1.06465.24.0 • Painted black • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	1.06443.00.21/31 1.06443.00.0.26/36 1.06443.00.0 1 06443.05.0 17300, 56300 57300, 43200 43700, 43800 19000, 49000 16000, 46000 4A000, 4A010 4A110, 4A120 4A200, 4A210	0,166	12	**1 06465 74 0**
	• REPLACES ITEM 1.06465.25.0 • Stainless steel • Lateral adjustment 2.5 mm • Nylon cover • For roller locks use nylon insert ITEM 1.06141.70.0	1.06443.00.21/31 1.06443.00.0.26/36 1.06443.00.0 1 06443.05.0 17300, 56300 57300, 43200 43700, 43800 19000, 49000 16000, 46000 4A000, 4A010 4A110, 4A120 4A200, 4A210	0,125	12	**1 06465 75 0**



Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.71.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,173	12	**1 06463 05 0**
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,166	12	**1 06463 06 0**
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,160	12	**1 06463 07 0**
	• For roller locks use nylon insert item 1.06141.71.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,150	12	**1 06463 09 0**

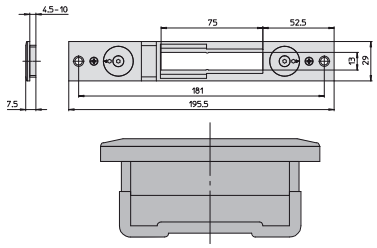
Type	Description	For series/item	Unit weight	Pieces	ITEM
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0	19000, 49000, 43200, 43700, 43800	0,180	12	1 06463 16 0
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0	19000, 49000, 43200, 43700, 43800	0,170	12	1 06463 17 0
	• Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc.	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,185	12	1 06463 21 0
	• REPLACES ITEM 1.06463.08.0 • Lateral adjustment 4 mm • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,130	12	1 06463 22 0
	• IDEM • Central part in stainless steel		0,129	12	1 06463 23 0











Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• REPLACING ITEM 1.06463.04.0 • Lateral adjustment 2.5 mm. • 4.5 to 10 mm adjustable thickness. • For roller locks, use nylon insert item 1.06141.70.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,150	12	**1 06463 24 0**
	• AS ABOVE$ Stainless steel		0,150	12	**1 06463 25 0**
	• Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. • ON REQUEST: • nickel-plated brass (fin. 12)	19000, 49000, 43200, 43700, 43800	0,195	12	**1 06463 31 0**
	• REPLACES ITEM 1.06463.18.0 • Lateral adjustment 4 mm • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0	19000, 49000, 43200, 43700, 43800	0,145	12	**1 06463 32 0**
	• IDEM • Central part in stainless steel		0,141	12	**1 06463 33 0**
	• REPLACING ITEM 1.06463.14.0 • Lateral adjustment 2.5 mm • 4.5 to 10 mm adjustable thickness. • For roller locks, use nylon insert item 1.06141.70.0	19000, 49000, 43200, 43700, 43800	0,158	12	**1 06463 34 0**
	• IDEM • Central part in stainless steel		0,158	12	**1 06463 35 0**








Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• For roller locks use nylon insert item 1.06141.71.0	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520, 56357, 57330, 57335, 57370, 57375	0,053	12	**1 06465 02 0**
	• For roller locks use nylon insert item 1.06141.71.0	1 06443 00 0, 1 06443 05 0, 1 06443 31 0, 1 06443 36 0, 1 06443 41 0, 1 06443 46 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,108	12	**1 06465 03 0**
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.71.0	1 06443 00 0, 1 06443 05 0, 1 06443 31 0, 1 06443 36 0, 1 06443 41 0, 1 06443 46 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,125	12	**1 06465 05 0**










Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0	1 06443 00 0, 1 06443 05 0, 1 06443 31 0, 1 06443 36 0, 1 06443 41 0, 1 06443 46 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,122	12	**1 06465 06 0**
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0	1 06443 00 0, 1 06443 05 0, 1 06443 31 0, 1 06443 36 0, 1 06443 41 0, 1 06443 46 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,117	12	**1 06465 07 0**
	• For roller locks use nylon insert item 1.06141.70.0	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,099	12	**1 06465 08 0**
	• For roller locks use nylon insert item 1.06141.70.0	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,115	12	**1 06465 10 0**







Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. • REQUEST: nickel-plated brass (fin. 12)	1 06443 00 0, 1 06443 05 0, 1 06443 31 0, 1 06443 36 0, 1 06443 41 0, 1 06443 46 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,140	12	**1 06465 21 0**
	• REPLACES ITEM 1.06465.02.0 • Lateral adjustment 4 mm • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0	1 06443 00 0, 1 06443 05 0, 1 06443 31 0, 1 06443 36 0, 1 06443 41 0, 1 06443 46 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,112	12	**1 06465 22 0**
	• IDEM • Central part in stainless steel		0,112	12	**1 06465 23 0**





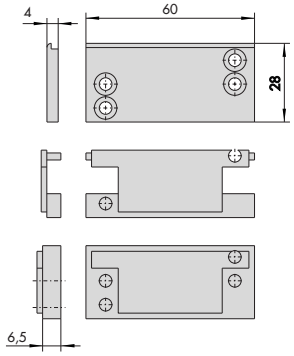
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• REPLACING ITEM 1.06463.04.0 • Lateral adjustment 2.5 mm • 4.5 to 10 mm adjustable thickness. • For roller locks, use nylon insert item 1.06141.70.0	1 06443 00 0, 1 06443 05 0, 1 06443 31 0, 1 06443 36 0, 1 06443 41 0, 1 06443 46 0, 1 06453 05 0, 17352, 17357, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 56357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,125	12	**1 06465 24 0**
	• AS ABOVE • Stainless steel		0,125	12	**1 06465 25 0**







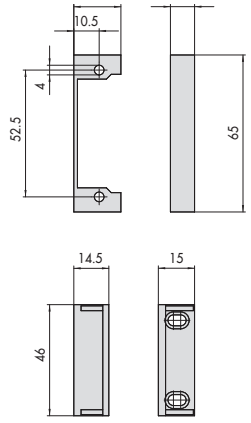
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Black nylon rose	02400	0,001	100	**1 06002 00 0**
	• Set of black nylon roses for European profile cylinders		0,004	100	**1 06012 01 0**
	• Set of black nylon roses for oval cylinders		0,004	100	**1 06027 01 0**
	• Nickel-plated steel screw	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,006	50	**1 06048 02 0**
	• Nickel-plated steel screw	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,008	50	**1 06048 03 0**
	• Zinc plated steel flat striker	44220, 44221, 44225, 44226	0,050	25	**1 06077 16 0**
	• Zinc plated steel flat striker	44220, 44221, 44225, 44226	0,070	25	**1 06077 20 0**
	• Zinc plated steel flat striker	44230, 44231, 44235, 44236	0,052	25	**1 06078 16 0**
	• Zinc plated steel flat striker	44230, 44231, 44235, 44236	0,070	25	**1 06078 20 0**
	• Zinc plated steel flat striker	44240, 44241, 44245, 44246	0,030	25	**1 06079 16 0**









Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc plated steel flat striker	44240, 44241, 44245, 44246	0,045	25	**1 06079 20 0**
	• Zinc plated steel flat striker	44360, 44361, 44460, 44461	0,037	25	**1 06079 77 0**
	• Zinc plated steel flat striker	44237, 44238	0,025	25	**1 06080 16 0**
	• Zinc plated steel flat striker	44237, 44238	0,034	25	**1 06080 20 0**
	• Brass floor striker diameter 11 mm. • USED FOR: extension bolts with 10 mm. diameter rods	1 06415 00 0, 1 06441 15 0, 1 07088 03 0, 1 07088 04 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57019, 57020, 57024, 57033, 57055, 57215, 57217, 57255, 57259, 57265, 57296, 57831, 57837, 57851, 57857	0,016	12	**1 06086 00 0**
	• Brass floor striker, diameter 9 mm. • USED FOR: Internal extension bolts with 8 mm. diameter rods	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,013	12	**1 06086 01 0**
	• Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: Internal extension bolts with 8 and 10 mm. diameter rods multi-point locks series 46445 extension boltextension boltfor Multitop item 1.06449.11.0	1 06415 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57019, 57020, 57024, 57033, 57055, 57215, 57217, 57255, 57259, 57265, 57296, 57831, 57837, 57851, 57857	0,020	12	**1 06086 02 0**











Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Nylon push-button for electric locks with hold-open device (except series 14020 and 14021)		0,020	12	1 06110 15 0
	• Set of chrome-plated brass key guides	17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,038	5	1 06123 00 1
	• Set of nylon key guides	17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,035	5	1 06123 03 0
	• Set of nylon faceplate spacers (8 mm.) for Alpha and Esedra Doors Shops profiles • Fitting both mid-rail horizontal locks and narrow frame upright locks		0,010	25	1 06141 52 0
	• Set of nylon faceplate spacers (2 mm.)	44200, 44600	0,002	25	1 06141 53 0
	• Nylon roller insert for striker of locks series 44600		0,003	25	1 06141 55 0
	• Nylon roller insert for striker of locks series 57300	1 56357 10 0, 1 56357 90 0, 1 56358 90 0	0,004	12	1 06141 56 0
	• Nylon faceplate spacer (2.5 mm.) for mid-rail locks with 16 and 20 mm. faceplate		0,011	25	1 06141 57 0
	• Nylon faceplate spacer (5 mm.) for locks with 16 and 20 mm. faceplate		0,016	25	1 06141 63 0
	• Set of nylon faceplate spacers (5 mm.) for locks and upright locks		0,003	25	1 06141 65 0







Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Nylon faceplate spacer (3 mm.) for locks with 16 and 20 mm. faceplate		0,010	25	1 06141 66 0
	• Nylon faceplate spacer (5 mm.) for locks with 16 and 20 mm. faceplate		0,010	25	1 06141 67 0
	• Set of nylon faceplate spacers (3 mm.)	16200, 17000, 19200, 46200, 49200, 56357, 57000	0,005	25	1 06141 68 0
	• Set of nylon faceplate spacers (2 mm.)	16200, 17000, 19200, 46200, 49200, 56357, 57000	0,001	25	1 06141 69 0
	• Nylon roller insert	1 06463 06 0, 1 06463 07 0, 1 06463 16 0, 1 06463 17 0, 1 06463 24 0, 1 06463 34 0, 1 06465 06 0, 1 06465 07 0, 1 06465 08 0, 1 06465 09 0, 1 06465 10 0, 1 06465 24 0	0,004	12	1 06141 70 0
	• Nylon roller insert	1 06463 05 0, 1 06463 08 0, 1 06463 09 0, 1 06463 15 0, 1 06463 18 0, 1 06463 19 0, 1 06463 21 0, 1 06463 22 0, 1 06463 23 0, 1 06463 31 0, 1 06463 32 0, 1 06463 33 0, 1 06465 02 0, 1 06465 03 0, 1 06465 05 0, 1 06465 21 0, 1 06465 22 0, 1 06465 23 0	0,003	12	1 06141 71 0
	• Nylon cover for DOUBLE-LEAF Ekip 50 door profil	1 06463 05 0, 1 06463 15 0, 1 06465 05 0	0,010	12	1 06141 74 0










Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Nylon roller insert	1 06141 40 0, 1 06141 41 0, 1 06141 42 0, 1 06141 43 0, 1 06141 44 0, 1 06141 46 0	0,002	12	**1 06141 75 0**
	• Nylon roller insert	1 06285 30 0, 1 06285 32 0, 1 06285 34 0, 1 06285 36 0, 1 06285 38 0, 1 06285 40 0, 1 06285 42 0, 1 06285 44 0	0,002	12	**1 06141 76 0**
	• Striker spacer (1,5 mm.)	1 06285 36 0, 1 06463 04 0, 1 06463 14 0, 1 06465 04 0, 1 06465 08 0, 1 06465 14 0	0,005	25	**1 06141 77 0**
	• Nylon faceplate spacer (3 mm.)	16200, 18200, 46200, 48200	0,020	12	**1 06141 78 0**
	• Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height from 7.5 to 10 mm)	1 06141 40 0, 1 06285 36 0, 1 06463 04 0, 1 06463 14 0, 1 06463 24 0, 1 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 04 0, 1 06465 24 0, 1 06465 25 0, 1 06465 34 0, 1 06465 35 0, 1 06465 44 0	0,019	25	**1 06141 79 0**
	• Upper striker for extension bolt • Black nylon	1 07089 52 0	0,022	25	**1 06141 80 0**









Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Nylon roller insert	1 06278 06 0, 1 06278 28 0	0,002	25	**1 06141 82 0**
	• Nylon faceplate spacer (3 mm.)	1 05020 00 0	0,012	12	**1 06141 84 0**
	• Nylon faceplate spacer (3 mm.)	1 05021 00 1, 1 05021 00 2	0,025	25	**1 06141 85 0**
	• Nylon roller insert	1 06232 05 0, 1 06461 25 0, 1 06461 30 0, 1 06461 35 0, 1 06461 40 0, 1 06461 45 0	0,002	12	**1 06141 86 0**
	• Set of additional spacers for cylinder protection roses for profiles wider than 65-87 mm. • Spacers from 2 mm. (11 pieces) • Screws M5 x 110 mm. (2 pieces)	1 06460 05 0	0,145	1	**1 06141 87 0**
	• Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height from 3 to 7.5 mm)	1 06463 24 0, 1 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 24 0, 1 06465 25 0, 1 06465 34 0, 1 06465 35 0	0,019	25	**1 06141 89 0**
	• Spacer + long lip for electric strikes		0,031	12	**1 06141 95 0**






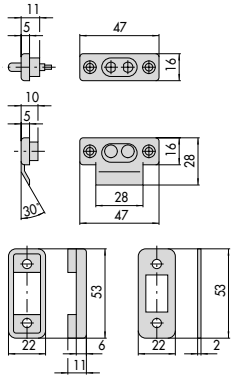

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Faceplate long lip for electric strikes		0,047	12	**1 06141 96 0**
	• Noise proof bushes for bolts diameter 8,5 mm. (pc.2) diameter 10 mm. (pc.1)	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,004	25	**1 06147 00 0**
	• Noise proof bushes for boltsdiameter 10 mm. (1 piece)	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,001	100	**1 06147 01 0**
	• Zinc-plated steel flat strike	44650, 44660, 44665, 44680	0,096	25	**1 06157 00 0**
	• Zinc-plated steel flat strike	44670	0,100	25	**1 06167 00 0**
	• Nylon guide rod	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06443 00 0, 1 06443 21 0, 1 06443 31 0, 1 06443 41 0 1 06451 00 0, 1 06451 10 0, 1 06453 05 0, 1 07088 00 0	0,003	25	**1 06224 00 0**
	• Zinc plated steel flat striker • Includes a pair of spacers item 1.06141.65.0 (roller insert item. 1.06141.86.0)	44600, 46000	0,065	25	**1 06232 05 0**
	• Zinc plated steel flat striker • Includes a pair of spacers item 1.06141.65.0	1 06443 00 0, 1 06443 05 0, 1 06453 05 0	0,069	25	**1 06232 06 0**







Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc plated steel striker	46215, 46217, 46225, 46227, 46325, 46327	0,086	25	**1 06232 20 0**
	• Stainless steel faceplate (25 mm.)	46215, 46217, 46225, 46227	0,141	12	**1 06233 00 0**
	• Stainless steel faceplate (25 mm.)	16215, 16217, 16225, 16227	0,160	12	**1 06233 01 0**
	• Stainless steel faceplate (25 mm.)	46230, 46250, 46252	0,130	12	**1 06233 02 0**
	• Stainless steel faceplate (25 mm.)	46200, 46210, 46212, 46220, 46222, 46240, 46260, 46265	0,144	12	**1 06233 03 0**
	• Set of threaded bushes (M5) in nylon	1 07088 00 0, 57317, 57325, 57335	0,010	12	**1 06290 00 0**
	• Set of threaded bushes (M8) in metal	1 06441 20 0, 16325, 17358, 56358, 56378, 57358, 57378	0,050	12	**1 06290 05 0**
	• Set of threaded bushes (M8) in metal	19225, 49225, 49228, 49250	0,050	12	**1 06290 06 0**
	• Pair of threaded steel bushings (M8), anti-unscrewing	56016, 57016, 57035, 57226, 57318, 57336	0,025	12	**1 06290 10 0**
	• Zinc plated steel saw resistant rod diameter 8 mm. • Lateral push resistance KN 8	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,036	12	**1 06291 01 0**

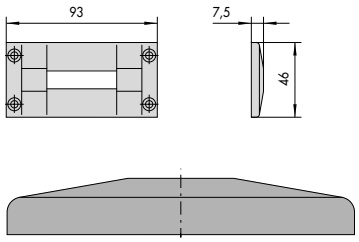

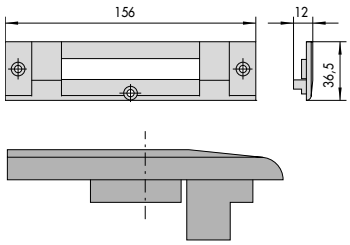

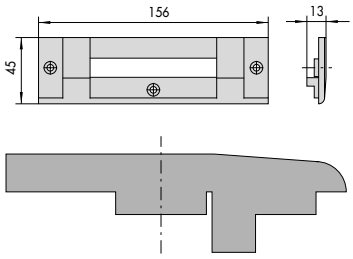

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc plated hardened steel single-piece rod diameter 8 mm. • Lateral push resistance KN 14	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,038	12	**1 06291 06 0**
	• Zinc-plated joining pin for bolt extension rods	1 06415 00 0, 1 06416 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0 1 07088 04 0	0,016	12	**1 06291 20 0**
	• Stainless steel flat striker 25 x 3 mm.	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46212, 46220, 46222, 46240, 46260, 46265, 46420, 46520	0,057	12	**1 06459 01 0**
	• Stainless steel flat striker 25 x 1.5 mm.	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46212, 46220, 46222, 46240, 46260, 46265, 46420, 46520	0,034	12	**1 06459 02 0**
	• Sinterised stainless steel cylinder protection rose	16000, 46000	0,125	1	**1 06460 00 0**
	• Protective rose for cylinders RS3, ASTRAL (with long key, CL special execution) and ASIX in chrome-plated carbonitrided steel complete with: 2 mm spacers (19pcs), 1 mm spacer (2pcs) screws M5 x 73 mm. inside escutcheon • ON REQUEST: external ring item 1.06473.60.0 in polished, chrome-plated satin-finished steel	19000, 49000	0,485	1	**1 06460 05 0**

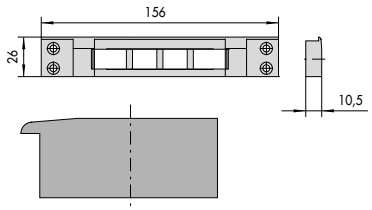
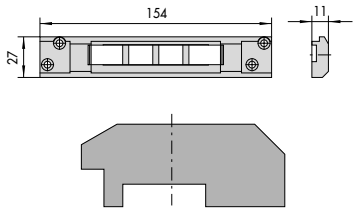
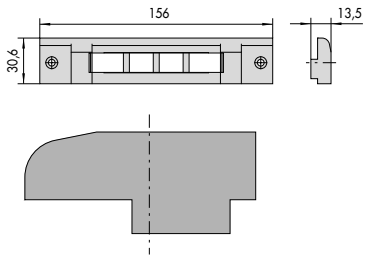



Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Stainless steel flat striker 25 x 3 mm.	46215, 46217, 46225, 46227, 46425, 46435, 46445, 46525, 46625, 46725	0,082	12	1 06461 01 0
	• Stainless steel flat striker 25 x 1.5 mm.	46215, 46217, 46225, 46227, 46425, 46435, 46445, 46525, 46625, 46725	0,050	12	1 06461 02 0
	• Stainless steel flat striker 24 x 1.5 mm.	19000, 49000	0,053	12	1 06461 07 0
	• Stainless steel flat striker 25 x 3 mm.	46230, 46250, 46252, 46450, 46550, 46650, 46750	0,085	12	1 06461 11 0
	• Stainless steel flat striker 24 x 1,5 mm.	19000, 49000	0,034	12	1 06461 12 0
	• Stainless steel flat striker 36x2 mm for FORSTER "UNICO" profile for Multitop locks with latch+deadb and roller+deadb	19000, 49000	0,080	12	1 06461 17 0
	• Stainless steel flat striker 25 x 3 mm.	57320, 57325, 57360, 57365	0,075	12	1 06461 20 0
	• Stainless steel flat striker 25 x 3 mm.	56357, 57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,067	12	1 06461 21 0
	• Stainless steel flat striker 36 x 2 mm.	19000, 49000	0,046	12	1 06461 22 0



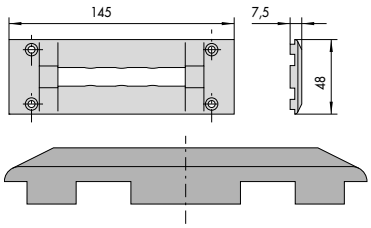



Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Stainless steel "U" striker 24x6 mm for locks with latch/roller and swing bolt (roller insert item 1.06141.86.0)		0,098	12	**1 06461 25 0**
	• Stainless steel "U" striker 24x6 mm for locks with swing bolt only		0,065	12	**1 06461 26 0**
	• Stainless steel flat striker 24 x 3 mm. • For roller locks use nylon insert item 1.06141.86.0	19000, 49000	0,093	12	**1 06461 30 0**
	• Stainless steel flat striker 24 x 3 mm.	19000, 49000	0,065	12	**1 06461 34 0**
	• Stainless steel U-shaped striker 24 x 6 mm. • For roller locks use nylon insert item 1.06141.86.0	19000, 49000	0,098	12	**1 06461 35 0**
	• Stainless steel U-shaped striker 24 x 6 mm.	19000, 49000	0,065	12	**1 06461 39 0**
	• Stainless steel flat striker 24 x 3 mm. with deadbolt protection case • For roller locks use nylon insert item 1.06141.86.0	19000, 49000	0,182	12	**1 06461 40 0**
	• Stainless steel U-shaped striker 24 x 6 mm. • For roller locks use nylon insert item 1.06141.86.0	19000, 49000	0,182	12	**1 06461 45 0**







Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Stainless steel U-shaped striker 25 x 3 mm with nylon slide	16205, 16207, 16215, 16217, 16225, 16227, 16425, 16435, 16445, 16525, 16625, 16725	0,077	12	**1 06462 01 0**
	• Stainless steel U-shaped striker 25 x 3 mm.	17352, 17357, 57352, 57357, 57370, 57375	0,058	12	**1 06462 20 0**
	• Brass oval inside escutcheon for European profile cylinders • Finish: Polished lacquered brass		0,100	12	**1 06473 20 0**
	• Finish: Nickel-plated, satin-finished and chrome brass		0,100	12	**1 06473 20 0 B1**
	• Brass oval inside escutcheon for European profile cylinders with adjustable shaft • Finish: Polished lacquered brass		0,100	12	**1 06473 30 0**
	• Finish: Nickel-plated, satin-finished and chrome brass		0,100	12	**1 06473 30 0 B1**
	• Polished, chrome-plated satin-finished external ring	1 06460 05 0	0,025	12	**1 06473 60 0**
	• Set of nylon contacts for electric locks complete with spacers: 2 mm. (6 pieces) 5 mm. (1 piece)		0,047	6	**1 06511 00 0**
	• Set of coils • 12 V ac CE	14010, 14011, 14012, 14017	0,030	6	**1 07013 00 0**


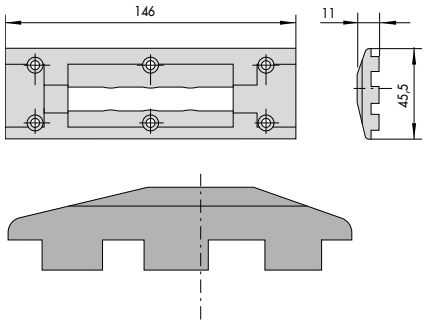



Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc plated steel flat striker	44210	0,035	25	1 07027 00 0
	• Zinc plated steel flat striker	45010, 45110	0,035	25	1 07028 00 0
	• Brass flat striker	45100	0,035	25	1 07028 10 0
	• Set of coils • 12 V ac CE	14020, 14021	0,027	6	1 07047 00 0
	• Set of coils • 12 V ac CE	14350, 14351, 14352, 14450, 14451, 14452, 14460, 14461, 14462, 14510, 14511, 14512, 15500, 16000, 17500, 18000	0,035	6	1 07086 00 0
	• Set of coils • 24 V ac CE	14350, 14351, 14352, 14450, 14451, 14452, 14460, 14461, 14462, 14510, 14511, 14512, 15500, 16000, 17500, 18000	0,035	6	1 07086 01 0
	• Set of coils • 12 V ac CE	17352, 17353, 17357, 17358	0,035	6	1 07128 00 0

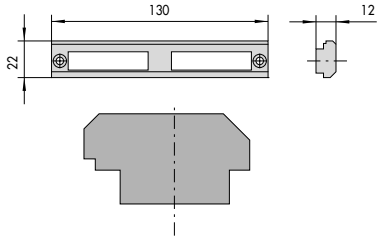
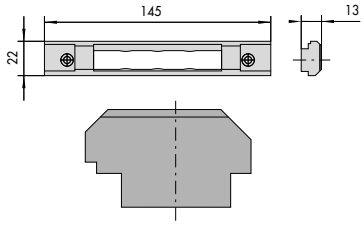



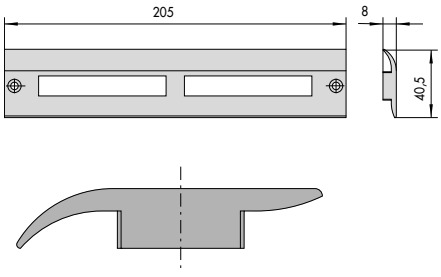
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		14010, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44210, 44227, 44240, 44245, 44350, 44450	0,016	25	**1 06062 00 0**
		14010, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44210, 44227, 44240, 44245, 44350, 44450	0,019	25	**1 06072 00 0**
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 46200, 46210, 46220, 46420, 57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,024	25	**1 06141 35 0**
		57320, 57325, 57360, 57365	0,030	25	**1 06141 36 0**
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 46200, 46210, 46220, 57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,034	25	**1 06141 37 0**
		57320, 57325, 57360, 57365	0,030	25	**1 06141 38 0**


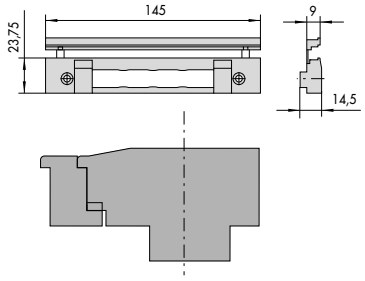
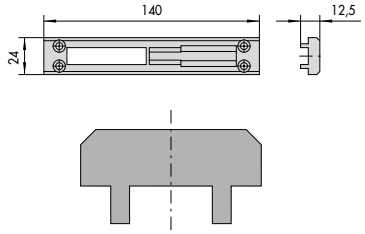

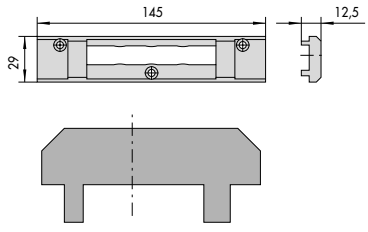
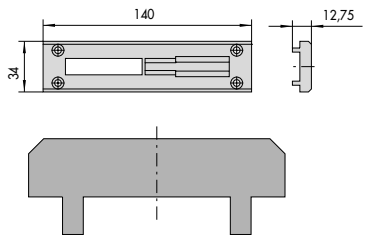
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• For roller locks item 57320 - 57325 - 57360 - 57365 use nylon insert item 1.06141.75.0	17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,035	25	**1 06141 40 0**
		17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,025	25	**1 06141 42 0**
		17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,029	25	**1 06141 44 0**
		44220, 44221, 44225, 44226	0,014	25	**1 06277 01 0**
		14460, 14461, 44120, 44121, 44360, 44361, 44460, 44461	0,018	25	**1 06277 02 0**
		44130, 44230, 44235, 44236, 44237, 44238, 44370, 44371, 44470, 44471	0,030	25	**1 06277 03 0**







Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		44220, 44221, 44225, 44226	0,030	25	1 06277 10 0
		14460, 14461, 44120, 44121, 44360, 44361, 44460, 44461	0,026	25	1 06277 11 0
		14460, 44120, 44360, 44460	0,021	25	1 06277 14 0
		44221, 44226	0,015	25	1 06277 28 0
		14461, 44121, 44361, 44461	0,018	25	1 06277 32 0
		14461, 44121, 44361, 44461	0,030	25	1 06277 41 0


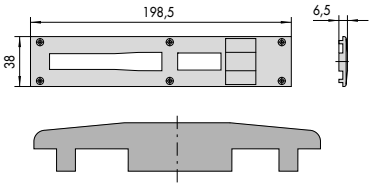
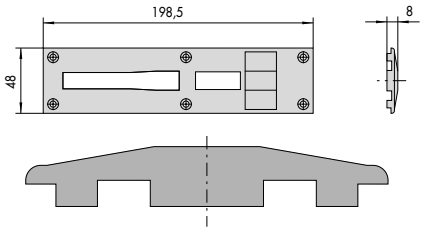
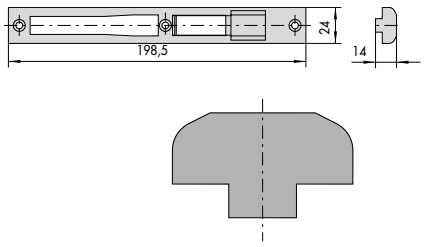
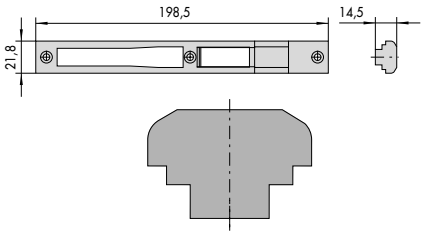
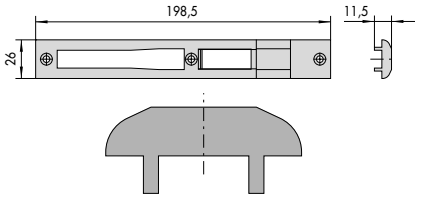
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		14461, 44121, 44361, 44461	0,030	25	1 06277 44 0
		44219, 44221, 44224, 44226	0,012	25	1 06277 76 0
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,016	25	1 06277 77 0
		44131, 44231, 44236, 44238, 44371, 44471	0,016	25	1 06277 78 0
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,030	25	1 06277 80 0
		44219, 44220, 44221, 44224, 44225, 44226	0,007	25	1 06277 88 0


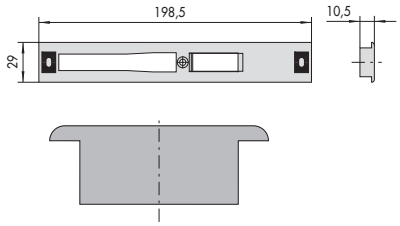
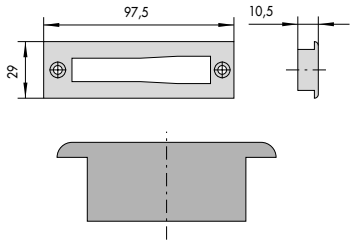
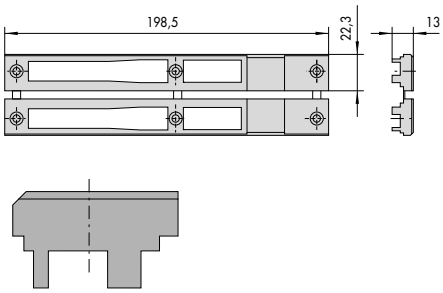
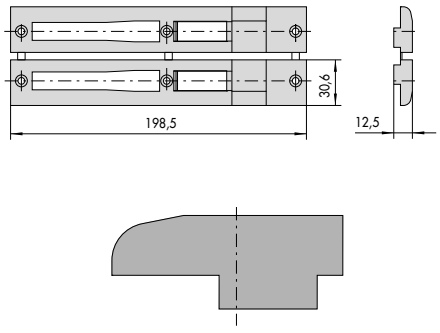
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		14460, 14461, 14462, 44120, 44121, 44360, 44361, 44362, 44460, 44461, 44462	0,013	25	1 **06277 89 0**
		14461, 44121, 44361, 44461	0,030	25	1 **06277 92 0**
		14460, 14461, 14462, 44120, 44121, 44360, 44361, 44362, 44460, 44461, 44462	0,030	25	1 **06277 95 0**
		44131, 44231, 44236, 44238, 44371, 44471	0,048	12	1 **06277 98 0**
		44221, 44226	0,023	25	1 **06277 99 0**


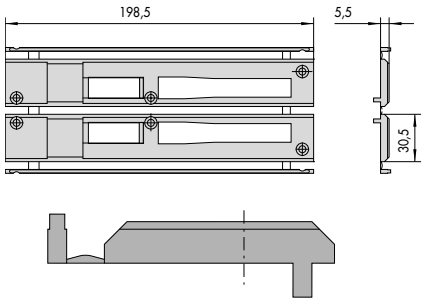


Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		44219, 44220, 44221, 44224, 44225, 44226	0,019	25	**1 06278 01 0**
		14460, 14461, 14462, 44120, 44121, 44360, 44361, 44362, 44460, 44461, 44462	0,022	25	**1 06278 02 0**
		14011, 14021, 14351, 14451, 14461, 14511, 44111, 44116, 44121, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44361, 44451, 44461	0,020	25	**1 06278 04 0**
		44131, 44231, 44236, 44238, 44371, 44471	0,017	25	**1 06278 05 0**
	• For roller locks item 44230 - 44235 - 44370 - 44470 use nylon insert item 1.06141.82.0	44220, 44225, 44230, 44235, 44360, 44370, 44460, 44470	0,020	25	**1 06278 06 0**
	• For lock 1.5C611.45.0.00.EN on round ABITHAL profile		0,026	12	**1 06278 07 0**

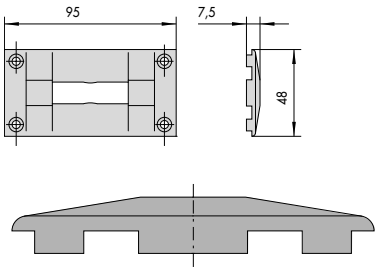



Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers.	Spec.
		44220, 44225	0,035	25	1	06278	16	0	
		14460, 44120, 44360, 44460	0,033	25	1	06278	17	0	
		44131, 44231, 44236, 44238, 44371, 44471	0,025	25	1	06278	19	0	
		44221, 44226	0,025	25	1	06278	20	0	
		14461, 44121, 44361, 44461	0,026	25	1	06278	21	0	
		44131, 44231, 44236, 44238, 44371, 44471	0,035	25	1	06278	22	0	






Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		44219, 44221, 44224, 44226	0,017	25	**1 06278 26 0**
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,022	25	**1 06278 27 0**
	• Use nylon roller insert item 1.06141.82.0	44131, 44231, 44236, 44238, 44371, 44471	0,030	25	**1 06278 28 0**
		44219, 44221, 44224, 44226	0,019	25	**1 06278 64 0**
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,021	25	**1 06278 65 0**
		44131, 44231, 44236, 44238, 44371, 44471	0,019	25	**1 06278 66 0**




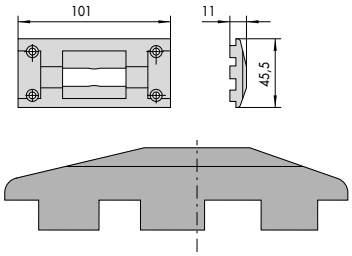

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,030	25	**1 06278 80 0**
		16205, 16215, 16225, 16425, 16625, 46215, 46225, 46425, 46435, 46445, 46625	0,025	25	**1 06285 25 0**
		16205, 16215, 16225, 16425, 16625, 46215, 46225, 46425, 46435, 46445, 46625	0,035	12	**1 06285 27 0**
	• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,026	12	**1 06285 30 0**
	• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,035	12	**1 06285 32 0**
	• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,020	12	**1 06285 34 0**



Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,030	25	**1 06285 35 0**
	• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,030	12	**1 06285 36 0**
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,015	25	**1 06285 37 0**
	• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,048	6	**1 06285 38 0**
	• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,072	6	**1 06285 42 0**

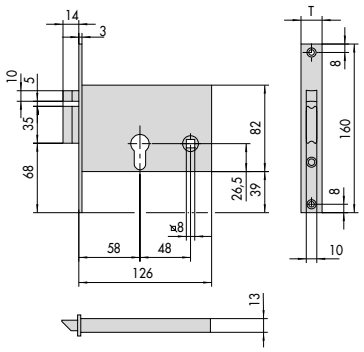
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,030	12	**1 06285 43 0**
	• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,060	6	**1 06285 44 0**
		14010, 14011, 14012, 14017, 14020, 14021, 14350, 14351, 14450, 14451, 14510, 14511, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44155, 44156, 44160, 44161, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,014	25	**1 06287 02 0**
		14010, 14011, 14012, 14017, 14020, 14021, 14350, 14351, 14450, 14451, 14510, 14511, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44155, 44156, 44160, 44161, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,030	25	**1 06287 11 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		14011, 14012, 14017, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44227, 44240, 44245, 44350, 44450	0,016	25	**1 06287 14 0**
		14011, 14012, 14017, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44227, 44240, 44245, 44350, 44450	0,024	25	**1 06287 17 0**
		14011, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44451	0,017	25	**1 06287 21 0**
		14010, 14011, 14012, 14017, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,015	25	**1 06287 26 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM
		14010, 14011, 14012, 14017, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,014	25	1 06287 27 0
		14011, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44451	0,015	25	1 06287 29 0
		14011, 14021, 14351, 14352, 14451, 14452, 14511, 14512, 44111, 44116, 44141, 44146, 44151, 44152, 44156, 44157, 44161, 44162, 44228, 44241, 44246, 44351, 44451	0,030	25	1 06287 50 0
	• For roller locks item item 44670 use nylon insert item 1.06141.55.0	44620, 44621, 44625, 44626, 44630, 44635, 44640	0,022	25	1 06287 64 0
		14011, 14021, 14351, 14352, 14451, 14452, 14511, 14512, 44111, 44116, 44141, 44146, 44151, 44152, 44156, 44157, 44161, 44162, 44228, 44241, 44246, 44351, 44451	0,016	25	1 06287 65 0

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		14011, 14021, 14351, 14352, 14451, 14452, 14511, 14512, 44111, 44116, 44141, 44146, 44151, 44152, 44156, 44157, 44161, 44162, 44228, 44241, 44246, 44351, 44451	0,012	25	**1 06287 77 0**
		44620, 44621, 44625, 44626, 44640	0,012	25	**1 06287 88 0**
		14010, 14011, 14012, 14017, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,011	25	**1 06287 89 0**
		14011, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44451	0,023	25	**1 06287 92 0**
		44620, 44621, 44625, 44626, 44640	0,022	25	**1 06287 94 0**

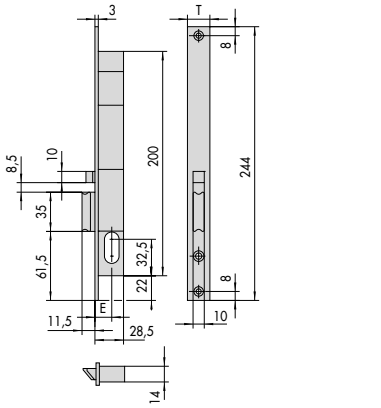
Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers.	Spec.
		14010, 14011, 14012, 14017, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,020	25	1 06287 95 0				
		14011, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44228, 44241, 44246, 44351, 44451	0,017	25	1 06287 97 0				



	T
1.14010.60	16
1.14011.60	20
1.14012.60	16

	T
1.14017.60	16

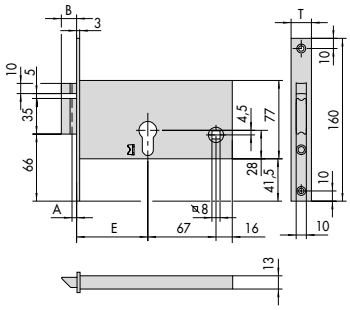
1



	T	E
1.14020.15	16	15
1.14020.18	16	18

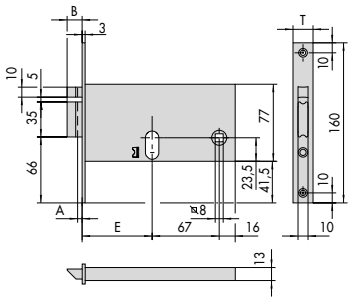
	T	E
1.14021.15	20	15
1.14021.18	20	18

2



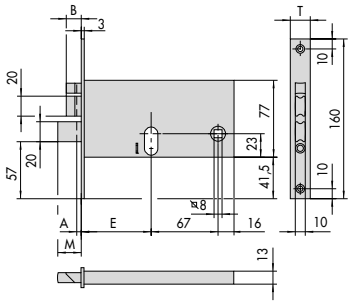
	E	T	B	A
1.14350.70	70	16	10,5	-
1.14350.80	80	16	10,5	-
1.14350.90	90	16	10,5	-
1.14351.70	70	20	10,5	-
1.14351.80	80	20	10,5	-
1.14351.90	90	20	10,5	-
1.14352.70	70	14,7	15	4,5
1.14352.80	80	14,7	15	4,5

3



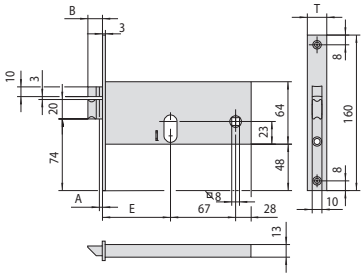
	E	T	B	A
1.14450.70	70	16	10,5	-
1.14450.80	80	16	10,5	-
1.14450.90	90	16	10,5	-
1.14451.70	70	20	10,5	-
1.14451.80	80	20	10,5	-
1.14451.90	90	20	10,5	-
1.14452.70	70	14,7	15	4,5
1.14452.80	80	14,7	15	4,5
1.14452.90	90	14,7	15	4,5

4



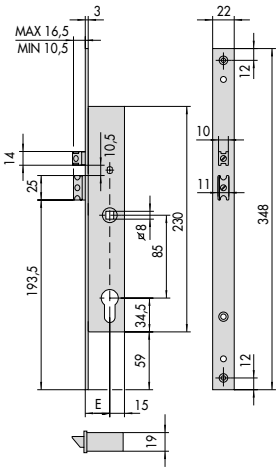
	E	T	B	A	M
1.14460.70	70	16	10,5	-	19
1.14460.80	80	16	10,5	-	19
1.14460.90	90	16	10,5	-	19
1.14461.70	70	20	10,5	-	19
1.14461.80	80	20	10,5	-	19
1.14461.90	90	20	10,5	-	19
1.14462.70	70	14,7	15	4,5	23,5
1.14462.80	80	14,7	15	4,5	23,5
1.14462.90	90	14,7	15	4,5	23,5

5



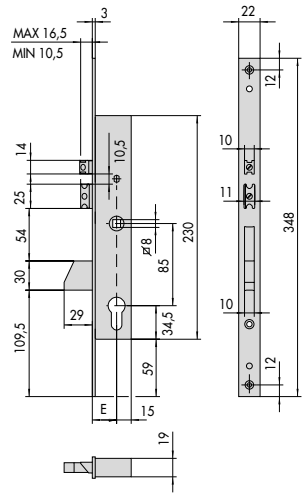
	E	T	B	A
1.14510.70	70	16	10,5	-
1.14510.80	80	16	10,5	-
1.14510.90	90	16	10,5	-
1.14511.70	70	20	10,5	-
1.14511.80	80	20	10,5	-
1.14511.90	90	20	10,5	-
1.14512.70	70	14,7	15	4,5
1.14512.80	80	14,7	15	4,5
1.14512.90	90	14,7	15	4,5

6



16205
E = 25 - 30 - 35

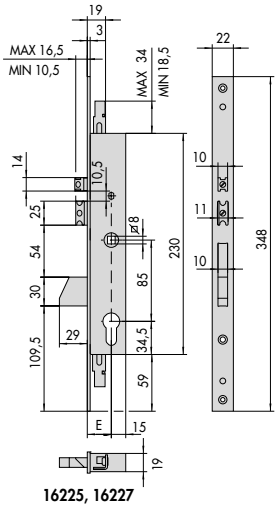
7



16215, 16216, 16217

E = 25 - 30 - 35

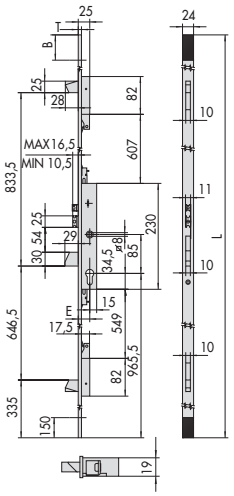
8



16225, 16227

E = 25 - 30 - 35

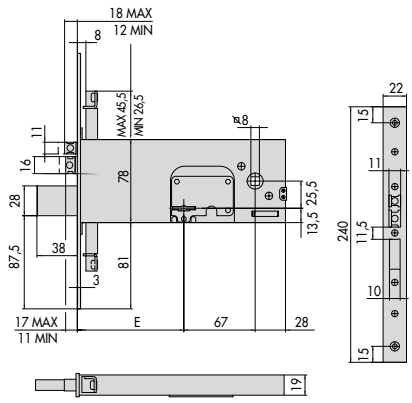
9



	L	T	B
16425	2600	7	650
16600	1920	7	
16625	2300	7	350
16525	2600	3	650
16700	1920	3	
16725	2300	3	350

E = 25 - 30 - 35

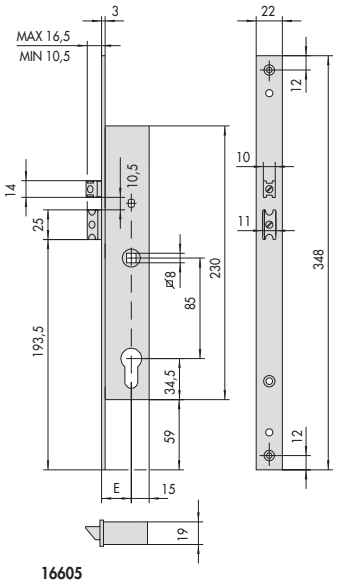
10



17357

E = 90 - 100

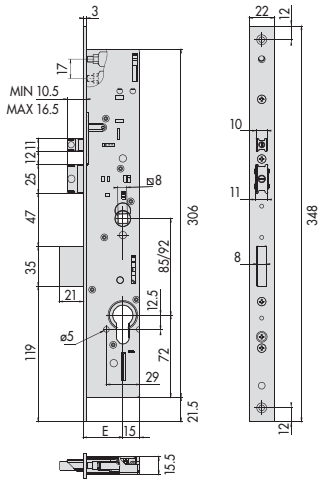
13



16605

E = 25 - 30 - 35

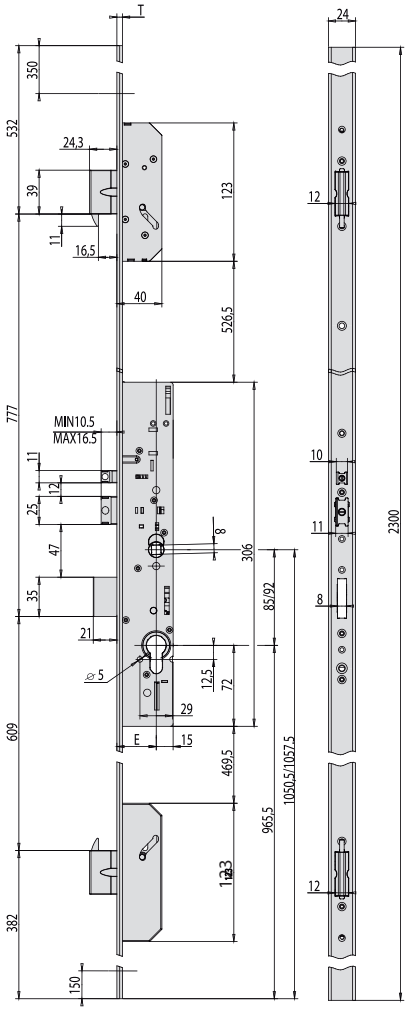
11



19225

E = 25-30-35-40

14

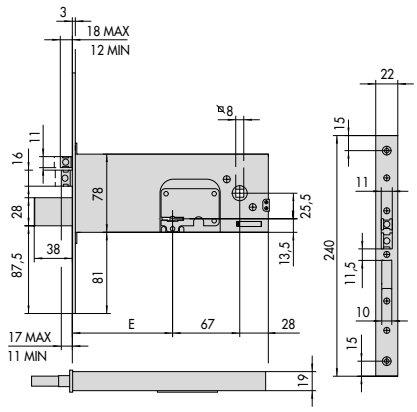


* ADJUSTEMENT

E = 25 - 30 - 35 - 40

T	T	T
19526 3	**19436 5**	**19426 7**
19726 3	**19626 5**	
19728 3	**19636 5**	
	19638 5	

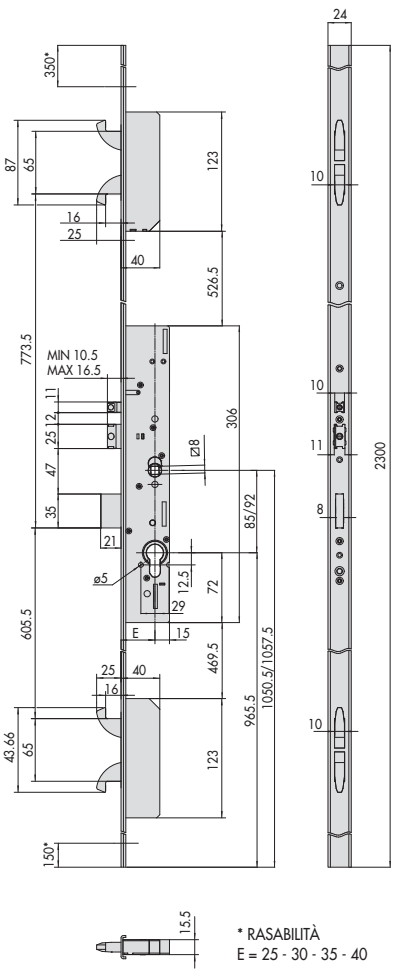
15



17352

E = 90 - 100

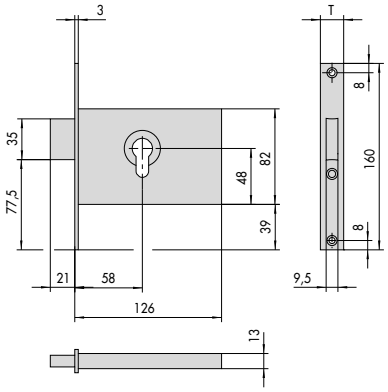
12





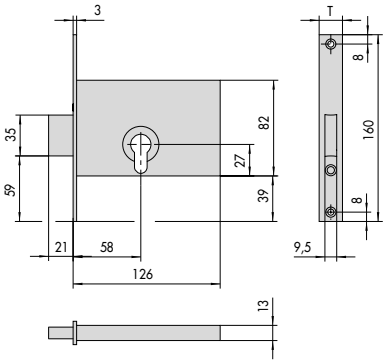
19656 19746

16



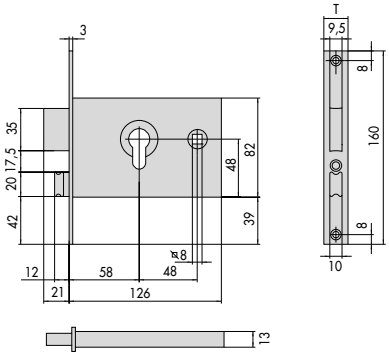
	T
1.44110.60	16
1.44111.60	40

17



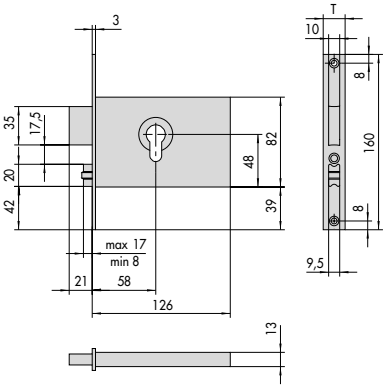
	T
1.44115.60	16
1.44116.60	20

18




	T
1.44120.60	16
1.44121.60	20

19



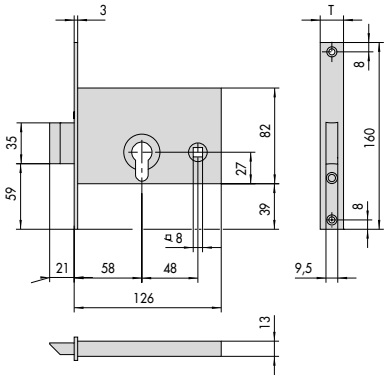
	T
1.44130.60	16
1.44131.60	20

20



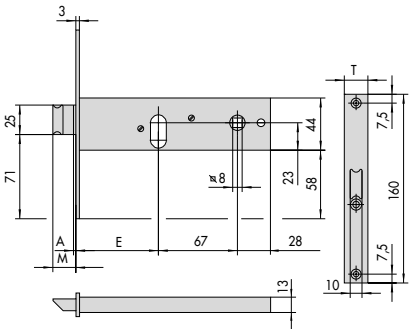
	T
1.44140.60	16
1.44141.60	20

21



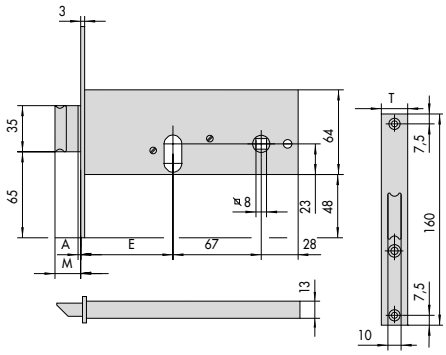
	T
1.44145.60	16
1.44146.60	20

22



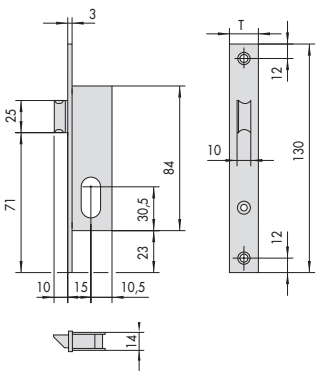
	E	T	M	A
1.44150.60	60	16	19	-
1.44150.70	70	16	28	-
1.44150.80	80	16	28	-
1.44150.90	90	16	28	-
1.44151.60	60	20	19	-
1.44151.70	70	20	28	-
1.44151.80	80	20	28	-
1.44151.90	90	20	28	-
1.44152.70	70	14,7	32,5	4,5
1.44152.80	80	14,7	32,5	4,5
1.44152.90	90	14,7	32,5	4,5

23



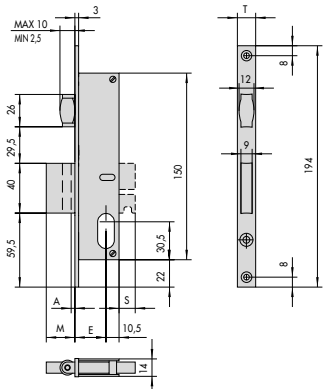
	E	T	M	A
1.44155.60	60	16	19	-
1.44155.70	70	16	28	-
1.44155.80	80	16	28	-
1.44155.90	90	16	28	-
1.44156.60	60	20	19	-
1.44156.70	70	20	28	-
1.44156.80	80	20	28	-
1.44156.90	90	20	28	-
1.44157.70	70	14,7	32,5	4,5

24



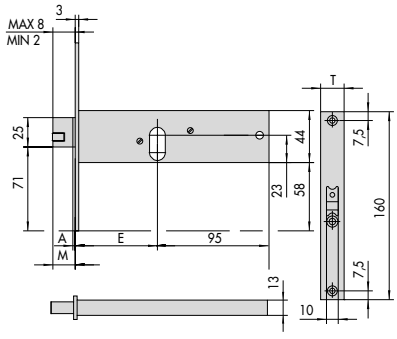
	T
1.44217.15	16
1.44218.15	20

27



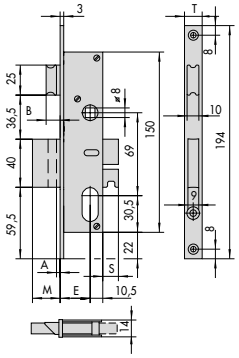
	E	T	M	A	B	S		E	T	M	A	B	S
1.44230.15	15	16	11	2	10	-	1.44235.15	15	16	18	2	10	13
1.44230.18	18	16	11	2	10	-	1.44235.18	18	16	18	2	10	13
1.44230.25	25	16	11	2	10	-	1.44235.25	25	16	18	2	10	13
1.44230.30	30	16	11	2	10	-	1.44235.30	30	16	18	2	10	13
1.44230.35	35	16	11	2	10	-	1.44235.35	35	16	18	2	10	13
1.44231.15	15	20	11	2	10	-	1.44236.15	15	20	18	2	10	13
1.44231.18	18	20	11	2	10	-	1.44236.18	18	20	18	2	10	13
1.44231.25	25	20	11	2	10	-	1.44236.25	25	20	18	2	10	13
1.44231.30	30	20	11	2	10	-	1.44236.30	30	20	18	2	10	13
1.44231.35	35	20	11	2	10	-	1.44236.35	35	20	18	2	10	13

30




	E	T	M	A
1.44160.60	60	16	19	-
1.44160.70	70	16	28	-
1.44160.80	80	16	28	-
1.44160.90	90	16	28	-
1.44161.60	60	20	19	-
1.44161.70	70	20	28	-
1.44161.80	80	20	28	-
1.44161.90	90	20	28	-

25



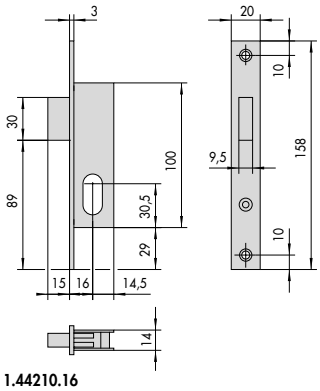
	E	T	M	A	B	S		E	T	M	A	B	S
1.44219.25	25	14,7	16	6,5	14,5	-	1.44224.25	25	14,7	23	6,5	14,5	13
1.44219.30	30	14,7	16	6,5	14,5	-	1.44224.30	30	14,7	23	6,5	14,5	13
1.44220.15	15	16	11	2	10	-	1.44225.15	15	16	18	2	10	13
1.44220.18	18	16	11	2	10	-	1.44225.18	18	16	18	2	10	13
1.44220.25	25	16	11	2	10	-	1.44225.25	25	16	18	2	10	13
1.44220.30	30	16	11	2	10	-	1.44225.30	30	16	18	2	10	13
1.44220.35	35	16	11	2	10	-	1.44225.35	35	16	18	2	10	13
1.44221.15	15	20	11	2	10	-	1.44226.15	15	20	18	2	10	13
1.44221.18	18	20	11	2	10	-	1.44226.18	18	20	18	2	10	13
1.44221.25	25	20	11	2	10	-	1.44226.25	25	20	18	2	10	13
1.44221.30	30	20	11	2	10	-	1.44226.30	30	20	18	2	10	13
1.44221.35	35	20	11	2	10	-	1.44226.35	35	20	18	2	10	13

28



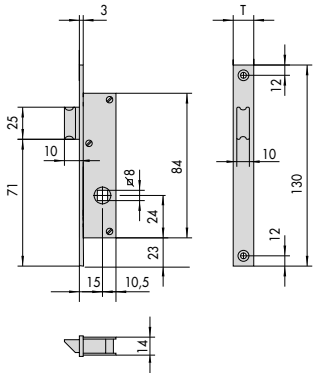
	T
1.44237.15	16
1.44238.15	20

31




1.44210.16

26



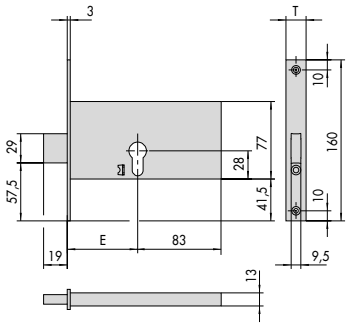
ARTICOLO	T
1.44227.15	16
1.44228.15	20

29



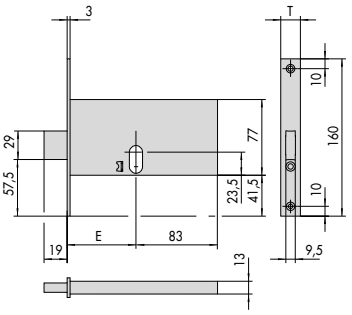
	E	T	M	A	B	S		E	T	M	A	B	S
1.44240.15	15	16	11	2	10	-	1.44245.15	15	16	18	2	10	13
1.44240.18	18	16	11	2	10	-	1.44245.18	18	16	18	2	10	13
1.44240.25	25	16	11	2	10	-	1.44245.25	25	16	18	2	10	13
1.44240.30	30	16	11	2	10	-	1.44245.30	30	16	18	2	10	13
1.44240.35	35	16	11	2	10	-	1.44245.35	35	16	18	2	10	13
1.44241.15	15	20	11	2	10	-	1.44246.15	15	20	18	2	10	13
1.44241.18	18	20	11	2	10	-	1.44246.18	18	20	18	2	10	13
1.44241.25	25	20	11	2	10	-	1.44246.25	25	20	18	2	10	13
1.44241.30	30	20	11	2	10	-	1.44246.30	30	20	18	2	10	13
1.44241.35	35	20	11	2	10	-	1.44246.35	35	20	18	2	10	13
1.44242.15	15	20	11	-	10	-							

32



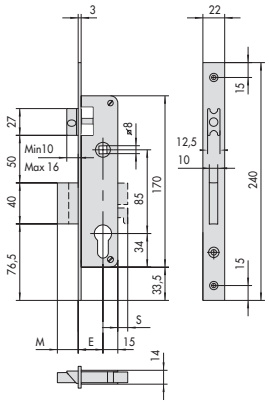
	E	T
1.44350.70	70	16
1.44351.70	70	20

33




	E	T
1.44450.70	70	16
1.44451.70	70	20

36




	E	M		E	M	S
1.44660.20	21	15	**1.44665.20**	21	20	8,5
1.44660.25	25	15	**1.44665.25**	25	20	8,5
1.44660.30	30	15	**1.44665.30**	30	20	8,5
1.44660.35	35	15	**1.44665.35**	35	20	8,5
1.44650.20	21					
1.44650.25	25					
1.44650.30	30					
1.44650.35	35					

39



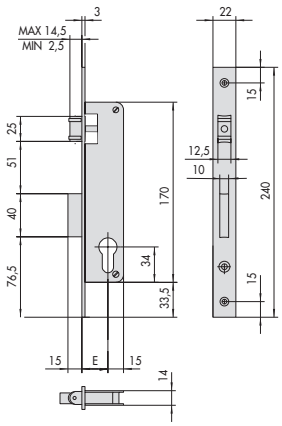
	E	T	M	A	B
1.44360.70	70	16	19	-	10,5
1.44360.80	80	16	19	-	10,5
1.44360.90	90	16	19	-	10,5
1.44361.70	70	20	19	-	10,5
1.44361.80	80	20	19	-	10,5
1.44361.90	90	20	19	-	10,5
1.44362.70	70	14,7	23,5	4,5	15
1.44362.80	80	14,7	23,5	4,5	15
1.44362.90	90	14,7	23,5	4,5	15

34



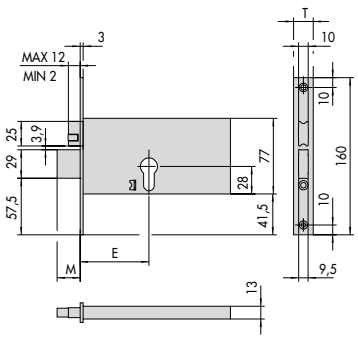
	E	T	M	A	B
1.44460.70	70	16	19	-	19
1.44460.80	80	16	19	-	19
1.44460.90	90	16	19	-	19
1.44461.70	70	20	19	-	10,5
1.44461.80	80	20	19	-	10,5
1.44461.90	90	20	19	-	10,5
1.44462.70	70	14,7	23,5	4,5	15
1.44462.80	80	14,7	23,5	4,5	15
1.44462.90	90	14,7	23,5	4,5	15

37



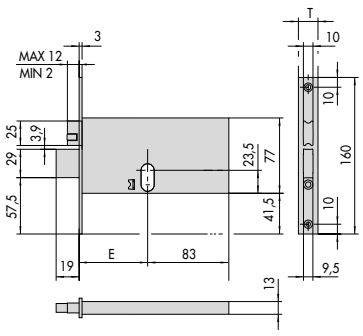
	E
1.44670.20	21
1.44670.25	25
1.44670.30	30
1.44670.35	35

40



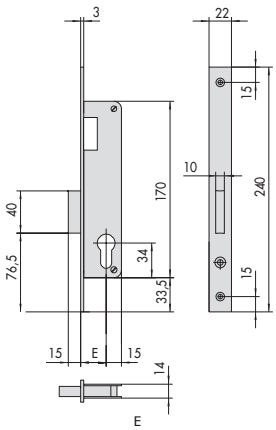
	E	T	M
1.44370.70	70	16	19
1.44370.80	80	16	19
1.44370.90	90	16	19
1.44371.70	70	20	19
1.44371.80	80	20	19
1.44371.90	90	20	19

35



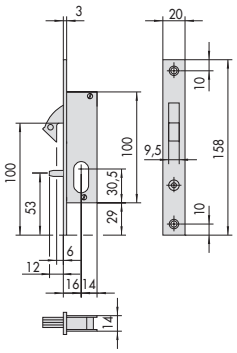
	E	T
1.44470.70	70	16
1.44470.80	80	16
1.44470.90	90	16
1.44471.70	70	20
1.44471.80	80	20
1.44471.90	90	20

38



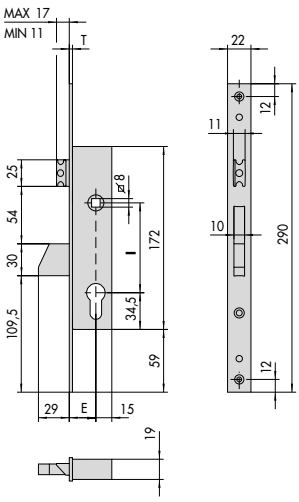
	E
1.44680.20	21
1.44680.25	25
1.44680.30	30
1.44680.35	35

41



45010, 45012, 45027

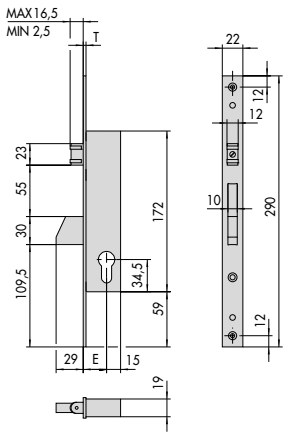
42



	I	T
46215	85	3
46217	85	3
46218	92	5
46219	92	3

E = 25 - 30 - 35

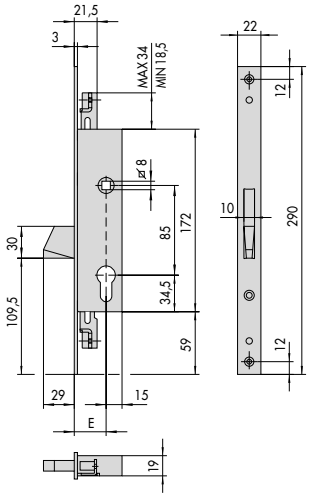
45



	T
46230	3
46233	5

E = 25 - 30 - 35

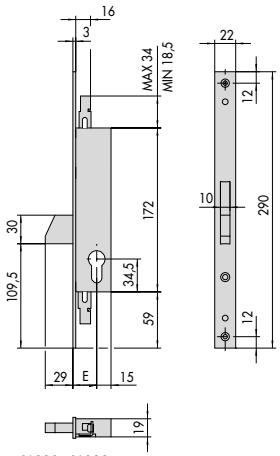
48



46200

E = 25 - 30 - 35

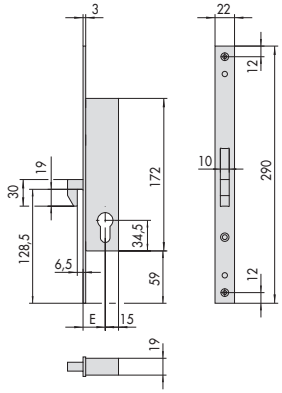
43



46220, 46222

E = 25 - 30 - 35

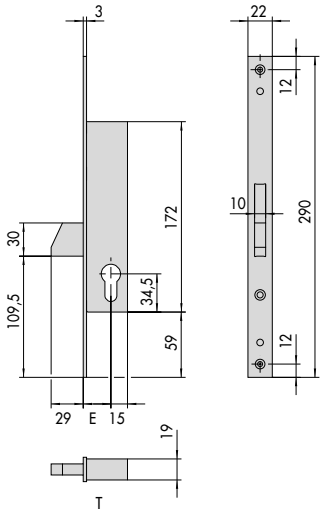
46



46240

E = 25 - 30 - 35

49

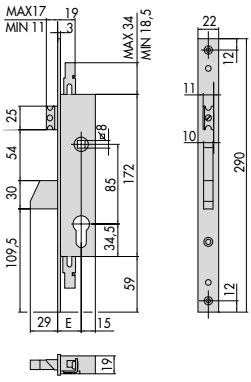


T

46210	3
46212	3
46213	5

E = 25 - 30 - 35

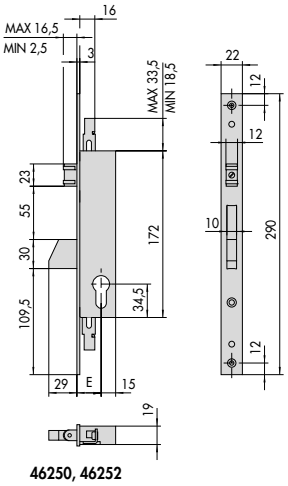
44



46225, 46227

E = 25 - 30 - 35

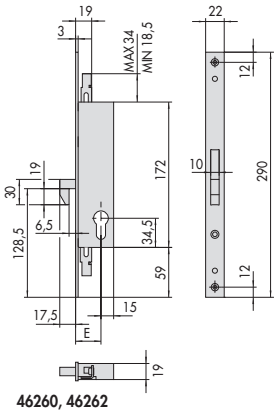
47



46250, 46252

E = 25 - 30 - 35

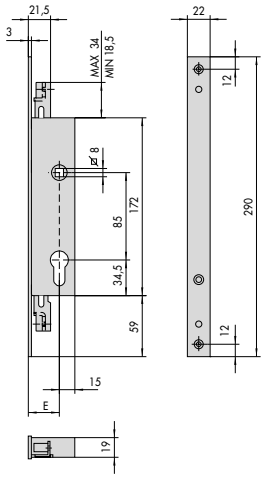
50



46260, 46262

E = 25 - 30 - 35

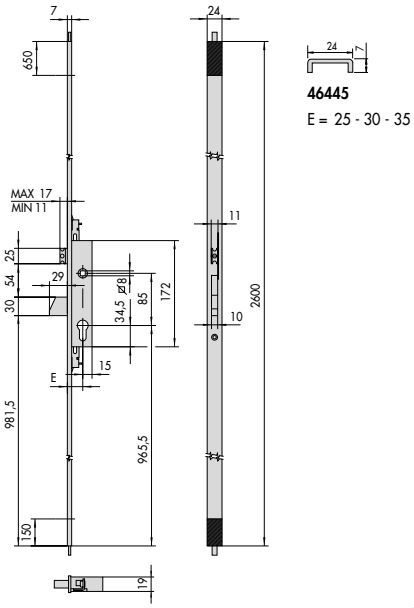
51



46275

E = 25 - 30 - 35

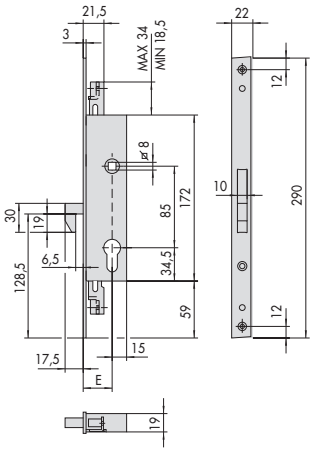
54



46445

E = 25 - 30 - 35

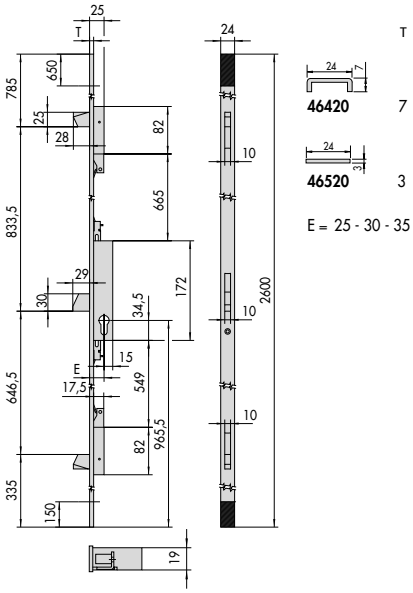
57



46265

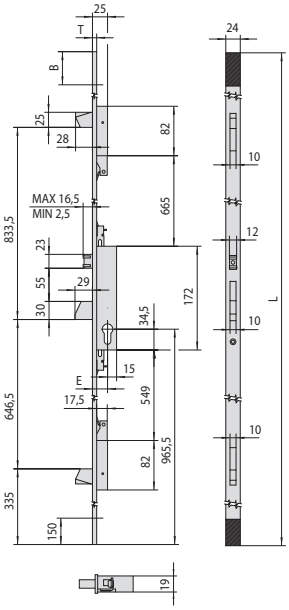
E = 25 - 30 - 35


52



E = 25 - 30 - 35

55

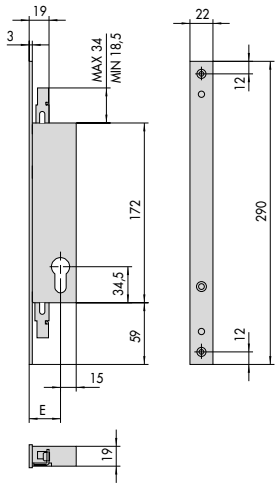




	L	T	B
46450	2600	7	650
46605	1920	7	
46650	2300	7	350
46550	2600	3	650
46705	1920	3	
46750	2300	3	350

E = 25 - 30 - 35

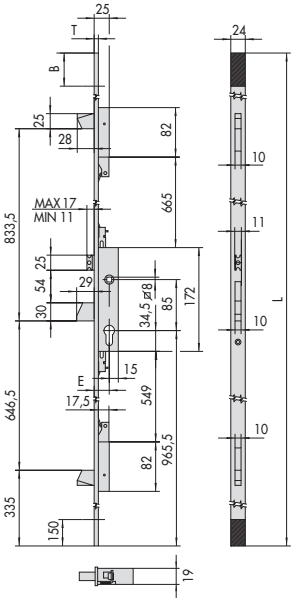
58




46270

E = 25 - 30 - 35

53

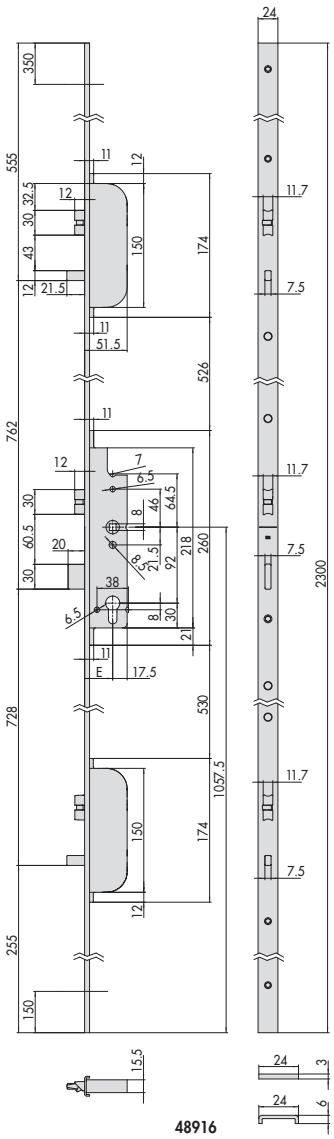




	L	T	B
46425	2600	7	650
46600	1920	7	
46625	2300	7	350
46525	2600	3	650
46700	1920	3	
46725	2300	3	350

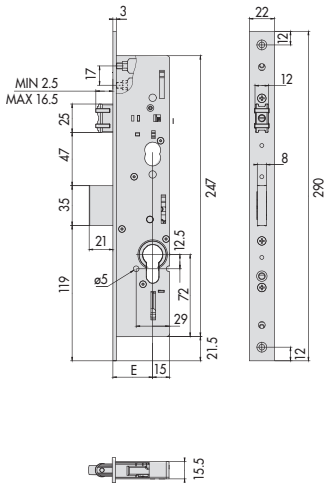
E = 25 - 30 - 35

56



48916
48816
E = 35-40

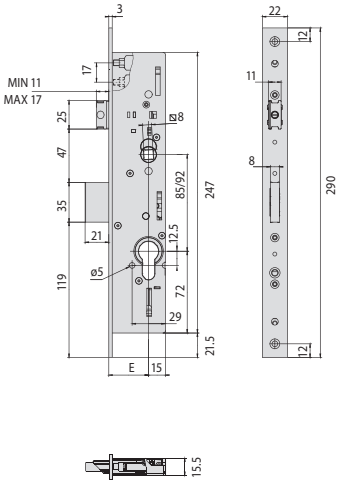
59



49250

E = 25-30-35-40

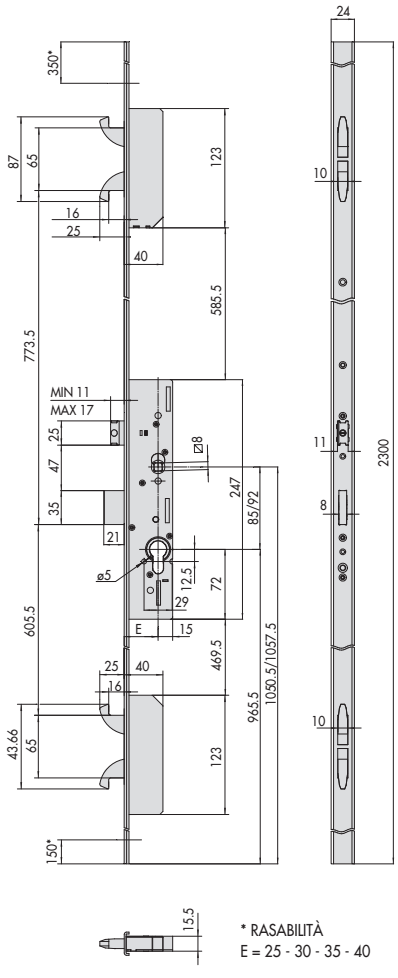
61



49225 - 49228

E = 25-30-35-40

60

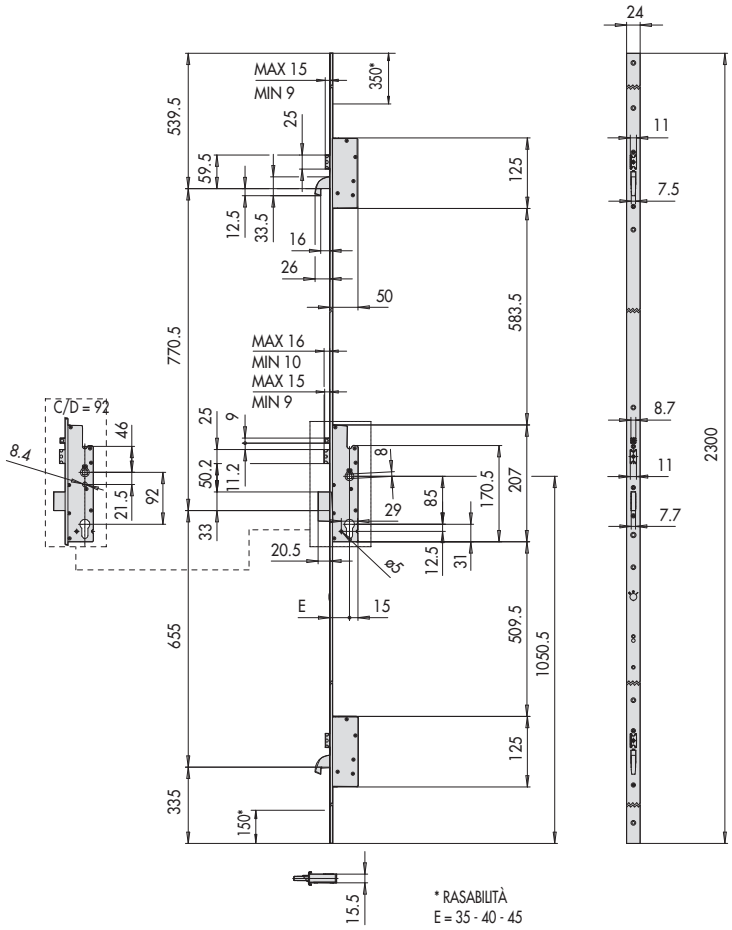



* RASABILITÀ
E = 25 - 30 - 35 - 40

49656 -49658

49746 - 49748

62



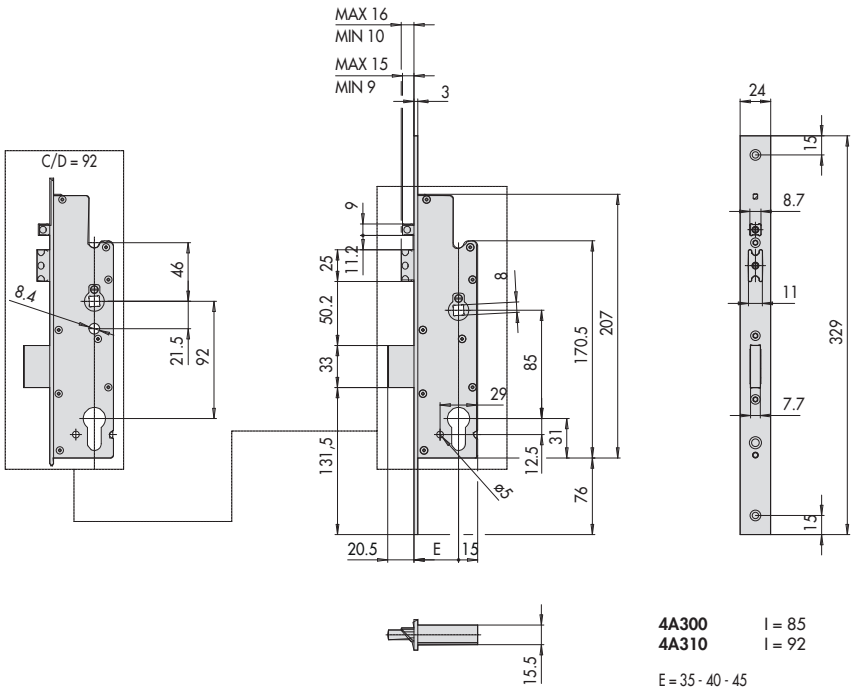


4A200 l = 85
4A210 l = 92

4A100 l = 85
4A110 l = 92

4A000 l = 85
4A010 l = 92

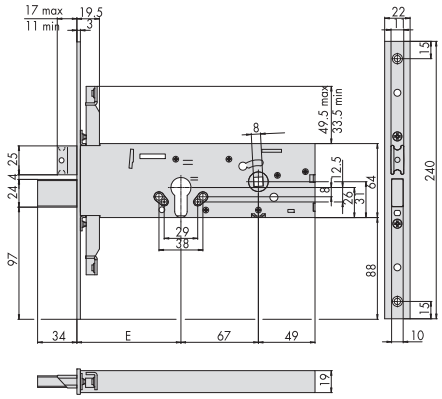
63



4A300 l = 85
4A310 l = 92

E = 35 - 40 - 45

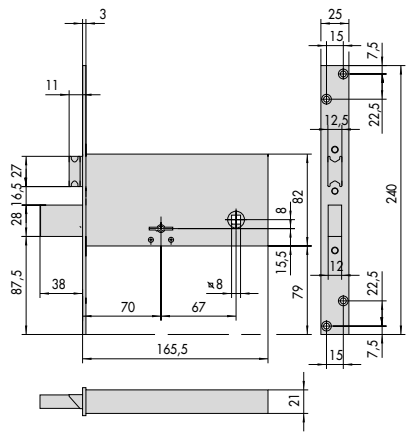
64



56357

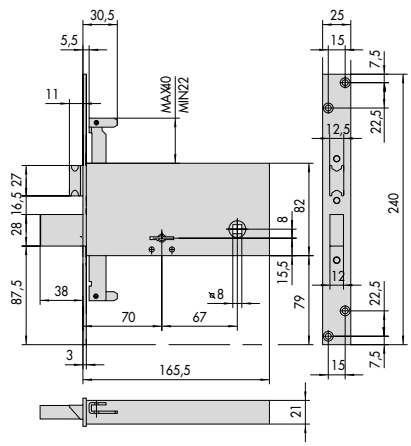
E = 90-100

65



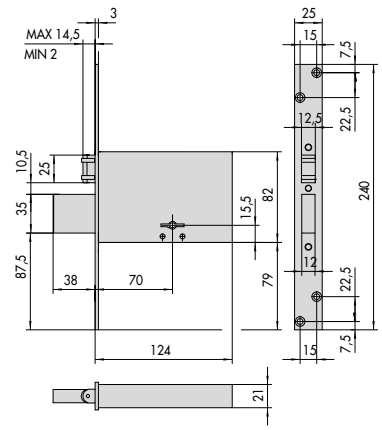
57312

66



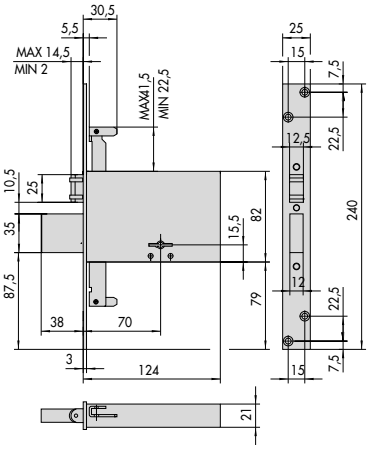
57317

67



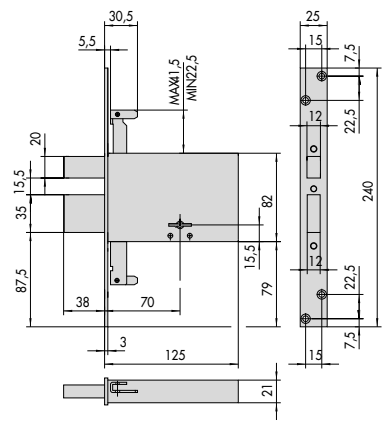
57320

68



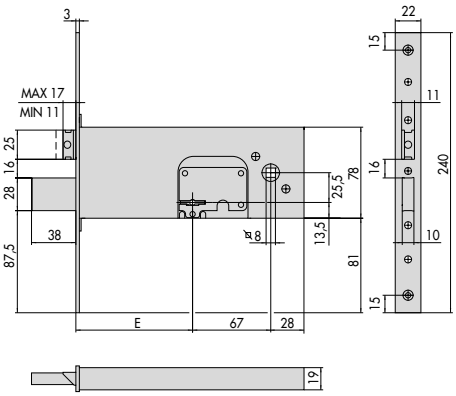
57325

69



57335

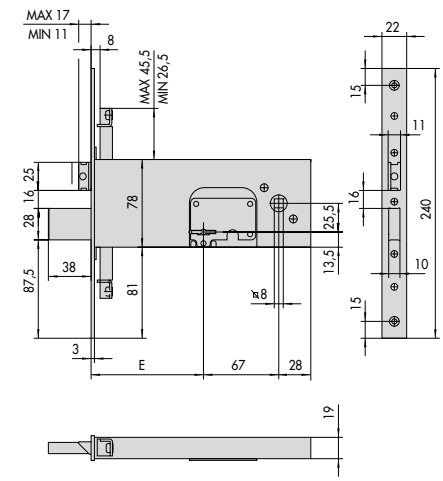
70



57352

E = 90 - 100

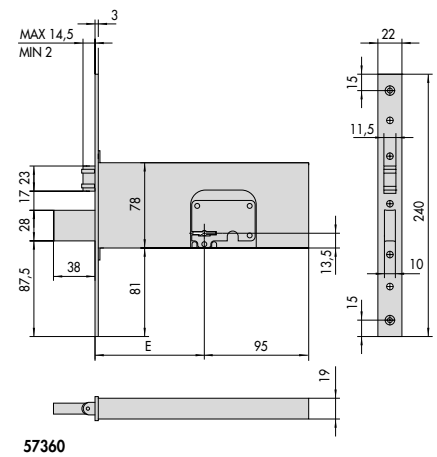
71



57357

E = 90 - 100

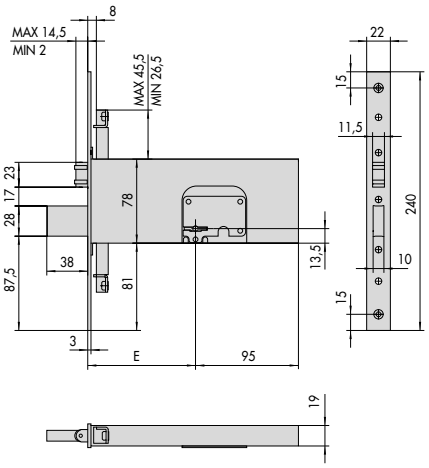
72



57360

E = 90 - 100

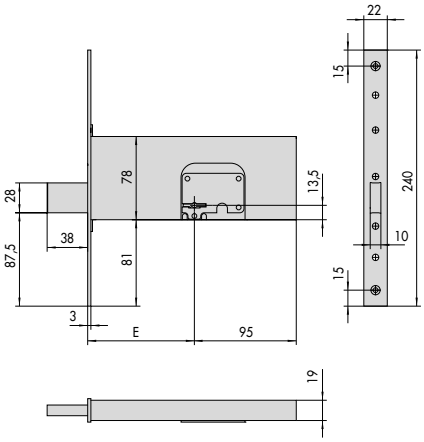
73



57365

E = 90 - 100

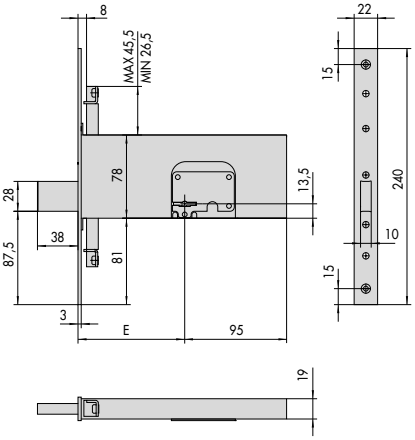
74



57370

E = 90 - 100

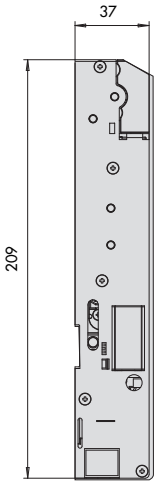
75




57375

E = 90 - 100

76





E0000

77




ALLEGION

CISA

Locks for wooden doors



Cylinder electric rim locks - Elettrika 307
Electric rim locks 308
Electric rim locks for heavy doors 310
Electric mortice locks 311
Electric strikers for mortice locks 312
Electric striker for mortice locks 315
Rim locks 316
Rim latches 320
Rim latches with opening limiting device 321
Multithrow cylinder rim locks 322
Cylinder mortice locks 323
Cylinder mortice locks CISA Logo Line series 325
Cylinder mortice locks 326
Three-throw cylinder mortice locks 328
Cylinder mortice locks with multiple deadbolt 330
Heavy Duty cylinder mortice locks 331
Cylinder mortice locks 335
Four-throw double-bit key or twin double-bit key mortice locks 336
Four-throw double-bit key mortice locks with multiple deadbolt 338
Two-throw double-bit key mortice locks 340
Two-throw double-bit key mortice locks with multiple deadbolt 342
Rim locks 343
Double-bit key rim locks 345
Multipoint cylinder mortice locks 347
Multipoint double-bit key mortice locks 352
Project Line handles 355
Accessories for electric locks 357
Accessories for cylinder rim locks 360
Accessories for cylinder mortice locks 361
Accessories for double-bit key mortice locks 364
Accessories for Heavy Duty mortice locks 368
Accessories for double-bit key rim locks 369
Accessories for multipoint mortice locks 371
Dimensional drawing 378





Project Line

DESIGN HANDLES FOR SPECIAL PLACES



CISA Project Line handles and protective roses: introducing design into the workplace. CISA chose handles from the Project Line range for its new offices in Faenza, because attention to detail and stylish design are just as important in the workplace as anywhere else. As always, it is the details that make the difference.

Features and functions

- Handles and protective roses in satin-finished AISI 304 stainless steel.
- Handle levers pre-mounted on mechanism with return spring.
- Fixed directly or using through screws on 38 to 54 mm thick doors. Fixing screws and square spindle provided.
- Steel fixing base with high-resistance galvanising specifically for external applications (versions with oval protective rose only).

HANDLES



Pair of handles **PL Oval**
item 1 07070 70 0



Pair of handles **PL Oval**
item 1 07070 80 0



Pair of handles **PL Angle**
item 1 07070 71 0



Pair of handles **PL Angle**
item 07070 82 0



Pair of handles **PL Radius**
item 1 07070 73 0



Pair of handles **PL Radius**
item 1 07070 81 0



Pair of handles **PL Arcus**
item 1 07070 72 0

PROTECTIVE ROSES



Pair of protective roses for Euro profile cylinders
item 1 06093 00 0



Pair of solid protective roses
item 1 06093 01 0



Pair of protective roses for Patent locks or similar
item 1 06093 02 0



Thumb turn for bathroom doors
item 1 06093 10 0



Thumb turn for bathroom doors with vacant/ engaged indicator
item 1 06093 11 0



Pair of protective roses for Euro profile cylinders
item 1 06093 04 0

Certifications

- Grade 3 – category of use (in places with high frequency of use).
- EN1906 - Grade 7 durability (200,000 cycles).
- EN1670 - Grade 2 corrosion resistance – 96 hours.
- EN1634 – Fire resistance - 2 hours on wooden doors and 4 hours on metal doors.



Elettrika

Technical features:
- Painted protective steel case
- Metal striker with stainless steel swinging pin
- Rotary hook deadbolt in extruded aluminium
- 12 V ac CE
- Non-handed and with a variable backset from 50 to 80 mm
- Rated current 3A

Supplied as standard:
- Striker
- Instruction sheet
- Fixing screws
- 2 spacers for the striker
- 3 keys item 1.01070.10.1





On request:
- Booster item 1.07022.00.0
- Booster plus item 1.07022.10.0
- BTicino coil item 1.07025.10.0
- Microswitch item 1.07023.00.0
- Open door indicator item 1.07126.01.0

Standards:
- ELETTRIKA is certified according to the European standard EN 14846:08

| 3 | X | 2 | 0 | 0 | M | 6 | 0 | 2 |

Security degree 6
(2,000 Kg lateral thrust)

Hand:
0 = Non-handed

Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Inner push-button	 Art. 1 0G500 00 0	50÷80		2,450	1	1	1A610	00	0		
	• Version with Booster item 1.07022.10.0		50÷80		2,450	1	1	1A610	00	0	00	PC
		 Art. 1 0G200 55 0	50÷80		2,350	1	1	1A611	00	0		
	• Version with Booster Plus item 1.07022.10.0		50÷80		2,450	1	1	1A611	00	0	00	PC
	• Inner push-button • Hold open device • Brass rose	 Art. 1 0G115 00 0	50÷80		2,500	1	1	1A630	00	0		
		 Art. 1 0G150 00 0	50÷80		2,350	1	1	1A631	00	0		



Technical features:
- Steel case and striker, painted aluminium grey
- Dead-locking latch
- 12 V ac CE
- Rated current 2,5A

Supplied as standard:
- Striker
- 3 keys item 1.01070.10.1
- Fixing screws
- Instruction sheet





On request:
- Booster module item 1.07022.00.0








Standards:
- This electric lock series is certified according to the European standard EN 14846:08:

| 3 | C | 2 | 0 | 0 | L | 3 | 0 | 2 |

- Security degree 3
(500 Kg lateral thrust and 200 Kg front load)

Hand:
1 = R.H. inwards
2 = L.H. inwards
3 = R.H. outwards
4 = L.H. outwards

Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Inside push-button	 1 02500 00 0	50	1,515	1	1	11610	50	1			
			50	1,440	1	1	11610	50	2			
			60	1,515	1	1	11610	60	1			
			60	1,445	1	1	11610	60	2			
			70	1,440	1	1	11610	70	1			
			70	1,450	1	1	11610	70	2			
			80	1,440	1	1	11610	80	1			
			80	1,440	1	1	11610	80	2			
		 1 02552 50 0	50	1,445	1	1	11611	50	1			
			50	1,434	1	1	11611	50	2			
			60	1,520	1	1	11611	60	1			
			60	1,520	1	1	11611	60	2			
			70	1,445	1	1	11611	70	1			
			70	1,440	1	1	11611	70	2			
			80	1,439	1	1	11611	80	1			
			80	1,444	1	1	11611	80	2			
	• Inside push-button and cylinder • Hold-open device	 1 02104 00 0	50	1,538	1	1	11630	50	1			
			50	1,523	1	1	11630	50	2			
			60	1,591	1	1	11630	60	1			
			60	1,591	1	1	11630	60	2			
			70	1,558	1	1	11630	70	1			
			70	1,527	1	1	11630	70	2			
			80	1,536	1	1	11630	80	1			
			80	1,531	1	1	11630	80	2			
		 1 02110 00 0	50	1,539	1	1	11631	50	1			
			50	1,524	1	1	11631	50	2			
			60	1,510	1	1	11631	60	1			
			60	1,510	1	1	11631	60	2			
			70	1,510	1	1	11631	70	1			
			70	1,510	1	1	11631	70	2			


Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Manual throw deadbolt • Inside push-button and cylinder	 1 02146 00 0	2	50	1,656	1	1	11670	50	1		
			2	50	1,650	1	1	11670	50	2		
			2	60	1,660	1	1	11670	60	1		
			2	60	1,670	1	1	11670	60	2		
			2	70	1,670	1	1	11670	70	1		
			2	70	1,665	1	1	11670	70	2		
			2	80	1,675	1	1	11670	80	1		
			2	80	1,675	1	1	11670	80	2		
		 1 02145 00 0	2	50	1,657	1	1	11671	50	1		
			2	50	1,654	1	1	11671	50	2		
			2	60	1,747	1	1	11671	60	1		
			2	60	1,666	1	1	11671	60	2		
			2	70	1,664	1	1	11671	70	1		
			2	70	1,670	1	1	11671	70	2		
			2	80	1,678	1	1	11671	80	1		
			2	80	1,679	1	1	11671	80	2		
	• FOR OUTWARD OPENING DOORS • Inside push-button	 1 02500 00 0		50	1,490	1	1	11610	50	3		
				50	1,490	1	1	11610	50	4		
				60	1,494	1	1	11610	60	3		
				60	1,495	1	1	11610	60	4		
				70	1,496	1	1	11610	70	3		
				70	1,486	1	1	11610	70	4		
				80	1,492	1	1	11610	80	3		
				80	1,480	1	1	11610	80	4		
	• FOR OUTWARD OPENING DOORS • Inside push-button and cylinder • Hold-open device	 1 02104 00 0		50	1,538	1	1	11630	50	3		
				50	1,523	1	1	11630	50	4		
				60	1,591	1	1	11630	60	3		
				60	1,591	1	1	11630	60	4		




Technical features:
- Steel case and striker, painted semi-opaque black
- Inside knob
- 12 V ac CE
- Rated current 0,81 A

Supplied as standard:
- Striker
- 3 keys item 1.01210.00.2
- Fixing screws
- Instruction sheet

Hand:
1 = R.H. inwards
2 = L.H. inwards



- Inside knob
- Black painted, semi-opaque



1 02520 00 0

Throws	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
60	3,345	1	1	13010	60	1			
60	3,350	1	1	13010	60	2			
70	3,338	1	1	13010	70	1			
70	3,314	1	1	13010	70	2			
80	3,320	1	1	13010	80	1			
80	3,322	1	1	13010	80	2			
90	3,300	1	1	13010	90	1			
90	3,286	1	1	13010	90	2			
100	3,334	1	1	13010	10	1			
100	3,322	1	1	13010	10	2			
110	3,574	1	1	13010	11	1			
110	3,260	1	1	13010	11	2			
120	3,600	1	1	13010	12	1			
120	3,260	1	1	13010	12	2			



Technical features:
- Zinc-plated steel case
- Satin brass faceplate and striker
- Reversible, electric latch
- 12 V ac CE
- Rated current 2,8 A


Supplied as standard:
- Electric contacts 1.06510.00.0
- Striker
- Lock and cylinder fixing screws
- Instruction sheet

On request:
- Satin nickel-plated brass (fin. 12)

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Manual latch and deadbolt • SUPPLIED AS STANDARD: striker item 1.06035.00.0 (L=25 mm.)	2	22	40	0,997	1	1	12010	40	0			
		2	22	50	1,040	1	1	12010	50	0			
		2	22	60	1,130	1	1	12010	60	0			
		2	22	70	1,138	1	1	12010	70	0			
	• Manual latch and deadbolt • SUPPLIED AS STANDARD: striker item 1.06218.00.0 (L=37 mm.)	2	22	40	1,047	1	1	12015	40	0			
		2	22	50	1,100	1	1	12015	50	0			
		2	22	60	1,180	1	1	12015	60	0			
		2	22	70	1,188	1	1	12015	70	0			
	• Automatic latch and deadbolt • SUPPLIED AS STANDARD: striker item 1.06035.00.0 (L=25 mm.)	2	22	40	0,975	1	1	12011	40	0			
		2	22	50	1,055	1	1	12011	50	0			
		2	22	60	1,144	1	1	12011	60	0			
		2	22	70	1,215	1	1	12011	70	0			
	• Automatic latch and deadbolt • SUPPLIED AS STANDARD: striker item 1.06218.00.0 (L=37 mm.)	2	22	40	1,047	1	1	12016	40	0			
		2	22	50	1,116	1	1	12016	50	0			
		2	22	60	1,180	1	1	12016	60	0			
		2	22	70	1,255	1	1	12016	70	0			







Technical features:
- Rated voltage 12-24V ac and 12-24V dc CE.
- Long lipped ZAL stainless alloy casing
- Steel or stainless steel interchangeable faceplates




Supplied as standard:
- Faceplate fixing screws
- Faceplate spacer (series 05020, 05021, 05005.00.0.20)

On request:
- Booster module item 1.07022.00.0

Hand:
0 = Non-handed
1 = R.H. inwards
L.H. outwards
2 = L.H. inwards
R.H. outwards

Type	Description	Facaplate	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Electric striker casing • Voltage 12V ac CE - Current absorption 0,7 A • Hold open catch mechanism • Hold open device		0,185	12	1	15100	00	0		
	• Electric striker casing • Voltage 12V ac CE - Current absorption 0,7A • Hold open catch mechanism		0,185	12	1	15101	00	0		
	• Electric striker casing • Voltage 12V ac/dc CE - Current absorption 0,7A • Hold open device		0,170	12	1	15102	00	0		
	• Electric striker casing • Voltage 12V ac/dc CE - Current absorption 0,7A		0,185	12	1	15110	00	0		
	• Electric striker casing • Voltage 24V ac CE - Current absorption 0,4A • Hold open catch mechanism • Hold open device		0,185	12	1	15120	00	0		
	• Electric striker casing • Voltage 24V ac CE - Current absorption 0,4A • Hold open catch mechanism		0,185	12	1	15121	00	0		
	• Electric striker casing • Voltage 24V ac/dc CE- Current absorption 0,4A • Hold open device		0,185	12	1	15122	00	0		
	• Electric striker casing • Voltage 24V ac/dc CE- Current absorption 0,4A		0,185	12	1	15130	00	0		
	• Electric striker casing • Live coils: opening is only obtained if power supply is cut • Voltage 12V dc CE - Current absorption 0,20A		0,185	12	1	15140	00	0		

Type	Description	Facaplate	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Electric striker casing • Live coils: opening is only obtained if power supply is cut • Voltage 24V dc CE - Current absorption 0,12A		0,185	12	1	15	15	00	0	
	• Electric striker casing • Voltage 12V ac CE - Current absorption 0,7A • Inside hold open catch mechanism • Hold open device		0,185	12	1	15	160	00	0	
	• Electric striker casing • Voltage 12V ac CE - Current absorption 0,25A		0,185	12	1	15	170	00	0	
	• Electric striker casing without coils • Hold open device		0,170	12	1	15	180	00	0	
	• Electric striker casing • 1 microswitch • Adjustable long lip • Voltage 10/24V ac/dc CE • Current absorption 0,24A a 10V dc		0,280	12	1	15	200	00	0	
	• Square corner steel flat faceplate • FINISHES gold fin. 06 silver fin. 07 nickel-plated fin. 12 brass lacquered fin. 38	25	0,092	12	1	05	001	00	0	06
		25	0,092	12	1	05	001	00	0	07
		25	0,092	12	1	05	001	00	0	12
		25	0,092	12	1	05	001	00	0	38
	• Square corner steel flat faceplate FINISHES hammered gold fin. 06 hammered silver fin. 07 satin-finished stainless steel fin. 20 painted brass fin. 38	25	0,083	12	1	05	002	00	1	06
		25	0,083	12	1	05	002	00	2	06
		25	0,083	12	1	05	002	00	1	07
		25	0,083	12	1	05	002	00	2	07
		25	0,083	12	1	05	002	00	1	20
		25	0,083	12	1	05	002	00	2	20
		25	0,083	12	1	05	002	00	1	38
		25	0,092	12	1	05	002	00	2	38

Type	Description	Facaplate	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Steel angular faceplate with square corners • FINISHES gold fin. 06 silver fin. 07	25	0,160	6	1	05003	00	1	06	
		25	0,160	6	1	05003	00	2	06	
		25	0,160	6	1	05003	00	1	07	
		25	0,160	6	1	05003	00	2	07	
	• Steel angular faceplate with round corners • FINISHES gold fin. 06 silver fin. 07	25	0,160	6	1	05004	00	1	06	
		25	0,160	6	1	05004	00	2	06	
		25	0,160	6	1	05004	00	1	07	
		25	0,160	6	1	05004	00	2	07	
	• Steel flat faceplate with square corners for use with latch only locks • FINISHES gold fin. 06 silver fin. 07 nickel-plated fin. 12 brass lacquered fin. 38 satin-finished stainless steel fin. 20	25	0,070	6	1	05005	00	0	06	
		25	0,070	6	1	05005	00	0	07	
		25	0,070	6	1	05005	00	0	12	
		25	0,070	6	1	05005	00	0	20	
		25	0,070	6	1	05005	00	0	38	





Technical features:
- Zal stainless alloy asymmetrical casing
- Power input 12V
- effect painted steel faceplate.
- Hold-open device
- Hold-open catch mechanism

Supplied as standard:
- Instruction sheet

Finishes:
- gold effect (fin.06)
- silver effect (fin.07)

Hand:
0 = Non-handed






Type	Description	Facaplate	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Non-handed flat faceplate • For locks series 5C000, 53000, 56000, 57200, 57800	25	0,330	1	1	15001	00	0	06	
		25	0,340	1	1	15001	00	0	07	
	• Non-handed flat faceplate • For locks series 5C000, 53000, 56000, 57200, 57800	25	0,302	1	1	15005	00	0	06	
		25	0,305	1	1	15005	00	0	07	














Technical features:
- Steel case and striker, painted amaranth red
- Brass latch and deadbolt
- Brass draw-back pull and knob












Supplied as standard:
- Striker
- 3 keys item 1.01070.10.1 (C2000 key bow)
- Fixing screws







Hand:
1 = R.H. inwards
2 = L.H. inwards

Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Inside draw-back pull and knob • Deadbolt and latch	 1 02500 00 0	2	40	0,893	1	1	50110	40	1		
			2	40	0,893	1	1	50110	40	2		
			2	50	0,950	1	1	50110	50	1		
			2	50	0,950	1	1	50110	50	2		
			2	60	1,025	1	1	50110	60	1		
			2	60	1,025	1	1	50110	60	2		
			2	70	1,100	1	1	50110	70	1		
			2	70	1,083	1	1	50110	70	2		
		 1 02552 50 0	2	40	0,890	1	1	50111	40	1		
			2	40	0,890	1	1	50111	40	2		
			2	50	0,960	1	1	50111	50	1		
			2	50	0,954	1	1	50111	50	2		
			2	60	1,039	1	1	50111	60	1		
			2	60	1,039	1	1	50111	60	2		
			2	70	1,100	1	1	50111	70	1		
			2	70	1,100	1	1	50111	70	2		
	• Inside draw-back pull and cylinder • Deadbolt and latch	 1 02102 00 0	2	40	0,890	1	1	50120	40	1		
			2	40	0,890	1	1	50120	40	2		
			2	50	0,960	1	1	50120	50	1		
			2	50	0,950	1	1	50120	50	2		
			2	60	1,030	1	1	50120	60	1		
			2	60	1,030	1	1	50120	60	2		
			2	70	1,100	1	1	50120	70	1		
			2	70	1,100	1	1	50120	70	2		
		 1 02106 00 0	2	40	0,890	1	1	50121	40	1		
			2	40	0,890	1	1	50121	40	2		
			2	50	0,950	1	1	50121	50	1		
			2	50	0,960	1	1	50121	50	2		
			2	60	1,045	1	1	50121	60	1		
			2	60	1,050	1	1	50121	60	2		
			2	70	1,100	1	1	50121	70	1		
			2	70	1,100	1	1	50121	70	2		

CISA

Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Inside draw-back pull and cylinder • Deadbolt and latch	 1 02102 00 0	3	60	1,075	1	1 50125 60 1					
			3	60	1,075	1	1 50125 60 2					
		 1 02106 00 0	3	60	1,080	1	1 50126 60 1					
			3	60	1,080	1	1 50126 60 2					
	• Inside knob • Deadbolt only	 1 02106 00 0	2	40	0,820	1	1 50130 40 1					
			2	40	0,820	1	1 50130 40 2					
			2	50	0,880	1	1 50130 50 1					
			2	50	0,880	1	1 50130 50 2					
			2	60	0,945	1	1 50130 60 1					
			2	60	0,950	1	1 50130 60 2					
			2	70	1,000	1	1 50130 70 1					
			2	70	1,000	1	1 50130 70 2					
		 1 02552 50 0	2	40	0,820	1	1 50131 40 1					
			2	40	0,820	1	1 50131 40 2					
			2	50	0,875	1	1 50131 50 1					
			2	50	0,875	1	1 50131 50 2					
			2	60	0,950	1	1 50131 60 1					
			2	60	0,950	1	1 50131 60 2					
			2	70	1,025	1	1 50131 70 1					
			2	70	1,025	1	1 50131 70 2					
	• Inside knob • Deadbolt only	 1 02106 00 0	2	40	0,820	1	1 50141 40 1					
			2	40	0,820	1	1 50141 40 2					
			2	50	0,880	1	1 50141 50 1					
			2	50	0,880	1	1 50141 50 2					
			2	60	0,970	1	1 50141 60 1					
			2	60	0,960	1	1 50141 60 2					
			2	70	1,030	1	1 50141 70 1					
			2	70	1,035	1	1 50141 70 2					
	• Inside draw-back pull and cylinder • Deadbolt and latch	 1 02102 00 0	2	40	0,890	1	1 50160 40 1					
			2	40	0,890	1	1 50160 40 2					
			2	50	0,960	1	1 50160 50 1					
			2	50	0,960	1	1 50160 50 2					
			2	60	1,020	1	1 50160 60 1					
			2	60	1,020	1	1 50160 60 2					
	• Inside draw-back pull and cylinder • Deadbolt and latch	 1 02106 00 0	2	40	0,890	1	1 50161 40 1					
			2	40	0,890	1	1 50161 40 2					
			2	50	0,960	1	1 50161 50 1					
			2	50	0,960	1	1 50161 50 2					
			2	60	1,020	1	1 50161 60 1					
			2	60	1,020	1	1 50161 60 2					

Type	Description	Cylinder	Throws	Backset	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Inside cylinder • Deadbolt and latch • Through spindle	 1 02102 00 0	2	60	1,130	1	**1 50170 60 1**
			2	60	1,130	1	**1 50170 60 2**
		 1 02106 00 0	2	60	1,146	1	**1 50171 60 1**
			2	60	1,160	1	**1 50171 60 2**
	• Inside knob • Deadbolt and latch • Through spindle	 1 02500 00 0	2	60	1,130	1	**1 50180 60 1**
			2	60	1,130	1	**1 50180 60 2**
		 1 02552 50 0	2	60	1,150	1	**1 50181 60 1**
			2	60	1,140	1	**1 50181 60 2**
	• Inside knob • Deadbolt and latch • Through spindle	 1 02102 00 0	2	45	1,200	1	**1 50210 45 1**
			2	45	1,185	1	**1 50210 45 2**
		 1 02106 00 0	2	45	1,180	1	**1 50211 45 1**
			2	45	1,180	1	**1 50211 45 2**
	• Inside draw-back pull and cylinder • Deadbolt and latch	 1 02102 00 0	2	45	1,150	1	**1 50220 45 1**
			2	45	1,140	1	**1 50220 45 2**
		 1 02106 00 0	2	45	1,130	1	**1 50221 45 1**
			2	45	1,130	1	**1 50221 45 2**

Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Lock case and striker painted in aluminium color • Nickel-plated draw-back pull and cylinder • Hold-open device	 1 02102 00 0	2	50	0,960	1	1	50320	50	1		
			2	50	0,960	1	1	50320	50	2		
			2	60	1,030	1	1	50320	60	1		
			2	60	1,030	1	1	50320	60	2		
		 1 02106 00 0	2	50	0,950	1	1	50321	50	1		
			2	50	0,950	1	1	50321	50	2		
			2	60	1,050	1	1	50321	60	1		
			2	60	1,050	1	1	50321	60	2		
	• Inside draw-back pull and knob • Deadbolt and latch • Hold-open device	 1 02500 00 0	2	40	0,910	1	1	50330	40	1		
			2	40	0,910	1	1	50330	40	2		
			2	50	0,960	1	1	50330	50	1		
			2	50	0,960	1	1	50330	50	2		
			2	60	1,030	1	1	50330	60	1		
			2	60	1,030	1	1	50330	60	2		
	• Inside draw-back pull and cylinder • Deadbolt and latch • Hold-open device	 1 02102 00 0	2	40	0,910	1	1	50340	40	1		
			2	40	0,910	1	1	50340	40	2		
			2	50	0,960	1	1	50340	50	1		
			2	50	0,960	1	1	50340	50	2		
			2	60	1,030	1	1	50340	60	1		
			2	60	1,030	1	1	50340	60	2		








Technical features:
- Steel case and striker, painted amaranth red
- Brass latch, deadbolt and draw-back pull
- PVC knobs

Supplied as standard:
- Striker
- 3 keys item 1.01070.10.1 (C2000 key bow)
- Fixing screws
- Instruction sheet

On request:
- STANDARD: painted amaranth red
- ON REQUEST: painted aluminium, with a nickel-plated cylinder (fin. 95) (for 54310, 54315, 54340, 54341 series)

Hand:
0 = Non-handed

Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Inside knob • Latch-bolt only • Hold-open device	 1 02500 00 0		60	0,659	1	**1 54310 60 0**
		 1 02552 50 0		60	0,645	1	**1 54311 60 0**
	• Inside knob • Latch-bolt only • Dead-locking latch with hold-open device	 1 02500 00 0		60	0,663	1	**1 54315 60 0**
		 1 02552 50 0		60	0,658	1	**1 54316 60 0**
	• Inside knob • deadbolt only	 1 02500 00 0	2	60	0,700	1	**1 54340 60 0**
		 1 02552 50 0	2	60	0,673	1	**1 54341 60 0**








Technical features:
- Die-cast alloy case and striker
- Steel deadbolt
- Steel limiting device
- Grey PVC knob
- Nickel-plated cylinder

Supplied as standard:
- Striker
- 3 keys item 1.01070.10.1 (C2000 key bow)
- Fixing screws
- Instruction sheet

Finishes:
- STANDARD: painted metallized aluminium, nickel plated cylinder

Hand:
0 = Non-handed





Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Inside knob • deadbolt only	 1 02500 00 0		60	0,973	1	1	54510	60	0		
	• Inside knob • deadbolt only	 1 02500 00 0	2	60	1,015	1	1	54550	60	0		
	• Inside cylinder • Fixed knob • deadbolt only	 1 02130 00 0	2	60	1,040	1	1	54560	60	0		
	• Inside knob • deadbolt only • Opening limiting device	 1 02500 00 0	2	60	1,061	1	1	54570	60	0		



Technical features:
- Purple red painted steel case, striker and plate
- Nickel-plated ground steel deadbolt
- Nickel-plated steel thumb turns

Supplied as standard:
- 3 keys item 1.01070.10.1
- Striker
- Fixing screws
- Brass roses

Hand:
1 = R.H. inwards

Type	Description	Cylinder	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• deadbolt only	 1.0G500.00.0	6	50	1,345	1	1	55051	50	1		
			6	60	1,345	1	1	55051	60	1		
		 0G200	6	50	1,250	1	1	55054	50	1		
			6	60	1,335	1	1	55054	60	1		
	• deadbolt and latch	 1.0G500.00.0	6	50	1,345	1	1	55071	50	1		
			6	60	1,345	1	1	55071	60	1		
		 0G200	6	50	1,335	1	1	55074	50	1		
			6	60	1,335	1	1	55074	60	1		



Technical features:
- Zinc-plated case and cover
- Brass removable faceplate and strike.
- Non-handed brass flat latch.
- 2 to 13 mm adjustable brass roller.
- Double-throw brass deadbolt, single throw for bathroom doors
- Can be fitted with roses and through-screw handle plates (except for 35 mm backset)
- Can be fitted with cylinder protective roses l = 38 mm and 29 mm (only l = 29 mm for 35 backset)





Supplied as standard:
- Striker
- Fixing screws for lock, striker and cylinder



Finishes:
- ON REQUEST:
  Satin nickel-plated brass (Fin. 12)
  Stainless steel (Fin. 20)

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06102.13.0	2	85	22	35	0,658	1	1	5C110	35	0	
		2	85	22	40	0,724	1	1	5C110	40	0	
		2	85	22	45	0,752	1	1	5C110	45	0	
		2	85	22	50	0,720	1	1	5C110	50	0	
		2	85	22	60	0,750	1	1	5C110	60	0	
		2	85	22	70	0,827	1	1	5C110	70	0	
	• deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06279.11.0	2	85	22	35	0,680	1	1	5C130	35	0	
		2	85	22	40	0,706	1	1	5C130	40	0	
		2	85	22	45	0,734	1	1	5C130	45	0	
		2	85	22	50	0,768	1	1	5C130	50	0	
		2	85	22	60	0,800	1	1	5C130	60	0	
		2	85	22	70	0,866	1	1	5C130	70	0	
	• Roller deadbolt • SUPPLIED AS STANDARD: striker item 1.06149.00.0	2		22	35	0,630	1	1	5C120	35	0	
		2		22	40	0,680	1	1	5C120	40	0	
		2		22	45	0,700	1	1	5C120	45	0	
		2		22	50	0,740	1	1	5C120	50	0	
		2		22	60	0,750	1	1	5C120	60	0	
		2		22	70	0,800	1	1	5C120	70	0	
	• Roller deadbolt • SUPPLIED AS STANDARD: striker	2		22	35	0,630	1	1	5C140	35	0	
		2		22	40	0,680	1	1	5C140	40	0	
		2		22	45	0,700	1	1	5C140	45	0	
		2		22	50	0,740	1	1	5C140	50	0	
		2		22	60	0,750	1	1	5C140	60	0	
		2		22	70	0,800	1	1	5C140	70	0	

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• For bathroom doors • deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06102.13.0	1	85	22	35	0,650	1	1	5C150	35	0	
		1	85	22	40	0,690	1	1	5C150	40	0	
		1	85	22	45	0,748	1	1	5C150	45	0	
		1	85	22	50	0,750	1	1	5C150	50	0	
		1	85	22	60	0,810	1	1	5C150	60	0	
		1	85	22	70	0,890	1	1	5C150	70	0	
	• For bathroom doors • deadbolt and latch • 8 mm spindle • SUPPLIED AS STANDARD: striker item 1.06279.11.0	1	85	22	45	0,748	1	1	5C170	45	0	
		1	85	22	50	0,750	1	1	5C170	50	0	
		1	85	22	60	0,810	1	1	5C170	60	0	
		1	85	22	70	0,890	1	1	5C170	70	0	



CISA® Locking Line

Technical features:
- Zinc-plated case and cover
- Brass removable faceplate and strike.
- Non-handed brass flat latch.
- 2 to 13 mm adjustable brass roller.
- Double-throw brass deadbolt, single throw for bathroom doors
- Can be fitted with roses and through-screw handle plates (except for 35 mm backset)
- Can be fitted with cylinder protective roses l = 38 mm and 29 mm (only l = 29 mm for 35 backset)





Supplied as standard:
- Strike plate
- Fixing screws for lock, striker and cylinder

Finishes:
- Finishes available at no extra charge:
  - nickel-plated steel (Fin. 12)
  - bronze-plated steel (Fin. 47)

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06102.10.0	2	85	22	35	0,628	1	1	5C611	35	0		
		2	85	22	40	0,643	1	1	5C611	40	0		
		2	85	22	45	0,668	1	1	5C611	45	0		
		2	85	22	50	0,718	1	1	5C611	50	0		
		2	85	22	60	0,768	1	1	5C611	60	0		
		2	85	22	70	0,768	1	1	5C611	70	0		
	• deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06100.10.0	2	85	22	35	0,658	1	1	5C631	35	0		
		2	85	22	40	0,678	1	1	5C631	40	0		
		2	85	22	45	0,718	1	1	5C631	45	0		
		2	85	22	50	0,718	1	1	5C631	50	0		
		2	85	22	60	0,768	1	1	5C631	60	0		
		2	85	22	70	0,820	1	1	5C631	70	0		
	• Roller deadbolt • SUPPLIED AS STANDARD: striker item 1.06102.10.0	2		22	40	0,620	1	1	5C621	40	0		
		2		22	45	0,670	1	1	5C621	45	0		
		2		22	50	0,718	1	1	5C621	50	0		
		2		22	60	0,778	1	1	5C621	60	0		
	• For toilet doors • deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06100.10.0	1	85	22	45	0,730	1	1	5C671	45	0		
		1	85	22	50	0,767	1	1	5C671	50	0		
		1	85	22	60	0,826	1	1	5C671	60	0		
		1	85	22	70	0,868	1	1	5C671	70	0		



Technical features:
- Faceplate and striker: in both satin brass and brass plated satin steel version
- Zinc-plated steel case
- Reversible latch
- Roller can be adjusted from 2,5 ÷ 14,5 mm.
- Aligned deabolt 10 mm thick
- Case cover to protect against dirt and chips




Supplied as standard:
- Striker
- Lock and cylinder fixing screws




On request:
- Nickel-plated (Fin. 12)

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	REPLACING 52010 SERIES • Satin brass faceplate • Deadbolt and latch • SUPPLIED AS STANDARD: • Satin brass strike plate item 1.06163.00.0	1	85	22	21	0,492	12	1	5C010	20	0	
		1	85	22	25	0,506	12	1	5C010	25	0	
		1	85	22	30	0,557	12	1	5C010	30	0	
	REPLACING 52011 SERIES • Satin brass steel faceplate • Deadbolt and latch • SUPPLIED AS STANDARD: • Satin brass-plated steel strike plate item 1.06152.00.0	1	85	22	21	0,450	12	1	5C011	20	0	
		1	85	22	25	0,511	12	1	5C011	25	0	
		1	85	22	30	0,530	12	1	5C011	30	0	
	REPLACING 52021 SERIES • Steel faceplate • Deadbolt and satin brass adjustable roller • SUPPLIED AS STANDARD: • Satin brass-plated steel strike plate item 1.06162.00.0	1		22	21	0,446	12	1	5C021	20	0	
		1		22	25	0,473	12	1	5C021	25	0	
		1		22	30	0,505	12	1	5C021	30	0	
	REPLACING 52031 SERIES • Satin brass-plated steel faceplate • Deadbolt and latch • SUPPLIED AS STANDARD: • Satin brass-plated steel strike plate item 1.06243.00.0	1	85	22	21	0,500	12	1	5C031	20	0	
		1	85	22	25	0,530	12	1	5C031	25	0	
		1	85	22	30	0,570	12	1	5C031	30	0	

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Satin brass faceplate • Deadbolt only • SUPPLIED AS STANDARD: • Satin brass strike plate item 1.07032.00.0	1		22	25	0,360	1	1	52210	25	0		
		1		22	30	0,380	1	1	52210	30	0		
	• Satin brass faceplate • Latch only • SUPPLIED AS STANDARD: • Satin brass strike plate item 1.06107.00.0			22	60	0,439	1	1	52300	60	0		
	• Satin brass faceplate • Deadbolt only • SUPPLIED AS STANDARD: • Satin brass strike plate item 1.07032.00.0	2		22	35	0,410	1	1	52310	35	0		
		2		22	40	0,430	1	1	52310	40	0		
		2		22	45	0,451	1	1	52310	45	0		
		2		22	50	0,470	1	1	52310	50	0		
		2		22	60	0,500	1	1	52310	60	0		
		2		22	70	0,530	1	1	52310	70	0		



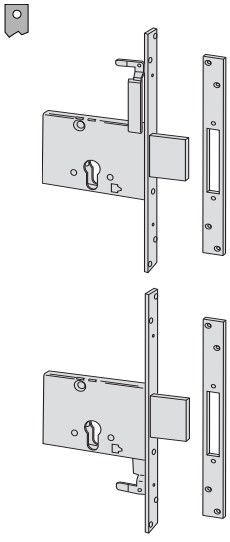




Technical features:
- Zinc-plated steel case

Supplied as standard:
- Lock and cylinder fixing screws
- Instruction sheet

On request:
- Protective rose item 1.06490.02.0, 1.06460.50/51/60/0
- Spacers item 1.06472.40.0

Hand:
0 = Non-handed

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt only in zinc-plated steel, 1 locking point • Zinc-plated faceplate and strike • Interchangeable with series 57010 (double-bitted key locks) • SUPPLIED AS STANDARD: Roses item 1.06043.00.0 (2 pcs) Strike item 1.06283.02.0.B7	3	25	52	0,825	1	1	56010	50	0		
		3	25	60	0,875	1	1	56010	60	0		
		3	25	70	0,925	1	1	56010	70	0		
	• Deadbolt only in zinc-plated steel, 3 locking points • Zinc-plated faceplate and strike • Interchangeable with series 57015 (double bitted key locks) • SUPPLIED AS STANDARD: Roses item 1.06043.00.0 (2 pcs) Strike item 1.06283.02.0.B7 Guide plate for extension bolts item 1.06085.00.0 (2pcs) Top strike item 1.06084.00.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Floor strike item 1.06086.00.0	3	25	60	0,925	1	1	56015	60	0		
		3	25	70	0,975	1	1	56015	70	0		
	• Deadbolt only in zinc-plated steel, lock set • Zinc-plated steel faceplate and strike • Interchangeable with 57020 series (double-bitted key) • SUPPLIED AS STANDARD: Escutcheons item 1.06043.00.0 (4 pcs) Strike item 1.06283.02.0.B7 (2 pcs) Guide plate for extension bolts, item 1.06085.00.0 (2pcs) Top strike item 1.06084.00.0 • ON REQUEST: Extension bolts item 1.06416.00.0 Floor strike item 1.06086.00.0	3	25	60	1,750	1	1	56020	60	0		
		3	25	70	1,850	1	1	56020	70	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Nickel-plated steel deadbolt and latchbolt • Faceplate and strike in nickel-plated satin-finished steel • SUPPLIED AS STANDARD: Strike item 1.06271.00.0	3	85	25	60	1,300	1	1	56250	60	0		
	• Nickel-plated steel deadbolt and latchbolt • Faceplate and strike in nickel-plated satin-finished steel • Pre-set for additional locking points • SUPPLIED AS STANDARD: Strike item 1.06272.00.0 Pair of guide plates for the extension bolts, item 1.06085.00.0 Top strike item. 1.06084.00.0 • ON REQUEST: Extension bolts item 1.06415.00.0 Floor strike item 1.06086.00.0	3	85	25	60	1,535	1	1	56255	60	0		






Technical features:
- Painted brass plated satin steel faceplate and striker
- Zinc-plated steel case
- Flat, reversible, nickel-plated latch
- Nickel-plated steel triple bolt

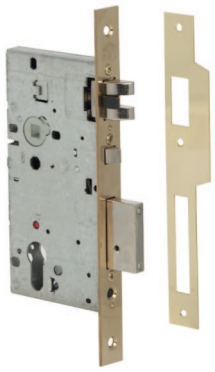
Supplied as standard:
- Striker
- Cylinder fixing screws

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06279.12.0	2	85	22	45	0,805	1	1	52520	45	0	
		2	85	22	50	0,835	1	1	52520	50	0	
		2	85	22	60	0,915	1	1	52520	60	0	
	• Deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06278.11.0	2	85	22	45	0,800	1	1	52521	45	0	
		2	85	22	50	0,840	1	1	52521	50	0	
		2	85	22	60	0,905	1	1	52521	60	0	
	• Deadbolt and latch • Pre-set for additional locking points • SUPPLIED AS STANDARD: striker item 1.06284.00.0 Two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0	2	85	25	45	1,145	1	1	52526	45	0	
		2	85	25	50	1,180	1	1	52526	50	0	
		2	85	25	60	1,245	1	1	52526	60	0	



Technical features:
- Laquered polished brass removable faceplate and striker
- Zinc-plated steel case
- Reversible, nickel-plated silent action latch
- Nickel-plated bolt for latch dead-locking (if provided)
- Nickel-plated cut-resistant deadbolt, with a 25 mm. protrusion
- Anti-corrosion galvanised internal components





Supplied as standard:
- Striker
- Fixing screws
- Instruction sheet






On request:
- Satin stainless steel faceplate and striker (fin 20)

Standards:
- Locks with satin stainless steel faceplate and striker (finish 20), are certified fire-resistant by the American Underwrite Laboratories (UL LISTED R 14945(N)
- CE mark in compliance with the directive 89/106/CEE, only for item with (fin. 20)
- Standard reference:
  UNI EN 179
  UNI EN 1125
  UNI EN 12209






Hand:
0 = Non-handed





Cylinder to be ordered separately

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• For entrance doors • Deadbolt and dead-locking latch • OPERATION: the latch-bolt is operated by handle or cylinder from either side The deadbolt is operated by cylinder from either side • SUPPLIED AS STANDARD: Square striker item 1.06106.20.0	1	85	22	60	0,950	1	1 52710 60 0					
		1	85	22	70	1,000	1	1 52710 70 0					
		1	85	22	80	1,050	1	1 52710 80 0					
		1	85	22	90	1,100	1	1 52710 90 0					
	• For entrance doors • Deadbolt and dead-locking latch • OPERATION: the latch-bolt is operated by handle or cylinder from either side The deadbolt is operated by cylinder from either side • SUPPLIED AS STANDARD: Square striker item 1.06106.25.0	1	85	22	60	0,950	1	1 52711 60 0					
		1	85	22	70	1,000	1	1 52711 70 0					
		1	85	22	80	1,050	1	1 52711 80 0					
		1	85	22	90	1,100	1	1 52711 90 0					
	• For bathroom and bedroom • deadbolt and latch • OPERATION: the latch-bolt is operated by handle from either side The deadbolt is operated by a 8 mm spindle • SUPPLIED AS STANDARD: Square striker item 1.06155.20.0	1	85	22	60	0,950	1	1 52730 60 0					
		1	85	22	70	1,000	1	1 52730 70 0					
		1	85	22	80	1,050	1	1 52730 80 0					
	• For bathroom and bedroom • deadbolt and latch • OPERATION: the latch-bolt is operated by handle from either side The deadbolt is operated by a 8 mm spindle • SUPPLIED AS STANDARD: Round striker item 1.06155.25.0	1	85	22	60	0,950	1	1 52731 60 0					
		1	85	22	70	1,000	1	1 52731 70 0					
		1	85	22	80	1,050	1	1 52731 80 0					
		1	85	22	90	1,100	1	1 52731 90 0					

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• For passage doors • Latch-bolt only • OPERATION: The latch-bolt is operated by handle from either side • SUPPLIED AS STANDARD: Square striker item 1.06156.20.0			22	60	0,900	1	1	52750	60	0	
				22	70	0,950	1	1	52750	70	0	
				22	80	1,000	1	1	52750	80	0	
	• For passage doors • Latch-bolt only • OPERATION: The latch-bolt is operated by handle from either side • SUPPLIED AS STANDARD: Round striker item 1.06156.25.0			22	60	0,900	1	1	52751	60	0	
				22	70	0,950	1	1	52751	70	0	
				22	90	1,050	1	1	52751	90	0	
	• For external doors • Dead-locking latch-bolt only • OPERATION: The latch-bolt is operated by handle or cylinder from either side The outside handle must be de-activated • SUPPLIED AS STANDARD: Square striker item 1.06158.20.0	1	85	22	60	0,900	1	1	52755	60	0	
		1	85	22	70	0,950	1	1	52755	70	0	
		1	85	22	80	1,000	1	1	52755	80	0	
	• For external doors • Dead-locking latch-bolt only • OPERATION: The latch-bolt is operated by handle or cylinder from either side The outside handle must be de-activated • SUPPLIED AS STANDARD: Round striker item 1.06158.25.0		85	22	60	0,900	1	1	52756	60	0	
			85	22	70	0,950	1	1	52756	70	0	
			85	22	80	1,000	1	1	52756	80	0	
	• FUNCTION TYPE B: • For panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch only with antipicking device • Split square spindle • Reversible panic function • The outside handle can be disactivated with the key • Outside: the latch can be operated with the handle, the key activates/disactivates the handle • Inside: the latch can be operated with the handle or the panic exit device, the key activates/disactivates the outside handle • Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains disactivated after the door is closed (in stand-by)		85	22	60	0,900	1	1	52760	60	0	
			85	22	70	0,950	1	1	52760	70	0	
			85	22	90	1,050	1	1	52760	90	0	

CISA

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• FUNCTION TYPE B: • For panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch only with antipicking device • Split square spindle • Reversible panic function • The outside handle can be disactivated with the key • Outside: the latch can be operated with the handle, the key activates/disactivates the handle • Inside: the latch can be operated with the handle or panic exit device, the key activates/disactivates the outside handle • Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains disactivated after the door is closed (in stand-by)		85	22	60	0,900	1	1	52761	60	0		
			85	22	70	0,950	1	1	52761	70	0		
			85	22	80	1,000	1	1	52761	80	0		
			85	22	90	1,050	1	1	52761	90	0		
	• For cabinet doors • deadbolt only • OPERATION: The deadbolt is operated by cylinder from either side • SUPPLIED AS STANDARD: Square striker item 1.06159.20.0	1		22	60	0,900	1	1	52780	60	0		
		1		22	70	0,950	1	1	52780	70	0		
		1		22	80	1,000	1	1	52780	80	0		
		1		22	90	1,050	1	1	52780	90	0		
	• For cabinet doors • deadbolt only • OPERATION: The deadbolt is operated by cylinder from either side • SUPPLIED AS STANDARD: Round striker item 1.06159.25.0	1		22	60	0,900	1	1	52781	60	0		
		1		22	70	0,950	1	1	52781	70	0		
		1		22	80	1,000	1	1	52781	80	0		
		1		22	90	1,050	1	1	52781	90	0		
	• FUNCTION TYPE A: for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Through square spindle • **The deadbolt is automatically released** when closing the the door • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device	1	85	22	60	0,950	1	1	52840	60	0		
		1	85	22	70	1,000	1	1	52840	70	0		
		1	85	22	80	1,050	1	1	52840	80	0		
		1	85	22	90	1,100	1	1	52840	90	0		
	• FUNCTION TYPE A: for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Through square spindle • **The deadbolt is automatically released** when closing the the door • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device	1	85	22	60	0,950	1	1	52860	60	0		
		1	85	22	70	1,000	1	1	52860	70	0		
		1	85	22	80	1,050	1	1	52860	80	0		
		1	85	22	90	1,100	1	1	52860	90	0		

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• FUNCTION TYPE A: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch and deadbolt with antipicking device • Through square spindle • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device	1	85	22	60	0,950	1	1	52842	60	0	
		1	85	22	70	1,000	1	1	52842	70	0	
		1	85	22	80	1,050	1	1	52842	80	0	
		1	85	22	90	1,100	1	1	52842	90	0	
	• FUNCTION TYPE A: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Latch and deadbolt with antipicking device • Through square spindle • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device	1	85	22	60	0,950	1	1	52862	60	0	
		1	85	22	70	1,000	1	1	52862	70	0	
		1	85	22	80	1,050	1	1	52862	80	0	
		1	85	22	90	1,100	1	1	52862	90	0	
	• FUNCTION TYPE D: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Split square spindle • Reversible panic function • Outside:the latch can be operated with the handle • Inside: latch and deadbolt are operated with the handle or the panic exit device • The key operates only the deadbolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the deadbolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open)	1	85	22	60	0,950	1	1	52844	60	0	
		1	85	22	70	1,000	1	1	52844	70	0	
		1	85	22	80	1,050	1	1	52844	80	0	
		1	85	22	90	1,100	1	1	52844	90	0	
	• FUNCTION TYPE D: • for panic function doors (for the suitable panic exit device to install, see the relevant catalogue) • Split square spindle • Reversible panic function • Outside:the latch can be operated with the handle • Inside: latch and deadbolt are operated with the handle or the panic exit device • The key operates only the deadbolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the deadbolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open)	1	85	22	60	0,950	1	1	52864	60	0	
		1	85	22	70	1,000	1	1	52864	70	0	
		1	85	22	80	1,050	1	1	52864	80	0	
		1	85	22	90	1,100	1	1	52864	90	0	



Technical features:
- Satin lacquered brass faceplate and striker
- Semi-matt black lacquered steel case
- Reversible, nickel-plated latch
- Nickel-plated, antipicking bolt (if provided)
- Nickel-plated deadbolt
- Can be fitted with: escutcheons, roses, handle plates and through screws
- Through-spindle





Supplied as standard:
- Striker
- Striker and cylinder fixing screws

On request:
- Satin lacquered chrome-plated finish (fin. 18)

Hand:
0 = Non-handed

Cylinder to be ordered separately





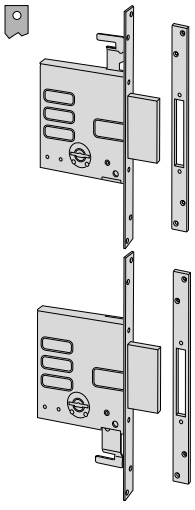
Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight Kg	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• FUNCTION TYPE A: • FOR PANIC FUNCTION DOORS (for the suitable panic exit device to install, see the relevant catalogue) • Deadbolt and dead-locking latch • SUPPLIED AS STANDARD: striker item 1.06106.01.0 • ON REQUEST: Faceplate 18x240 (pers. AG) Without antipicking bolt (suffix AF)	1	85	22	40	0,720	1	1	52810	40	1	
		1	85	22	40	0,720	1	1	52810	40	2	
		1	85	22	45	0,760	1	1	52810	45	0	
		1	85	22	50	0,780	1	1	52810	50	0	
		1	85	22	60	0,840	1	1	52810	60	0	
		1	85	22	70	0,920	1	1	52810	70	0	
	• FUNCTION TYPE A: • FOR PANIC FUNCTION DOORS (for the suitable panic exit device to install, see the relevant catalogue) • Deadbolt and dead-locking latch • SUPPLIED AS STANDARD: striker item 1.06106.05.0 • ON REQUEST: Faceplate 18x240 (spec. AG) Without antipicking bolt (suffix AF)	1	85	22	40	0,720	1	1	52830	40	1	
		1	85	22	40	0,720	1	1	52830	40	2	
		1	85	22	45	0,760	1	1	52830	45	0	
		1	85	22	50	0,780	1	1	52830	50	0	
		1	85	22	60	0,840	1	1	52830	60	0	
		1	85	22	70	0,920	1	1	52830	70	0	
	• FOR PASSAGE DOORS • Latch bolt only • Supplied as standard strikers		85	22	60	0,790	1	1	52318	60	0	
	• FOR PASSAGE DOORS • Latch bolt only • Supplied as standard strikers		85	22	60	0,790	1	1	52338	60	0	






Technical features:
- Nickel-plated satin steel faceplate and striker
- Zinc-plated steel case
- Reversible, nickel-plated latch
- Nickel-plated steel deadbolt

Supplied as standard:
- Striker
- 2 escutcheons : inside item 1.06143.00.0, outside item 1.06082.00.0
- 3 keys
- Fixing screws

Hand:
0 = Non-handed

Type	Description	Key item	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt only • SUPPLIED AS STANDARD: striker item 1.06231.00.0	 1 00100 00 1	4	25	52	1,150	1	1	57010	50	0		
			4	25	60	1,200	1	1	57010	60	0		
			4	25	70	1,250	1	1	57010	70	0		
		 1 00102 00 1	4	25	52	1,160	1	1	57010	51	0		
			4	25	60	1,310	1	1	57010	61	0		
			4	25	70	1,280	1	1	57010	71	0		
	• Deadbolt only • Pre-set for additional locking points • SUPPLIED AS STANDARD: striker item 1.06235.00.0 Two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0	 1 00100 00 1	4	25	60	1,385	1	1	57015	60	0		
			4	25	70	1,430	1	1	57015	70	0		
		 1 00102 00 1	4	25	60	1,410	1	1	57015	61	0		
			4	25	70	1,460	1	1	57015	71	0		
	• Pair of locks deadbolt only • Pre-set for additional locking points • SUPPLIED AS STANDARD: two strikers item 1.06235.00.0 two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06416.00.0 Floor striker item 1.06086.00.0	 1 00100 00 1	4	25	60	2,455	1	1	57020	60	0		
			4	25	70	2,540	1	1	57020	70	0		
		 1 00102 00 1	4	25	60	2,610	1	1	57020	61	0		
			4	25	70	2,550	1	1	57020	71	0		




Type	Description	Key item	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06271.00.0	 1 00100 00 1	4	85	25	60	1,475	1	**1 57250 60 0**
		 1 00102 00 1	4	85	25	60	1,500	1	**1 57250 61 0**
	• Deadbolt and latch • Pre-set for additional locking points • SUPPLIED AS STANDARD: striker item 1.06272.00.0 Two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0	 1 00100 00 1	4	85	25	60	1,700	1	**1 57255 60 0**
		 1 00102 00 1	4	85	25	60	1,750	1	**1 57255 61 0**
	• For metal profiles • deadbolt and latch • Pre-set for additional locking points • Without striker • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0	 1 00100 00 1	4	85	25	60	1,500	1	**1 57256 60 0**

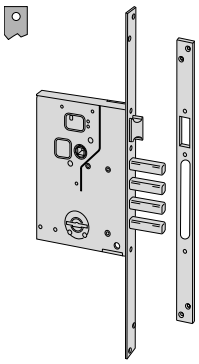



Technical features:
- Painted, brass plated satin steel faceplate and striker
- Zinc-plated steel case
- Reversible, nickel-plated latch
- Nickel-plated steel multiple deadbolts

Supplied as standard:
- Striker
- 2 escutcheons: inside item 1.06143.00.0, outside item 1.06082.00.0
- 3 keys
- Fixing screws

Hand:
0 = Non-handed

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• 3 deadbolts only • SUPPLIED AS STANDARD: striker item 1.06283.00.0	 1 00101 00 1	4		25	50	1,065	1	1	57028	50	0	
		 1 00102 00 1	4		25	51	1,065	1	1	57028	51	0	
	• 4 deadbolts only • SUPPLIED AS STANDARD: striker item 1.06283.01.0	 1 00101 00 1	4		25	60	1,150	1	1	57028	60	0	
		 1 00102 00 1	4		25	61	1,150	1	1	57028	61	0	
	• 4 deadbolts only • Pre-set for additional locking points • SUPPLIED AS STANDARD: Two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 striker item 1.06283.02.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0	 1 00101 00 1	4		25	60	1,400	1	1	57033	60	0	




Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Latch and 4 deadbolts • SUPPLIED AS STANDARD: striker item 1.06284.00.0	 1 00101 00 1	4	85	25	60	1,410	1	1	57260	60	0	
		 1 00102 00 1	4	85	25	60	1,425	1	1	57260	61	0	
	• Latch and 4 deadbolts • Pre-set for additional locking points • SUPPLIED AS STANDARD: Two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 striker item 1.06284.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0	 1 00101 00 1	4	85	25	60	1,700	1	1	57265	60	0	
		 1 00102 00 1	4	85	25	60	1,715	1	1	57265	61	0	






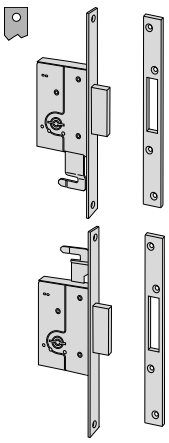
Technical features:
- Nickel-plated steel faceplate and striker
- Zinc-plated steel case
- Flat, reversible, nickel-plated latch
- Nickel-plated steel deadbolt
- Adjustable roller from 2 to 13 mm

Supplied as standard:
- Striker
- 2 escutcheons: inside item 1.06143.00.0, outside item 1.06082.00.0
- 3 keys
- Fixing screws

Hand:
0 = Non-handed

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06279.00.0	 1 00100 00 1	2	85	22	40	0,950	1	1	57210	40	0	
			2	85	22	45	0,900	1	1	57210	45	0	
			2	85	22	50	1,000	1	1	57210	50	0	
			2	85	22	60	1,070	1	1	57210	60	0	
	• Deadbolt and latch • SUPPLIED AS STANDARD: striker item 1.06278.00.0	 1 00100 00 1	2	85	22	40	0,935	1	1	57211	40	0	
			2	85	22	45	0,980	1	1	57211	45	0	
			2	85	22	50	1,020	1	1	57211	50	0	
			2	85	22	60	1,070	1	1	57211	60	0	
		 1 00102 00 1	2	85	22	40	0,890	1	1	57211	41	0	
			2	85	22	45	0,890	1	1	57211	46	0	
			2	85	22	50	1,030	1	1	57211	51	0	
			2	85	22	60	1,075	1	1	57211	61	0	
	• Deadbolt and latch • Pre-set for additional locking points • SUPPLIED AS STANDARD: striker item 1.06272.00.0 Two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0	 1 00100 00 1	2	85	25	45	1,340	1	1	57215	45	0	
			2	85	25	50	1,360	1	1	57215	50	0	
			2	85	25	60	1,420	1	1	57215	60	0	
		 1 00102 00 1	2	85	25	45	1,340	1	1	57215	46	0	
			2	85	25	50	1,365	1	1	57215	51	0	
			2	85	25	60	1,430	1	1	57215	61	0	

CISA




Type	Description	Key item	Throws	Centre Distance	Facaplate	Backset	Unit weight Kg	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Deadbolt and roller latch • Pre-set for additional locking points • SUPPLIED AS STANDARD: Special striker Two guides for extension bolts item 1.06085.00.0 Top striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0	 1 00100 00 1	2	85	25	45	1,280	1	1 57217 45 0
			2	85	25	50	1,310	1	1 57217 50 0
			2	85	25	60	1,260	1	1 57217 60 0
	• Deadbolt only • SUPPLIED AS STANDARD: striker item 1.06282.00.0	 1 00100 00 1	2		22	40	0,690	1	1 57220 40 0
			2		22	45	0,710	1	1 57220 45 0
			2		22	50	0,730	1	1 57220 50 0
			2		22	60	0,765	1	1 57220 60 0
		 1 00102 00 1	2		22	40	0,700	1	1 57220 41 0
			2		22	45	0,640	1	1 57220 46 0
			2		22	50	0,740	1	1 57220 51 0
			2		22	60	0,680	1	1 57220 61 0
	• Deadbolt only • Pre-set for additional locking points • SUPPLIED AS STANDARD: striker item 1.06235.00.0 Two guides for extension bolts item 1.06085.00.0 Upper striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0	 1 00100 00 1	2		25	45	0,945	1	1 57225 45 0
			2		25	50	0,960	1	1 57225 50 0
			2		25	60	1,000	1	1 57225 60 0
		 1 00102 00 1	2		25	45	0,950	1	1 57225 46 0
			2		25	50	0,960	1	1 57225 51 0
			2		25	60	1,000	1	1 57225 61 0
	• Pair of locks deadbolt only • Pre-set for additional locking points • SUPPLIED AS STANDARD: Two strikers item 1.06235.00.0 Two guides for extension bolts item 1.06085.00.0 Top striker item 1.06084.00.0 • ON REQUEST: extension bolts item 1.06416.00.0 Floor striker item 1.06086.00.0	 1 00100 00 1	2		25	45	1,670	1	1 57230 45 0
			2		25	50	1,720	1	1 57230 50 0
			2		25	60	1,790	1	1 57230 60 0
		 1 00102 00 1	2		25	45	1,680	1	1 57230 46 0
			2		25	50	1,735	1	1 57230 51 0
			2		25	60	1,812	1	1 57230 61 0



Technical features:
- Painted, brass plated steel faceplate and striker
- Zinc-plated steel case
- Flat, reversible, nickel-plated latch
- Nickel-plated steel multiple deadbolts

Supplied as standard:
- Striker
- Escutcheons item 1.06144.10.0
- 3 keys
- Fixing screws

Hand:
0 = Non-handed

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
	• Latch and 3 deadbolts • SUPPLIED AS STANDARD: striker item 1.06279.12.0	 1 00101 00 1	2	85	22	45	0,960	1	1	57290 45	0	
			2	85	22	50	1,030	1	1	57290 50	0	
			2	85	22	60	1,095	1	1	57290 60	0	
		 1 00102 00 1	2	85	22	45	0,960	1	1	57290 46	0	
			2	85	22	50	1,030	1	1	57290 51	0	
			2	85	22	60	1,085	1	1	57290 61	0	
	• Latch and 3 deadbolts • SUPPLIED AS STANDARD: striker item 1.06278.11.0	 1 00101 00 1	2	85	22	45	1,000	1	1	57291 45	0	
			2	85	22	50	1,030	1	1	57291 50	0	
			2	85	22	60	1,100	1	1	57291 60	0	
		 1 00102 00 1	2	85	22	45	0,960	1	1	57291 46	0	
			2	85	22	50	1,035	1	1	57291 51	0	
			2	85	22	60	0,960	1	1	57291 61	0	
	• Latch and 3 deadbolts • Pre-set for additional locking points • SUPPLIED AS STANDARD: Two plates item 1.06085.00.0 Upper striker item 1.06084.00.0 striker item 1.06284.00.0 • ON REQUEST: extension bolts item 1.06415.00.0 Floor striker item 1.06086.00.0	 1 00101 00 1	2	85	25	45	1,340	1	1	57296 45	0	
			2	85	25	50	1,400	1	1	57296 50	0	
			2	85	25	60	1,435	1	1	57296 60	0	
		 1 00102 00 1	2	85	25	45	1,396	1	1	57296 46	0	
			2	85	25	50	1,370	1	1	57296 51	0	
			2	85	25	60	1,450	1	1	57296 61	0	



Technical features:
- Steel case and striker, painted in a metallized, antique bronze colour
- Nickel-plated steel latch
- Nickel-plated steel multiple deadbolts





Supplied as standard:
- Striker
- Outside escutcheon item 1.06043.00.0
- Inside escutcheon item 1.06458.11.0
- Fixing screws
- Instruction sheet



On request:
- Protective rose for item 1.06490.02.0 , 1.06490.02.0.B1
- Spacer item 1.06472.40.0

Hand:
1 = R.H. inwards
2 = L.H. inwards

Cylinder to be ordered separately



Type	Description	Key item	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• 4 deadbolts only		2	64	2,120	1	1	56152	60	1		
			2	64	2,120	1	1	56152	60	2		
	• 4 deadbolts only • SUPPLIED AS STANDARD: 2 extension bolts item 1.06425.07.0 2 divertor item 1.06418.00.0		2	64	2,130	1	1	56162	60	1		
			2	64	2,130	1	1	56162	60	2		
	• 4 deadbolts only • SUPPLIED AS STANDARD: • Secondary divertor case • ON REQUEST: Extension bolts item 1.06426.07.0 2 divertor item 1.06418.00.0		2	64	2,710	1	1	56172	60	1		
			2	64	2,710	1	1	56172	60	2		
	• Latch and 3 deadbolts • Draw-back pull		2	64	2,120	1	1	56157	60	1		
			2	64	2,120	1	1	56157	60	2		









Type	Description	Key item	Throws	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Latch and 3 deadbolts • Draw-back pull • SUPPLIED AS STANDARD: 2 extension bolts item 1.06425.07.0 2 divertor item 1.06418.00.0		2	64	2,130	1	1	56167	60	1		
			2	64	2,130	1	1	56167	60	2		
	• Latch and 3 deadbolts • Draw-back pull • ON REQUEST: 2 extension bolts item 1.06425.07.0 2 divertor item 1.06418.00.0		2	64	2,710	1	1	56177	60	1		
			2	64	2,710	1	1	56177	60	2		








Technical features:
- Steel case and striker, painted in a metallized, antique bronze colour
- Nickel-plated steel latch
- Nickel-plated steel multiple deadbolts
- External draw-back pull
- Picking resistant protection device on the latch lever
- External key guide

Supplied as standard:
- Striker
- Outside escutcheon item 1.06140.00.0
- 3 keys:
  item 1.00125.00.1 for hand 1
  item 1.00125.00.2 for hand 2
- Fixing screws
- Instruction sheet

Hand:
1 = R.H. inwards
2 = L.H. inwards

Type	Description	Key item	Throws	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• 4 deadbolts only	 1 00125 00 1/2	4	64	2,510	1	1	57152	60	1		
			4	64	2,510	1	1	57152	60	2		
	• 4 deadbolts only • SUPPLIED AS STANDARD: 2 extension bolts item 1.06425.07.0 2 divertor item 1.06418.00.0	 1 00125 00 1/2	4	64	2,520	1	1	57162	60	1		
			4	64	2,520	1	1	57162	60	2		
	• 4 deadbolts only • SUPPLIED AS STANDARD: • Secondary divertor case • ON REQUEST 2 extension bolts item 1.06426.07.0 2 divertor item 1.06418.00.0	 1 00125 00 1/2	4	64	3,100	1	1	57172	60	1		
			4	64	3,100	1	1	57172	60	2		
	• Latch and 3 deadbolts • Draw-back pull	 1 00125 00 1/2	4	64	2,510	1	1	57157	60	1		
			4	64	2,510	1	1	57157	60	2		

Type	Description	Key item	Throws	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Latch and 3 deadbolts • Draw-back pull • SUPPLIED AS STANDARD: 2 extension bolts item 1.06425.07.0 2 divertor item 1.06418.00.0	 1 00125 00 1/2	4	64	2,520	1	1	57167	60	1		
			4	64	2,520	1	1	57167	60	2		
	• Latch and 3 deadbolts • Draw-back pull • ON REQUEST: 2 extension bolts item 1.06425.07.0 2 divertor item 1.06418.00.0	 1 00125 00 1/2	4	64	3,100	1	1	57177	60	1		
			4	64	3,100	1	1	57177	60	2		
	• Top and bottom locking • Inside coin activated piece • ON REQUEST: 2 extension bolts item 1.06425.07.0 (pc.2)				0,735	1	1	57192	00	0		







Technical features:
- Zinc-plated steel case
- Reversible flat latch with double chamfer, nickel-plated
- Nickel-plated deadbolt, either in a regular or multiple bolts configuration







Supplied as standard:
- Fixing screws for lock and striker
- Instruction sheet

Hand:
0 = Non-handed



Cylinder to be ordered separately

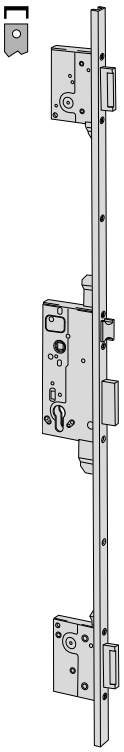


Type	Description	DEADBOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• bronze-plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm. • Latch-bolt and 3 lateral deadbolts • ON REQUEST: Set of bronze-plated strikiers item 1.07174.00.0 bronze-plated striker item 1.06329.00.0 bronze-plated long lip item 1.06293.00.0		3	2	85	22	45	2,600	6	1	53002	45	0		
			3	2	85	22	50	2,600	6	1	53002	50	0		
			3	2	85	22	60	2,700	6	1	53002	60	0		
	• Yellow zinc plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm. • Latch-bolt and 3 lateral deadbolts • ON REQUEST: Set of yellow zinc plated strikers item 1.07174.00.0.82 Yellow zinc plated striker item 1.06329.00.0.82 Brass long lip item 1.06293.01.0		3	2	85	22	45	3,420	6	1	53002	45	0	82	
			3	2	85	22	50	3,420	6	1	53002	50	0	82	
			3	2	85	22	60	3,420	6	1	53002	60	0	82	
	• High-resistance zinc-plated flat faceplate 22x3 mm, 1600 mm. • 3 lateral deadbolts • ON REQUEST: High-resistance zinc-plated strike plate set item 1.07174.00.0.B7 High-resistance zinc-plated strike plate item 1.06329.00.0.B7		3	2	85	22	45	3,000	6	1	53002	45	0	B7	
			3	2	85	22	50	2,600	6	1	53002	50	0	B7	
			3	2	85	22	60	2,700	6	1	53002	60	0	B7	


Type	Description	DEADBOLTS	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• bronze-plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm. • Latch-bolt and 3 lateral deadbolts • ON REQUEST: Set of bronze-plated strikers item 1.07175.00.0 bronze-plated striker item 1.06328.00.0 bronze-plated long lip item 1.06293.00.0		3	2	85	22	45	2,600	6	1	53003	45	0	
			3	2	85	22	50	4,000	6	1	53003	50	0	
			3	2	85	22	60	4,000	6	1	53003	60	0	
	• Yellow zinc plated steel 'flat' faceplate 22 x 3 mm., 1.600 mm. • Latch-bolt and 3 lateral deadbolts • ON REQUEST: Set of yellow zinc plated strikers item 1.07175.00.0.82 Yellow zinc plated striker item 1.06328.00.0.82 Brass long lip item 1.06293.01.0		3	2	85	22	45	2,600	6	1	53003	45	0	82
			3	2	85	22	50	3,420	6	1	53003	50	0	82
			3	2	85	22	60	3,420	6	1	53003	60	0	82
	• High-resistance zinc-plated flat faceplate 22x3 mm, 1600 mm. • Latch and 3 lateral deadbolts • ON REQUEST: High-resistance zinc-plated strike plate set item 1.07175.00.0.B7 High-resistance zinc-plated strike plate item 1.06328.00.0.B7		3	2	85	22	45	2,600	6	1	53003	45	0	B7
			3	2	85	22	50	4,000	6	1	53003	50	0	B7
			3	2	85	22	60	4,000	6	1	53003	60	0	B7
	• Lacquered satin brass adjustable 'flat' faceplate 22 x 3 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 35 mm. • Latch-bolt and 3 lateral deadbolts • ON REQUEST: Set of lacquered satin brass strikers item 1.07176.00.0 Set of long lipped lacquered satin brass strikers item 1.07176.10.0 Lacquered satin brass adjustable striker item 1.06330.00.0		3	2	85	22	50	4,750	2	1	53035	50	0	
			3	2	85	22	60	4,750	2	1	53035	60	0	

CISA

Type	Description	DEADBOLTS Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 35 mm. • Latch-bolt and central deadbolt • Vertical extension bolts • SUPPLIED AS STANDARD: 2 top strikers item 1.06292.00.0 and item 1.06292.01.0 1 floor striker item 1.06086.00.0 • ON REQUEST: Lacquered satin brass striker item 1.06279.11.0 Long lipped lacquered satin brass striker item 1.06213.05.0 (2 pcs required)	3	2	85	22	45	4,750	2	1	53131	45	0		
		3	2	85	22	50	4,750	2	1	53131	50	0		
		3	2	85	22	60	4,750	2	1	53131	60	0		
	• Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 35 mm. • Latch-bolt and central deadbolt • Vertical extension bolts • SUPPLIED AS STANDARD: 2 top strikers item 1.06292.00.0 and item 1.6292.01.0 1 floor striker item 1.06086.00.0 • ON REQUEST: Lacquered satin brass striker item 1.06279.11.0 Long lipped lacquered satin brass striker item 1.06213.05.0 (2 pcs required)	3	2	85	22	45	4,750	2	1	53151	45	0		
		3	2	85	22	50	4,750	2	1	53151	50	0		
		3	2	85	22	60	4,750	2	1	53151	60	0		
	• Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 35 mm. • Latch-bolt and 2 lateral deadbolts • Top vertical extension bolt • SUPPLIED AS STANDARD: 2 top strikers item 1.06292.00.0 and item 1.06292.01.0 • ON REQUEST: Set of lacquered satin brass strikers item 1.07178.00.0 Set of long lipped lacquered satin brass strikers item 1.07178.10.0	3	2	85	22	45	3,900	2	1	53133	45	0		
		3	2	85	22	50	3,900	2	1	53133	50	0		
		3	2	85	22	60	3,900	2	1	53133	60	0		
	• Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm. upper adjustment 650 mm. lower adjustment 35 mm. • Latch-bolt and 2 lateral deadbolts • Top vertical extension bolt • SUPPLIED AS STANDARD: 2 top strikers item 1.06292.00.0 and item 1.06292.01.0 • ON REQUEST: Set of lacquered satin brass strikers item 1.07179.00.0 Set of long lipped lacquered satin brass strikers item 1.07179.10.0	3	2	85	22	50	3,900	2	1	53153	50	0		
		3	2	85	22	60	3,900	2	1	53153	60	0		



- Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm., 2.600 mm.
  upper adjustment 650 mm.
  lower adjustment 35 mm.
- Latch-bolt and 3 lateral deadbolts
- ON REQUEST:
  Set of lacquered satin brass strikers item 1.07176.00.0
  Set of long lipped lacquered satin brass strikers item 1.07176.10.0
  Lacquered satin brass adjustable striker item 1.06330.00.0




DEADBOLTS	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	22	45	4,750	2	1	**53135**	**45**	**0**			
3	2	85	22	50	4,750	2	1	**53135**	**50**	**0**			
3	2	85	22	60	4,750	2	1	**53135**	**60**	**0**			

- Lacquered satin brass adjustable U-shaped faceplate 22 x 10 mm. 2.600 mm.
  upper adjustment 650 mm.
  lower adjustment 35 mm.
- Latch-bolt and 3 lateral deadbolts
- ON REQUEST:
  Set of lacquered satin brass strikers item 1.07177.00.0
  Set of long lipped lacquered satin brass strikers item 1.07177.10.0
  Lacquered satin brass adjustable striker item 1.06331.00.0



DEADBOLTS	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	22	45	4,750	2	1	**53155**	**45**	**0**			
3	2	85	22	50	4,750	2	1	**53155**	**50**	**0**			
3	2	85	22	60	4,750	2	1	**53155**	**60**	**0**			



- Lacquered satin brass adjustable U-shaped faceplate
  22 x 10 mm., 2.600 mm.
  upper adjustment 650 mm.
  lower adjustment 35 mm.
- Latch-bolt and 3 lateral deadbolts
- Vertical extension bolts
- SUPPLIED AS STANDARD:
  2 upper strikers item 1.06292.00.0 and item 1.06292.01.0
  1 floor striker item 1.06086.00.0
- ON REQUEST:
  Set of lacquered satin brass strikers item 1.07176.00.0
  Set of long lipped lacquered satin brass strikers
  item 1.07176.10.0
  Lacquered satin brass adjustable striker item 1.06330.00.0



DEADBOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	5	2	85	22	45	3,900	2	1	53137	45	0		
	5	2	85	22	50	3,900	2	1	53137	50	0		
	5	2	85	22	60	3,900	2	1	53137	60	0		

- Lacquered satin brass adjustable U-shaped faceplate
  22 x 10 mm., 2.600 mm.
  upper adjustment 650 mm.
  lower adjustment 35 mm.
- Latch-bolt and 3 lateral deadbolts
- Vertical extension bolts
- SUPPLIED AS STANDARD:
  2 upper strikers item 1.06292.00.0 and item 1.06292.01.0
  1 floor striker item 1.06086.00.0
- ON REQUEST:
  Set of lacquered satin brass strikers item 1.07177.00.0
  Set of long lipped lacquered satin brass strikers
  item 1.07177.10.0
  Lacquered satin brass adjustable striker item 1.06331.00.0




DEADBOLTS	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	5	2	85	22	45	4,750	2	1	53157	45	0		
	5	2	85	22	50	3,900	2	1	53157	50	0		
	5	2	85	22	60	4,750	2	1	53157	60	0		




Technical features:
- Zinc-plated steel case
- Reversible flat latch with double chamfer, nickel-plated
- Nickel-plated deadbolt, either in a regular or multiple bolts configuration
- U shaped adjustable faceplate (22 x 10) in satin finish laquered brass, 2,600 mm. height
  upper adjustment 650 mm.
  lower adjustment 35 mm.

Supplied as standard:
- 3 keys
- Fixing screws for lock and striker
- Instruction sheet

Hand:
0 = Non-handed




- Lacquered satin brass adjustable faceplate
- Latch-bolt and central deadbolt
- Vertical extension bolts
- SUPPLIED AS STANDARD:
  2 top strikers item 1.06292.00.0 and item 1.06292.01.0
  1 floor striker item 1.06086.00.0
  1 Inside escutcheon item 1.06143.00.0
  1 Outside escutcheon item 1.06082.00.0
- ON REQUEST:
  Lacquered satin brass striker item 1.06279.11.0
  Long lipped lacquered satin brass striker item 1.06213.05.0 (2 pcs. required)





1 00100 00 1

Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	22	45	4,750	2	1	57831	45	0		
3	2	85	22	50	4,750	2	1	57831	50	0		
3	2	85	22	60	4,750	2	1	57831	60	0		







1 00102 00 1

Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	22	45	4,750	2	1	57831	46	0		
3	2	85	22	50	4,750	2	1	57831	51	0		
3	2	85	22	60	4,750	2	1	57831	61	0		

- Lacquered satin brass adjustable faceplate
- Latch-bolt and central deadbolt
- Vertical extension bolts
- SUPPLIED AS STANDARD:
  2 top strikers item 1.06292.00.0 and item 1.06292.01.0
  1 floor striker item 1.06086.00.0
  Escutcheons item 1.06144.10.0
- ON REQUEST:
  Lacquered satin brass striker item 1.06279.11.0
  Long lipped lacquered satin brass striker item 1.06213.05.0 (2 pcs. required)





1 00101 00 1


Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	22	45	4,750	2	1	57851	45	0		
3	2	85	22	50	4,750	2	1	57851	50	0		
3	2	85	22	60	4,750	2	1	57851	60	0		







1 00102 00 1

Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	22	45	4,750	2	1	57851	46	0		
3	2	85	22	50	4,750	2	1	57851	51	0		
3	2	85	22	60	4,750	2	1	57851	61	0		




- Lacquered satin brass adjustable faceplate
- Latch-bolt and 2 lateral deadbolts
- Top vertical extension bolt
- SUPPLIED AS STANDARD:
  2 top strikers item 1.06292.00.0 and item 1.06292.01.0
  1 Inside escutcheon item 1.06143.00.0
  1 Outside escutcheon item 1.06082.00.0
- ON REQUEST:
  Set of lacquered satin brass strikers item 1.07178.00.0
  Set of long lipped lacquered satin brass striker item 1.07178.10.0





1 00100 00 1

Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
3	2	85	22	45	4,750	2	1 57833 45 0
3	2	85	22	50	4,750	2	1 57833 50 0
3	2	85	22	60	4,750	2	1 57833 60 0






1 00102 00 1

Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
3	2	85	22	45	4,750	2	1 57833 46 0
3	2	85	22	50	4,750	2	1 57833 51 0
3	2	85	22	60	4,750	2	1 57833 61 0

- Lacquered satin brass adjustable faceplate
- Latch-bolt and 2 lateral deadbolts
- Top vertical extension bolt
- SUPPLIED AS STANDARD:
  2 top strikers item 1.06292.00.0 and item 1.06292.01.0
  Escutcheons item 1.06144.10.0
- ON REQUEST:
  Set of lacquered satin brass strikers item 1.07179.00.0
  Set of long lipped lacquered satin brass striker item 1.07179.10.0





1 00101 00 1


Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
3	2	85	22	45	4,750	2	1 57853 45 0
3	2	85	22	50	4,750	2	1 57853 50 0
3	2	85	22	60	4,750	2	1 57853 60 0





1 00102 00 1

Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
3	2	85	22	45	4,750	2	1 57853 46 0
3	2	85	22	50	4,750	2	1 57853 51 0



- Lacquered satin brass adjustable faceplate
- Latch-bolt and 3 lateral deadbolts
- SUPPLIED AS STANDARD:
  Inside escutcheon item 1.06143.00.0
  Outside escutcheon item 1.06082.00.0
- ON REQUEST:
  Set of lacquered satin brass strikers item 1.07176.00.0
  Set of long lipped lacquered satin brass striker item 1.07176.10.0
  Lacquered satin brass adjustable striker item 1.06330.00.0





1 00100 00 1

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	22	45	4,750	2	1	57835	45	0		
3	2	85	22	50	4,750	2	1	57835	50	0		
3	2	85	22	60	4,750	2	1	57835	60	0		





1 00102 00 1

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	22	45	4,750	2	1	57835	46	0		
3	2	85	22	50	4,750	2	1	57835	51	0		
3	2	85	22	60	4,750	2	1	57835	61	0		

- Lacquered satin brass adjustable faceplate
- Latch-bolt and 3 lateral deadbolts
- SUPPLIED AS STANDARD:
  Escutcheons item 1.06144.10.0
- ON REQUEST:
  Set of lacquered satin brass strikers item 1.07177.00.0
  Set of long lipped lacquered satin brass striker item 1.07177.10.0
  Lacquered satin brass adjustable striker item 1.06331.00.0





1 00101 00 1

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	22	45	4,750	2	1	57855	45	0		
3	2	85	22	50	4,750	2	1	57855	50	0		
3	2	85	22	60	4,750	2	1	57855	60	0		





1 00102 00 1

Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
3	2	85	22	45	4,750	2	1	57855	46	0		
3	2	85	22	50	4,750	2	1	57855	51	0		
3	2	85	22	60	4,750	2	1	57855	61	0		










Technical features:
- Handles and protective roses in satin-finished AISI 304 stainless steel.
- Handle levers pre-mounted on mechanism with return spring.
- Fixed directly or using through screws on 38 to 54 mm thick doors. Fixing screws and square spindle provided






Certifications:
- Grade 3 - category of use (in places with high frequency of use)
- EN1906 - Grade 7 durability (200,000 cycles)
- EN1670 - Grade 2 corrosion resistance - 96 hours
- EN1634 - Fire resistance - 2 hours on wooden doors and 4 hours on metal doors




Project line



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of handles PL Oval series					0,300	1	1 07070	70	0			
	• Pair of handles PL Oval series. • Supplied as standard: pair of protective roses for Euro profile cylinder					0,300	1	1 07070	80	0			
	• Pair of handles PL Angle series.					0,300	1	1 07070	71	0			
	• Pair of handles PL Angle series. • Supplied as standard: pair of protective roses for Euro profile cylinder.					0,300	1	1 07070	82	0			
	• Pair of handles PL Arcus series					0,300	1	1 07070	72	0			
	• Pair of handles PL Radius series.					0,300	1	1 07070	73	0			
	• Pair of handles PL Radius series. • Supplied as standard: pair of protective roses for Euro profile cylinder					0,300	1	1 07070	81	0			











Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of protective roses for Euro profile cylinders					0,070	1	1	06093	00	0		
	• Pair of solid protective roses					0,070	1	1	06093	01	0		
	• Pair of protective roses for Patent locks or similar					0,070	1	1	06093	02	0		
	• Pair of protective roses for Euro profile cylinders					0,070	1	1	06093	04	0		
	• Thumb turn for bathroom doors.					0,070	1	1	06093	10	0		
	• Thumb turn for bathroom doors WITH vacant/engaged indicator.					0,090	1	1	06093	11	0		










Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Angular non-handed brass striker	12010, 12011	0,110	6	**1 06035 00 0**
	• Brass push-button • ON REQUEST: Nichel plated brass (fin. 12)	12010, 12011, 12015, 12016	0,037	6	**1 06110 00 0**
	• Angular non-handed brass striker	12015, 12016	0,163	6	**1 06218 00 0**
	• Nylon contact set complete with spacers: 2 mm. (Pcs. 4)	11000, 12000, 13000	0,035	6	**1 06510 00 0**
	• Coil set • 12 V ac	12010, 12011, 12015, 12016	0,051	6	**1 07009 00 0**
	• Coil set • 12 V ac	13010	0,071	6	**1 07012 00 0**
	• Gray lacquered steel striker with roller	11610, 11611, 11630, 11631	0,178 0,178	6 6	**1 07017 10 1** **1 07017 10 2**



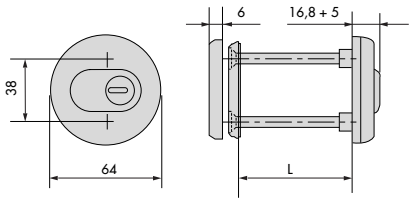

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Striker	1A610, 1A611, 1A630, 1A631	0,200	6	1	07021	10	0		
	• 1 mm spacer for striker	1A610, 1A611, 1A630, 1A631	0,025	12	1	07021	11	0		
	• Striker set including: slide anchoring plate screws	11610, 11921, 11931	0,100 0,100	1 1	1 1	07018 07018	10 10	3 4		
	• Gray lacquered steel striker with roller	11670, 11671	0,210 0,210	6 6	1 1	07019 07019	10 10	1 2		
	• Coil set • 12 V ac • Black nylon support	11610, 11611, 11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,087 0,087	6 6	1 1	07118 07118	00 00	1 2		
	• Coil set • 24 V ac • Black nylon support	11610, 11611, 11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,075 0,082	6 6	1 1	07118 07118	01 01	1 2		






Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Adjustable coil set • 12 V ac • Blue nylon support	11610, 11611, 11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,075	6	**1 07120 00 1**					
			0,074	6	**1 07120 00 2**					
	• Adjustable coil set • 24 V ac • Blue nylon support	11610, 11611, 11630, 11631, 11670, 11671, 11721, 11731, 11761, 11771, 11823, 11921, 11931	0,075	6	**1 07120 01 1**					
			0,075	6	**1 07120 01 2**					
	• Coil set • 12V ac CE	1A610, 1A611, 1A630, 1A631, 1A721, 1A731	0,092	6	**1 07025 00 0**					

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand Fin.	Pers. Spec.
	• Metalized aluminium spacer set	54570, 57580	0,180	6	1	**06091 10 0**	
	• Amaranth red lacquered steel striker	50110, 50111, 50115, 50120, 50121, 50150, 50151, 50160, 50170, 50171, 50180, 50181	0,104	6	1	**07024 00 1**	
			0,090	6	1	**07024 00 2**	










Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Long lipped, brass plated steel striker with round corners	5C031, 5C130, 5C631, 5C671	0,049	25	1 06098 00 0
	• Brass plated steel striker with round corners	5C631, 5C641, 5C671	0,087	25	1 06100 10 0
	• Brass plated striker with round conrners	5C140	0,096	25	1 06100 15 0
	• Long lipped, brass plated steel striker with round corners	52641	0,056	25	1 06101 10 0
	• Long lipped, brass plated steel striker	52621	0,058	25	1 06102 10 0
	• Long lipped, brass striker	5C110	0,057	25	1 06102 13 0
	• Long lipped, brass striker	52300	0,040	25	1 06107 00 0
	• Long lipped, brass striker	5C120	0,055	25	1 06149 00 0
	• Long lipped, brass plated steel striker with round corners	52031	0,090	25	1 06150 00 0
	• Long lipped, brass plated steel striker	52011	0,052	25	1 06152 00 0

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Long lipped, brass plated steel striker	5C021	0,550	25	1 **06162 00 0**
	• Long lipped brass striker	52010	0,055	25	1 **06163 00 0**
	• Brass plated steel striker	5C120, 5C611, 5C621, 5C651	0,074	25	1 **06206 00 0**
	• Long lipped brass striker	5C130, 5C170, 53131, 53151, 57831, 57851	0,055	25	1 **06213 05 0**
	• Brass striker	5C110	0,062	25	1 **06216 00 0**
	• Long lipped brass plated steel striker	5C110, 5C611, 5C651	0,050	25	1 **06223 00 0**
	• Brass plated steel striker	5C110, 5C611, 5C651	0,053	25	1 **06226 00 0**
	• Brass plated steel striker with round corners	5C130, 5C631, 5C671	0,098	25	1 **06243 00 0**
	• Polished, chrome-plated satin-finished external ring	1 06460 05 0, 1 06460 06 0	0,025	12	1 **06473 60 0**











Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Brass striker	52210, 52310	0,025	25	**1 07032 00 0**
	• Protective rose for cylinder series RS3, ASTRAL (with long key CL) and ASIX, in polished golden finish carbonitrited steel • Complete with: Spacers 2 mm. (pcs.19), 1 mm. (pcs. 2) Outside cover plates 2 mm. (pcs.2) Screws M5 x 73 mm. Inner rose	12000, 52000, 53000	0,500	1	**1 06460 15 0**
	• Carbonitrided steel protection rose with polished brass finish • 2 screws (M6) • AVAILABLE FINISHES: Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) Polished chrome (fin. 18)	0A310, 0B310, 08310, 08710	70,0	1	**1 06460 50 0**
		0A310, 0B310, 08310, 08710	110,0 0,320	1	**1 06460 51 0**
	• Carbonitrided steel rotor protection for roses series 06460 and 06461	0A310, 0B310, 08310, 08510, 08710	0,009	50	**1 06466 01 0**





Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Inside brass escutcheon	57000	0,035	12	**1 06081 00 0**
	• Outside brass escutcheon	1 06119 00 0, 1 06142 00 0, 57000	0,030	12	**1 06082 00 0**
	• Hollow outside brass escutcheon	1 06119 00 0, 1 06142 00 0, 57000	0,031	12	**1 06083 00 0**
	• Top steel striker	52526, 56015, 56020, 56255, 57015, 57020, 57024, 57033, 57215, 57217, 57255, 57296	0,028	12	**1 06084 00 0**
	• Brass floor striker diameter 11 mm. • FOR: extension bolts with rods diameter 10 mm	1 06415 00 0, 1 06441 15 0, 1 07088 03 0, 1 07088 04 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57019, 57020, 57024, 57033, 57055, 57215, 57217, 57255, 57259, 57265, 57296, 57831, 57837, 57851, 57857	0,016	12	**1 06086 00 0**



CISA

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: Internal extension bolts with 8 and 10 mm. diameter rods multi-point locks series 46445 extension bolt for Multitop item 1.06449.11.0		0,020	12	**1 06086 02 0**
	• Nylon key guide, with eight spacers	57000	0,050	12	**1 06142 00 0**
	• Inside brass escutcheon with plug	57000	0,032	12	**1 06143 00 0**
	• Nickel-plated steel striker	57010	0,117	25	**1 06231 00 0**
	• Nickel-plated steel striker	57015, 57020, 57220, 57225, 57230	0,124	25	**1 06235 00 0**
	• Nickel-plated steel striker	56250, 57250	0,126	25	**1 06271 00 0**
	• Nickel-plated steel striker	56255, 57215, 57255	0,131	25	**1 06272 00 0**
	• Long lipped nickel-plated steel striker	56255, 57255	0,146	25	**1 06275 00 0**
	• Nickel-plated steel striker	57211	0,100	12	**1 06278 00 0**







CISA®

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Lacquered brass plated satin steel striker	52521, 57291	0,120	12	**1 06278 11 0**
	• Nickel-plated steel striker with round corners	57210	0,096	12	**1 06279 00 0**
	• Lacquered brass plated satin steel striker with round corners	52520, 57290	0,120	12	**1 06279 12 0**
	• Long lipped nickel-plated steel striker	57211, 57215	0,145	25	**1 06281 00 0**
	• Nickel-plated steel striker	57220	0,079	25	**1 06282 00 0**
	• Lacquered brass plated steel striker	1 57028 60 0	0,100	12	**1 06283 01 0**
	• Lacquered brass plated steel striker	56010, 56015, 56020	0,100	12	**1 06283 02 0 B7**
	• Lacquered brass plated steel striker	52526, 57260, 57265, 57296	0,131	25	**1 06284 00 0**
	• Long lipped lacquered brass plated steel striker	57260, 57265	0,140	25	**1 06284 01 0**
	• Zinc plated steel saw resistant tip, 10 mm. • Side push resistance KN 15	1 06415 00 0, 1 06416 00 0, 1 06441 15 0	0,056	12	**1 06291 00 0**




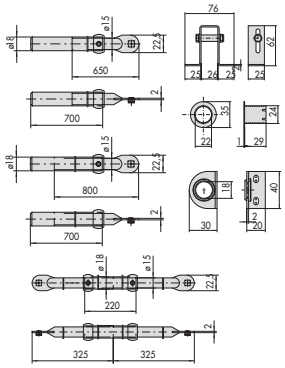



Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc plated hardened steel tip, dia. 10 mm. • Side push resistance KN 25	1 06415 00 0, 1 06416 00 0, 1 06441 15 0, 1 07088 03 0	0,054	12	**1 06291 05 0**
	• Zinc plated steel pin connector	1 06415 00 0, 1 06416 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0	0,016	12	**1 06291 20 0**
	• Zinc plated extension bolts • SUPPLIED AS STANDARD: • Pair of bolts dia. 8 mm. • Pair of tips dia. 10 mm. item 1.06291.05.0 (2 pieces)	52526, 56015, 56016, 56255, 57015, 57016, 57019, 57033, 57035, 57055, 57215, 57217, 57225, 57226, 57255, 57256, 57259, 57265, 57296, 57318, 57336	0,533	12	**1 06415 00 0**
	• Zinc plated extension bolt • SUPPLIED AS STANDARD: • Bolt dia. 8 mm. • Pair of tips dia. 10 mm. item 1.06291.05.0 (2 pieces)	56020, 57020, 57024, 57230	0,350	10	**1 06416 00 0**








Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
	• Indicator of occupancy	52842, 52844, 52862, 52864	0,015	6	1	06146	00	0
	• Split follower	52760, 52761, 52844, 52864	0,047	25	1	07206	01	0

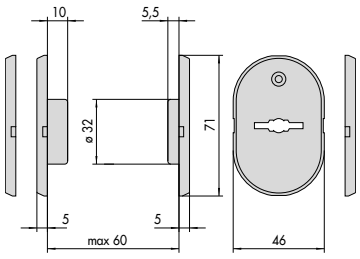






CISA








Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Polished brass protective rose for use with Euro profile cylinders		0,024	100	**1 06043 00 0**
	• Outside brass escutcheon	56152, 56157, 56162, 56167, 56172, 56177, 57152, 57157, 57162, 57167, 57172, 57177	0,029	12	**1 06140 00 0**
	• Hollow outside brass escutcheon • A = 10, door thickness 60 mm.	56152, 56157, 56162, 56167, 56172, 56177, 57152, 57157, 57162, 57167, 57172, 57177	0,032	12	**1 06140 01 0**
	• Hollow outside brass escutcheon • A = 22, door thickness 70 mm.	56152, 56157, 56162, 56167, 56172, 56177, 57152, 57157, 57162, 57167, 57172, 57177	0,037	12	**1 06140 02 0**
	• Bronze lacquered steel top striker	56162, 56167, 56172, 56177, 57162, 57167, 57172, 57177, 57192	0,100	12	**1 06236 00 0**
	• Brass floor striker with sprung dust cover	56162, 56167, 56172, 56177, 57162, 57167, 57172, 57177, 57192	0,028	12	**1 06237 01 0**
	• Set of bronze lacquered steel divertor	56162, 56167, 56172, 56177, 57162, 57167, 57172, 57177, 57192	0,029	12	**1 06418 00 0**





CISA®



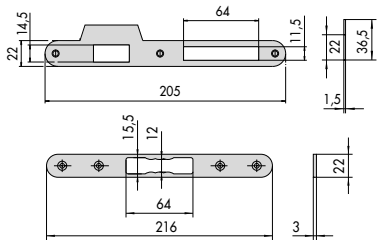

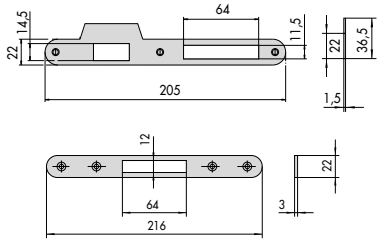
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Bronze lacquered steel bar guide	56162, 56167, 56172, 56177, 57162, 57167, 57172, 57177, 57192	0,030	24	1 **06422 00 0**
	• Bronze lacquered steel long adjustable extension bolt	56162, 56167, 56172, 56177, 57162, 57167, 57172, 57177, 57192	0,766	6	1 **06424 00 0**
	• Complete set of bolt extension rods for locks with 3 locking points • SUPPLIED AS STANDARD: - Set of bolt extension rods - Top strike item 1.06236.00.0 - Floor strike item 1.06237.00.0 - 2 rod guide clips item 1.06422.00.0	56162, 56167, 57162, 57167, 57192	1,500	1	1 **06425 07 0**
	• Complete set of bolt extension rods for locks with 5 locking points • SUPPLIED AS STANDARD: - 2 sets of top/bottom bolt extension rods - 2 top strikes item 1.06236.00.0 - 2 floor strikes item 1.06237.00.0 - 4 rod guide clips item 1.06422.00.0	56172, 56177, 57172, 57177	3,300	1	1 **06426 07 0**
	• Inside aluminium escutcheon painted in metallic antique bronze colour		0,036	12	1 **06458 11 0**
	• Bronze lacquered steel striker	56152, 56157, 56162, 56167, 56172, 56177, 57152, 57157, 57162, 57167, 57172, 57177	0,320	2	1 **07054 00 0**
	• Bronze lacquered steel top striker	56152, 56157, 56162, 56167, 56172, 56177, 57152, 57157, 57162, 57167, 57172, 57177	0,442	2	1 **07055 00 0**


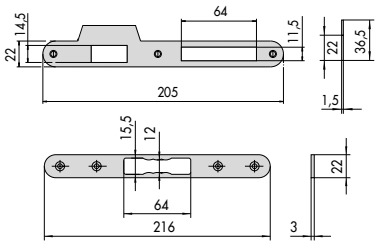




Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Nickel-plated steel screw	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,006	50	**1 06048 02 0**
	• Nickel-plated steel screw	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,008	50	**1 06048 03 0**
	• Inside brass escutcheon	57000	0,035	12	**1 06081 00 0**
	• Outside brass escutcheon	1 06119 00 0, 1 06142 00 0, 57000	0,030	12	**1 06082 00 0**
	• Hollow outside brass escutcheon	1 06119 00 0, 1 06142 00 0, 57000	0,031	12	**1 06083 00 0**
	• Polished brass key guide escutcheon with ten spacers • AVAILABLE FINISHES: Bronze anodised aluminium (fin. 47) Chrome-plated brass (fin.18)	57000	0,094	5	**1 06119 00 0**
	• Inside brass escutcheon with plug	57000	0,032	12	**1 06143 00 0**





Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Polished brass rose with key guide • For double bitted locks • AVAILABLE FINISHES: Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64) Polished chrome plated (Fin B1)		0,105	6	**1 06144 10 1**
	• Nylon key guide, including 2 supports for escutcheon and 3 spacers • For double bit key locks		0,066	6	**1 06144 15 0**
	• Polished brass cover for escutcheon and key guide • AVAILABLE FINISHES: Polished chrome (fin.18) Anodised light bronze(fin.65) Anodised dark bronze (fin.64) Polished chrome plated (Fin B1)	1 06144 10 1, 1 06144 15 0	0,030	50	**1 06144 50 1**
	• Brass long lipped striker	5C130, 5C170, 53131, 53151, 57831, 57851	0,055	25	**1 06213 05 0**
	• bronze-plated steel central striker	53002	0,100	12	**1 06279 10 0**
	• Yellow zinc plated steel central striker	53002	0,100	12	**1 06279 10 0 82**
	• Lacquered satin brass central striker	5C130, 5C170, 53035, 53131, 53133, 53135, 53137, 53151, 53153, 53155, 53157, 57831, 57833, 57835, 57851, 57853, 57855	0,096	12	**1 06279 11 0**
	• Brass upper striker (single-leaf doors)	53131, 53133, 53137, 53151, 53153, 53157, 57831, 57833, 57851, 57853	0,060	12	**1 06292 00 0**

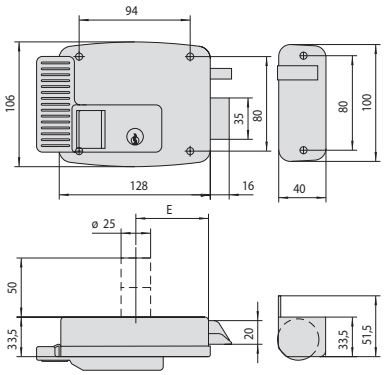
Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Brass upper striker (double-leaf doors)	53131, 53133, 53137, 53151, 53153, 53157, 57831, 57833, 57851, 57853	0,060	12	1 06292 01 0
	• Long lip in bronze-plated brass for central strikers	53002, 53003	0,040	25	1 06293 00 0
	• Long lip in lacquered satin brass for central strikers	53002, 53003	0,040	25	1 06293 01 0
	• Top and bottom striker in bronze-plated steel, for lateral deadbolts	53003	0,100	12	1 06322 00 0
	• Top and bottom striker in bronze-plated steel, for lateral deadbolts	53002	0,100	12	1 06323 00 0
	• Top and bottom striker in yellow zinc plated steel, for lateral deadbolts	53002	0,100	12	1 06323 00 0 82
	• Top and bottom striker in lacquered satin brass, for lateral deadbolts	53035, 53133, 53135, 53137, 57833, 57835	0,100	12	1 06323 01 0
	• Top and bottom striker in lacquered satin brass, for lateral deadbolts	53153, 53155, 53157, 57853, 57855	0,120	12	1 06325 00 0
	• Square striker (1.600 mm.) in bronze-plated steel	53003	0,800	6	1 06328 00 0
	• Square striker (1.600 mm.) in yellow zinc plated steel	53003	0,800	6	1 06328 00 0 82
	• Square strike plate (1600 mm.) in high resistance zinc-plated steel	53003	0,900	6	1 06328 00 0 B7
	• Round striker (1.600 mm.) in bronze-plated steel	53002	0,800	6	1 06329 00 0
	• Round striker (1.600 mm.) in yellow zinc plated steel	53002	0,800	6	1 06329 00 0 82
			0,800	6	1 06329 00 0 B7

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Adjustable striker in lacquered satin brass	53035, 53135, 53137, 53155, 53157, 57835, 57837, 57855, 57857	1,300	6	1 **06331 00 0**
	• Protective rose for cylinder series RS3, ASTRAL (with long key CL) and ASIX, in polished golden finish carbonitrited steel • Complete with: Spacers 2 mm. (pcs.19), 1 mm. (pcs. 2) Outside cover plates 2 mm. (pcs.2) Screws M5 x 73 mm. Inner rose	12000, 52000, 53000	0,500	1	1 **06460 15 0**
	• Set of vertical extension bolts including 2 upper strikers (flat, square) and 1 floor striker	53000, 57000	0,533	1	1 **07173 00 0**
	• Set of bronze-plated steel strikers: pcs. 1 item 1.06279.10.0 pcs 2 item 1.06323.00.0	53002	0,266	6	1 **07174 00 0**
	• Set of yellow zinc plated steel strikers: pcs. 1 item 1.06279.10.0.82 pcs. 2 item 1.06323.00.0.82	53002	0,180	6	1 **07174 00 0 82**
	• High resistance zinc-plated steel strike plate set: 1 pc central strike 2 pcs side deabdolt strike	53002	0,266	6	1 **07174 00 0 B7**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Set of bronze-plated steel strikers: pcs. 1 item 1.06278.10.0 pcs. 2 item 1.06322.00.0	53003	0,300	6	**1 07175 00 0**
	• Set of yellow zinc plated steel strikers: pcs. 1 item 1.06278.10.0.82 pcs. 2 item 1.06322.00.0.82	53003	0,300	6	**1 07175 00 0 82**
	• High resistance zinc-plated steel strike plate set:: pz. 1 item 1.06278.10.0.B7 pz. 2 item 1.06322.00.0.B7	53003	0,300	6	**1 07175 00 0 B7**
	• Set of lacquered satin brass strikers: pcs. 1 item 1.06279.11.0 pcs. 2 item 1.06323.01.0	53035, 53135, 53137, 57835	0,300	6	**1 07176 00 0**
	• Set of lacquered satin brass strikers: pcs. 2 item 1.06213.05.0 pcs. 2 item 1.06323.01.0	53035, 53135, 53137, 57835	0,300	6	**1 07176 10 0**
	• Set of lacquered satin brass strikers: pcs. 1 item 1.06279.11.0 pcs. 2 item 1.06325.00.0	53155, 53157, 57855	0,275	6	**1 07177 00 0**
	• Set of lacquered satin brass strikers: pcs. 2 item 1.06213.05.0 pcs. 2 item 1.06325.00.0	53155, 53157, 57855	0,300	6	**1 07177 10 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Set of lacquered satin brass strikers: pcs. 1 item 1.06279.11.0 pcs. 1 item 1.06323.01.0	53133, 57833	0,192	6	1	07178	00	0		
	• Set of lacquered satin brass strikers: pcs. 2 item 1.06213.05.0 pcs. 1 item 1.06323.01.0	53133, 57833	0,200	6	1	07178	10	0		
	• Central cylinder lock with latch-bolt and flat-type deadbolt	53002, 53003, 53035, 53131, 53133, 53135, 53137	0,770 0,800 0,860	1 1 1	1 1 1	52507	45	0		
	• Central cylinder lock with roller latch and flat-type deadbolt	53002, 53003, 53035, 53131, 53133, 53135, 53137	1,145 0,770 1,145	1 1 1	1 1 1	52508	45	0		
	• Central cylinder lock with latch-bolt and pin-operated deadbolt	53151, 53153, 53155, 53157	0,735 0,765 0,800	1 1 1	1 1 1	52527	45	0		
	• Central cylinder lock with roller latch and pin-operated deadbolt	53151, 53153, 53155, 53157	0,700 0,700 0,805	1 1 1	1 1 1	52528	45	0		

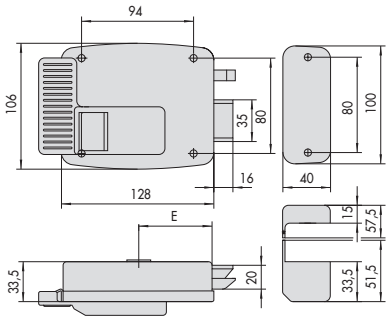
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Double bit key central lock with latch-bolt and flat-type deadbolt • 3 key blanks item 1.00100.00.1	57831, 57833, 57835	0,845	1	**1 57218 45 0**
			0,870	1	**1 57218 50 0**
			0,925	1	**1 57218 60 0**
	• Double bit key central lock with latch-bolt and flat-type deadbolt • 3 key blanks item 1.00102.00.1	57831, 57833, 57835	0,850	1	**1 57218 46 0**
			0,880	1	**1 57218 51 0**
			0,940	1	**1 57218 61 0**
	• Double bit key central lock with roller latch and flat-type deadbolt • 3 key blanks item 1.00100.00.1	57831, 57833, 57835	1,340	1	**1 57219 45 0**
			1,340	1	**1 57219 50 0**
	• Double bit key central lock with latch-bolt and pin-operated deadbolt • 3 key blanks item 1.00100.00.1	57851, 57853, 57855	1,340	1	**1 57298 45 0**
			0,845	1	**1 57298 50 0**
			0,910	1	**1 57298 60 0**
	• Double bit key central lock with latch-bolt and pin-operated deadbolt • 3 key blanks item 1.00102.00.1	57851, 57853, 57855	1,340	1	**1 57298 46 0**
			1,340	1	**1 57298 51 0**
			1,340	1	**1 57298 61 0**
	• Double bit key central lock with roller latch and pin-operated deadbolt • 3 key blanks item 1.00100.00.1	57851, 57853, 57855	0,950	1	**1 57299 45 0**
			0,815	1	**1 57299 50 0**
			0,875	1	**1 57299 60 0**



11611-11631

E = 50 - 60 - 70 - 80

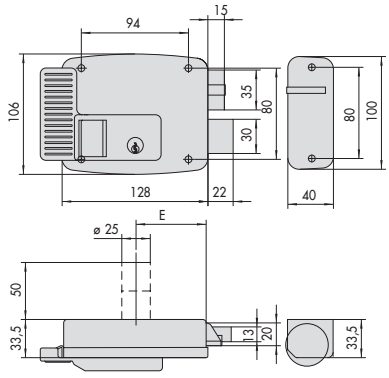
1



11610 - 11630

E = 50 - 60 - 70 - 80

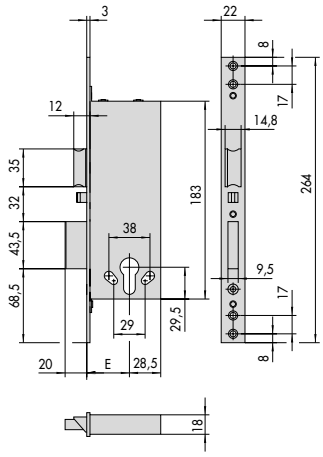
2



11670, 11761, 11671, 11771

E = 50 - 60 - 70 - 80

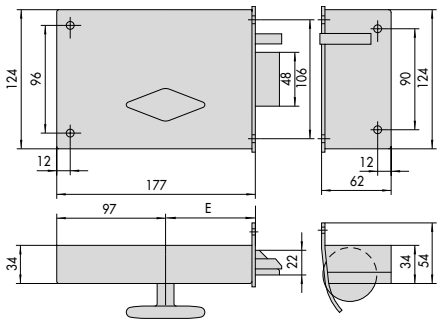
3



12010, 12011, 12015, 12016

E = 40 - 50 - 60 - 70

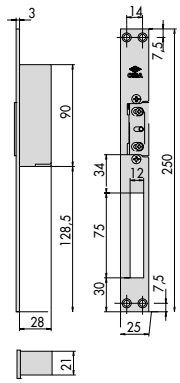
4



13010


E = 60 - 70 - 80 - 90 - 100 - 110 - 120

5




1.15001.00

6



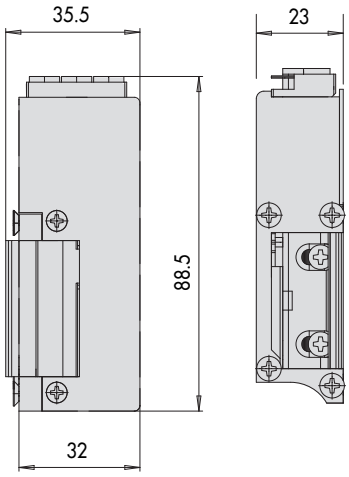
1.15005.00

7



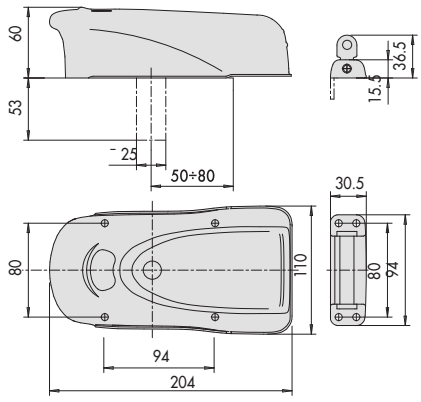
15100, 15101, 15102,
15110, 15120, 15121,
15122, 15130, 15140
15150, 15160, 15170,
15180

8




15300

9



1A610, 1A611, 1A630, 1A631, 1A721, 1A731

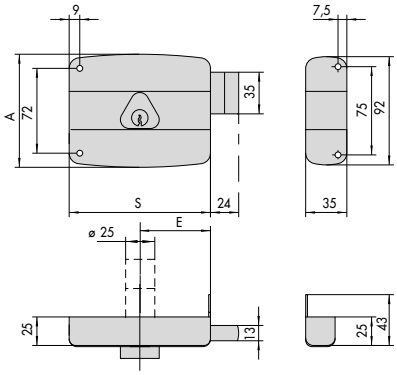
10



	E	S	A	M
1.50110.40	40	80	94	24
1.50110.50	50	100	95	24
1.50110.60	60	120	96	24
1.50110.70	70	140	97	24
1.50111.40	40	80	94	24
1.50111.50	50	100	95	24
1.50111.60	60	120	96	24
1.50111.70	70	140	97	24
1.50115.50	50	100	95	33
1.50115.60	60	120	96	33
1.50115.70	70	140	97	33
1.50120.40	40	80	94	24
1.50120.50	50	100	95	24
1.50120.60	60	120	96	24
1.50120.70	70	140	97	24
1.50121.40	40	80	94	24
1.50121.50	50	100	95	24
1.50121.60	60	120	96	24
1.50121.70	70	140	97	24
1.50125.50	50	100	95	33
1.50125.60	60	120	96	33
1.50125.70	70	140	97	33

	E	S	A	M
1.50126.50	50	100	95	33
1.50126.60	60	120	96	33
1.50126.70	70	140	97	33
1.50161.40	40	80	94	24
1.50161.50	50	100	95	24
1.50161.60	60	120	96	24
1.50161.70	70	140	97	24
1.50320.40	40	80	94	24
1.50320.50	50	100	95	24
1.50320.60	60	120	96	24
1.50320.70	70	140	97	24
1.50321.40	40	80	94	24
1.50321.50	50	100	95	24
1.50321.60	60	120	96	24
1.50321.70	70	140	97	24
1.50330.40	40	80	94	24
1.50330.50	50	100	95	24
1.50330.60	60	120	96	24
1.50330.70	70	140	97	24
1.50340.40	40	80	94	24
1.50340.50	50	100	95	24
1.50340.60	60	120	96	24
1.50340.70	70	140	97	24

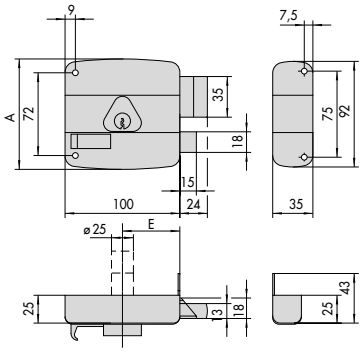
11



	E	S	A
1.50130.40	40	80	94
1.50130.50	50	100	95
1.50130.60	60	120	96
1.50130.70	70	140	97
1.50131.40	40	80	94
1.50131.50	50	100	95
1.50131.60	60	120	96
1.50131.70	70	140	97

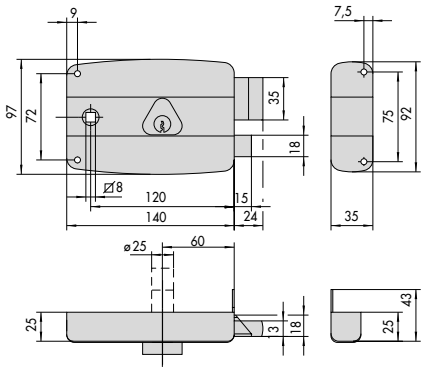
	E	S	A
1.50141.40	40	80	94
1.50141.50	50	100	95
1.50141.60	60	120	96
1.50141.70	70	140	97

12




	E	S	A
1.50160.40	40	80	94
1.50160.50	50	100	95
1.50160.60	60	120	96
1.50160.70	70	140	97

13




1.50170.60, 1.50171.60, 1.50180.60, 1.50181.60,

14



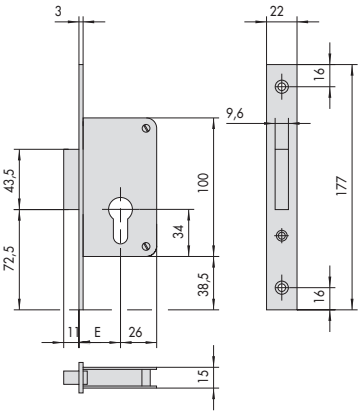
1.50210.45, 1.50211.45

15



1.50220.45, 1.50221.45

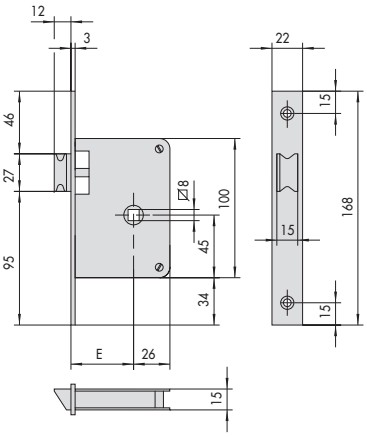
16



52210

E = 30

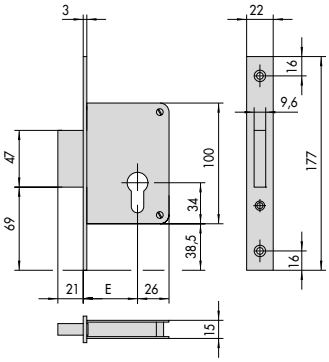
17



52300

E = 60

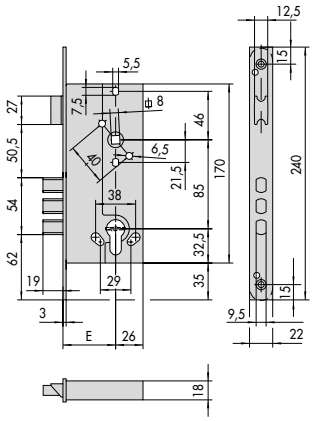
18



52310

E = 40 - 45 - 50 - 60 - 70

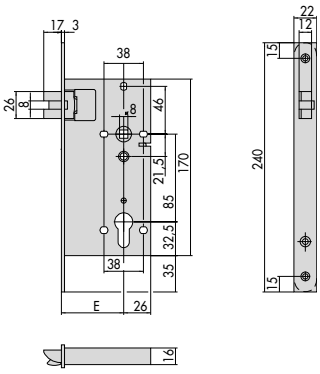
19



52521
52520
57291
57290

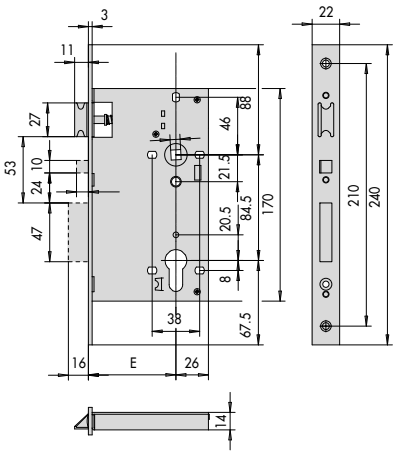
E = 45 - 50 - 60

20



52750, 52751

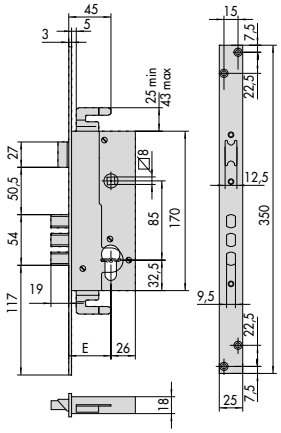
23



52118, 52158, 52318, 52810
52138, 52178, 52338, 52830

E = 40 - 45 - 50 - 60

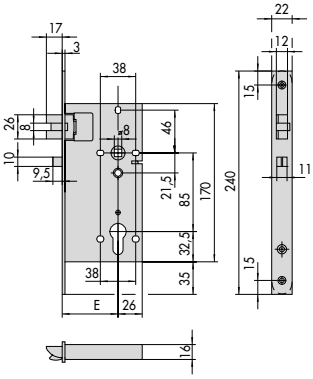
26



52526
57296

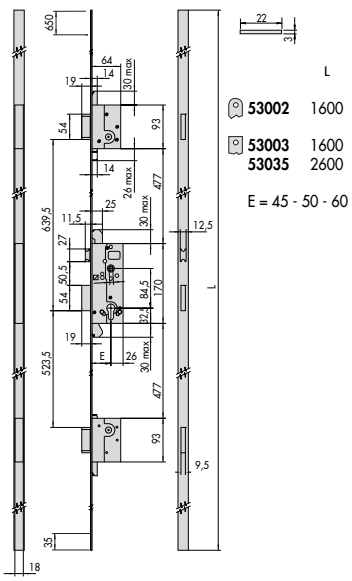
E = 45 - 50 - 60

21



52755, 52756, 52760, 52761

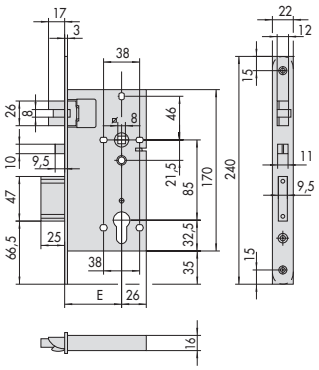
24



53002	1600
53003	1600
53035	2600

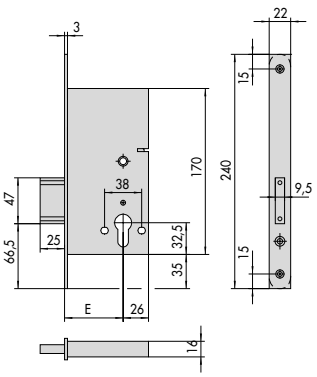
E = 45 - 50 - 60

27



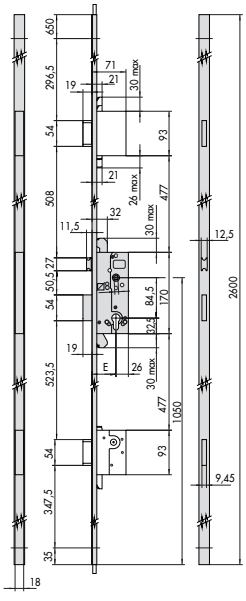
52710, 52711, 52730, 52731, 52840, 52842, 52844, 52860, 52862, 52864

22



52780, 52781, 52871, 52891


25



53131, 53133, 53135, 53137, 53151, 53153, 53155, 53157, 57831, 57833, 57835, 57851, 57853, 57857


E = 45 - 50 - 60

28




54310, 54311, 54315, 54316,

29




54340, 54341

30



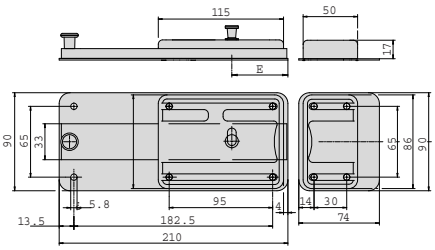
54510, 54550, 54560

31



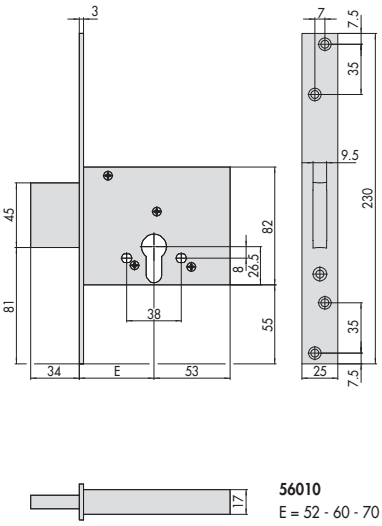
54570

32



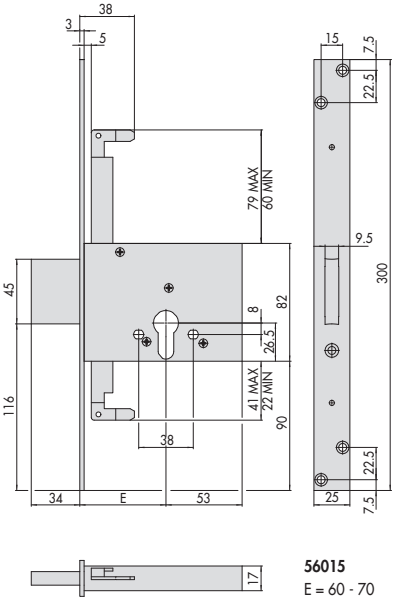
55051, 55054, 55071, 55074

33



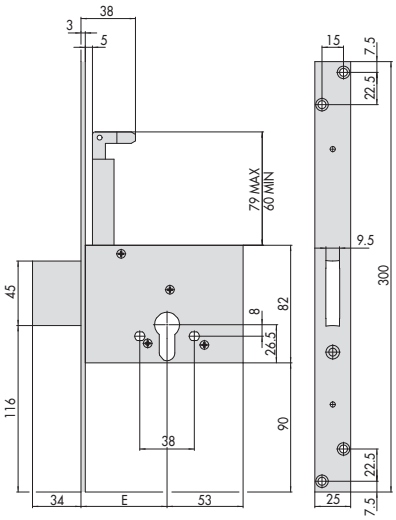
56010
E = 52 - 60 - 70

34

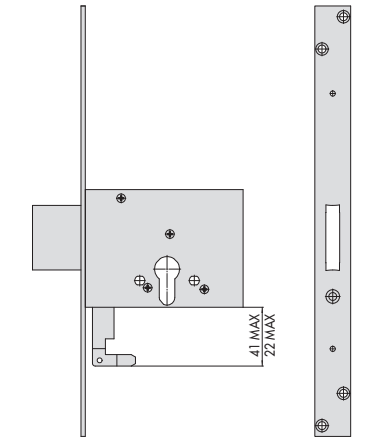


56015
E = 60 - 70

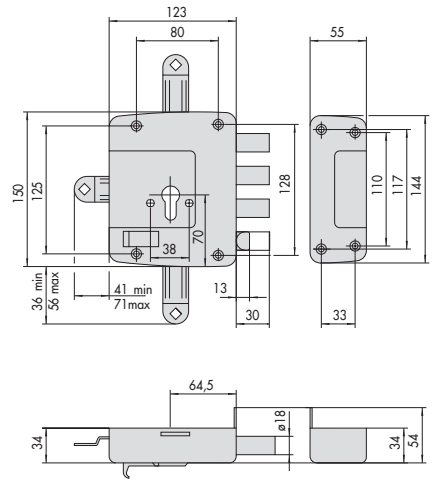
35



56020
E = 60 - 70

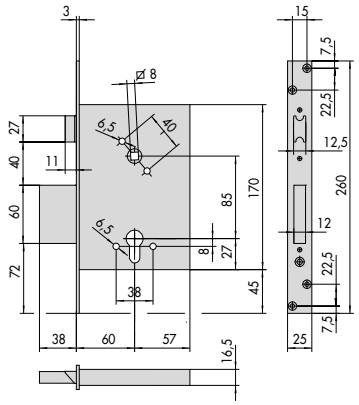


36



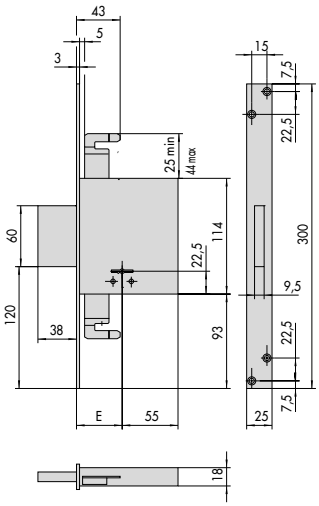
56152, 56162, 56172, 56157, 56167, 56177

37



1.56250.60

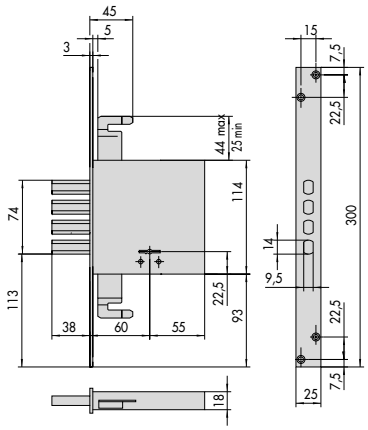
38



57015, 57019
E = 60 - 70

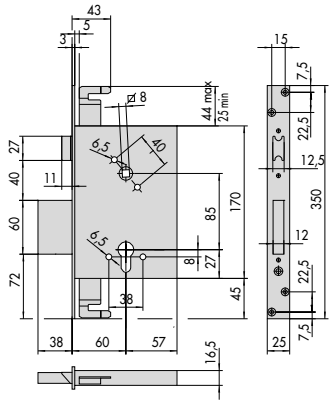
1.57055.60
E = 60

41



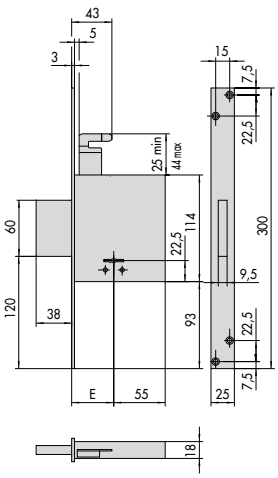
1.57033.60

44



1.56255.60

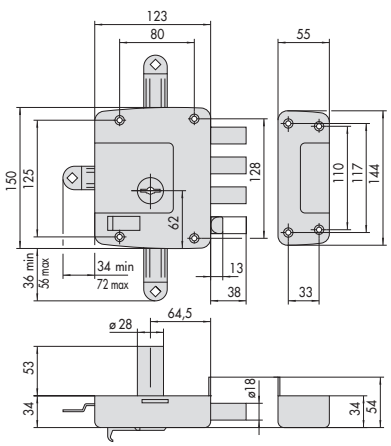
39



57020, 57024

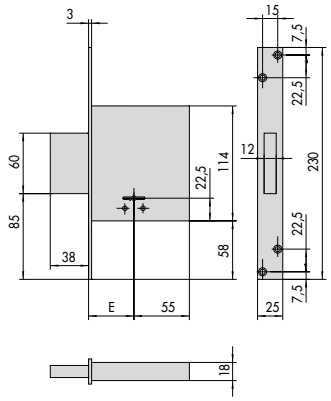
E = 60 - 70

42



1.57152.60, 1.57157.60, 1.57162.60,
1.57167.60, 1.57172.60, 1.57177.60

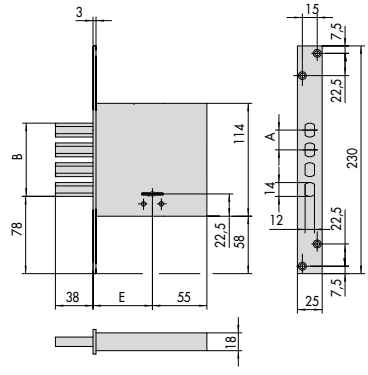
45



57010, 57014
E = 52 - 60 - 70


57050
E = 52 - 60

40



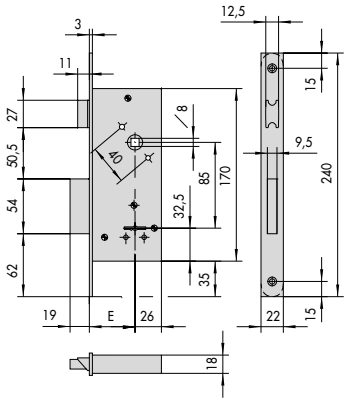
	E	A	B
1.57028.50	52	23	60
1.57028.60	60	20	74

43



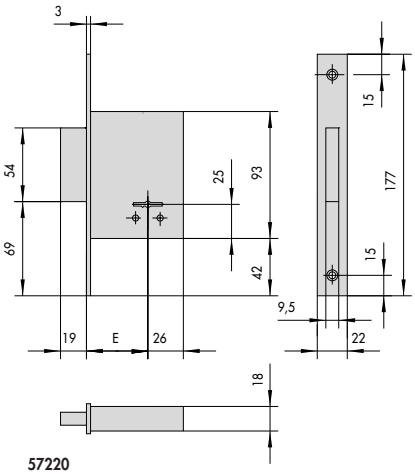
1.57192.00

46



57210
57211
E = 40 - 45 - 50 - 60

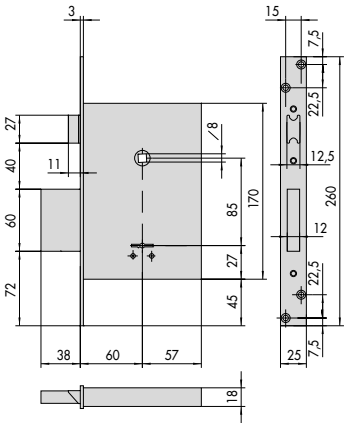
47



57220

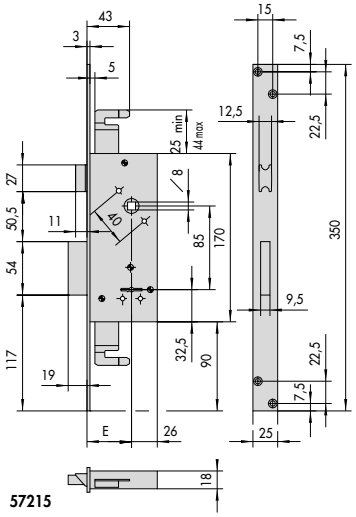
E = 40 - 45 - 50 - 60

50



57250, 57254

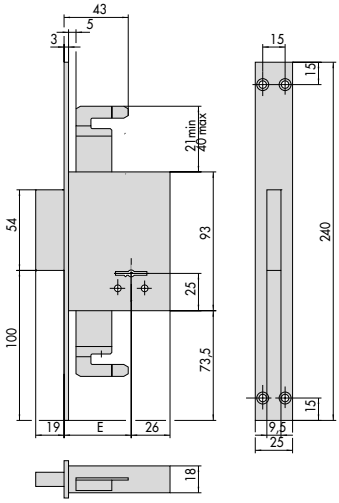
53



57215

E = 45 - 50 - 60

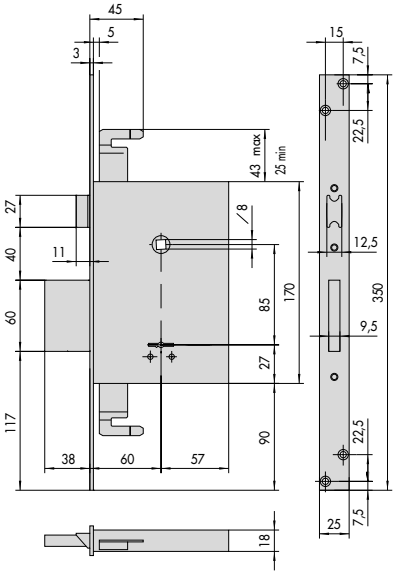
48



57225

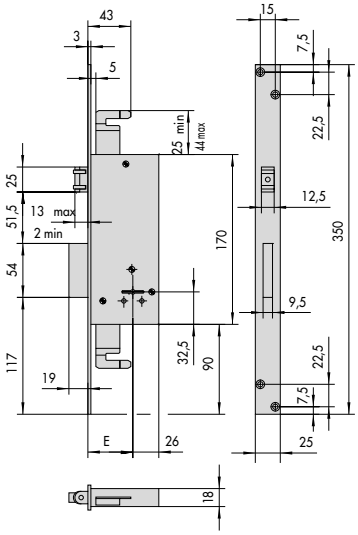
E = 45 - 50 - 60

51



57255, 57259

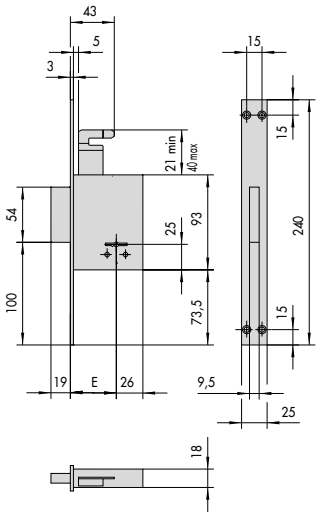
54



57217

E = 45 - 50 - 60

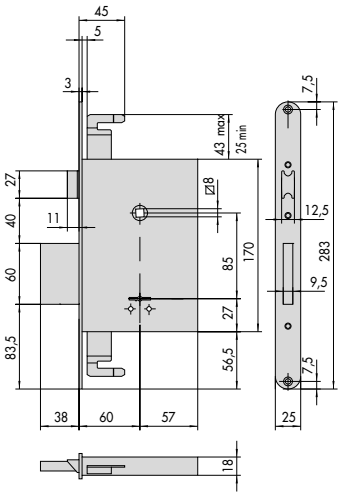
49



57230

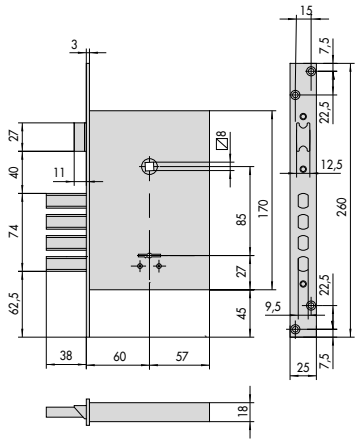
E = 45 - 50 - 60

52



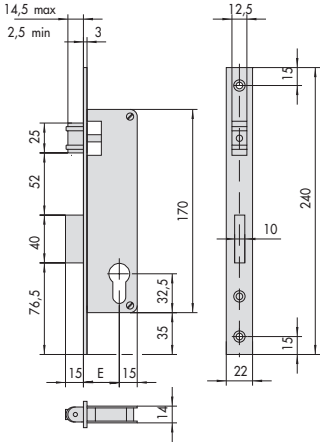
1.57256.60

55



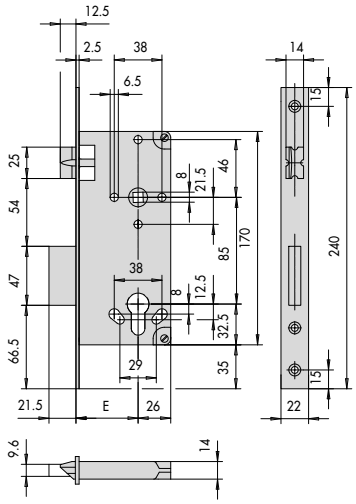
57260

56



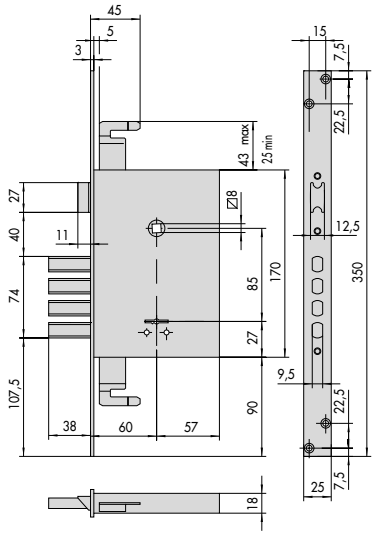
5C021
E = 21 - 25 - 30

59



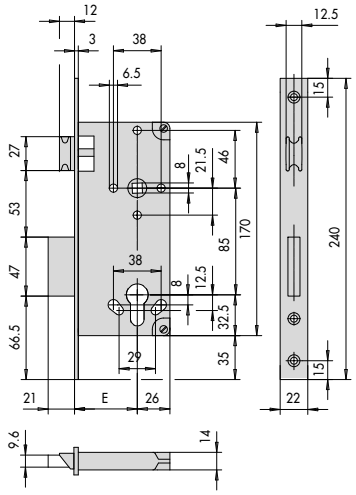
5C611, 5C651
5C631, 5C671
E = 35 - 40 - 45 - 50 - 60 - 70

62



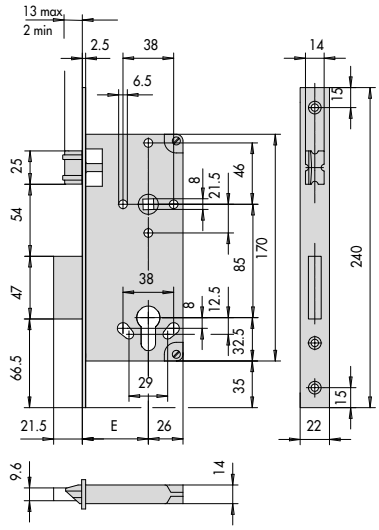
57265

57



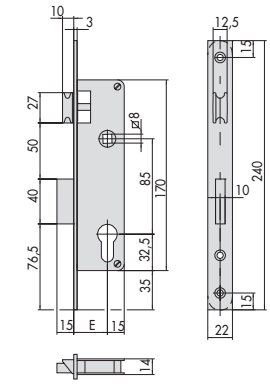
5C110, 5C150, 5C611, 5C651
5C130, 5C170, 5C631, 5C671
E = 35 - 40 - 45 - 50 - 60 - 70

60



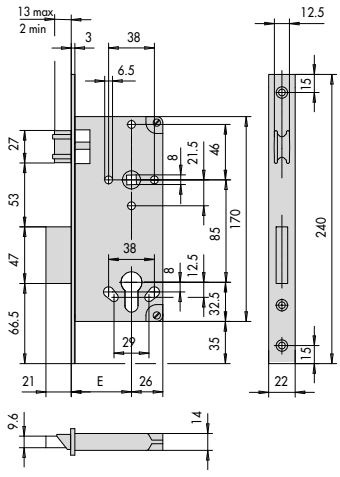
5C621
5C641
E = 35 - 40 - 45 - 50 - 60 - 70

63



5C010, 5C011,
5C031
E = 21 - 25 - 30

58



5C120, 5C621
5C140, 5C641
E = 35 - 40 - 45 - 50 - 60 - 70

61

ALLEGION

CISA

Locks for armour plated doors



MyEVO rim powered electronic locks 387
MyEVO mortice powered electronic locks..... 388
MyEVO locks configuration components..... 389
Comfortlock panic function rim locks 391
Comfortlock panic function mortice locks..... 392
Cylinder rim locks Cisa Revolution PRO 393
Cylinder mortice locks Cisa Revolution PRO 394
Cylinder rim locks with gear mechanism 395
Cylinder mortice locks with gear mechanism..... 397
Exitlock system functions 399
Exitlock panic function rim locks 400
Exitlock panic function mortice locks 401
Double-bit key rekeyable rim locks New Cambio Facile . 402
Double-bit key rekeyable mortice locks 404
Spare keys for rekeyable double-bit key locks 406
Double-bit key rim locks 407
Double-bit key mortice locks 409
Multifunction rim locks 411
Multifunction mortice locks 419
Double-bit key cylinders 427
Protection roses 429
Locks for blocking systems 436
Electric strikers for armour plated door locks 437
Accessories for armour plated door locks 438
Dimensional drawings 447

CISA®

MyEVO

SOLUTIONS FOR ARMOURED DOORS



SMART AUTOMATIC CLOSING

Shutting the door automatically activates the system and engages all the deadbolts until it is completely locked.

3 DIFFERENT OPERATING MODES WITHOUT KEYS

Different opening controls to choose from.

- With keypad only
- With RFID credentials only (transponder)
- With keypad and transponder



ACCESS WITH TRADITIONAL KEY

- The lock can always be opened using a mechanical key.

ACCESS CONTROL

Personalised codes which can be easily activated and deactivated and/or RFID credentials (transponder) allow access to different people.

3 DIFFERENT MODES FOR VERSATILE USE

- AUTOMATIC: just push the door and it shuts securely: the deadbolts automatically engage.
- SEMI-AUTOMATIC: when the door is shut, the deadbolts do not engage so you can open it with the handle.
- HOLD OPEN: the door is always open. The latchbolt and deadbolt never engage even when the door is pushed to.



CERTIFIED LOCK

Security and operation have been tested in accordance with EN 12209:03 and EN 14846:10.

SILENT OPERATION

The operating mechanism has been designed to keep noise to an absolute minimum.

ACOUSTIC AND LIGHT ALARMS

Acoustic and light alarms on the keypad, RFID reader and button indicate whether the system is working properly.



MyEVO

Technical features:
- Powered latch-bolt, deadbolt and extension bolts for automatic operation
- Automatic closing of the door
- Emergency opening with the mechanical key
- Steel case and cover
- Nickel-plated deadbolts.
- Nickel-plated non-handed latchbolt.
- Anti-crush plates for fixing screws
- Steel extension bolts


Supplied as standard:
- 12V - 2.3 AH lead battery
- Connecting cables

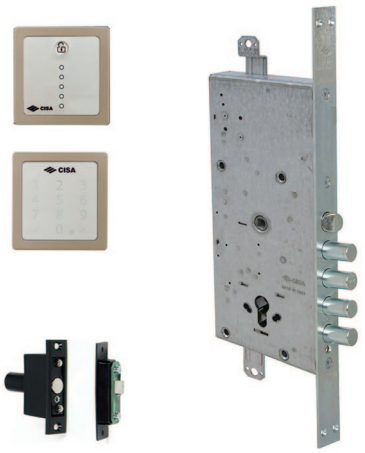
Finishes:
- Zinc-plated aluminium

Standards:
- Product in compliance with European Standard pr EN 12209:99

Hand:
0 = Non-handed

Cylinder to be ordered separately

Type	Description	DEADBOLTS No.	Projection	Centre Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• CISA motorised lock • Rim version • Latchbolt and deadbolt • SUPPLIED AS STANDARD: - door status contacts strip with cable	4	3,5	28		85		64	4,800	1	**1**	**E6516**	**28**	**0**	
		3	3,5	38		85		64	4,800	1	**1**	**E6516**	**38**	**0**	



MyEVO

Technical features:
- Powered latch-bolt, deadbolt and extension bolts for automatic operation
- Automatic closing of the door
- Emergency opening with the mechanical key
- Steel case and cover
- Nickel-plated faceplate.
- Nickel-plated deadbolts.
- Nickel-plated non-handed latchbolt.
- Anti-crush plates for fixing screws
- Steel extension bolts

Supplied as standard:
- 12V - 2.3 AH lead battery
- Connecting cables

Finishes:
- Zinc-plated aluminium

Standards:
- Product in compiance with European Standard pr EN 12209:2003

Hand:
0 = Non-handed


Cylinder to be ordered separately







Type	Description	DEADBOLTS No.	Projection	Centredistance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• CISA motorised lock • Mortice version • Latchbolt and deadbolt • SUPPLIED AS STANDARD: - door status contacts strip with cable	4		28		85	35	67	3,800	1	**1 E6536**	**28**	**0**		

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Door status contacts strip	0,035	1	1	06510	50	0		
	• INTERNAL BUTTON - Graphite black finish	0,385	1	1	06525	51	0	L6	
	- Dove grey finish	0,385	1	1	06525	51	0	L7	
	- Aluminium finish	0,385	1	1	06525	51	0	L8	
	- White pearl finish	0,385	1	1	06525	51	0	L9	
	• EXTERNAL KEYPAD - Graphite black finish	0,385	1	1	06525	71	0	L6	
	- Dove grey finish	0,385	1	1	06525	71	0	L7	
	- Aluminium finish	0,385	1	1	06525	71	0	L8	
	- White pearl finish	0,385	1	1	06525	71	0	L9	
	• EXTERNAL KEYPAD AND TRANSPONDER - Graphite black finish	0,385	1	1	06525	73	0	L6	
	- Dove grey finish	0,385	1	1	06525	73	0	L7	
	- Aluminium finish	0,385	1	1	06525	73	0	L8	
	- White pearl finish	0,385	1	1	06525	73	0	L9	
	• EXTERNAL TRANSPONDER - Graphite black finish	0,385	1	1	06525	75	0	L6	
	- Dove grey finish	0,385	1	1	06525	75	0	L7	
	- Aluminium finish	0,385	1	1	06525	75	0	L8	
	- White pearl finish	0,385	1	1	06525	75	0	L9	

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• USER CARD • Kit of 5 cards	0,085	1	1	06526	11	0		
	• USER MINI CARD • Kit of 5 cards	0,085	1	1	06526	21	0		
	• CHANGE AND SAFE MODE CARD KIT	0,085	1	1	06526	30	0		
	• MASTER AND RESET CARD KIT	0,085	1	1	06526	40	0		
	• Power supply for motorised lock (24V, DC). • Powered by electrical system or by rechargeable batteries	0,492	1	1	07060	03	0		
	• Power supply cable (when lock is powered by the mains)	0,600	1	1	07030	70	0		
	• Cable to open door using remote control (e.g. Intercom, button)	0,600	1	1	07030	72	0		
	• Battery holder group with cable (for 12 x 1.5V AA batteries, not included)	0,600	1	1	07030	80	0		



Technical features:
- Steel case and cover.
- Zinc-plated high resistant steel deadbolts.
- Zinc-plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

On request:
- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.


Finishes:
- Zinc aluminum.

Hand:
0 = Non-handed

Cylinder to be ordered separately



ComFortlock

Type	Description	DEADBOLTS No.	Projection	Centredistance	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Deadbolt and latch • Pre-setting for additional locking points • Operation: • Closing from inside deadbolts operated by rotating handle upwards and/or with key. Opening from inside: latchbolt with handle and/or key deadbolts by rotating handle downwards (function to be selected according to user's choice) and/or key Closing from outside deadbolts operated by rotating handle upwards and/or with key Opening from outside: latchbolt with handle and/or key deadbolts with key	4	3,5	27	2	85	64	2,650	1	1	56815	27	0			
		4	3,5	28	2	85	64	2,650	1	1	56815	28	0			
		3	3,5	38	2	85	64	2,650	1	1	56815	38	0			
		4	3,5	27	2	85	64	2,550	5	1	56815	47	0			
		4	3,5	28	2	85	64	2,550	5	1	56815	48	0			
		3	3,5	38	2	85	64	2,550	5	1	56815	58	0			



Technical features:
- Steel case and cover.
- Zinc-plated high resistant steel faceplate
- Zinc-plated high resistant steel deadbolts.
- Zinc-plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

On request:
- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.


Finishes:
- Zinc aluminum.

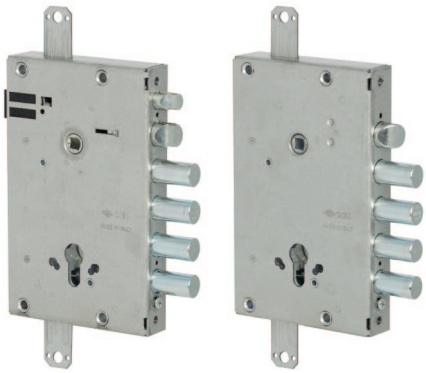
Hand:
0 = Non-handed

Cylinder to be ordered separately



ComFortlock

Type	Description	DEADBOLTS No.	Projection	Centre Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt and latch • Pre-setting for additional locking points • Operation: Closing from inside deadbolts operated by rotating handle upwards and/or with key. Opening from inside: latchbolt with handle and/or key deadbolts by rotating handle downwards (function to be selected according to user's choice) and/or key Closing from outside deadbolts operated by rotating handle upwards and/or with key Opening from outside: latchbolt with handle and/or key deadbolts with key	4	28	2	85	35	67	2,800	1	1	**56835**	**28**	**0**		
		4	28	2	85	35	67	2,700	5	1	**56835**	**48**	**0**		



Technical features:





- LOCK FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED
- Effort reducer gear-operated system
- Zinc-plated steel case
- High-resistance zinc-plated reversible latch
- High resistance zinc-plated deadbolts
- Package: 1 pc or 5 pcs
- (industrial package)
- Two different dimensions are available as standard to meet various installation requirements.
- CE 12V ac voltage
- Absorbed current:3.1 A

Hand:
0 = Non-handed

Cylinder to be ordered separately



CISA Revolution PRO

Type	Description	DEADBOLTS No.	Projection	Centre Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Deadbolt and latch • Electrically controlled dead-locking latch • Slide item 1.06224.50.0 • Pre-set for additional locking points	4	3,5	28	2	85	64	2,660	1	1	15515	28	B			
		3	3,5	38	2	85	64	2,520	1	1	15515	38	B			
		4	3,5	28	2	85	64	2,430	1	1	15515	48	B			
		3	3,5	38	2	85	64	2,220	1	1	15515	58	B			
	• Deadbolt only • Pre-set for additional locking points	5	3,5	28	2	85	64	2,370	1	1	56505	28	B			
		4	3,5	38	2	85	64	2,370	1	1	56505	38	B			
		5	3,5	28	2	85	64	2,370	5	1	56505	48	B			
	• Deadbolt and latch • Pre-set for additional locking points	4	3,5	25	2	85	64	2,650	1	1	56515	28	B			
		3	3,5	38	2	85	64	2,320	1	1	56515	38	B			
		4	3,5	28	2	85	64	2,346	5	1	56515	48	B			
		3	3,5	38	2	85	64	2,300	5	1	56515	58	B			
	• Deadbolt and latch • Pre-set for additional locking points	4	3,5	28	2	85	64	2,550	1	1	B6515	28	B			
		3	3,5	38	2	85	64	2,550	1	1	B6515	38	B			
		4	3,5	28	2	85	64	2,620	5	1	B6515	48	B			
		3	3,5	38	2	85	64	2,620	5	1	B6515	58	B			



Technical features:





- LOCK FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED
- Effort reducer gear-operated system
- Zinc-plated steel case
- High-resistance zinc-plated reversible latch
- High resistance zinc-plated deadbolts
- High resistance zinc-plated steel faceplate
- Package: 1 pc or 5 pcs (industrial packing)
- Two different dimensions are available as standard to meet various installation requirements.
- CE 12V ac voltage
- Absorbed current: 3.1 A

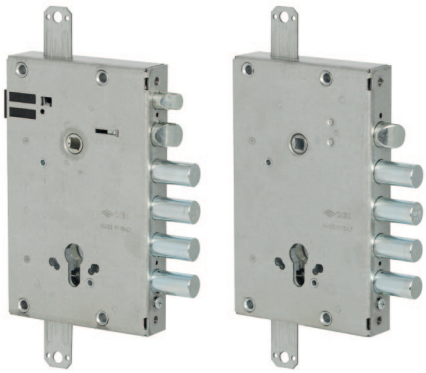
Hand:
0 = Non-handed

Cylinder to be ordered separately



CISA Revolution PRO

Type	Description	DEADBOLTS No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt and latch • Electrically controlled dead-locking latch • Slide item 1.06224.50.0 • Pre-set for additional locking points	4	28	2	85	35	67	2,790	1	1	**15535 28 B**				
		4	28	2	85	35	67	2,490	5	1	**15535 48 B**				
	• Deadbolt only • Pre-set for additional locking points	5	28	2	85	35	67	2,650	1	1	**56525 28 B**				
		5	28	2	85	35	67	2,600	5	1	**56525 48 B**				
	• Deadbolt and latch • Pre-set for additional locking points	4	28	2	85	35	67	2,800	1	1	**56535 28 B**				
		4	28	2	85	35	67	2,600	5	1	**56535 48 B**				
	• Deadbolt and latch • Pre-set for additional locking points	4	28	2	85	35	67	3,100	1	1	**B6535 28 B**				
		4	38	2	85	35	67	2,600	1	1	**B6535 38 B**				
		4	28	2	85	35	67	2,300	5	1	**B6535 48 B**				
		4	38	2	85	35	67	2,300	5	1	**B6535 58 B**				






Technical features:
- Geared operating device for reduced key effort
- Zinc-plated steel case
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant steel bolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developped according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Hand:
0 = Non-handed




Cylinder to be ordered separately



Revolution

Type	Description	DEADBOLTS No.	Projection	Centre Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt and latch • Electrically controlled dead-locking latch • Slide item 1.06224.50.0 • Pre-set for additional locking points	4	3,5	25	2	85	64	2,520	1	1	15515	25	0		
		4	3,5	27	2	85	64	2,520	1	1	15515	27	0		
		4	3,5	28	2	85	64	2,660	1	1	15515	28	0		
		3	3,5	38	2	85	64	2,520	1	1	15515	38	0		
		4	3,5	27	2	85	64	2,220	5	1	15515	47	0		
		4	3,5	28	2	85	64	2,430	5	1	15515	48	0		
		3	3,5	38	2	85	64	2,220	5	1	15515	58	0		
	• Deadbolt only • Pre-set for additional locking points	5	3,5	25	2	85	64	2,370	1	1	56505	25	0		
		5	3,5	27	2	85	64	2,370	1	1	56505	27	0		
		5	3,5	28	2	85	64	2,370	1	1	56505	28	0		
		4	3,5	32	2	85	64	2,370	1	1	56505	32	0		
		4	3,5	38	2	85	64	2,370	1	1	56505	38	0		
		5	3,5	28	2	85	64	2,235	5	1	56505	48	0		
		4	3,5	38	2	85	64	2,240	5	1	56505	58	0		
	• Deadbolt and latch • Pre-set for additional locking points	4	3,5	25	2	85	64	2,320	1	1	56515	25	0		
		4	3,5	27	2	85	64	2,320	1	1	56515	27	0		
		4	3,5	28	2	85	64	2,650	1	1	56515	28	0		
		3	3,5	32	2	85	64	2,320	1	1	56515	32	0		
		3	3,5	38	2	85	64	2,320	1	1	56515	38	0		
		4	3,5	28	2	85	64	2,346	5	1	56515	48	0		
		3	3,5	38	2	85	64	2,300	5	1	56515	58	0		
		4	3,5	27	2	92	64	2,320	1	1	56615	27	0		
		4	3,5	28	2	92	64	2,320	1	1	56615	28	0		
		4	3,5	27	2	92	64	2,020	5	1	56615	47	0		
		4	3,5	28	2	92	64	2,370	5	1	56615	48	0		
		3	3,5	38	2	92	64	2,360	5	1	56615	58	0		

CISA®

Type	Description	DEADBOLTS No.	Projection	Centre Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
	• Deadbolt only • Pre-set for additional locking points	5	3,5	28	2	85		64	2,370	1	1 B6505	28	0	
		4	3,5	38	2	85		64	2,370	1	1 B6505	38	0	
		5	3,5	28	2	85		64	2,070	5	1 B6505	48	0	
		4	3,5	38	2	85		64	2,070	5	1 B6505	58	0	
	• Deadbolt and latchbolt • Pre-set for additional locking points	4	3,5	25	2	85		64	2,550	1	1 B6515	25	0	
		4	3,5	28	2	85		64	2,550	1	1 B6515	28	0	
		3	3,5	38	2	85		64	2,550	1	1 B6515	38	0	
		4	3,5	28	2	85		64	2,620	5	1 B6515	48	0	
		3	3,5	38	2	85		64	2,600	5	1 B6515	58	0	
	• Deadbolt and latchbolt • Pre-set for additional locking points	4	3,5	28	2	92		64	2,550	1	1 B6615	28	0	
		3	3,5	38	2	92		64	2,550	1	1 B6615	38	0	
		4	3,5	28	2	92		64	2,020	5	1 B6615	48	0	
		3	3,5	38	2	92		64	2,020	5	1 B6615	58	0	








Technical features:
- Geared operating device for reducing key effort
- Zinc-plated steel case
- Zinc-plated high resistant satin steel faceplate
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant steel deadbolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developped according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

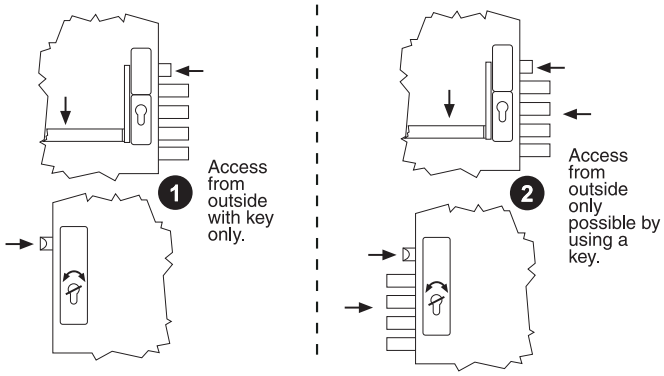
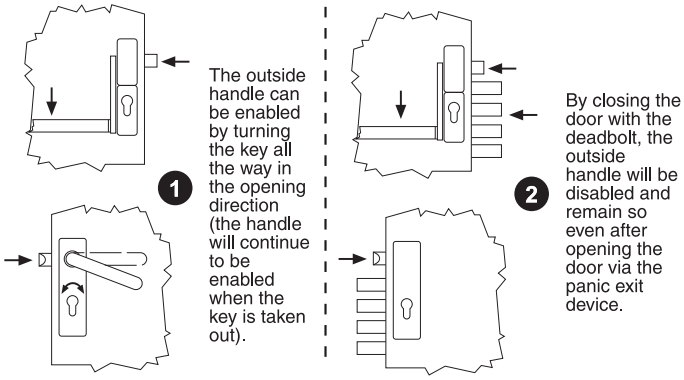
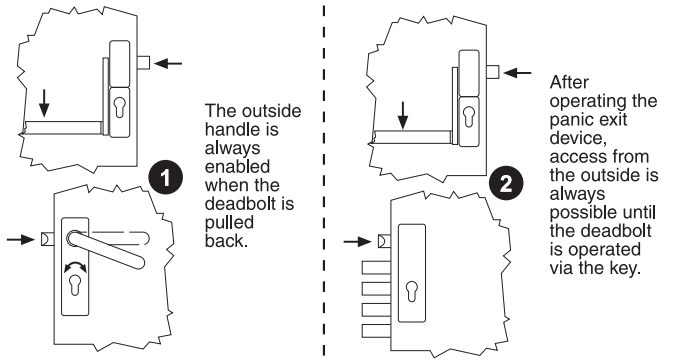
Hand:
0 = Non-handed

Cylinder to be ordered separately

Revolution

Type	Description	DEADBOLTS No.	Projection	Centre Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Deadbolt and latch • Electrically controlled dead-locking latch • Slide item 1.06224.50.0 • Pre-set for additional locking points	4	28	2	85	35	67	2,790	1	1	15535	28	0			
		4	28	2	85	35	67	2,490	5	1	15535	48	0			
	• Deadbolt only • Pre-set for additional locking points	5	28	2	85	35	67	2,650	1	1	56525	28	0			
		5	28	2	85	35	67	2,600	5	1	56525	48	0			
	• Deadbolt and latch • Pre-set for additional locking points	4	28	2	85	35	67	2,800	1	1	56535	28	0			
		4	28	2	85	35	67	2,600	5	1	56535	48	0			

Type	Description	DEADBOLTS No.	Projection	Centre Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt only • Pre-set for additional locking points	5	28	2	85	35	67	2,650	1	1	B6525	28	0		
		5	38	2	85	35	67	2,650	1	1	B6525	38	0		
		5	28	2	85	35	67	2,350	5	1	B6525	48	0		
		5	38	2	85	35	67	2,350	5	1	B6525	58	0		
	• Deadbolt and latch • Pre-set for additional locking points	4	28	2	85	35	67	3,100	1	1	B6535	28	0		
		4	38	2	85	35	67	2,600	1	1	B6535	38	0		
		4	28	2	85	35	67	2,300	5	1	B6535	48	0		
		4	38	2	85	35	67	2,300	5	1	B6535	58	0		

TYPE	CONTROLS	OPERATION
A **ACCESS FROM OUTSIDE WITH KEY ONLY** For doors to be only opened from the outside by authorized personnel using a key.	INSIDE • Panic exit device to open • Key to close with deadbolt OUTSIDE • Key to operate the latch or deadbolt	
B **OUTSIDE HANDLE ENABLED/DISABLED** For doors opening to the outside and for buildings in which free access must be programmed.	INSIDE • Panic exit device to open • Key to close with deadbolt or enable/disable the outside handle OUTSIDE • The key operates the deadbolt or enables/disables the outside handle to control the latchbolt	
D **OUTSIDE HANDLE ALWAYS ENABLED** For doors located in passage areas (e.g. corridors).	INSIDE • Panic exit device to open • Key to close with deadbolt OUTSIDE • Key to operate the deadbolt. The handle is enabled by the latch with the deadbolt pulled back	





Exitlock

Technical features:
- Steel case and cover.
- Zinc plated high resistant steel deadbolts.
- Zinc plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:
- Striker plate series 06220.

On request:
- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric strikerst series 15300
- For panic exits (UNI EN 1125) Panic exit device series 59607 + horizontal bar series 07007 or item 59711.10/11
For fire door (spec. FR)
- For additional locking points
Divertor item series 06433.00/01/11
Pair of bolts item 06425.06.0
Striker plates item 06220.28/29.0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 plus horizontal bar series 07007 or item 59711-10/11
- For emergency exits (UNI EN 179)
Handle item 1.07070.50.0
Pair of handles item 1.07070.60.0


Finishes:
- Zinc aluminum.

Standards:
- UNI EN 179
- UNI EN 1125
- UNI EN 12209

Hand:
0 = Non-handed

Cylinder to be ordered separately





- Deadbolt and latch
- Pre-set for additional locking points

- FUNCTION TYPE A
- Inside:
The panic exit device and/or the handle to open
The key to close with the deadbolt
- Outside:
The key to close with the deadbolt.

- FUNCTION TYPE D
- Inside:
The panic exit device and/or the handle to open
The key to close with the deadbolt
- Outside:
The key to close with the deadbolt. When the deadbolt is withdrawn, the handle is activated and can operate the latch

DEADBOLTS No.	Projection	Centre Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
4	3,5	27	2	85	64		2,650	1	1	56917	27	0	
4	3,5	28	2	85	64		2,650	1	1	56917	28	0	
3	3,5	38	2	85	64		2,650	1	1	56917	38	0	
4	3,5	27	2	85	64		2,550	5	1	56917	47	0	
4	3,5	28	2	85	64		2,550	5	1	56917	48	0	
3	3,5	38	2	85	64		2,550	5	1	56917	58	0	

- FUNCTION TYPE B
- Inside:
Panic exit device and/or handle to open
Key to close with deadbolt and enable or disable the outside handle when latch is operated
- Outside:
Key to close with deadbolt and enable or disable the outside handle when latch is operated

4	3,5	27	2	85	64		2,650	1	1	56916	27	0	
4	3,5	28	2	85	64		2,650	1	1	56916	28	0	
3	3,5	38	2	85	64		2,650	1	1	56916	38	0	
4	3,5	27	2	85	64		2,550	5	1	56916	47	0	
4	3,5	28	2	85	64		2,550	5	1	56916	48	0	
3	3,5	38	2	85	64		2,550	5	1	56916	58	0	





Exitlock

Technical features:
- Steel case and cover.
- Zinc-plated high resistant steel faceplate
- Zinc-plated high resistant steel deadbolts.
- Zinc-plated high resistant steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:
- Striker plate series 06220.

On request:
- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric strikerst series 15300
- For additional locking points
  Divertor item series 06433.00/01/11
  Pair of bolts item 06425.06.0
  Striker plates item 06221.28/29.0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 plus horizontal bar series 07007 or item 59711-10/11
- For fire door (spec. FR)
- For emergency exits (UNI EN 179)
  Handle item 1.07070.50.0
  Pair of handles item 1.07070.60.0


Finishes:
- Zinc aluminum.

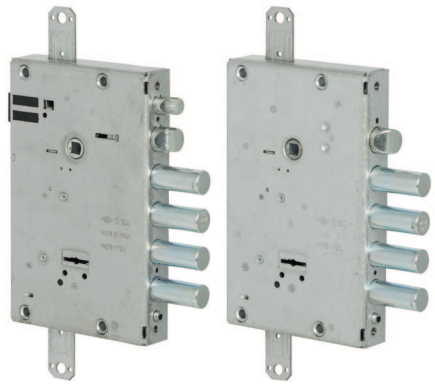
Standards:
- UNI EN 179
- UNI EN 1125
- UNI EN 12209

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	DEADBOLTS No.	Projection	Centre Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt and latch • Pre-setting for additional locking points • FUNCTION TYPE A • Inside: The panic exit device and/or the handle to open The key to close with the deadbolt • Outside: The key to close with the deadbolt.	4	28	2	85	35	67	2,800	1	1	56937	28	0		
		4	28	2	85	35	67	2,650	5	1	56937	48	0		
	• FUNCTION TYPE D • Inside: The panic exit device and/or the handle to open The key to close with the deadbolt • Outside: The key to close with the deadbolt. When the deadbolt is withdrawn, the handle is activated and can operate the latch														
	• FUNCTION TYPE B • Inside: Panic exit device and/or handle to open Key to close with deadbolt and enable or disable the outside handle when latch is operated • Outside: Key to close with deadbolt and enable or disable the outside handle when latch is operated	4	28	2	85	35	67	2,800	1	1	56936	28	0		
		4	28	2	85	35	67	2,650	5	1	56936	48	0		



New CambioFacile









Technical features:
- The NEW CAMBIO FACILE system allows to re-key the lock by using a special re-keying tool and the keys, so that it is not necessary to disassemble the lock or any of its parts
- Zinc-plated steel case
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant, steel deadbolts
- Pre-set for additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developped according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE


Operation:
- VERSION WITH CONSTRUCTION KEY: the key operates the 4 throws

Supplied as standard:
- Keys
- Re-keying tool
- Key guide item 1.06142.01.0
- Inside escutcheon item 1.06143.00.0
- Outside escutcheon item 1.06082.00.0

Standards:
- **New manipulation and picking protection system:** active on all six levers to block the lock in the event of burglary attempts
  European Patent EP 2212493 B1

Hand:
A = Non-handed


Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• CONSTRUCTION KEY VERSION • Deadbolt and latch • Electrically controlled dead-locking latch • Slide item 1.06224.50.0	 3 art. 1 00163 00 1 1 art. 1 00120 00 1 construction key	4	3,5	27	4	85	64	2,750	1	1	17665	27	A		
			4	3,5	28	4	85	64	2,750	1	1	17665	28	A		
			4	3,5	38	3	85	64	2,750	1	1	17665	38	A		
			4	3,5	27	4	85	64	2,450	5	1	17665	47	A		
			4	3,5	28	4	85	64	2,450	5	1	17665	48	A		
			3	3,5	38	4	85	64	2,450	5	1	17665	58	A		
	• CONSTRUCTION KEY VERSION • Deadbolt only	 3 art. 1 00163 00 1 1 art. 1 00120 00 1 construction key	5	3,5	25	4	85	64	2,550	1	1	57655	25	A		
			5	3,5	27	4	85	64	2,550	1	1	57655	27	A		
			5	3,5	28	4	85	64	2,550	1	1	57655	28	A		
			4	3,5	32	4	85	64	2,550	1	1	57655	32	A		
			4	3,5	38	4	85	64	2,550	1	1	57655	38	A		
			5	3,5	27	4	85	64	2,250	5	1	57655	47	A		
			5	3,5	28	4	85	64	2,250	5	1	57655	48	A		
			4	3,5	38	4	85	64	2,250	5	1	57655	58	A		
	• CONSTRUCTION KEY VERSION • Deadbolt and latch	 3 art. 1 00163 00 1 1 art. 1 00120 00 1 construction key	4	3,5	25	4	85	64	2,700	1	1	57665	25	A		
			4	3,5	27	4	85	64	2,700	1	1	57665	27	A		
			4	3,5	28	4	85	64	2,700	1	1	57665	28	A		
			3	3,5	32	4	85	64	2,700	1	1	57665	32	A		
			3	3,5	38	4	85	64	2,700	1	1	57665	38	A		
			4	3,5	27	4	85	64	2,400	5	1	57665	47	A		
			4	3,5	28	4	85	64	2,400	5	1	57665	48	A		
			3	3,5	38	4	85	64	2,400	5	1	57665	58	A		
	• VERSION WITH CONSTRUCTION KEY • Deadbolt only	 3 art. 1 00163 00 1 1 art. 1 00120 00 1 construction key	5	3,5	28	4	85	64	2,550	1	1	B7655	28	A		
			4	3,5	38	4	85	64	2,550	1	1	B7655	38	A		
			5	3,5	28	4	85	64	2,250	5	1	B7655	48	A		
			4	3,5	38	4	85	64	2,250	5	1	B7655	58	A		



- VERSION WITH CONSTRUCTION KEY
- Deadbolt and latchbolt



3 art. 1 00163 00 1



1 art.
1 00120 00 1
construction key

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
			4	3,5	28	4	85		64	2,700	1	1 B7665	28	A			
			3	3,5	38	4	85		64	2,700	1	1 B7665	38	A			
			4	3,5	28	4	85		64	2,400	5	1 B7665	48	A			
			3	3,5	38	4	85		64	2,400	5	1 B7665	58	A			



New CambioFacile









Technical features:
- The NEW CAMBIO FACILE system allows to re-key the lock by using a special re-keying tool and the keys, so that it is not necessary to disassemble the lock or any of its parts
- Zinc-plated steel case
- Zinc-plated high resistant satin steel faceplate
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant, steel deadbolts
- Pre-set for additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developped according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE





Operation:
- VERSION WITH CONSTRUCTION KEY: the key operates the 4 throws


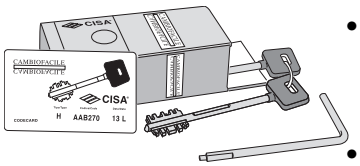

Supplied as standard:
- Keys
- Re-keying tool
- Inside escutcheon item 1.06143.00.0
- Outside escutcheon item 1.06082.00.0

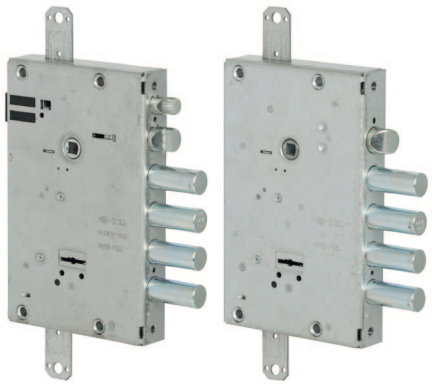
On request:
- **New manipulation and picking protection system:** active on all six levers to block the lock in the event of burglary attempts
  European Patent EP 2212493 B1

Hand:
A = Non-handed

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• CONSTRUCTION KEY VERSION • Deadbolt and latch • Electrically controlled dead-locking latch • Slide item 1.06224.50.0	 3 art. 1 00162 00 1  1 art. 1 00120 00 1 construction key	4	28	4	85	35	67	3,000	1	1	17685	28	A		
			4	28	4	85	35	67	2,850	5	1	17685	48	A		
	• CONSTRUCTION KEY VERSION • Deadbolt only	 3 art. 1 00162 00 1  1 art. 1 00120 00 1 construction key	5	28	4	85	35	67	2,800	1	1	57675	28	A		
			5	28	4	85	35	67	2,600	5	1	57675	48	A		
	• CONSTRUCTION KEY VERSION • Deadbolt and latch	 3 art. 1 00162 00 1  1 art. 1 00120 00 1 construction key	4	28	4	85	35	67	2,950	1	1	57685	28	A		
			4	28	4	85	35	67	2,650	5	1	57685	48	A		

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH CONSTRUCTION KEY • Deadbolt only	 3 art. 1 00162 00 1	5	28	4	85	35	67	2,800	1	1	B7675	28	A		
			4	38	4	85	35	67	2,800	1	1	B7675	38	A		
			5	28	4	85	35	67	2,500	5	1	B7675	48	A		
		 1 art. 1 00120 00 1 construction key	4	38	4	85	35	67	2,500	5	1	B7675	58	A		
	• VERSION WITH CONSTRUCTION KEY • Deadbolt and latchbolt	 3 art. 1 00162 00 1	4	28	4	85	35	67	2,950	1	1	B7685	28	A		
			3	38	4	85	35	67	2,950	1	1	B7685	38	A		
		 1 art. 1 00120 00 1 construction key	3	38	4	85	35	67	2,650	5	1	B7685	58	A		

Type	Description	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
 **CambioFacile**	• SUPPLIED AS STANDARD: 3 keys item 1.00162.00.1 1 change key	0,135	1	1 06520 00 1
	• SUPPLIED AS STANDARD: 5 keys item 1.00162.00.1 1 change key	0,185	1	1 06520 01 1
	• SUPPLIED AS STANDARD: 3 keys item 1.00163.00.1 1 change key	0,145	1	1 06520 10 1
	• SUPPLIED AS STANDARD: 5 keys item 1.00163.00.1 1 change key	0,200	1	1 06520 11 1
 **New CambioFacile**	• SUPPLIED AS STANDARD: 3 keys item 1.00162.00.1 1 change key	0,130	1	1 06520 50 1
	• SUPPLIED AS STANDARD: 5 keys item 1.00162.00.1 1 change key	0,185	1	1 06520 51 1
	• SUPPLIED AS STANDARD: 3 keys item 1.00163.00.1 1 change key	0,130	1	1 06520 60 1
	• SUPPLIED AS STANDARD: 5 keys item 1.00163.00.1 1 change key	0,190	1	1 06520 61 1
 **New CambioFacile**	• STANDARD SUPPLY: 3 keys item 1.00170.00.1 1 changing tool	0,130	1	1 06520 55 1
	• STANDARD SUPPLY: 3 keys item 1.00171.00.1 1 changing tool	0,130	1	1 06520 65 1
	• Group of construction keys for rekeyable armoured door locks NEW CAMBIO FACILE • SUPPLIED AS STANDARD: 1 construction key (Italian bitting)	0,033	1	1 06521 50 1
	• Changing tool for NEW CAMBIO FACILE locks	0,045	10	1 06522 00 0















Technical features:
- Zinc-plated steel case
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant steel bolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developped according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Operation:
- VERSION WITH CONSTRUCTION KEY: the key operates the latch
- VERSION WITH SERVICE KEY: the key operates the latch and first 2 throws

Supplied as standard:
- Keys
- Key guide item 1.06142.01.0
- Inside escutcheon item 1.06143.00.0
- Outside escutcheon item 1.06082.00.0

Hand:
0 = Non-handed

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
	• Deadbolt and latch • Electrically controlled dead-locking latch • Slide item 1.06224.50.0 • Pre-set for additional locking points	 3 Art. 1 00123 00 1	4	3,5	28	4	85		64	2,570	1	1 17515	28 0
			3	3,5	38	4	85		64	2,570	1	1 17515	38 0
			4	3,5	28	4	85		64	2,270	5	1 17515	48 0
			3	3,5	38	4	85		64	2,270	5	1 17515	58 0
	• Deadbolt only • Pre-set for additional locking points	 3 Art. 1 00123 00 1	5	3,5	28	4	85		64	2,380	1	1 57505	28 0
			4	3,5	38	4	85		64	2,380	1	1 57505	38 0
	• SERVICE KEY VERSION • deadbolt only • Pre-set for additional locking points	 3 art. 1 00123 00 1  1 art. 1 00120 00 1 service key	5	3,5	28	4	85		64	2,400	1	1 57506	28 0
			4	3,5	38	4	85		64	2,400	1	1 57506	38 0
	• Deadbolt only • Pre-set for additional locking points • Cover plate item 1.06228.00.0	 3 Art. 1 00123 00 1	5	43,5	28	4	85		64	2,580	1	1 57507	28 0

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt and latch • Pre-set for additional locking points	 2 art. 1 00125 00 1  1 art. 1 00120 00 1	4	3,5	28	4	85		64	2,430	1	1	57515	08	0		
	• Deadbolt and latch • Pre-set for additional locking points	 3 Art. 1 00123 00 1	4	3,5	25	4	85		64	2,430	1	1	57515	25	0		
			4	3,5	27	4	85		64	2,600	1	1	57515	27	0		
			4	3,5	28	4	85		64	2,600	1	1	57515	28	0		
			3	3,5	32	4	85		64	2,430	1	1	57515	32	0		
			3	3,5	38	4	85		64	2,430	1	1	57515	38	0		
			4	3,5	28	4	85		64	2,260	5	1	57515	48	0		
	• CONSTRUCTION KEY VERSION • Deadbolt and latch • Pre-set for additional locking points	 3 art. 1 00123 00 1  1 art. 1 00120 00 1 construction key	4	3,5	28	4	85		64	2,450	5	1	57515	68	0		
	• SERVICE KEY VERSION • Deadbolt and latch • Pre-set for additional locking points	 3 art. 1 00123 00 1  1 art. 1 00120 00 1 service key	4	3,5	28	4	85		64	2,450	1	1	57516	28	0		
			3	3,5	38	4	85		64	2,450	1	1	57516	38	0		
	• Deadbolt and latch • Pre-set for additional locking points • Cover plate item 1.06228.00.0	 3 Art. 1 00123 00 1	4	43,5	28	4	85		64	2,630	1	1	57517	28	0		
			3	43,5	38	4	85		64	2,630	1	1	57517	38	0		
	• Deadbolt only • Pre-set for additional locking points	 3 Art. 1 00123 00 1	5	3,5	25	4	85		64	2,380	1	1	B7505	25	0		
			5	3,5	28	4	85		64	2,380	1	1	B7505	28	0		
			4	3,5	38	4	85		64	2,380	1	1	B7505	38	0		
			5	3,5	28	4	85		64	2,380	5	1	B7505	48	0		
			4	3,5	38	4	85		64	2,380	5	1	B7505	58	0		
	• Deadbolt and latch • Pre-set for additional locking points	 3 Art. 1 00123 00 1	4	3,5	25	4	85		64	2,430	1	1	B7515	25	0		
			4	3,5	28	4	85		64	2,800	1	1	B7515	28	0		
			3	3,5	38	4	85		64	2,685	1	1	B7515	38	0		
			4	3,5	28	4	85		64	2,590	5	1	B7515	48	0		
			3	3,5	38	4	85		64	2,500	5	1	B7515	58	0		

















Technical features:
- Zinc-plated steel case
- Zinc-plated high resistant satin steel faceplate
- Zinc-plated high resistant reversible latch
- Zinc-plated high resistant steel deadbolts
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developped according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE

Operation:
- VERSION WITH CONSTRUCTION KEY: the key operates the latch
- VERSION WITH SERVICE KEY: the key operates the latch and first 2 throws

Supplied as standard:
- Keys
- Inside escutcheon item 1.06143.02.0
- Outside escutcheon item 1.06082.01.0

Hand:
0 = Non-handed

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Deadbolt and latch • Electrically controlled dead-locking latch • Slide item 1.06224.50.0 • Pre-set for additional locking points	 3 art. 1 00122 00 1	4		28	4	85	35	67	2,840	1	1	17535	28	0		
			4		28	4	85	35	67	2,540	5	1	17535	48	0		
	• Deadbolt only • Pre-set for additional locking points	 3 art. 1 00122 00 1	5		28	4	85	35	67	2,750	1	1	57525	28	0		
	• SERVICE KEY VERSION • Deadbolt only • Pre-set for additional locking points	 3 art. 1 00122 00 1  1 art. 1 00121 00 1 service key	5		28	4	85	35	67	2,600	1	1	57526	28	0		

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt only • Pre-set for additional locking points	 3 art. 1 00122 00 1	4	28	4	85	35	67	2,780	1	1	57535	28	0		
			4	28	4	85	35	67	2,500	5	1	57535	48	0		
	• CONSTRUCTION KEY VERSION • Deadbolt and latch • Pre-set for additional locking points	 3 art. 1 00122 00 1  1 art. 1 00121 00 1 construction key	4	28	4	85	35	67	2,520	5	1	57535	68	0		
			4	28	4	85	35	67	2,800	1	1	57535	88	0		
	• SERVICE KEY VERSION • Deadbolt and latch • Pre-set for additional locking points	 3 art. 1 00122 00 1  1 art. 1 00121 00 1 service key	5	28	4	85	35	67	2,800	1	1	57536	28	0		
	• Deadbolt only • Pre-set for additional locking points	 3 art. 1 00122 00 1	5	28	4	85	35	67	2,580	1	1	B7525	28	0		
			5	38	4	85	35	67	2,580	1	1	B7525	38	0		
			5	28	4	85	35	67	2,580	5	1	B7525	48	0		
			5	38	4	85	35	67	2,580	5	1	B7525	58	0		
	• Deadbolt and latch • Pre-set for additional locking points	 3 art. 1 00122 00 1	4	28	4	85	35	67	3,100	1	1	B7535	28	0		
			4	38	4	85	35	67	2,780	1	1	B7535	38	0		
			4	28	4	85	35	67	2,600	5	1	B7535	48	0		
			4	38	4	85	35	67	2,600	5	1	B7535	58	0		



Technical features:
- Zinc-plated steel case
- Zinc-plated high resistant steel deadbolts:
  n° 4 for the lower lock
  n° 1 for the upper lock
- Zinc-plated high resistant reversible latch
- Can be fitted with additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developped according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE





Operation:
- VERSION WITH SECURITY FUNCTION: the upper lock blocks the lower lock when the latter is locked
- VERSION WITH SERVICE KEY: the upper lock key operates the latch and upper deadbolt
- VERSION WITH SERVICE KEY AND OPENING LIMITING DEVICE: the upper lock key operates the latch and upper deadbolt; the opening limiting device is activated by operating the first throw of the upper lock







Supplied as standard:
- Keys (only for those items with double-bit key locks)


Standards:
- **New manipulation and picking protection system on NEW CAMBIO FACILE locks:** active on all six levers to block the lock in the event of burglary attempts
  European Patent EP 2212493 B1


Cylinder to be ordered separately













Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • Double bitted 6 lever main lock • Electric operation self locking latchbolt • Slide item 1.06224.50.0	 3 Art. 1 00123 00 1	3,5	28		85		64	3,100	1	1	17766	28	0		
			3,5	28		85		64	2,880	5	1	17766	48	0		
	• VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • 2 throw main cylinder lock • Electric operation self locking latchbolt • Slide item 1.06224.50.0		3,5	28		85		64	2,900	1	1	16766	28	0		
			3,5	28		85		64	3,140	5	1	16766	48	0		
	• VERSION WITH SERVICE LOCK • 2-throw secondary cylinder lock • 2-throw main cylinder lock • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • Electrically controlled dead-locking latch • Slide item 1.06224.50.0		3,5	28		85		64	2,900	1	1	16766	28	B		
			3,5	28		85		64	3,140	5	1	16766	48	B		

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • Double bit 6 lever NEW CAMBIO FACILE main lock with construction key, 4 throws • Electric operation self locking latchbolt • Slide item 1.06224.50.0	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key	1	3,5	28		85	64	3,500	1	1	17966	28	A		
			1	3,5	28		85	64	3,200	5	1	17966	48	A		
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Double bit 6 lever secondary lock, 2 throws • Cylinder main lock, 2 throws	 3 Art. 1 00123 00 1	1	3,5	28		85	64	3,100	1	1	56715	28	0		
			1	3,5	28		85	64	2,800	5	1	56715	48	0		
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated whrn the main lock is in its closed position • Double bit 6 lever secondary lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)	 3 Art. 1 00123 00 1	1	3,5	28		85	64	3,100	1	1	56715	28	B		
			1	3,5	28		85	64	2,800	5	1	56715	48	B		
	• VERSION WITH SERVICE LOCK • Double bit 6 lever secondary lock, 2 throws • Cylinder main lock, 2 throws	 3 Art. 1 00123 00 1	1	3,5	28		85	64	3,100	1	1	56716	28	0		
			1	3,5	28		85	64	2,800	5	1	56716	48	0		
	• VERSION WITH SERVICE LOCK • Double bit 6 lever secondary lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)	 3 Art. 1 00123 00 1	1	3,5	28		85	64	3,100	1	1	56716	28	B		
			1	3,5	28		85	64	2,800	5	1	56716	48	B		









Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws			3,5	28		85		64	2,900	1	1	56765	28	0		
				3,5	28		85		64	3,100	5	1	56765	48	0		
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated whrn the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)			3,5	28		85		64	2,900	1	1	56765	28	B		
				3,5	28		85		64	3,100	5	1	56765	48	B		
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws			3,5	28		85		64	2,900	1	1	56766	28	0		
				3,5	28		85		64	3,100	5	1	56766	48	0		
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)			3,5	28		85		64	2,900	1	1	56766	28	B		
				3,5	28		85		64	3,100	5	1	56766	48	B		





Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2		3,5	28		85		64	2,900	1	1	56767	28	0		
			3,5	28		85		64	2,600	5	1	56767	48	0		
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: Limiting device chaihn item 1.06421.10.1/2		3,5	28		85		64	2,900	1	1	56767	28	B		
			3,5	28		85		64	2,600	5	1	56767	48	B		
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2		3,5	28		85		64	2,900	1	1	56768	28	0		
			3,5	28		85		64	3,140	5	1	56768	48	0		
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2		3,5	28		85		64	2,900	1	1	56768	28	B		
			3,5	28		85		64	3,140	5	1	56768	48	B		

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws		1	3,5	28		85		64	2,900	1	1 B6764	28	0			
			1	3,5	38		85		64	2,900	1	1 B6764	38	0			
			1	3,5	28		85		64	3,100	5	1 B6764	48	0			
			1	3,5	38		85		64	3,100	5	1 B6764	58	0			
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws		1	3,5	28		85		64	2,900	1	1 B6765	28	0			
			1	3,5	38		85		64	2,900	1	1 B6765	38	0			
			1	3,5	28		85		64	3,100	5	1 B6765	48	0			
			1	3,5	38		85		64	3,100	5	1 B6765	58	0			
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws		1	3,5	28		85		64	2,900	1	1 B6766	28	0			
			1	3,5	38		85		64	2,900	1	1 B6766	38	0			
			1	3,5	38		85		64	3,100	5	1 B6766	58	0			
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)		1	3,5	28		85		64	2,900	1	1 B6766	28	B			
			1	3,5	38		85		64	2,900	1	1 B6766	38	B			
			1	3,5	38		85		64	3,100	1	1 B6766	48	B			
			1	3,5	38		85		64	3,100	5	1 B6766	58	B			
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws	 3 Art. 1 00123 00 1	1	3,5	28		85		64	3,100	1	1 57765	28	0			
			1	3,5	28		85		64	2,900	5	1 57765	48	0			
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws	 3 Art. 1 00123 00 1	1	3,5	28		85		64	3,100	1	1 57766	28	0			
			1	3,5	28		85		64	2,900	5	1 57766	48	0			

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2	 3 Art. 1 00123 00 1	3,5	28	85		64		3,100	1	1	57767	28	0		
			3,5	28	85		64		2,900	5	1	57767	48	0		
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Double bit 6 lever main lock, 4 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2	 3 Art. 1 00123 00 1	3,5	28	85		64		3,100	1	1	57768	28	0		
	• VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws	 3 Art. 1 00123 00 1	3,5	28	85		64		3,100	1	1	B7764	28	0		
			3,5	38	85		64		3,100	1	1	B7764	38	0		
			3,5	28	85		64		2,900	5	1	B7764	48	0		
			3,5	38	85		64		2,900	5	1	B7764	58	0		
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws	 3 Art. 1 00123 00 1	3,5	38	85		64		3,100	1	1	B7765	38	0		
			3,5	28	85		64		2,900	5	1	B7765	48	0		
			3,5	38	85		64		2,900	5	1	B7765	58	0		
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws	 3 Art. 1 00123 00 1	3,5	28	85		64		3,100	1	1	B7766	28	0		
			3,5	38	85		64		3,100	1	1	B7766	38	0		
			3,5	28	85		64		2,900	5	1	B7766	48	0		
			3,5	38	85		64		2,900	5	1	B7766	58	0		

CISA

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key		3,5	28		85	64	3,400	1	1	57965	28	A		
				3,5	28		85	64	3,100	5	1	57965	48	A		
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key		3,5	28		85	64	3,400	1	1	57966	28	A		
				3,5	28		85	64	3,100	5	1	57966	48	A		
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key		3,5	28		85	64	3,400	1	1	57967	28	A		
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key		3,5	28		85	64	3,100	5	1	57968	48	A		

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws, NEW CAMBIO FACILE, with construction key	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key	1	3,5	28	1	85	64	64	3,400	1	1	B7964	28	A	
			1	3,5	38	1	85	64	64	3,400	1	1	B7964	38	A	
			1	3,5	28	5	85	64	64	3,100	5	1	B7964	48	A	
			1	3,5	38	5	85	64	64	3,100	5	1	B7964	58	A	
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key	1	3,5	28	1	85	64	64	3,400	1	1	B7965	28	A	
			1	3,5	38	1	85	64	64	3,400	1	1	B7965	38	A	
			1	3,5	28	5	85	64	64	3,100	5	1	B7965	48	A	
			1	3,5	38	5	85	64	64	3,100	5	1	B7965	58	A	
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key	 3 art. 1 00163 00 1  1 art. 1 00120 00 1 construction key	1	3,5	28	1	85	64	64	3,400	1	1	B7966	28	A	
			1	3,5	38	1	85	64	64	3,400	1	1	B7966	38	A	
			1	3,5	28	5	85	64	64	3,100	5	1	B7966	48	A	
			1	3,5	38	5	85	64	64	3,100	5	1	B7966	58	A	



Technical features:
- Zinc-plated steel case
- Zinc-plated high resistant satin steel faceplate
- Zinc-plated high resistantsteel deadbolts:
  n° 4 for the lower lock
  n° 1 for the upper lock
- Zinc-plated high resistant reversible latch
- Can be fitted with additional locking points
- Packing: 1 or 5 pcs. (industrial wrapping)
- Range developped according to 2 dimensional standards to meet any installation requirements
- Current absorption 3,1 A
- Voltage 12 V ac CE




Operation:
- VERSION WITH SECURITY FUNCTION: the upper lock blocks the lower lock when the latter is locked
- VERSION WITH SERVICE KEY: the upper lock key operates the latch and upper deadbolt
- VERSION WITH SERVICE KEY AND OPENING LIMITING DEVICE: the upper lock key operates the latch and upper deadbolt; the opening limiting device is activated by operating the first throw of the upper lock









Supplied as standard:
- Keys (only for those items with double-bit key locks)


Standards:
- **New manipulation and picking protection system on NEW CAMBIO FACILE locks**: active on all six levers to block the lock in the event of burglary attempts
  European Patent EP 2212493 B1


Cylinder to be ordered separately














Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • Double bitted 6 lever main lock • Electric operation self locking latchbolt • Slide item 1.06224.50.0	 3 art. 1 00122 00 1			28		85	35	67	3,600	1	1	17786	28	0	
					28		85	35	67	3,300	5	1	17786	48	0	
	• VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • 2 throw main cylinder lock • Electric operation self locking latchbolt • Slide item 1.06224.50.0				28		85	35	67	3,800	1	1	16786	28	0	
					28		85	35	67	3,500	5	1	16786	48	0	
	• VERSION WITH SERVICE LOCK • 2-throw secondary cylinder lock • 2-throw main cylinder lock • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • Electrically controlled dead • locking latch • Slide item 1.06224.50.0				28		85	35	67	3,800	1	1	16786	28	B	
					28		85	35	67	3,500	5	1	16786	48	B	











Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • Double bitted 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key • Electric operation self locking latchbolt • Slide item 1.06224.50.0	 3 art. 1 00162 00 1  1 art. 1 00120 00 1 construction key	1	28	85	35	67	3,735	1	1	17986	28	A		
			1	28	85	35	67	3,700	5	1	17986	48	A		
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Double bit 6 lever secondary lock, 2 throws • Cylinder main lock, 2 throws	 3 art. 1 00122 00 1	1	28	85	35	67	3,800	1	1	56735	28	0		
			1	28	85	35	67	3,500	5	1	56735	48	0		
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated whrn the main lock is in its closed position • Double bit 6 lever secondary lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)	 3 art. 1 00122 00 1	1	28	85	35	67	3,800	1	1	56735	28	B		
			1	28	85	35	67	3,500	5	1	56735	48	B		
	• VERSION WITH SERVICE LOCK • Double bitted 6 lever secondary lock, 2 throws • Cylinder main lock, 2 throws	 3 art. 1 00122 00 1	1	28	85	35	67	3,800	1	1	56736	28	0		
			1	28	85	35	67	3,500	5	1	56736	48	0		
	• VERSION WITH SERVICE LOCK • Double bit 6 lever secondary lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)	 3 art. 1 00122 00 1	1	28	85	35	67	3,800	1	1	56736	28	B		
			1	28	85	35	67	3,500	5	1	56736	48	B		








Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws		1		28		85	35	67	3,600	1	1	56785	28	0		
			5		28		85	35	67	3,300	5	1	56785	48	0		
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated whrn the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)		1		28		85	35	67	3,600	1	1	56785	28	B		
			5		28		85	35	67	3,300	5	1	56785	48	B		
	• VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • 2 throw main cylinder lock		1		28		85	35	67	3,600	1	1	56786	28	0		
			5		28		85	35	67	3,300	5	1	56786	48	0		
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)		1		28		85	35	67	3,600	1	1	56786	28	B		
			5		28		85	35	67	3,300	5	1	56786	48	B		

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2				28		85	35	67	3,600	1	1	56787	28	0	
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: • Limiting device chain item 1.06421.10.1/2				28		85	35	67	3,600	1	1	56787	28	B	
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2				28		85	35	67	3,400	1	1	56788	28	0	
					28		85	35	67	3,400	5	1	56788	48	0	
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO) • TO ORDER SEPARATELY: • Limiting device chain item 1.06421.10.1/2				28		85	35	67	3,400	1	1	56788	28	B	
					28		85	35	67	3,400	5	1	56788	48	B	

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws				28		85	35	67	3,600	1	1	B6784	28		0	
					38		85	35	67	3,600	1	1	B6784	38		0	
					28		85	35	67	3,300	5	1	B6784	48		0	
					38		85	35	67	3,300	5	1	B6784	58		0	
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws				28		85	35	67	3,600	1	1	B6785	28		0	
					38		85	35	67	3,600	1	1	B6785	38		0	
					28		85	35	67	3,300	5	1	B6785	48		0	
					38		85	35	67	3,300	5	1	B6785	58		0	
	• VERSION WITH SERVICE LOCK • 2 throw secondary cylinder lock • 2 throw main cylinder lock				28		85	35	67	3,600	1	1	B6786	28		0	
					38		85	35	67	3,600	1	1	B6786	38		0	
					28		85	35	67	3,300	5	1	B6786	48		0	
					38		85	35	67	3,300	5	1	B6786	58		0	
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Main cylinder lock, 2 throws • FITTED WITH A BLOCKING DEVICE WHICH IS ACTIVATED IF THE CYLINDER IS EXTRACTED (REVOLUTION PRO)				28		85	35	67	3,600	1	1	B6786	28		B	
					38		85	35	67	3,600	1	1	B6786	38		B	
					28		85	35	67	3,300	5	1	B6786	48		B	
					38		85	35	67	3,300	5	1	B6786	58		B	
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws	 3 art. 1 00122 00 1			28		85	35	67	3,600	1	1	57785	28		0	
					28		85	35	67	3,300	5	1	57785	48		0	
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws	 3 art. 1 00122 00 1			28		85	35	67	3,600	1	1	57786	28		0	
					28		85	35	67	3,300	5	1	57786	48		0	

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2	 3 art. 1 00122 00 1			28		85	35	67	3,300	5	1	57787	48	0	
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Double bit 6 lever main lock, 4 throws • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2	 3 art. 1 00122 00 1			28		85	35	67	3,600	1	1	57788	28	0	
					28		85	35	67	3,300	5	1	57788	48	0	
	• VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws	 3 Art. 1 00123 00 1			28		85	35	67	3,600	1	1	B7784	28	0	
					38		85	35	67	3,600	1	1	B7784	38	0	
					28		85	35	67	3,300	5	1	B7784	48	0	
					38		85	35	67	3,300	5	1	B7784	58	0	
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws	 3 Art. 1 00123 00 1			28		85	35	67	3,600	1	1	B7785	28	0	
					38		85	35	67	3,600	1	1	B7785	38	0	
					28		85	35	67	3,300	5	1	B7785	48	0	
					38		85	35	67	3,300	5	1	B7785	58	0	
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws	 3 Art. 1 00123 00 1			28		85	35	67	3,600	1	1	B7786	28	0	
					38		85	35	67	3,600	1	1	B7786	38	0	
					28		85	35	67	3,300	5	1	B7786	48	0	
					38		85	35	67	3,300	5	1	B7786	58	0	

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key	 3 art. 1 00162 00 1  1 art. 1 00120 00 1 construction key			28		85	35	67	4,000	1	1	57985	28	A	
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key	 3 art. 1 00162 00 1  1 art. 1 00120 00 1 construction key			28		85	35	67	3,800	1	1	57986	28	A	
					28		85	35	67	3,500	5	1	57986	48	A	
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE CYLINDER • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2	 3 art. 1 00162 00 1  1 art. 1 00120 00 1 construction key			28		85	35	67	4,000	1	1	57987	28	A	
					28		85	35	67	3,700	5	1	57987	48	A	
	• VERSION WITH SERVICE LOCK AND OPENING LIMITING DEVICE, OPERATED VIA THE INSIDE THUMB TURN ONLY • Secondary thumb turn lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key • TO ORDER SEPARATELY: Limiting device chain item 1.06421.10.1/2	 3 art. 1 00162 00 1  1 art. 1 00120 00 1 construction key			28		85	35	67	3,700	5	1	57988	48	A	

Type	Description	Key item	DEADBOLTS No.	Projection	Distance	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• VERSION WITH SECURITY LOCK (independent locks) the secondary lock can be operated also when the main lock is in its open position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, 4 throws, NEW CAMBIO FACILE, with construction key	 3 art. 1 00164 00 1  1 art. 1 00120 00 1 construction key	1	28		85	35	67	4,000	1	1	B7984	28		A	
			1	38		85	35	67	4,000	1	1	B7984	38		A	
			5	28		85	35	67	3,700	5	1	B7984	48		A	
			5	38		85	35	67	3,700	5	1	B7984	58		A	
	• VERSION WITH SECURITY LOCK (interlocked locks) the secondary lock can only be operated when the main lock is in its closed position • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock NEW CAMBIO FACILE, 4 throws, with construction key	 3 art. 1 00164 00 1  1 art. 1 00120 00 1 construction key	1	28		85	35	67	4,000	1	1	B7985	28		A	
			1	38		85	35	67	4,000	1	1	B7985	38		A	
			5	28		85	35	67	3,700	5	1	B7985	48		A	
			5	38		85	35	67	3,700	5	1	B7985	58		A	
	• VERSION WITH SERVICE LOCK • Secondary cylinder lock, 2 throws • Double bit 6 lever main lock, NEW CAMBIO FACILE, 4 throws, with construction key	 3 art. 1 00164 00 1  1 art. 1 00120 00 1 construction key	1	38		85	35	67	3,800	1	1	B7986	38		A	
			5	28		85	35	67	3,700	5	1	B7986	48		A	
			5	38		85	35	67	3,700	5	1	B7986	58		A	




Technical features:
- 11-pin bitting.
- Pins
- Wear resistant bronze
- Hardened steel pins in first position.
- Drivers
- Brass
- Hardened steel driver in first position
- Phosphor bronze springs
- Hardened steel gate



Operation:
- The key rotation activates/open a window which allows key introduction


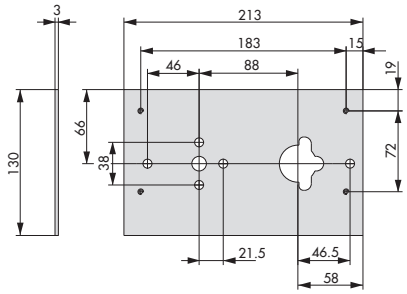
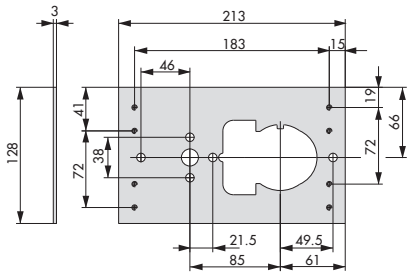
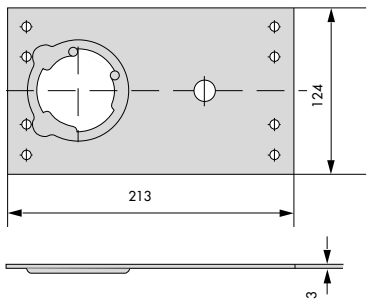
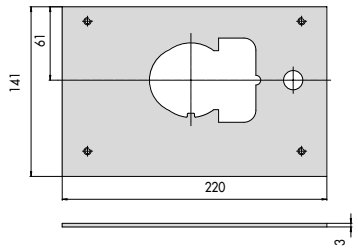
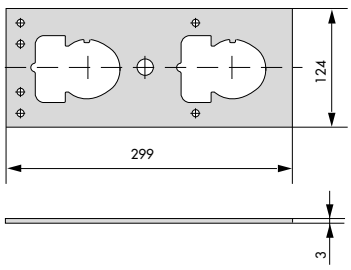
Supplied as standard:
- Fixing screws.
- Instruction sheet
- Keys bitted on stem only
- Keys bitted on stem and bits (for New Cambio facile locks)

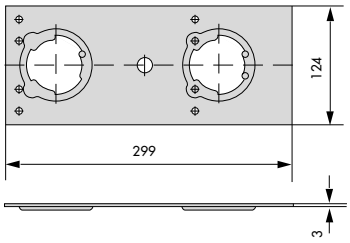
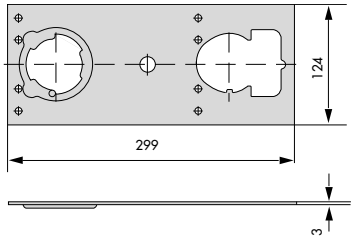
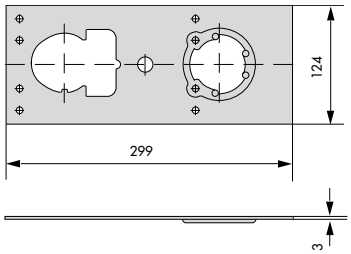


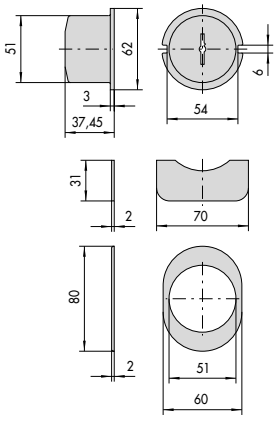
On request:
- Hardened steel protective rose for double bit key cylinder.

Finishes:
- Standard:
  - polished brass fin. 00
- On request:
  - polished chrome fin. 18
  - gun burrel fin. 46



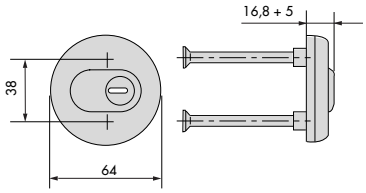
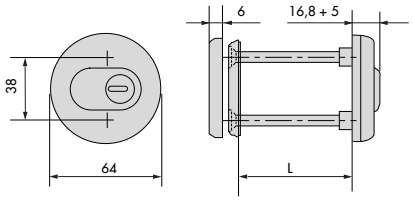

Type	Description	For series/item	L	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• May be combined with 6 lever double bit key locks, for armoured doors • Bitted keys only on stem • For lock combination , bit the key by duplicating main key • SUPPLIED AS STANDARD: 3 keys item 1.00162.00.1		53,0	0,580	1	**1 02715 10 1**
	• May be combined with 6 lever double bit key locks, for armoured doors • Bitted keys only on stem • For lock combination , bit the key by duplicating main key • SUPPLIED AS STANDARD: 3 keys item 1.00163.00.1		70,0	0,605	1	**1 02715 11 1**


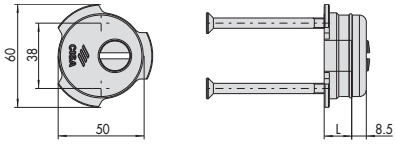


Type	Description	For series/item	L	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00162.00.1		53,0	0,350	1	1	02716	00	1		
	• May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00162.00.1		53,0	0,840	1	1	02716	01	1		
	• May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00163.00.1		70,0	0,350	1	1	02716	10	1		
	• May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00163.00.1		70,0	0,400	1	1	02716	11	1		
	• May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00162.00.1		53,0	0,665	1	1	02716	50	1		
	• May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00162.00.1		53,0	0,820	1	1	02716	51	1		
	• May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 3+3 keys item 1.00163.00.1		70,0	0,350	1	1	02716	60	1		
	• May be combined with rekeyable double bit key CAMBIO FACILE locks, for armoured doors • Bitted keys on stem and bit • SUPPLIED AS STANDARD: 5+5 keys item 1.00163.00.1		70,0	0,833	1	1	02716	61	1		

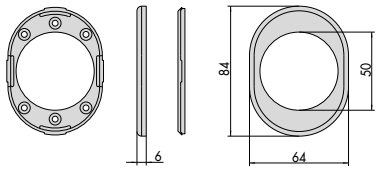






Type	Description	For series/item	L	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Nickel-plated steel screws	06460, 06461, 06480, 06485	105,0	0,020	25	1	06047	51	0		
	• Steel welding plate • For double-bit key locks	57000		0,660	12	1	06429	00	0		
	• Steel welding plate • For cylinder and double-bit key locks	56000, 57000		0,552	12	1	06429	05	0		
	• Steel welding plate for assembly of protection roses series 06485	15000, 56000		0,552	12	1	06429	06	0		
	• Steel welding plate • For cylinder and double-bit key locks	B6515, B7515		0,650	12	1	06429	10	0		
	• Steel welding plate • For double hole locks	56700, 57700, 57900		0,695	12	1	06429	15	0		



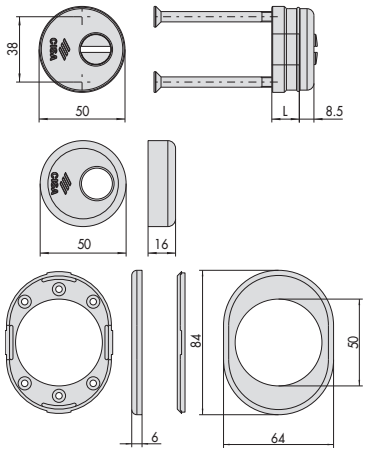
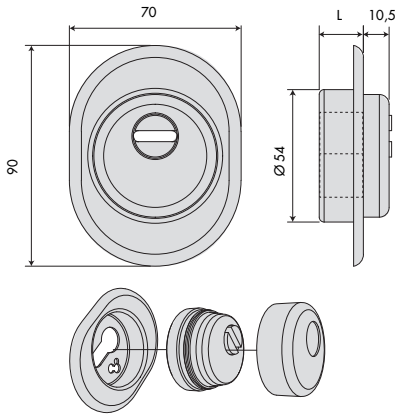
Type	Description	For series/item	L	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Steel welding plate for assembly of protection roses series 06485	56765, 56766, 56767, 56768, 56785, 56786, 56787, 56788		0,950	12	**1 06429 16 0**
	• Steel welding plate for assembly of protection roses series 06485	56715, 56716, 56735, 56736		0,950	12	**1 06429 18 0**
	• Steel welding plate for assembly of protection roses series 06485	57765, 57766, 57785, 57786, 57787, 57915, 57916, 57917, 57935, 57936, 57937, 57965, 57966, 57967, 57985, 57986, 57987		0,950	12	**1 06429 20 0**
	• Manganese steel anti-drill protection • For double bit key locks • May be combined with welding plates	1 06429 05 0, 1 06429 10 0, 1 06429 15 0, 1 06429 18 0, 1 06429 20 0		0,075	12	**1 06429 50 0**
	• Manganese steel anti-drill protection • For cylinder key locks • May be combined with welding plates	1 06429 05 0, 1 06429 10 0, 1 06429 15 0, 1 06429 18 0, 1 06429 20 0		0,075	12	**1 06429 51 0**
	• Carbonitrided steel protection rose for bit key cylinder series 02715 and 02716 • May be combined with 6 lever and NEW CAMBIO FACILE locks • Use assembly plate item 1.06429.05.0 or 1.06429.15.0 • SUPPLIED AS STANDARD: Hardened steel hole protection plate Plate ring • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) satin-finished nickel-plated chrome (fin. B1)			0,280	1	**1 06429 60 1**

CISA

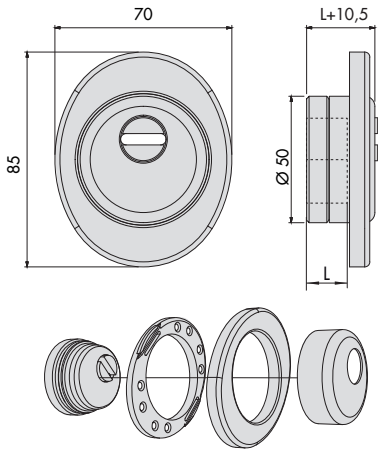
Type	Description	For series/item	L	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Polished brass internal rose to be combined with European profile cylinders on locks series 15000, 56000 • AVAILABLE FINISHES: Anodised dark brown (fin. 58) Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64)			0,036	12	1 06458 10 0
	• Polished brass internal rose to be combined with European profile cylinders with adjustable knob on locks series 15000, 56000 • AVAILABLE FINISHES: Anodised dark brown (fin. 58) Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) Polished chrome (fin. 18)	0A317, 0H3S7, 0L3S7, 0M317		0,037	12	1 06458 20 0
	• Carbonitrided steel protection rose with polished brass finish • 2 screws L. 45 mm. (M6) • AVAILABLE FINISHES: Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) Polished chrome (fin. 18)	0A310, 0H3S0, 0L3S1, 0M311	45,0	0,200	1	1 06460 40 0
	• Carbonitrided steel protection rose with polished brass finish • 2 screws (M6) • AVAILABLE FINISHES: Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) Polished chrome (fin. 18)	0A310, 0H3S0, 0L3S1, 0M311	70,0	0,310	1	1 06460 50 0
		0A310, 0H3S0, 0L3S1, 0M311	110,0	0,320	1	1 06460 51 0
		08815	70,0	0,310	1	1 06460 60 0
		0A317, 0H3S7, 0L3S7, 0M317	70,0	0,335	1	1 06461 50 0
		0A317, 0H3S7, 0L3S7, 0M317	110,0	0,325	1	1 06461 51 0
		08887	70,0	0,200	1	1 06461 60 0
		08887	110,0	0,325	1	1 06461 61 0
	• Carbonitrided steel rotor protection for roses series 06460 and 06461	0A310, 0H3S0, 0L3S1, 0M311		0,009	50	1 06466 01 0
		08815		0,008	50	1 06466 02 0

Type	Description	For series/item	L	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Carbonitrided steel protective rose-casing • 2 L 45 mm screws (M6 • To order separately: -rose cap -cover plate ring	0A310, 0H3S0, 0L3S1, 0M311	16,0	0,285	6	1 06480 00 0
		0A310, 0H3S0, 0L3S1, 0M311	24,5	0,385	6	1 06480 01 0
		0A310, 0H3S0, 0L3S1, 0M311	34,5	0,594	6	1 06480 02 0
		0A310, 0H3S0, 0L3S1, 0M311	16,0	0,365	30	1 06480 20 0
		0A310, 0H3S0, 0L3S1, 0M311	24,5	0,482	30	1 06480 21 0
		0A310, 0H3S0, 0L3S1, 0M311	34,5	0,594	30	1 06480 22 0
		08815	16,0	0,365	6	1 06480 10 0
		0A310, 0H3S0, 0L3S1, 0M311	24,5	0,482	6	1 06480 11 0
		08815	34,5	0,594	6	1 06480 12 0
	• Carbonitrided steel protective rose-casing with quick coupling • 2 screws L 45 mm	0A310, 0H3S0, 0L3S1, 0M311	16,0	0,378	6	1 06485 00 0
		0A310, 0H3S0, 0L3S1, 0M311	24,5	0,482	6	1 06485 01 0
		0A310, 0H3S0, 0L3S1, 0M311	34,5	0,594	6	1 06485 02 0
		0A310, 0H3S0, 0L3S1, 0M311	16,0	0,378	30	1 06485 20 0
		0A310, 0H3S0, 0L3S1, 0M311	24,5	0,482	30	1 06485 21 0
		0A310, 0H3S0, 0L3S1, 0M311	34,5	0,594	30	1 06485 22 0
	• Protective rose-casing cap • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Dark anodised bronze (fin. 64) Light anodised bronze (fin. 65) satin-finished nickel-plated chrome (Fin B1)	06480, 06485	16,0	0,025	6	1 06483 00 0
		06480, 06485	16,0	0,025	30	1 06483 20 0
	• Cover plate ring for protective rose • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Dark anodised bronze (fin. 64) Light anodised bronze (fin. 65) satin-finished nickel-plated chrome (fin. B1)	06480, 06485		0,025	6	1 06483 60 0
		06480, 06485		0,025	30	1 06483 80 0



Type	Description	For series/item	L	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Cover plate ring for protective rose • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome (fin. 18) Shotgun grey (fin. 46) Dark anodised bronze (fin. 64) Light anodised bronze (fin. 65) satin-finished nickel-plated chrome (fin. B1)	06480, 06485		0,025	30	1 06483 61 0
		06480, 06485	16,0	0,025	30	1 06483 81 0
	• Carbonitrided steel rotor, polished chrome, to be combined with roses series 06475, 06476	0A310, 0H3S0, 0L3S1, 0M311, 06470		0,016	50	1 06472 00 0
		0A310, 0H3S0, 0L3S1, 0M311, 06470		0,016	50	1 06472 10 0
	• Zinc plated 2 mm. spacer for protection roses	06480		0,025	25	1 06472 40 0
	• Pair of zinc plated anti-crush plates	06480, 06485		0,025	25	1 06472 50 0
	• Pair of zinc plated anti-crush plates	06480, 06485		0,050	25	1 06472 51 0
	• Internal rose • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome(fin. 18) Shotgun grey (fin. 46) Anodised dark bronze (fin. 64) Anodised light bronze (fin. 65) satin-finished nickel-plated chrome (fin. B1)	06460, 06461, 06480, 06485		0,116	12	1 06473 00 0
	• Internal rose for cylider series 0A317 and 0B317 • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome(fin. 18) Shotgun grey (fin. 46) Anodised light bronze (fin. 65) Anodised dark bronze (fin. 64) satin-finished nickel-plated chrome (fin. B1)	06460, 06461, 06480, 06485		0,120	12	1 06473 10 0

Type	Description	For series/item	L	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• External ring for plate • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome(fin. 18) Shotgun grey (fin. 46) Anodised dark bronze (fin. 64) Anodised light bronze (fin. 65) satin-finished nickel-plated chrome (fin. B1)	1 06429 60 1		0,025	25	**1 06473 50 0**
	• External ring for plate • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome(fin. 18) Shotgun grey (fin. 46) Anodised dark bronze (fin. 64) Anodised light bronze (fin. 65) satin-finished nickel-plated chrome (fin. B1)	1 06429 60 1		0,025	25	**1 06473 51 0**
	• Carbonitrided steel protective rose • SUPPLIED AS STANDARD: Rose body Cap Cover plate ring screws M6 x 45 mm • AVAILABLE FINISHES: Polished brass (fin. 00) Polished chrome-plated (fin. 18) Gunbarrel grey (fin. 46) Anodised dark bronze (fin. 64) Anodised light bronze (fin. 65) satin-finished nickel-plated chrome (fin. B1)		16,0	0,365	6	**1 06490 00 0**
			24,5	0,482	6	**1 06490 01 0**
			34,5	0,594	6	**1 06490 02 0**
	• CONE-SHAPED PROTECTIVE ROSE • Carbonitrided steel protective rose casing • 2 screws L. 45 mm. (M6) • Rose cap • Inner escutcheon • AVAILABLE FINISHES: Satin nickel-plated chrome (fin. B1) Polished chrome (fin. 18)		13,0	0,285	1	**1 06490 50 0**
			18,0	0,385	1	**1 06490 51 0**
			22,0	0,594	1	**1 06490 52 0**
			25,0	0,365	1	**1 06490 53 0**

Type	Description	For series/item	L	Unit weight	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
			25,0	0,378	6	1	06490 10 0



- CONE-SHAPED PROTECTIVE ROSE
- Carbonitrided steel protective rose casing
- 2 screws L. 45 mm.
- Rose cap
- Cover plate ring
- AVAILABLE FINISHES:
- Satin nickel-plated chrome (fin. B1)
- Dark anodised bronze (fin. 64)
- Polished chrome (fin. 18)

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• 2 keys item 1.00100.00.1 • Key removal with open or closed lock • 1 locking point	0,770	1	1	57410	30	1		
		0,770	1	1	57410	30	2		
	• 2 keys item 1.00100.00.1 • Key removal with closed lock • 1 locking point	0,400	1	1	57410	35	1		
		0,400	1	1	57410	35	2		
	• 2 keys item 1.00100.00.1 • Key removal with open or closed lock • Pre-set for additional locking points	0,450	1	1	57415	30	1		
	• 2 keys item 1.00100.00.1 • Key removal with closed lock • Pre-set for additional locking points	0,930	1	1	57415	35	1		
		0,930	1	1	57415	35	2		


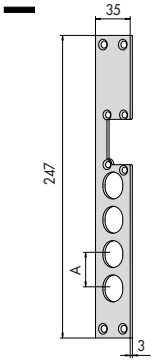










Technical features:
- Electric case operating voltage 12V ac.
- ZAL stainless alloy casing and long lip.
- Satin-finished stainless steel interchangeable faceplates for installation with locks having 28 and 38 mm center distances (to be ordered separately)

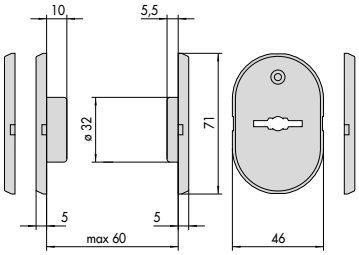




Supplied as standard:
- Screws for faceplate fixing








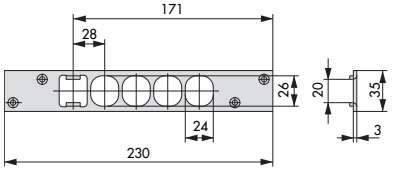
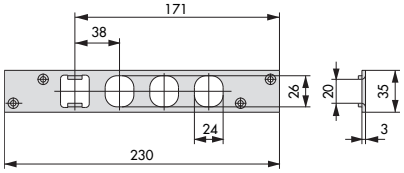
Hand:
0 = Non-handed
1 = R.H. inwards
L.H. outwards
2 = L.H. inwards
R.H. outwards


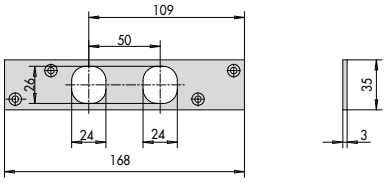








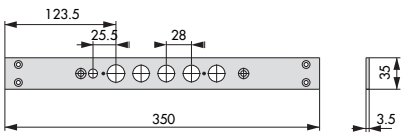
Cylinder to be ordered separately










Type	Description	Facaplate	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Electric striker casing • Voltage 12 V ac CE - current absorption 0,7A • Hold open catch mechanism • Hold open device		0,285	12	1	15300	00	1		
			0,285	12	1	15300	00	2		
	• Satin-finished stainless steel faceplate • To install with locks with deadbolt distance A=28 mm	34	0,042	12	1	05030	00	0		
	• Satin-finished stainless steel faceplate • To install with locks with deadbolt distance A=38 mm	34	0,042	12	1	05031	00	0		







Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Polished brass internal hole cover • For double bit key locks		0,029	12	1 **06081 01 0**
	• Polished brass key guide • For double bit key locks		0,041	5	1 **06123 04 0**
	• Inside aluminium escutcheon painted in metallic antique bronze colour		0,036	12	1 **06458 11 0**
	• Nylon key guide supplied with 7 spacers • For double bit key locks		0,050	1	1 **06142 01 0**
	• Key guide with nylon flange supplied with twelve spacers	1 57500 08 0, 1 57505 08 0, 1 57510 08 0, 1 57515 08 0	0,061	1	1 **06142 02 0**
	• Concealed cable guard with spring	15000, 17000	0,058	6	1 **06515 00 0**
	• Nylon spacer for key guide series 06144 and 06145		0,004	100	1 **06142 51 0**
	• Inside escutcheon with spring		0,325	6	1 **06515 15 0**


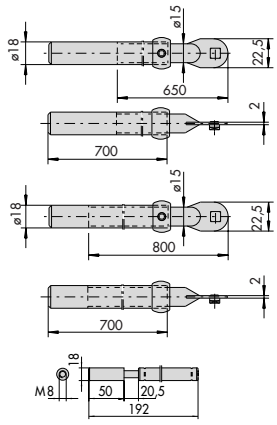

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Polished brass rose with key guide • For double bitted locks • AVAILABLE FINISHES: Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64) satin-finished nickel-plated chrome (fin. B1)		0,105	6	**1 06144 10 1**
	• Nylon key guide, including 2 supports for escutcheon and 3 spacers • For double bit key locks		0,066	6	**1 06144 15 0**
	• Polished brass cover for escutcheon and key guide • AVAILABLE FINISHES: Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64) satin-finished nickel-plated chrome (fin. B1)	1 06144 10 1, 1 06144 15 0	0,030	50	**1 06144 50 1**
	• Polished brass escutcheon with key guide • For double bit key locks • AVAILABLE FINISHES: Polished brass (fin.00) Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64)		0,135	6	**1 06145 10 0**
	• Polished brass escutcheon with key guide • For double bit key locks • AVAILABLE FINISHES: Polished brass (fin.00) Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64)		0,130	6	**1 06145 11 0**







Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Key guide escutcheon-nylon key complete with support for escutcheon and 3 spacers • For double bitted locks		0,135	6	1 06145 15 0
	• Set of brass cover for escutcheon item 1.06145.00.0 • AVAILABLE FINISHES: Polished chrome (fin.18) Anodised light bronze (fin.65) Anodised dark bronze (fin.64) satin-finished nickel-plated chrome (fin. B1)	1 06145 10 0, 1 06145 15 0	0,071	6	1 06145 50 0
	• Nickel-plated steel flat striker • For 28 mm.deadbolt locks distance.		0,132	6	1 06220 00 0
	• Nickel-plated steel flat striker • For 28 mm.deadbolt locks distance.		0,250	6	1 06220 02 0
	• Nickel-plated steel flat striker	1 06433 00 0, 1 06434 00 0, 1 06437 00 0	0,169	6	1 06220 03 0
	• Nickel-plated steel flat striker • For double hole locks		0,220	6	1 06220 05 0
	• Nickel-plated steel flat striker • For electric locks	15510, 15515, 15530, 15535, 17510, 17515, 17530, 17535	0,132	6	1 06220 20 0
	• Nickel-plated steel flat striker • For panic function locks with deadbolt distance of 28 mm	56900	0,250	6	1 06220 26 0
	• Nickel-plated steel flat striker • For panic function locks with deadbolt distance of 38 mm	56900	0,250	6	1 06220 27 0


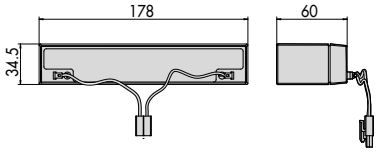



Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Nickel-plated steel flat striker • For 1 deadbolt divertor	06433	0,169	6	1 06220 28 0
	• Nickel-plated steel flat striker • For 2 deadbolt divertor	06433	0,169	6	1 06220 29 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	57500	0,297	6	1 06221 00 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	56500	0,300	6	1 06221 01 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	17500	0,275	6	1 06221 10 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	15500	0,295	6	1 06221 11 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	1 B7515 28 0	0,297	6	1 06221 15 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	1 B6515 28 0	0,297	6	1 06221 16 0
	• Nickel-plated steel faceplate • 38 mm. deadbolt distance	1 B6515 38 0	0,297	6	1 06221 17 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	B7665	0,297	6	1 06221 18 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	56835, 57815	0,297	6	1 06221 20 0

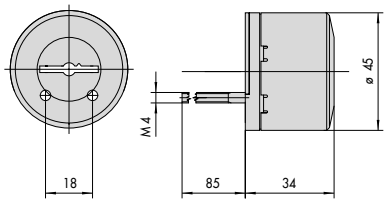
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	57715, 57716, 57735, 57736	0,380	6	1 06221 50 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	56765, 56766, 56785, 56786	0,380	6	1 06221 51 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	57915, 57965	0,380	6	1 06221 52 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	B6764, B6765, B6766	0,380	6	1 06221 60 0
	• Nickel-plated steel faceplate • 28 mm. deadbolt distance	B7964, B7965, B7966	0,380	6	1 06221 62 0
 	• Nylon slide	15000, 17000	0,003	6	1 06224 50 0
	• Bush for latchbolt guide • For electrical locks		0,003	6	1 06224 60 0
	• Nickel-plated steel cover plate • For electric locks with 28 mm. deadbolt distance		0,023	6	1 06228 08 0
	• Nickel-plated steel cover plate • For electric locks with 28 mm. deadbolt distance		0,024	25	1 06228 28 0

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Steel spring rod for floor bolt item 1.06425.00.0	1 06425 00 0	0,221	12	**1 06291 50 0**
	• Pair of zinc plated high resistant steel divertor • For mortice locks		0,128	6	**1 06418 01 0**
	• Pair of zinc plated high resistant steel divertor • For mortice locks		0,047	6	**1 06418 03 0**
	• Opening limiting device chain • For double hole locks with opening limiting device		0,066 0,066	6 6	**1 06421 10 1** **1 06421 10 2**
	• Set of zinc plated extension bolts • For rim locks pre-set for additional locking points		1,500	1	**1 06425 02 0**
	• Set of zinc plated extension bolts • For mortice locks pre-set for additional locking points		1,435	1	**1 06425 03 0**

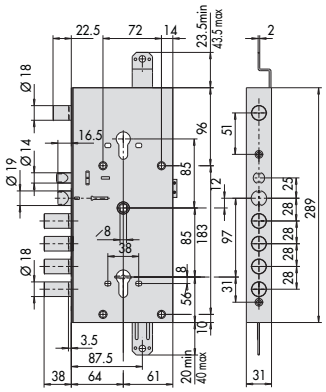
Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Set of zinc plated steel connecting bars • For rim locks pre-set for additional locking points		1,300	1	1	06425	04	0		
	• Top and bottom extension bolts for use with rekeyable locks (lower spring rod) • For rim locks pre-set for additional locking points		1,610	1	1	06425	05	0		
	• Pair of bolts for diverter deadbolt control, galvanized steel • For rim locks pre-set for additinal locking points	56900	0,540	6	1	06425	06	0		

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc plated side bolt (single) • S = 3,5 mm. • For rim locks pre-set for additional locking points		0,455	1	1 06433 00 0
	• Zinc plated side bolt (single) • S = 43,5 mm. • For rim locks pre-set for additional locking points		0,510	1	1 06433 10 0
	• Zinc plated side bolt (double) • S = 3,5 mm. • For rim locks pre-set for additional locking points		0,855	1	1 06433 01 0
	• Zinc plated side bolt (double) • S = 43,5 mm. • For rim locks pre-set for additional locking points		0,990	1	1 06433 11 0
	• Zinc plated side bolt (single) • For mortice locks pre-set for additional locking points		0,646	1	1 06434 00 0
	• Zinc plated side bolt (double) • For mortice locks pre-set for additional locking points		0,900	1	1 06434 01 0
	• Zinc plated side bolt (single) • For rim locks pre-set for additional locking points		0,448	1	1 06437 00 0
	• Zinc plated side bolt (double) • For rim locks pre-set for additional locking points		0,789	1	1 06437 01 0


Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of nylon electric contacts	15000, 17000	0,029	6	1	06510	10	0		
	• Battery (lead) 12V 2.3 ah • For CISA e-Volution locks		0,492	1	1	06740	00	0		
	• 40 VA 12 V AC transformer • For CISA e-Volution locks		0,492	1	1	07060	01	0		
	• Pair of handles to install with Exit lock • AVAILABLE FINISHES: Anodised bronze (fin. 00) satin-finished nickel-plated chrome (fin. B1)	56915, 56935	0,400	1	1	07070	50	0		
	• Handle and fixed thumb turn to install with Exit lock • AVAILABLE FINISHES: Anodised bronze (fin. 00) satin-finished nickel-plated chrome (fin. B1)	56916, 56917, 56936, 56937	0,400	1	1	07070	60	0		



02715, 02716




16766, 17766, 17916, 17966



56510, 56515, 56815, 56916, 56917, 57510, 57511, 57512, 57515, 57516, 57517, 57518, 57615, 57665

A = 25 - 27 - 28 - 32 - 37,3

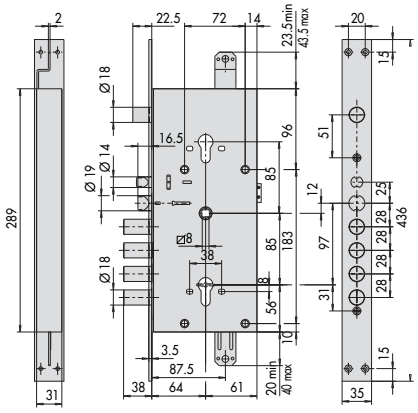
1



15510, 17510, 15515, 17515, 17615, 17665, E6515, E6615

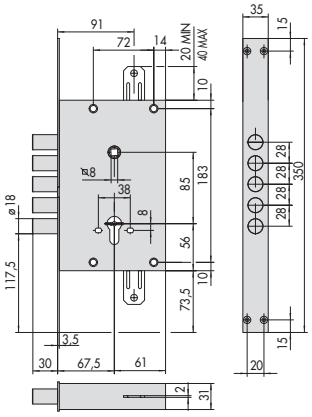
A= 25 - 27 - 28 - 32 - 37,3

4



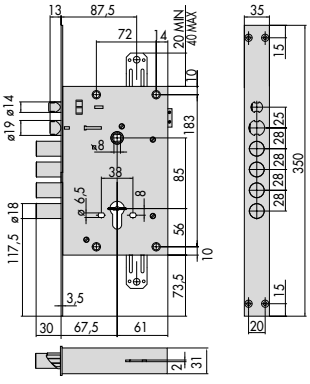
16786, 17786, 17936, 17986

7




56520, 57520, 57521, 56525, 57525, 57526, 57625, 57675,

2



15530, 17530,15535, 17535, 17635, 17685, E6535

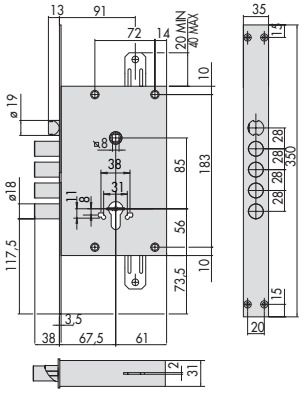
5



56500, 57500, 57501, 57502, 56505, 57505, 57506, 57507, 57605, 57655, 67505

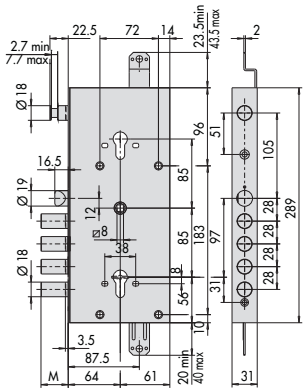
A= 25 - 27 - 28 - 32 - 37,3

8



56530, 56535, 56835, 56936, 56937, 57530, 57531, 57535, 57536, 57635, 57685

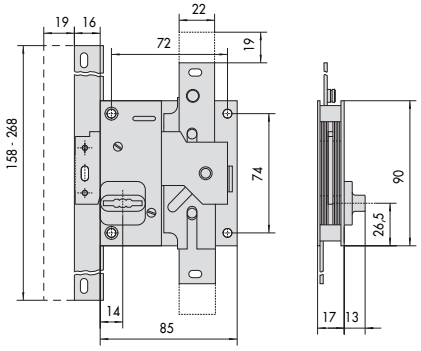
3 **6** **9**



56715, 56716, 56765, 56766, 56767, 56768
M = 30

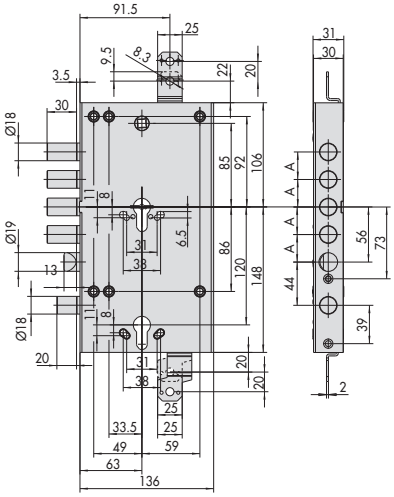
57765, 57766, 57767, 57768, 57915, 57916, 57917, 57918, 57965, 57966, 57967, 57968
M = 38

10



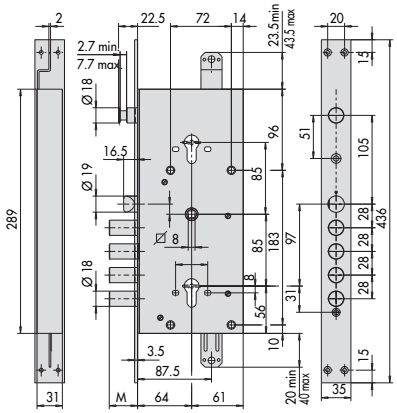
1.57415.30,

13



B6764, B6765, B6766, B7764, B7765, B7766
B7964, B7965, B7966
A = 28-37,3

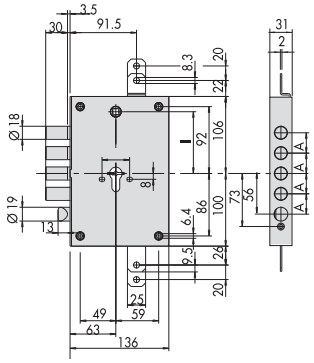
16



56735, 56736, 56785, 56786, 56787, 56788
M = 30

57785, 57786, 57787, 57788, 57935, 57936, 57937, 57938, 57985, 57986, 57987, 57988
M = 38

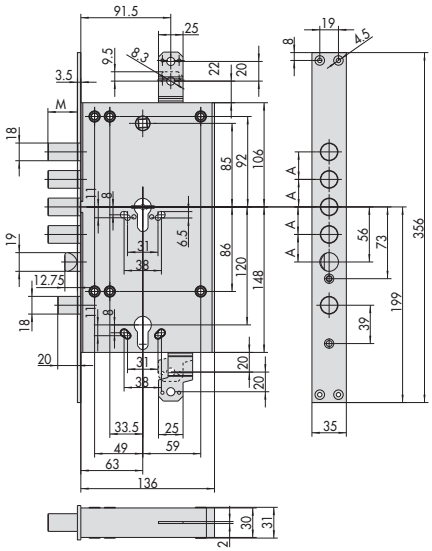
11



B6505, B6515, B7505, B7515
I = 85, A = 25-28-37,3

B6615
I = 92, A = 25-28-37,3

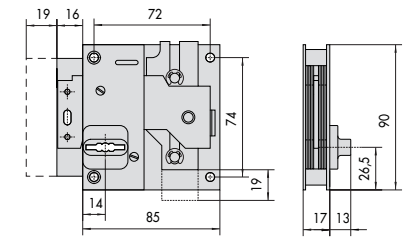
14



B6784, B6785, B6786
A = 28-37,3 M = 30

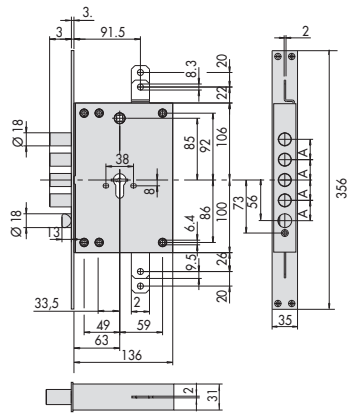
B7784, B7785, B7786, B7984, B7985, B7986
A = 28-37,3 M = 30

17



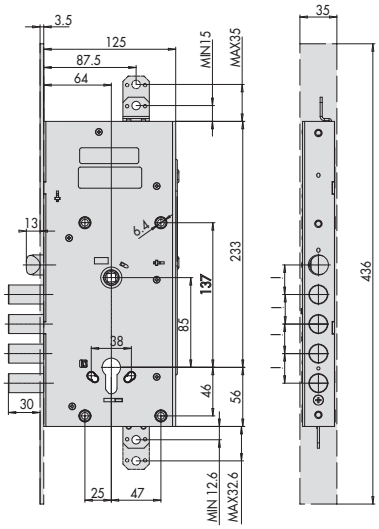
1.57410.30

12



B6525, B6535, B7525, B7535
B7675, B7685
A = 25-28-37,3

15



E6516, E6536
I = 28 -37,3

18

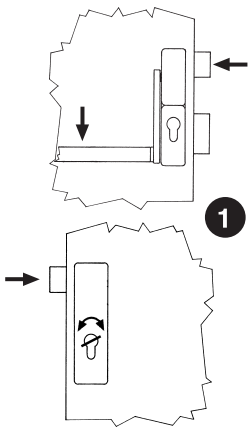
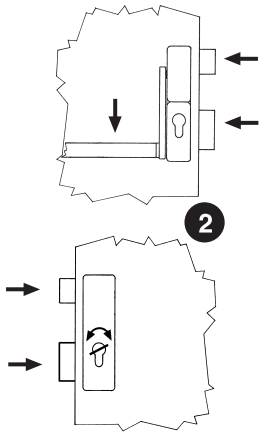
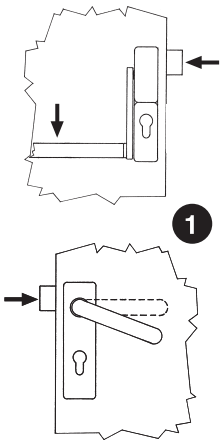
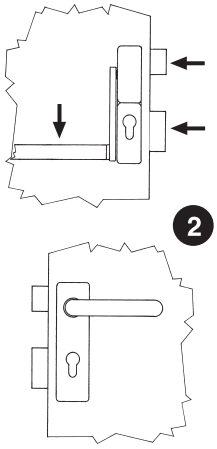
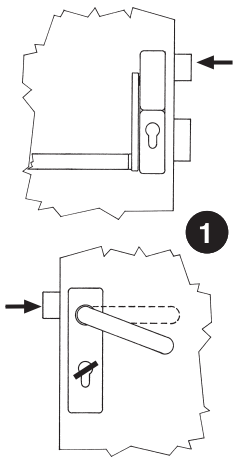
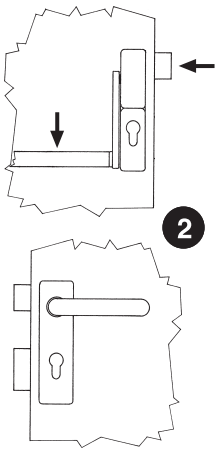
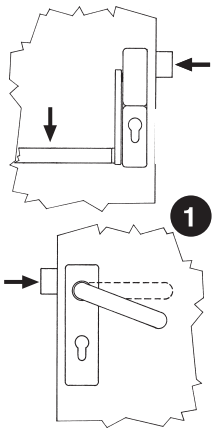
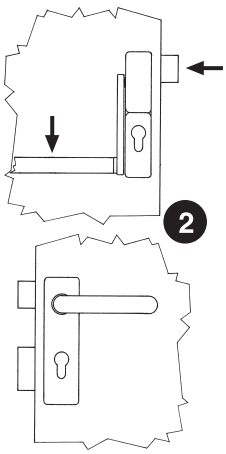
ALLEGION

CISA

Fire door locks and panic exit devices



Panic function mortice locks with split follower 450
Cylinder mortice locks 451
Panic function cylinder mortice locks 454
Extension bolts for additional locking points 457
Cylinder mortice locks 458
Panic function cylinder mortice locks 459
Panic exit devices with black painted case cover for panic function locks 461
Cisa Fast Touch series panic exit devices for panic function mortice locks 462
Cisa Fast Push series panic exit devices for panic function mortice locks 463
Cisa Prestige series panic exit devices for panic function mortice locks 464
Cisa Prestige INOX series panic exit devices for panic function mortice locks 465
Electric handles 466
Horizontal bars for panic exit devices 467
Accessories for fire door locks 468
Dimensional drawings 474

TYPE	CONTROLS	OPERATION	
A **OUTSIDE ENTRANCE BY KEY** For doors which have to be opened with the key from the outside by authorised personnel only	**INSIDE** - Panic exit device to open. - Key to close with deadbolt. **OUTSIDE** - The key operates latch and deadbolt.	 1 Outside entrance by key only.	 2 Locking with the deadbolt, outside entrance is possible only with the use of the key.
B **OUTSIDE HANDLE ACTIVATED OR DISACTIVATED** For doors that open outwards and places where it is necessary to provide free entrance.	**INSIDE** - Panic exit device to open. - Key to close with deadbolt and activate or disactivate the outside handle. **OUTSIDE** - The key operates the deadbolt and activates or disactivates the outside handle for latch operation.	 1 The outside handle is activated by rotating the key in the lock-opening direction as far as it will go (the handle remains activated when the key is removed).	 2 Closing with the deadbolt disactivates the outside handle; the latter remains disactivated even after the door has been opened with the panic exit device.
C **OUTSIDE HANDLE AUTOMATICALLY DISACTIVATED** For doors that must be opened from the outside only by authorised persons.	**INSIDE** - Panic exit device to open. - Key to close with deadbolt. **OUTSIDE** - The key operates the throw and activates the handle.	 1 The outside handle is activated by rotating the key in the lock-opening direction as far as it will go, after first withdrawing the deadbolt.	 2 Removing the key automatically disactivates the outside handle.
D **OUTSIDE HANDLE ALWAYS ACTIVATED** For doors that partition throughways (e.g. corridors).	**INSIDE** - Panic exit device to open. - Key to close with deadbolt. **OUTSIDE** - The key operates the deadbolt. The handle, with the deadbolt withdrawn, engages for latch operation.	 1 The outside handle is always activated when the deadbolt is withdrawn.	 2 Entry is after using the panic exit device, always possible from the outside as long as the deadbolt is not activated by the key.



Technical features:
- Zinc-plated steel faceplate
- Zinc-plated steel case
- Zinc-plated steel latch
- 9 mm. through follower





On request:
- Stainless steel faceplate fin. 20




Hand:
0 = Non-handed

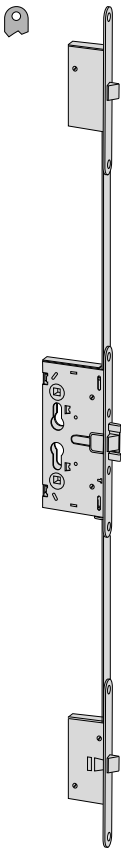

Cylinder to be ordered separately



Mito

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	ELECTRIC LOCK • Latch only OPERATION: • From inside: by handle or key • From outside: by electrically operated handle and/or key		72	24	65	0,980	1	1	13100	65	0		
	"FAIL SAFE" FUNCTION ELECTRIC LOCK • Latch only OPERATION: • From inside: by handle • From outside: the key activates or deactivates the handle and withdraws the latchbolt. The live coil keeps the handle disabled and only enables it if power supply is off.		72	24	65	0,980	1	1	13200	65	0		
	MECHANICAL LOCK • Latch only OPERATION: • Latch can be operated by key or handle		72	24	65	0,690	12	1	43000	65	0		
	MECHANICAL LOCK • Latch only • Pre-set for additional locking points OPERATION: • The handle withdraws the latchbolt only when enabled by the key. When the handle is disabled, it cannot operate the latchbolt The key withdraws the latchbolt	1	72	24	65	0,850	12	1	43014	65	0		

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	MECHANICAL LOCK • Latchbolt and deadbolt • Pre-set for additional locking points OPERATION: • The handle withdraws the latchbolt only when enabled by the key. When the handle is disabled, it cannot operate the latchbolt The key withdraws the latchbolt		72	24	65	1,750	6	1	43015	65	0	
	MECHANICAL LOCK • Deadbolt and latchbolt • 1 15-mm throw. • Stainless steel faceplate fin. 20 OPERATION: • Latch can be operated by key or handle • Deadbolt can be operated by key	1	72	24	65	0,746	12	1	43020	65	0	
	MECHANICAL LOCK • Deadbolt and latchbolt • 1 15-mm throw. • Pre-set for additional locking points OPERATION: • Latch can be operated by key or handle • Deadbolt can be operated by key ON REQUEST: • Set of side latches item 1.07090.50.0 • Set of bolt extension rods item 1.07091.50.0	1	72	24	65	0,850	12	1	43024	65	0	

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	MECHANICAL LOCK • Deadbolt and latchbolt • 15-mm throw. • 3 locking points OPERATION: • Latch can be operated by key or handle • Deadbolt can be operated with the key	1	72	24	65	1,400	6	1	43025	65	0	
	• FOR SECONDARY LEAF OF DOUBLE DOORS OPERATION: • Extension bolts are operated by a lever on the faceplate • Rods forward strike 17 mm ON REQUEST: • Extension bolts item 1.07088.03.0 • Automatic dogging device item 1.07089.50.0		1	24		0,360	1	1	43091	00	0	







Technical features:
- Zinc-plated steel faceplate
- Zinc-plated steel case
- Zinc-plated steel latch
- 9 mm. split follower
- Can be combined with the panic exit devices series 59600 and 59710



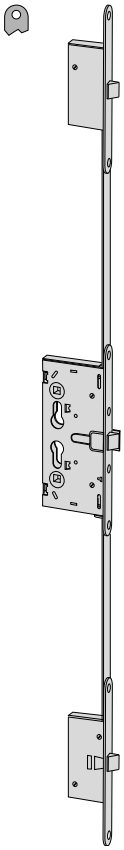

On request:
- Stainless steel faceplate fin. 20





Hand:
0 = Non-handed



Cylinder to be ordered separately

Mito Panic

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	ELECTRIC LOCK • Latch only OPERATION: • From inside: by handle or panic exit device (panic function) • From outside: by electrically operated handle and/or key		72	24	65	0,980	1	1	13110	65	0	
	ELECTRIC LOCK • Latch only OPERATION: • For inward opening panic doors		72	24	65	0,980	1	1	13160	65	1	
			72	24	65	0,980	1	1	13160	65	2	
	"FAIL SAFE" FUNCTION ELECTRIC LOCK • Latch only OPERATION: • From inside: by handle or panic exit device (panic function) • From outside: the key activates or deactivates the handle and withdraws the latchbolt. The live coil keeps the handle disabled and only enables it if power supply is off.		72	24	65	0,980	1	1	13210	65	0	
	"FAIL SAFE" FUNCTION ELECTRIC LOCKS • Latch only OPERATION: • For inward opening panic doors • From outside: the key activates or deactivates the handle and withdraws the latchbolt. The live coil keeps the handle disabled and only enables it if power supply is off.		72	24	65	0,980	1	1	13260	65	1	
			72	24	65	0,980	1	1	13260	65	2	

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	MECHANICAL LOCK| • Latch only • Stainless steel faceplate fin. 20 OPERATION: • From inside: by panic exit device and/or key • From outside: the key activates and deactivates the handle and withdraws the latchbolt; the handle withdraws the latchbolt only if it is enabled by the key		72	24	65	0,848	6	1	43110	65	0		
	MECHANICAL LOCK • Latch only • Pre-set for additional locking points ON REQUEST: • Zinc-plated steel extension bolts item 1.07091.50.0 • Set of zinc-plated steel side latchbolts item 1.07090.50.0 OPERATION: • From inside: by panic exit device and/or key • From outside: the key activates and deactivates the handle and withdraws the latchbolt; the handle withdraws the latchbolt only if it is enabled by the key		72	24	65	0,850	6	1	43114	65	0		
	MECHANICAL LOCK • Latches only • 3 locking points OPERATION: • From inside: by panic exit device and/or key • From outside: the key activates and deactivates the handle and withdraws the latchbolts • The handle withdraws the latchbolts only if it is enabled by the key.		72	24	65	1,750	6	1	43115	65	0		
	MECHANICAL LOCK • Deadbolt and latchbolt • 1 15-mm throw. OPERATION: • From inside: by panic exit device and/or key • From outside: the key withdraws the latchbolt and the deadbolt	1	72	24	65	0,853	6	1	43120	65	0		

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	MECHANICAL LOCK • Deadbolt and latchbolt • 1 15-mm throw. OPERATION: • From inside: by panic exit device and/or key • From outside: the key withdraws the latchbolt and the deadbolt, the handle withdraws the latchbolt	1	72	24	65	0,876	6	1	43130	65	0		
	MECHANICAL LOCK • Latch only • Stainless steel faceplate fin. 20 OPERATION: • For inward opening panic doors		72	24	65	0,750	6	1	43160	65	1		
			72	24	65	0,845	6	1	43160	65	2		
	FOR SECONDARY LEAF OF DOUBLE DOORS • Latch only lock item 1.43110.65.0 or 1.43115.65.0 installed on main leaf • Rod forward stroke 17 mm OPERATION: • From inside: panic exit device ON REQUEST: • Extension bolts item 1.07088.03.0 • Automatic dogging device item 1.07089.50.		1	24	65	0,858	1	1	43190	65	0		
			1	24	95	1,150	1	1	43190	95	0		
	FOR SECONDARY LEAF OF DOUBLE DOORS • Latch only lock item 1.43110.65.0 or 1.43115.65.0 installed on main leaf • Rod forward stroke 17 mm • Double follower for non-handed doors OPERATION: • From inside: panic exit device ON REQUEST: • Inside bolt extension rods with screw item 1.07088.03.0 • Automatic dogging device item 1.07089.50.0		1	24	65	0,858	1	1	43191	65	0		
			1	24	95	1,000	1	1	43191	95	0		

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Set of zinc plated side latches	43024, 43114	0,900	24	**1**	**07090**	**50**	**0**		
	• Set of zinc plated rods	1 07090 50 0	0,230	24	**1**	**07091**	**50**	**0**		



Technical features:
- Zinc-plated steel faceplate
- Zinc-plated steel case
- Nickel-plated reversible steel latch with anti-picking device
- Single throw (15 mm.) nickel-plated deadbolt
- 9 mm. through follower


Supplied as standard:
- Instruction sheet

Hand:
0 = Non-handed

Cylinder to be ordered separately



Sicur

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt and latch • OPERATION: Outside and inside: latch and deadbolt operated by key; latch withdrawn by handle	1	92	24	25	0,680	1	1	43520	25	0	
		1	92	24	30	0,720	1	1	43520	30	0	
		1	92	24	35	0,762	1	1	43520	35	0	
		1	92	24	40	0,805	1	1	43520	40	0	
		1	92	24	45	1,000	1	1	43520	45	0	
	• Deadbolt and latch • OPERATION: Outside and inside: the key operates the deadbolt and activates or disactivates the handle for latch operation	1	92	24	35	0,775	1	1	43530	35	0	
		1	92	24	40	0,805	1	1	43530	40	0	





Technical features:
- Zinc-plated steel faceplate
- Zinc-plated steel case
- Nickel-plated reversible steel latch
- Single throw (15 mm.) nickel-plated deadbolt
- 9 mm. split follower
- Can be combined with the panic exit devices series 59600 and 59711.10/11.0.00.00.FE


Supplied as standard:
- Instruction sheet



Hand:
0 = Non-handed

Cylinder to be ordered separately



Sicur Panic

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• FOR SINGLE LEAF DOORS • Dead-locking latch and deadbolt • A TYPE OPERATION • Inside: Panic exit device for opening Key for closing with deadbolt • Outside: Key for activating latch and deadbolt	1	92	24	25	0,610	1	1 43620	25	0			
		1	92	24	30	0,655	1	1 43620	30	0			
		1	92	24	35	0,800	1	1 43620	35	0			
		1	92	24	40	0,730	1	1 43620	40	0			
		1	92	24	45	0,780	1	1 43620	45	0			
	• B TYPE OPERATION • Inside: Panic exit device for opening Key for closing with deadbolt and activating or disactivating external handle for latch operation • Outside: Key for closing with deadbolt and activating or disactivating external handle for latch operation	1	92	24	25	0,610	1	1 43630	25	0			
		1	92	24	30	0,655	1	1 43630	30	0			
		1	92	24	35	0,690	1	1 43630	35	0			
		1	92	24	40	0,730	1	1 43630	40	0			
		1	92	24	45	0,780	1	1 43630	45	0			

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• FOR DOUBLE DOORS • Panic lock series 43690 to be installed on secondary leaf • deadbolt and latch • A TYPE OPERATION • Inside: Panic exit device for opening Key for closing with deadbolt • Outside: Key for activating latch and deadbolt	1	92	24	25	0,560	1	1	43650	25	0	
		1	92	24	30	0,610	1	1	43650	30	0	
		1	92	24	35	0,725	1	1	43650	35	0	
		1	92	24	40	0,770	1	1	43650	40	0	
		1	92	24	45	0,710	1	1	43650	45	0	
	• B TYPE OPERATION • Inside: Panic exit device for opening Key for closing with deadbolt and activating or disactivating external handle for latch operation • Outside: Key for closing with deadbolt and activating or disactivating external handle for latch operation	1	92	24	25	0,640	1	1	43660	25	0	
		1	92	24	30	0,610	1	1	43660	30	0	
		1	92	24	35	0,725	1	1	43660	35	0	
		1	92	24	40	0,760	1	1	43660	40	0	
		1	92	24	45	0,710	1	1	43660	45	0	
	• C TYPE OPERATION • Replacing series 43631 • Inside: Panic exit device for opening Key for closing with deadbolt and activating external handle for latch operation • Outside: Key for closing with deadbolt and activating external handle for latch operation	1	92	24	25	0,560	1	1	43661	25	0	
		1	92	24	30	0,610	1	1	43661	30	0	
		1	92	24	35	0,640	1	1	43661	35	0	
		1	92	24	40	0,670	1	1	43661	40	0	
		1	92	24	45	0,710	1	1	43661	45	0	
	• D TYPE OPERATION • Replacing series 43632 • Inside: Panic exit device for opening Key for closing with deadbolt • Outside: Key for closing with deadbolt. The handle, with deadbolt withdrawn, is activated for latch operation	1	92	24	25	0,560	1	1	43662	25	0	
		1	92	24	30	0,610	1	1	43662	30	0	
		1	92	24	35	0,715	1	1	43662	35	0	
		1	92	24	40	0,760	1	1	43662	40	0	
		1	92	24	45	0,710	1	1	43662	45	0	
	• FOR SECONDARY LEAF OF A DOUBLE DOOR • Panic lock series 43650, 43660, 43661, 43662 to be installed on secondary leaf • OPERATION: • Inside:panic exit device • ON REQUEST: extension bolts item 1.07088.03.0 Automatic dogging device item 1.07089.50.0 Top striker item 1.06141.80.0		28	30		0,795	1	1	43690	30	0	
			28	40		0,865	1	1	43690	40	0	
			28	60		1,020	1	1	43690	60	0	
			28	75		1,100	1	1	43690	75	0	





Technical features:
- Black painted aluminium casings or black nylon
- Internal, zinc-plated steel components, suitable for fire doors

Supplied as standard:
- Fixing screws
- Instruction sheet for assembly and maintenance
- CE and ICIM certification

Finish:
- ON REQUEST: 59615-59646 series Painted gray (fin. 97)


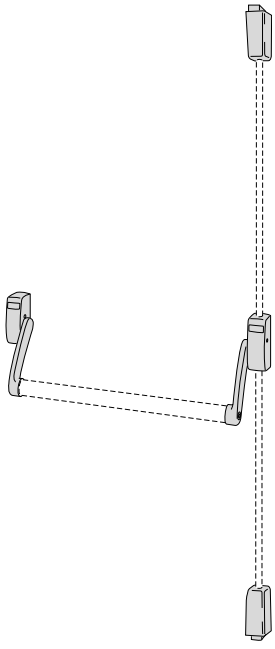
Standards:
- CE mark in compliance with the DIRECTIVE 89/106/CEE issued by AENOR.
- Voluntary ICIM certification issued by third party as provided for in the UNI EN 1125 standard

Hand:
0 = Non-handed

Bar to be ordered separately



series 07007

Type	Description	Spindle hole	Centre Distance	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Black nylon casing • May be combined with mortice locks series 43100, 43600 • pre-set for single cylindrer	9	72	1,400	1	1	59616	00	0		
	• Black nylon casing • May be combined with mortice locks series 43100 • pre-set for double cylindrer	9	72	1,350	1	1	59616	10	0		
	• Black nylon cover • FOR THE SECONDARY LEAF OF A DOUBLE DOOR, where it is not possible to assemble the safety lock • On the main door it is possible to install the panic exit devices series 59616 together with the locks series 43110 and 43114 • SUPPLIED AS STANDARD: Striker item 1.07072.11.0 Floor striker item 1.07003.11.0 • TO BE ORDERED SEPARATELY Pair of extension bolts item 1.07081.12.0	-		2,050	1	1	59647	00	0		



FAST Touch

Technical features:
- Painted aluminum alloy/aluminum cover
- Painted steel bar, adjustable in length down to 300 mm on all models
- Galvanized steel internal components suitable for fire doors




Supplied as standard:
- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:
- Internal and external plates
- Version with microswitch (spec. LA)
- Fire door version (FR spec.).

Standards:
- Cover: black bar: red
- ON REQUEST (only item 1.59711-00/10-0):
- Cover: red bar: black (fin. 41)
- Cover: yellow bar: black (fin. 42)
- Cover: geen bar: black (fin. 43)
- Cover: black bar: black (fin. 44)
- Cover: white bar: white (fin. 45)
- Cover: gray bar: gray (fin. 97)
- Carter and bar painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2)

Standards:
- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

Type	Description	Spindle hole	L	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830 and 43100 (spec. FR)	8/9	1200	3,366	1	1	59711	00	0		
		8/9	840	2,592	1	1	59711	01	0		
	• satin-finished PVD-treated stainless steel	8/9	1200	3,366	1	1	59711	00	0	C2	
	• Can be combined with panic function locks series Exitlock and Sicur Panic	8/9	1200	3,360	1	1	59711	10	0		
		8/9	840	2,592	1	1	59711	11	0		
	• satin-finished PVD-treated stainless steel	8/9	1200	3,366	1	1	59711	10	0	C2	
	• SUPPLIED WITHOUT PUSH BAR VERSION • Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830 and 43100 (spec. FR)	8/9	1200	2,366	1	1	59711	00	0	00	SB
	• Can be combined with panic function locks series Exitlock and Sicur Panic	8/9	1200	2,360	1	1	59711	10	0	00	SB
	• Bar • May be combined with panic exit devices series 1.59711.00.0.00.SB - 1.59711.10.0.00.SB • STANDARD FINISHES painted red • BAR COLOR OPTIONS: satin-finished anodised aluminium (fin. 62) Anodised bronze (fin. 64) Brass-plated (fin. A1) Matt black (fin. 00) Red (fin. 41) Yellow (fin. 42)| Green (fin. 43) White (fin. 45)| Grey (fin. 97)			1,000	1	1	06196	43	0		



FAST Push

Technical features:
- Painted aluminum alloy/aluminum cover (59607 series)
- Galvanized steel internal components suitable for fire doors

Supplied as standard:
- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:
- Internal and external plates
- Version with microswitch
- Fire door version (FR spec.).

Finishes:
- STANDARD: Painted black
- ON REQUEST:

Version 59607
Painted red (fin. 41)
Painted yellow (fin. 42)
Painted green (fin. 43)
Painted white (fin. 45)
Painted gray (fin. 97)
PVD treatment: satin-finished stainless steel (fin. C2)
Painted steel grey (fin. B9)

Version 59617.00/12
Painted white (fin. 45)
Painted gray (fin. 97)



Standards:
- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

Bar to be ordered separately



series 07007

Type	Description	Spindle hole	L	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Can be combined with panic function locks	8/9		1,900	1	1	59607	10	0		
	• satin-finished PVD-treated stainless steel	8/9		1,650	1	1	59607	10	0	C2	
	• Black nylon casing • Can be combined with panic function locks	8/9	72	1,350	1	1	59617	00	0		
	• Black nylon casing • Can be combined with panic function locks	8/9	92	1,350	1	1	59617	12	0		

N.B. To install a bar on a double-leaf door, use the 59016+07063.61 serie (PERS. FR.)



CISA Prestige

Technical features:
- Steel case cover, painted black

Supplied as standard:
- Fixing screws
- Instruction sheet
- ICIM and CE Certification


Finishes:
- STANDARD:
  - painted black
- ON REQUEST:
  - painted red (fin. 41)
  - painted yellow (fin. 42)
  - painted green (fin. 43)
  - painted white (fin. 45)
  - painted grey (fin. 97)

Standards:
- CE mark in compliance with the DIRECTIVE 89/106/CEE issued by AENOR.
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard

Hand:
0 = Non-handed

Bar to be ordered separately

series 07007

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• May be combined with panic function mortice locks series 43100, 43200, 43600 and heavy duty mortice locks series 52760, 52761, 52840, 52842, 52844, 52860, 52862, 52864 (see locks for wooden doors) • For assembly with fire resistant locks specify Spec. FR in your order • Use inside plates item 1.07076.65.0 and 1.07066.66.0 to mount the panic exit device with matching lock	2,500	1	1	59321	10	0		



Technical features:
- Stainless steel case cover

Supplied as standard:
- Fixing screws
- Instruction sheet
- ICIM and CE Certification


Standards:
- CE mark in compliance with the DIRECTIVE 89/106/CEE issued by AENOR.
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard

Hand:
0 = Non-handed

Bar to be ordered separately

series 07007

CISA Prestige

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• May be combined with panic function mortice locks series 43100, 43200, 43600 and heavy duty mortice locks series 52760, 52761, 52840, 52842, 52844, 52860, 52862, 52864 (see locks for wooden doors) • For assembly with fire resistant locks specify Spec. FR in your order • For use inside plates item 1.07076.65.0 and 1.07066.66.0 to mount the panic exit device with matching lock	2,650	1	1	59371	10	0		



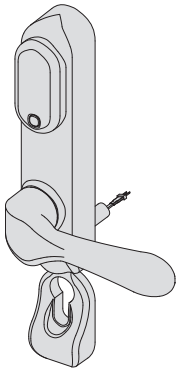

Technical features:
- Non-handed handle.
- Idle handle under no power input conditions.
- Key operated mechanical emergency system: the key will operate the handle. By removing the key the handle will be deactivated.
- Wiring system with connector for complete connection insulation.
- LED integral with handle body for door status visual indication.
- Nickel-plated steel case.
- Painted aluminum alloy cover.
- Electric hold-open device available.
- Power input through supplied Booster device.
- Rated voltage 12/24 V ac/dc.
- Operating voltage min. 5 V, max 28 V.



Supplied as standard:
- 8/9 mm square spindle.



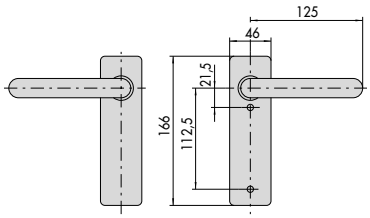
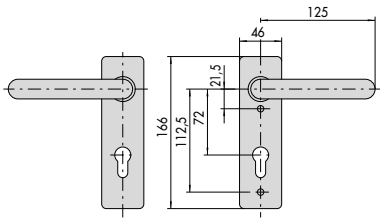


On request:
- European profile cylinder.
- Timer item 1.07022.20.0.







Finishes:
- Black painted (RAL 9005).
- Grey painted (RAL 9006).





Hand:
0 = Non-handed










Type	Description	Facaplate	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Electrically enabled handle • Can be installed with locks series 43100 • Handle to cylinder distance 72 mm • STANDARD SUPPLY: Connecting cable fixing screws • ON REQUEST: Timer device 07022.20.0		1,150	1	**1**	**07074**	**70**	**0**		
	• Electrically enabled handle (A function only) • Can be installed with locks series 43225, 43250, 43650, 43670, 43725, 43825 • Handle to cylinder distance 92 mm • STANDARD SUPPLY: Connecting cable Fixing screws • ON REQUEST: Timer device 07022.20.0		1,150	1	**1**	**07074**	**71**	**0**		
	• Multiple scale timer		0,100	1	**1**	**07022**	**20**	**0**		




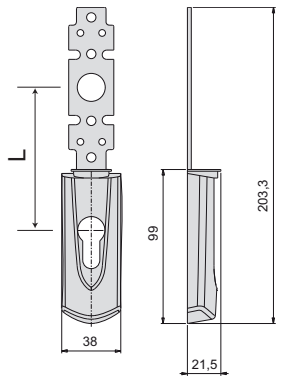
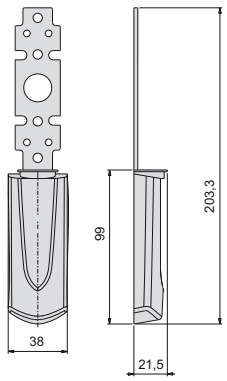
Type	Description	L	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Red painted steel oval shaped bar • AVAILABLE FINISHES (extra price): yellow painted (fin. 42) green painted (fin. 43) black painted (fin. 44) white painted (fin. 45) grey painted (fin. 97) painted steel grey (fin. B9) (Only versions .13 and .14)	900	0,800	1	**1 07007 13 0**
		1200	1,054	1	**1 07007 14 0**
		1500	1,440	1	**1 07007 15 0**
	• Stainless steel oval shaped horizontal bar	900	0,800	1	**1 07007 60 0**
		1200	1,070	1	**1 07007 61 0**
		1500	1,400	1	**1 07007 62 0**


Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Set of plates with cylinder hole	43000, 43020	0,200	6	1	07070	12	0		
	• Set of plates with fixed handle knob and cylinder hole	43000, 43020, 43025	0,600	6	1	07070	14	0		
	• Set of plates with handles	43000, 43020, 43025	0,410	6	1	07070	15	0		
	• Set of plates with handles and cylinder hole	43000, 43020, 43025	0,626	6	1	07070	16	0		
	• Cylinder adaptor for bit keys (patent type) • SUPPLIED AS STANDARD: Bitted key Fixing screws 2 nylon escutcheons with plug, to be combined with handles series 1.07070.12/14/16	43000, 43020, 43025	0,066	6	1	07071	10	0		
	• Galvanized steel striker	43000, 43100	0,150	20	1	07073	20	0		

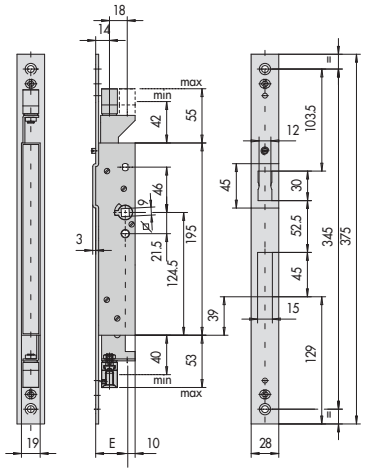
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Galvanized steel striker	43000, 43100	0,117	20	1 07073 21 0
	• Outside plate for reinforced assembly • To be combined with panic exit devices series 59600 and 59710 with distance 72 mm	43110, 43115, 43120, 43130	0,204	6	1 07076 11 0
	• Outside plate with fixed knob • To be combined with panic exit devices series 59600 and 59710 with distance 72 mm	43110, 43115, 43120, 43130	0,160	6	1 07076 13 0
	• Outside plate with fixed knob and cylinder hole • To be combined with panic exit devices series 59600 and 59710 with distance 72 mm	43110, 43115, 43120, 43130	0,264	6	1 07076 14 0
	• Outside plate with handle • To be combined with panic exit devices series 59600 and 59710 with distance 72 mm	43110, 43115, 43120, 43130	0,250	6	1 07076 15 0
	• Outside plate with handle and cylinder hole • To be combined with panic exit devices series 59600 and 59710 with distance 72 mm	43110, 43115, 43120, 43130	0,400	6	1 07076 16 0

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Black painted inside plate • Can be installed with panic exit devices • To be combined with European profile cylinder protective roses on armoured doors • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97)		0,106	6	**1 07076 70 0**
	• satin-finished PVD-treated stainless steel		0,106	6	**1 07076 70 0 C2**
	• Black painted inside plate • Can be installed with mortice version panic exit devices • To be combined with European profile cylinder protective roses on armoured doors • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97)		0,106	6	**1 07076 71 0**
	• satin-finished PVD-treated stainless steel		0,106	6	**1 07076 71 0 C2**
	• Black painted steel extension bolts • For use with: Panic exit devices series 59647	1 07063 00 0, 1 07063 10 1, 1 07063 10 2	1,130	1	**1 07081 12 0**
	• Black painted inside plate • May be assembly with locks 72 mm centre distance	59321, 59371	0,100	1	**1 07076 65 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Black painted inside plate • May be assembly with locks 92 mm centre distance	59321, 59371	0,250	1	**1 07076 66 0**
	• Steel split splindle		0,060	6	**1 07083 50 0**
	• Steel split splindle		0,060	6	**1 07083 51 0**
	• Steel split splindle		0,060	6	**1 07083 52 0**
	• Steel split splindle		0,060	6	**1 07083 53 0**
	• Steel spindle		0,030	6	**1 07083 70 0**
	• Steel spindle		0,038	1	**1 07085 75 0**
	• Steel spindle		0,060	1	**1 07085 76 0**
	• Automatic dogging device, steel	43090, 43190, 43690	0,050	3	**1 07089 50 0**

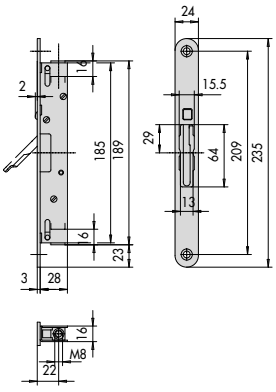
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc plated extension bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2)	16325, 17358, 46300, 46302, 46305, 46307, 46320, 46322, 46325, 46327, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336, 57358, 57378	0,600	12	1 **07088 03 0**
	• Open door indicator	07074	0,005	1	1 **07126 01 0**
	• 3 mm metal spacer for use with FAST TOUCH panic exit devices, mortice version		0,200	1	1 **07126 51 0**
	• Black painted outside plate • Can be installed with Fast Touch panic exit devices series 59711 • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) L=72 (dim. 61) L=85 (dim. 62) L=92 (dim. 63)		0,110 0,110 0,110	6 6 6	1 **07176 61 0** 1 **07176 62 0** 1 **07176 63 0**
	• satin-finished PVD-treated stainless steel		0,110 0,110 0,110	6 6 6	1 **07176 61 0 C2** 1 **07176 62 0 C2** 1 **07176 63 0 C2**
	• Black painted outside plate • Can be installed with Fast Touch panic exit devices series 59711 • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97)		0,110	6	1 **07176 66 0**
	• satin-finished PVD-treated stainless steel		0,110	6	1 **07176 66 0 C2**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
	• Booster module: • Voltage adaptor for voltages other than 12 V AC 24 V AC - 24 V DC and absorption reduction	13000, 13100, 13200, 13210	0,850	1	**1**	**07022 00 0**



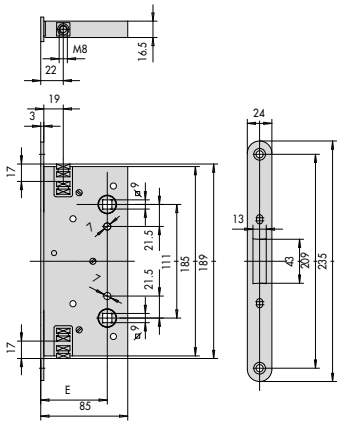
43690
E = 30 - 40

1



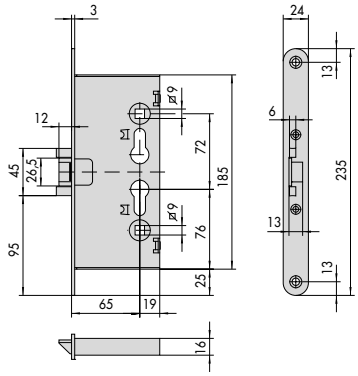
1.43091.00.0

4



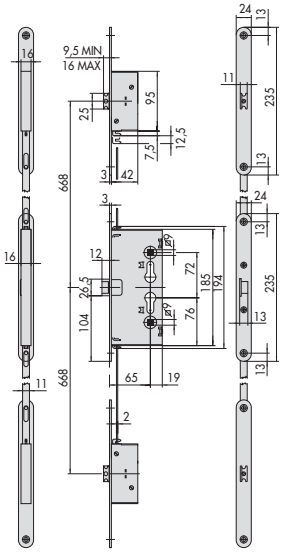
43191
E = 65 - 95

7



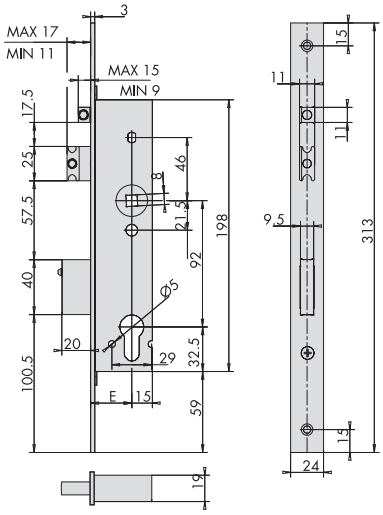
1.43020.65,1.43024.65, 1.43120.65, 1.43130.65,

2



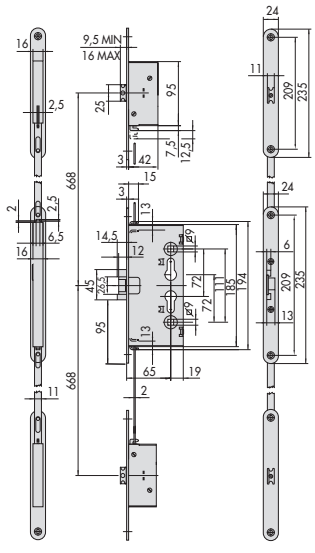
1.43015.65, 1.43115.65

5



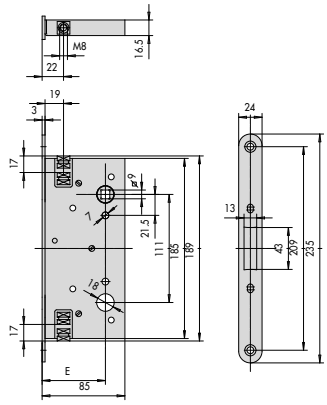
43225, 43235, 43236
E = 30-35-40-45

8



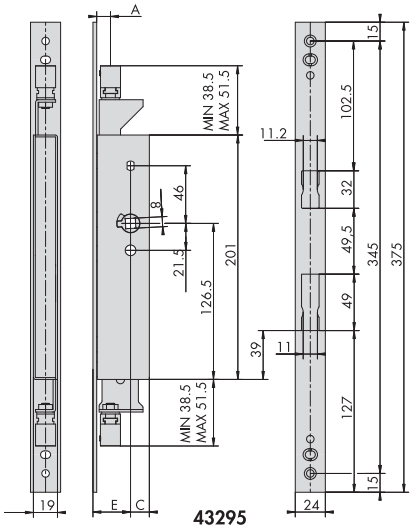
1.43025.65

3



43190
E = 65 - 95

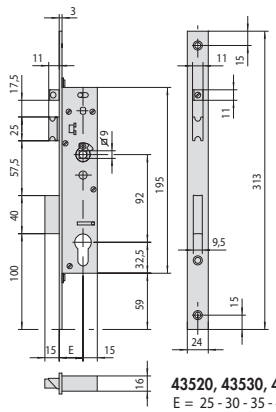
6



43295

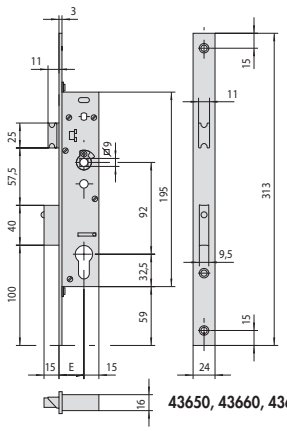
E	A	C
30	11÷29	15
40	21÷39	10
60	41÷59	10
75	56÷74	10

9



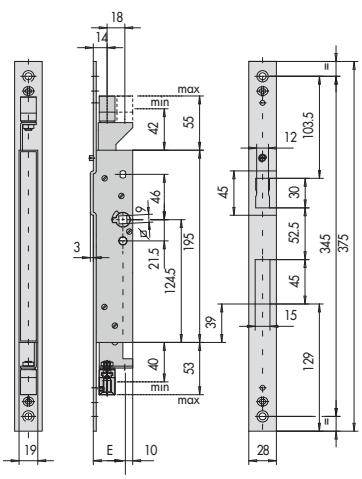
43520, 43530, 43620, 43630, 43631, 43632
E = 25 - 30 - 35 - 40 - 45

10



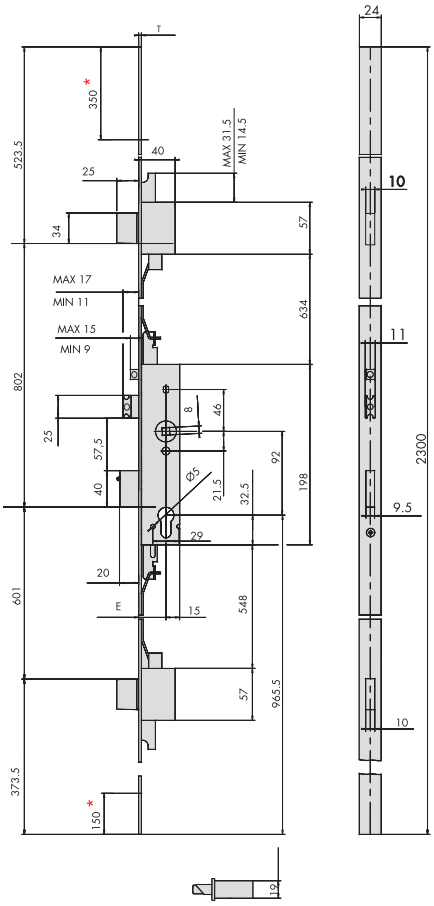
43650, 43660, 43661, 43662
E = 25 - 30 - 35 - 40 - 45


11



43690
E = 30 - 40 - 6

12

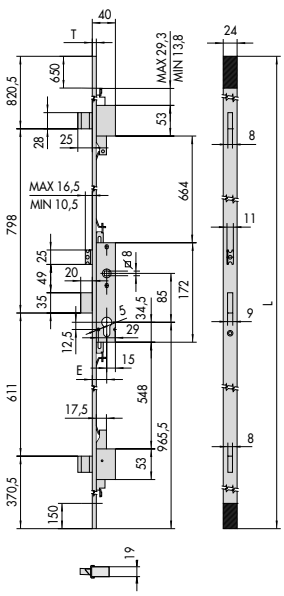






E = 30-35-40-45

* Adjustement

13







E = 25 - 30 - 35

14

ALLEGION

CISA

Locks and panic exit devices



Panic exit devices, rim version 478
Cisa eFASTpanic exit devices 479
CISA FAST TOUCH series panic exit devices 480
CISA FAST PUSH series panic exit devices 482
CISA FAST PUSH-PAD series panic exit devices 483
Kit for additional locking points for Cisa FAST panic exit devices . 484
Fast Flow emergency exit system 487
CISA Prestige series panic exit devices 488
CISA Prestige inox series panic exit devices 489
Kits for additional locking points for CISA Prestige panic exit devices 490
Kits for additional locking points for CISA Prestige inox panic exit devices 492
Horizontal bars for panic exit devices 494
Outside operation devices for panic exit devices FAST and Prestige 495
Electric handles 497
Electric strikers for panic exit devices 498
Kit glass for assembling panic exit devices on glazed doors ...499
Cisa Polaris 501
Accessories for panic exit devices 502

Panic exit devices, mortice version 508
Sikurexit system instructions 509
Panic function mortice locks with split follower 522
Sikurexit system certified products itemized list 523
Sikurexit series panic function mortice locks 524
Adjustable metal strikers 528
Panic function cylinder mortice locks 530
Exitlock panic function rim locks 531
exitlock panic function MORTICE locks 532
Heavy Duty cylinder mortice locks 533
Cylinder mortice locks 535
Cisa FAST TOUCH series panic exit devices for panic function mortice locks 536
Cisa FAST PUSH series panic exit devices for panic function mortice locks 537
Electric handles 538
Accessories for panic exit devices 539
Dimensional drawings 543
Installation of panic exit devices for single doors 547
Installation of panic exit devices for double doors 548

CISA®

eFAST

SOLUTIONS FOR EMERGENCY EXITS

CISA POLARIS



The system with LED lights which can be installed on FAST Touch and eFAST panic exit devices.

Finding an emergency exit when visibility is low (if power fails or there is smoke) becomes easy.





eFAST

Technical features:
- Aluminium/aluminium alloy cover
- Extruded aluminium bar, adjustable in length down to 600 mm for all versions

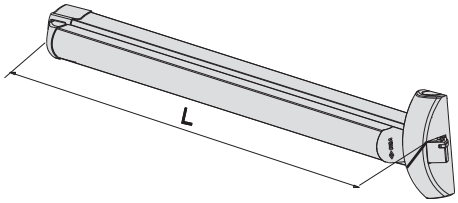
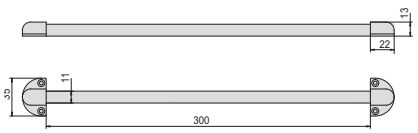


Operation:
- Latchbolt is withdrawn by motor allowing the door to be opened.
- Timed latch withdrawal from 3 to 30 seconds: By pushing the bar the latchboth is withdrawn allowing the door to be opened.

Supplied as standard:
- Special strikes
- Fixing screws
- Certificates of compliance
- Installation and maintenance instructions

On request:
- Outside access devices
- Extension bolts
- Fire door version with steel latchbolt (Spec. FR)

Finishes:
- STANDARD: Cover: black bar: red
- ON REQUEST (only item 1.59811-10-0): Cover: gray bar: gray (fin. 97) Carter and bar painted steel grey (fin. B9) PVD treatment: satin-finished stainless steel (fin. C2)

Standards:
- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Motorised modular panic exit device • Supplied as standard • strikes item 1.07071.20.0 • ON REQUEST • Strike item 1.07072.21.0 • Outside access devices item 1.07078.36/38/68/69 • Only use outside access device item 1.07078.35.0 if the panic exit device is set to operate with one side locking point	1300	5,000	1	**1 59851 09 0**
		1200	4,000	1	**1 59851 10 0**
		840	3,500	1	**1 59851 11 0**
	• Outside escutcheon with spring		0,100	10	**1 06515 20 0**
	• Outside escutcheon with spring		0,100	10	**1 06515 21 0**
	• Keypad • Glossy black • satin-finished nickel-plated chrome (fin. B1)		0,500	1	**1 06525 77 0**
			0,500	1	**1 06525 77 0 B1**



FAST Touch

Technical features:
- Painted aluminum alloy/aluminum cover
- Painted steel bar, adjustable in length down to 300 mm on all models
- Chrome aluminum alloy self-locking latchbolt

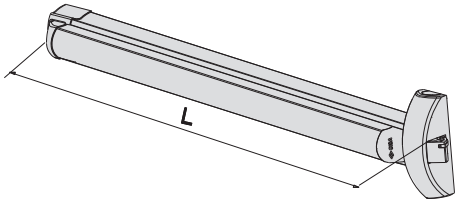
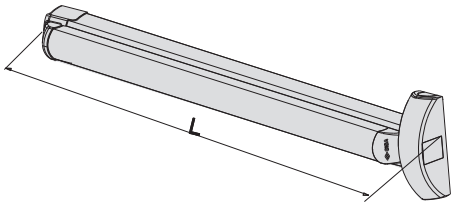
Supplied as standard:
- Special strikers
- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

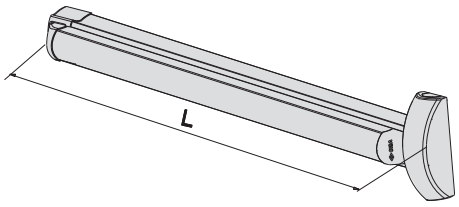
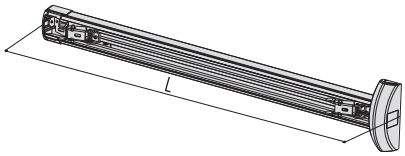

On request:
- External drives
- Extension bolts
- Version with microswitch (spec. LA)
- Version with hold open device (spec FG).
- Fire door version with steel latchbolt (FR spec.).

Finishes:
- STANDARD: Cover: black bar: red
- ON REQUEST (only item 1.59811-10-0):
  Cover: red bar: black(fin. 41)
  Cover: yellow bar: black (fin. 42)
  Cover: green bar: black (fin. 43)
  Cover: black bar: black (fin. 44)
  Cover: white bar: white (fin. 45)
  Cover: gray bar: gray (fin. 97)
  Carter and bar painted steel grey (fin. B9)
  PVD treatment: satin-finished stainless steel (fin. C2)

Standards:
- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

Type	Description	L	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Dead-locking lateral latch bolt • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • ON REQUEST: Striker item 1.07072.21.0 outside operation devices item 1.07078.35/36/38/68/69	1200	3,700	1	1	59801	10	0		
		840	2,684	1	1	59801	11	0		
	• MODULAR VERSION • Dead-locking lateral latch bolt with override option • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • Can be combined with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom deadbolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.36/38/68/69	1300	3,760	1	1	59811	09	0		
		1200	3,472	1	1	59811	10	0		
		840	3,000	1	1	59811	11	0		
	• satin-finished PVD-treated stainless steel	1200	3,472	1	1	59811	10	0	C2	
		840	2,684	1	1	59811	11	0	C2	

Type	Description	L	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• MODULAR VERSION WITHOUT CENTRAL latch bolt • Can be used with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom deadbolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.36/38/68/69	1200 840	3,500 3,000	1 1	**1 59816 10 0** **1 59816 11 0**
	• MODULAR VERSION WITHOUT BAR • Can be used with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom deadbolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.36/38/68/69	1200	2,472	1	**1 59811 10 0 00 SB**
	• Bar • May be combined with panic exit devices series 1.59811.10.0.00.00.SB • BAR COLOR OPTIONS: satin-finished anodised aluminium (fin. 62) Anodised bronze (fin. 64) Brass-plated (fin. A1) Red (fin. 41) Yellow (fin. 42) Green (fin. 43) White (fin. 45) Grey (fin. 97) Steel grey (B9)		1,000	1	**1 06196 43 0**



FAST Push

Technical features:
- Painted aluminum alloy/aluminum cover
- Chrome aluminum alloy self-locking latchbolt.

Supplied as standard:
- Special strikers
- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions




On request:
- External drives
- Extension bolts
- Microswitch
- Hold open device
- Fire door version with steel latchbolt (FR spec.).

Finishes:
- STANDARD:
  Painted black
- ON REQUEST (only item 1.59011.10.0):
  Painted red (fin. 41)
  Painted yellow (fin. 42)
  Painted green (fin. 43)
  Painted white (fin. 45)
  Painted gray (fin. 97)
  Painted steel grey (fin. B9)
  PVD treatment: satin-finished stainless steel (fin. C2)

Standards:
- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

Bar to be ordered separately
series 07007

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Dead-locking lateral latch bolt • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • ON REQUEST: Striker item 1.07072.21.0 outside operation devices item 1.07078.35/36/38/68/69	2,150	1	1	59001	10	0		
	• MODULAR VERSION • Dead-locking lateral latch bolt with override option • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • Can be combined with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom deadbolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.36/38/68/69	2,200	1	1	59011	10	0		
	• satin-finished PVD-treated stainless steel	2,266	1	1	59011	10	0	C2	
	• MODULAR VERSION WITHOUT CENTRAL latch bolt • Can be used with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom deadbolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.36/38/68/69	2,050	1	1	59016	10	0		



FAST Push-pad

Technical features:
- Painted aluminum alloy/aluminum cover
- Chrome aluminum alloy latchbolt




Supplied as standard:
- Special strikers
- Fixing screws
- Installation and maintenance Instructions

On request:
- External drives
- Extension bolts
- Version with hold open device.
- Fire door version with steel latchbolts (FR spec.).

Finishes:
- STANDARD: Painted black
- ON REQUEST (only item 1.59061.10.0): Painted red (fin. 41) Painted yellow (fin. 42) Painted green (fin. 43) Painted white (fin. 45) Painted gray (fin. 97) Carter and bar painted steel grey (fin. B9) PVD treatment: satin-finished stainless steel (fin. C2) item 1.59061.10.0

Standards:
- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 179

Hand:
0 = Non-handed

Type	Description	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Dead-locking lateral latch bolt • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • ON REQUEST: Striker item 1.07072.21.0 outside operation devices item 1.07078.35/36/38/68/69	0,900	1	**1 59051 10 0**
	• MODULAR VERSION • Dead-locking lateral latch bolt with override option • SUPPLIED AS STANDARD: Striker item 1.07072.20.0 • Can be combined with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom deadbolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.36/38/68/69	1,020	1	**1 59061 10 0**
	• satin-finished PVD-treated stainless steel	0,860	1	**1 59061 10 0 C2**
	• MODULAR VERSION WITHOUT CENTRAL latch bolt • Can be used with: Pair of top/bottom latch bolts item 1.07063.61.0 Pair of lateral latch bolts item 1.07063.51.0 Pair of top/lateral latch bolts item 1.07063.66.1/2 Pair of top/bottom deadbolts item 1.07063.71.0 • ON REQUEST: Striker item 1.07072.21.0 Outside operation devices item 1.07078.36/38/68/69	0,860	1	**1 59066 10 0**

KIT FOR ADDITIONAL LOCKING POINTS FOR CISA FAST PANIC EXIT DEVICES



Technical features:
- Painted aluminum alloy/aluminum cover
- Chrome aluminum alloy latchbolt
- Can be combined with the panic exit devices series FAST



Supplied as standard:
- Special strikers
- Fixing screws
- Installation and maintenance Instructions




On request:
- Extension bolts
- Fire door version with steel latchbolts (FR spec.).



Finishes:
- STANDARD:
  Painted black
- ON REQUEST:
  Painted red (fin. 41)
  Painted yellow (fin. 42)
  Painted green (fin. 43)
  Painted white (fin. 45)
  Painted gray (fin. 97)
  Satin-finished stainless steel treatment (fin. C2)

Standards:
- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Pair of latch bolts for lateral locking point • SUPPLIED AS STANDARD: strikers item 1.07072.20 2 flexible cables 2 cable covers 2 connecting plates 2 cable feedthrough hooks • ON REQUEST Striker item 1.07072.21.0	59011, 59016, 59061, 59065, 59811, 59816	2,000	1	1	07063	51	0		
	• satin-finished PVD-treated stainless steel	59011, 59016, 59061, 59065, 59811, 59816	2,100	1	1	07063	51	0	C2	
	• Pair of dead-locking latch bolts for top/bottom locking points • SUPPLIED AS STANDARD: Top strikers item 1.07072.20.0 Floor striker item 1.07072.27.0 2 flexible cables 2 cable covers 2 connecting plates 2 cable feedthrough hooks • ON REQUEST Striker item 1.07072.21.0	59011, 59016, 59061, 59065, 59811, 59816	1,950	1	1	07063	61	0		
	• satin-finished PVD-treated stainless steel	59011, 59016, 59061, 59065, 59811, 59816	2,100	1	1	07063	61	0	C2	

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Dead-locking latchbolt set for lateral locking point • SUPPLIED AS STANDARD: Strikes item 1.07072.20| • 2 threaded rods • 2 bolt covers • 2 connecting plates • 2 bolt guide hooks • ON REQUEST Strike item 1.07072.21.0	59011, 59016, 59061, 59065, 59811, 59816	2,000	1	**1 07063 53 0**
	• satin-finished PVD-treated stainless steel	59011, 59016, 59061, 59065, 59811, 59816	2,100	1	**1 07063 53 0 C2**
	• Dead-locking latchbolt set for top/bottom locking points • SUPPLIED AS STANDARD: Top strikes item 1.07072.20.0 Floor strike item 1.07072.27.0 2 threaded bolt extension rods 2 bolt extension rod cover 2 connecting plates 2 rod guide hooks • ON REQUEST Strike item 1.07072.21.0	59011, 59016, 59061, 59065, 59811, 59816	1,950	1	**1 07063 63 0**
	• satin-finished PVD-treated stainless steel	59011, 59016, 59061, 59065, 59811, 59816	2,100	1	**1 07063 63 0 C2**
	• Pair of latch bolts for top dead-locking locking point and bottom lateral locking point • SUPPLIED AS STANDARD: • striker item 1.07072.20 • 2 flexible cables • 2 cable covers • 2 connecting plates • 2 cable feedthrough hooks • ON REQUEST Striker item 1.07072.21.0	59011, 59016, 59061, 59065, 59811, 59816	1,950 1,950	1 1	**1 07063 66 1** **1 07063 66 2**
	• satin-finished PVD-treated stainless steel	59011, 59016, 59061, 59065, 59811, 59816	1,950 1,950	1 1	**1 07063 66 1 C2** **1 07063 66 2 C2**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Pair of deadbolts for top/bottom locking points for swinging doors • SUPPLIED AS STANDARD: Top strikers item 1.07072.25.0 and item 1.07072.26.0 Floor striker item 1.07072.25.0 2 threaded bolts 2 bolt covers 2 bolt guide hooks 2 connecting plates	59011, 59016, 59061, 59065, 59811, 59816	2,100	1	**1 07063 71 0**
	• satin-finished PVD-treated stainless steel	59011, 59016, 59061, 59065, 59811, 59816	1,000	1	**1 07063 71 0 C2**
	• Additional lateral latch bolt • SUPPLIED AS STANDARD: Strikers item 1.07072.20.0	1 07063 51 0	0,600	1	**1 07063 26 1**
			0,600	1	**1 07063 26 2**
	• satin-finished PVD-treated stainless steel	1 07063 51 0	0,600	1	**1 07063 26 1 C2**
			0,600	1	**1 07063 26 2 C2**
	• Top extension bolt kit complete with: Flexible cable Cable cover Cable feedthrough hook	1 07063 51 0, 1 07063 61 0, 1 07063 66 1	0,500	1	**1 07064 51 0**
	• satin-finished PVD-treated stainless steel		0,384	1	**1 07064 51 0 C2**
	• Top extension bolt kit complete with: Threaded bolt Bolt cover Bolt guide hook	1 07063 71 0 1 07063 53 0 1 07063 63 0	0,384	1	**1 07064 71 0**
	• satin-finished PVD-treated stainless steel		0,384	1	**1 07064 71 0 C2**





FAST Flow

Technical features:
- Patented deadbolt locking system
- Painted aluminum alloy/aluminum cover
- Forward strike 13.5 mm
- Deadbolt diameter 15 mm
- Adjustable strikers for overlap height 10 mm - 20 mm (patented system)

Supplied as standard:
- 3 Locking point panic exit device **(do not use standard panic devices)**
- Kit of rods and latch bolt for top/bottom locking point
- Fixing screws
- Installation and maintenance Instructions

On request:
- External drives
- Bar to ordered separately series 07007

Finishes:
- STANDARD:
  Painted black
- ON REQUEST:
  Painted gray (fin. 97)
  Painted white (fin. 45)
  Grey stainless steel B9
  PVD satin-finished stainless steel treatment C2

Standards:
- CE mark according to the 89/106/EEC DIRECTIVE granted by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125


Hand:
0 = Non-handed

Bar to be ordered separately



series 07007

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		Kg							



- Modular panic exit device complete with top/bottom closing rods
- SUPPLIED AS STANDARD:
  - 2 adjustable top strikers
  - 2 floor strikers
  - 2 threaded rods
  - 2 rod covers
  - 2 rod guide hooks
  - 1 pair of top/bottom deadbolts

4,055	1	1	59014	10	0			

Use only the panic devices included in the kit. The product does not work if combined with a standard panic device





CISA Prestige

Technical features:
- Steel case cover, painted black
- Chrome-plated aluminium alloy self-locking latch

Supplied as standard:
- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:
- Microswitch
- Hold-open device
- Fire resistant version with steel latch (spec. FR)

Finishes:
- STANDARD:
  - painted black
- ON REQUEST:
  - painted red (fin. 41)
  - painted yellow (fin. 42)
  - painted green (fin. 43)
  - painted white (fin. 45)
  - painted grey (fin. 97)




Standards:
- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard

Hand:
0 = Non-handed

Bar to be ordered separately



series 07007

Type	Description	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Lateral latch-bolt • SUPPLIED AS STANDARD: Strikers item 1.07072.20.0 • ON REQUEST: Outside operation devices item 1.07078.65/68/69	2,850	1	1	59301	10	0		
	• MODULAR VERSION • Lateral latch-bolt which can be disactivated • SUPPLIED AS STANDARD: Strikers item 1.07072.20.0 • Can be used with: Pair of top/bottom latch-bolts item 1.07063.30.0 Pair of lateral latch-bolts item 1.07063.20.0 Pair of top/lateral latch-bolts item 1.07063.35.1/2 Pair of top/bottom deadbolts item 1.07063.40.0 • ON REQUEST: Outside operation device item 1.07078.68/69	2,846	1	1	59311	10	0		
	• MODULAR VERSION • Can be used with: Pair of top/bottom latch-bolts item 1.07063.30.0 Pair of lateral latch-bolts item 1.07063.20.0 Pair of top/lateral latch-bolts item 1.07063.35.1/2 Pair of top/bottom deadbolts item 1.07063.40.0 • ON REQUEST: Outside operation device item 1.07078.68/69	2,666	1	1	59316	10	0		



CISA Prestige Inox

Technical features:
- Stainless steel case cover
- Chrome-plated aluminium alloy self-locking latch with PVD coating.

Supplied as standard:
- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:
- Microswitch version (spec. LA)
- Hold-open device version (spec. FG)
- Fire door version with steel latchbolt with PVD coating (spec. FR)




Standards:
- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1125 standard

Hand:
0 = Non-handed

Bar to be ordered separately



series 07007

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Lateral latchbolt • SUPPLIED AS STANDARD: Strikers item 1.07072.70.0 • ON REQUEST: Outside operation devices item 1.07078.65/68/69.0.C2	2,864	1	1	**59351**	**10**	**0**		
	• MODULAR VERSION • Lateral latchbolt which can be disconnected • SUPPLIED AS STANDARD: Strikers item 1.07072.70.0 • Can be used with: Pair of top/bottom latchbolts item 1.07063.31.0 Pair of lateral latchbolts item 1.07063.21.0 Pair of top/lateral latchbolts item 1.07063.36.1/2 Pair of top/bottom deadbolts item 1.07063.41.0 • ON REQUEST: Outside operation device 1.07078.68/69.0.C2	3,002	1	1	**59361**	**10**	**0**		
	• MODULAR VERSION • Can be used with: Pair of top/bottom latchbolts item 1.07063.31.0 Pair of lateral latchbolts item 1.07063.21.02 Pair of top/lateral latchbolts item 1.07063.36.1/2 Pair of top/bottom deadbolts item 1.07063.41.0 • ON REQUEST: Outside operation device 1.07078.68/69.0.C2	2,700	1	1	**59366**	**10**	**0**		

KITS FOR ADDITIONAL LOCKING POINTS FOR CISA PRESTIGE PANIC EXIT DEVICES







Technical features:
- Steel case cover, painted black
- Chrome-plated aluminium alloy latch bolt and deadbolt



Supplied as standard:
- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:
- Fire resistant version with steel latch (spec. FR) item 1.07063.20/30/35.0

Finishes:
- STANDARD:
  - painted black
- ON REQUEST:
  - painted red (fin. 41)
  - painted yellow (fin. 42)
  - painted green (fin. 43)
  - painted white (fin. 45)
  - painted grey (fin. 97)

Hand:
0 = Non-handed
1 = R.L. outwards
2 = L.H. outwards

Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Pair of latch-bolts for lateral locking points • SUPPLIED AS STANDARD: 2 strikers item 1.07072.20.0 • ON REQUEST: Rods item 1.07081.06.0	59311, 59316	1,062	1	**1 07063 20 0**
	• Pair of dead-locking latch-bolts for top/bottom locking points • SUPPLIED AS STANDARD: upper strikers item 1.07072.20.0 Floor striker item 1.07072.28.0 • ON REQUEST: Rods item 1.07081.06.0	59311, 59316	1,000	1	**1 07063 30 0**
	• Pair of latch-bolts for upper dead-locking and bottom lateral locking points • SUPPLIED AS STANDARD: strikers item 1.07072.20.0 • ON REQUEST: Rods item 1.07081.06.0	59311, 59316	1,000 1,000	1 1	**1 07063 35 1** **1 07063 35 2**
	• Pair of latch-bolts for top/bottom locking points for swinging doors • SUPPLIED AS STANDARD: Upper strikers item 1.07072.25.0 and 1.07072.26.0 Floor striker item 1.07072.25.0 • ON REQUEST: Rods item 1.07081.06.0	59311, 59316	1,000	1	**1 07063 40 0**
	• Additional lateral latch-bolt • SUPPLIED AS STANDARD: Strikers item 1.07072.20.0 and 1.07072.21.0	59311, 59316	0,300 0,300	1 1	**1 07063 15 1** **1 07063 15 2**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Black painted set of extension bolts • Black painted case cover • To be used with latch-bolts item 1.07063.20/30/35/40.0	59311, 59316	1,220	1	**1 07081 06 0**
	• Black painted top extension bolt set • Black painted case cover	07063	0,652	1	**1 07064 60 0**









Technical features:
- Stainless steel case cover
- Chrome-plated aluminium alloy latch bolt and deadbolt with PVD coating.



Supplied as standard:
- Strikers
- Fixing screws
- Instruction sheet
- ICIM and CE Certification

On request:
- Fire resistant version with steel latch (spec. FR)

Hand:
0 = Non-handed
1 = R.H. inwards
2 = L.H. inwards

Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Pair of latch-bolts for lateral locking points • SUPPLIED AS STANDARD: 2 strikers item 1.07072.70.0 • ON REQUEST: Rods item 1.07081.61.0	59361, 59366	1,220	1	**1 07063 21 0**
	• Pair of dead-locking latch-bolts for top/bottom locking points • SUPPLIED AS STANDARD: upper strikers item 1.07072.70.0 Floor striker item 1.07072.78.0 • ON REQUEST: Rods item 1.07081.61.0	59361, 59366	1,080	1	**1 07063 31 0**
	• Pair of latch-bolts for upper dead-locking and bottom lateral locking points • SUPPLIED AS STANDARD: 2 strikers item 1.07072.70.0 • ON REQUEST: Rods item 1.07081.61.0	59361, 59366	1,000 1,000	1 1	**1 07063 36 1** **1 07063 36 2**
	• Pair of latch-bolts for top/bottom locking points for swinging doors • SUPPLIED AS STANDARD: Upper strikers item 1.07072.75.0 and 1.07072.76.0 Floor striker item 1.07072.75.0 • ON REQUEST: Rods item 1.07081.61.0	59361, 59366	1,000	1	**1 07063 41 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Stainless steel extension bolts • Stainless steel case cover • To be used with latch-bolts item 1.07063.21/31/36/41.0	59361, 59366	1,196	1	**1 07081 61 0**
	• Stainless steel top extension bolt set • Stainless steel case cover	07063	0,500	1	**1 07064 61 0**

Type	Description	L	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
	• Red painted steel oval shaped bar • AVAILABLE FINISHES (extra price): yellow painted (fin. 42) green painted (fin. 43) black painted (fin. 44) white painted (fin. 45) grey painted (fin. 97) painted steel grey (fin. B9)	900	0,800	1	1	07007	13	0
		1200	1,054	1	1	07007	14	0
		1500	1,440	1	1	07007	15	0
	• Stainless steel oval shaped horizontal bar	900	0,800	1	1	07007	60	0
		1200	1,070	1	1	07007	61	0
		1500	1,400	1	1	07007	62	0











Technical features:
- Aluminium plate

Supplied as standard:
- Cylinders with 3 keys (where these are provided for)
- Fixing screws
- Instruction sheet

On request:
- Microswitch, only for item 107078.68/69
- For cylinder replacement, use 30/10 single cylinders

Hand:
0 = Non-handed

Type	Description	For series/item	Unit weight	Pieces	ITEM
					Type Dim. Hand Fin. Pers. Spec.
	• Fixed knob, centre distance 43 mm • The key operates the latchbolt • Nickel-plated cylinder • Only for 1-locking point panic exit devices • FINISHES ON REQUEST painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97)	59001, 59051, 59801	0,600	1	1 07078 35 0
	• satin-finished PVD-treated stainless steel		0,600	1	1 07078 35 0 C2
	• Fixed knob, centre distance 90 mm • The key operates the latchbolt • Nickel-plated cylinder • Only for 1-locking point panic exit devices • FINISHES ON REQUEST painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97)	59301	0,600	1	1 07078 65 0
	• satin-finished PVD-treated stainless steel		0,600	1	1 07078 65 0 C2
	• Plate with low profile handle • The hande is disactivated with the key • Nickel-plated cylinder • Non-removable key setting (optional) • FINISHES ON REQUEST: painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97)	59001, 59011, 59016, 59051, 59061, 59066, 59801, 59811, 59816	0,600	1	1 07078 36 0
	• Version without cylinder		1,308	1	1 07078 36 0 00 SH

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Black painted plate with handle • Handle deactivated by key • Nickel-plated cylinder • Non-removable key setting (optional) • FINISHES ON REQUEST: painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97)	59001, 59011, 59016, 59051, 59061, 59066, 59801, 59811, 59816	0,600	1	1	07078	38	0		
	• Version without cylinder		0,500	1	1	07078	38	0	00	SH
	• Black painted plate with handle • Handle deactivated by key • Nickel-plated cylinder • Non-removable key setting (optional) • FINISHES ON REQUEST: painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97)	59001, 59011, 59016, 59051, 59061, 59066, 59301, 59311, 59316, 59801, 59811, 59816	0,900	1	1	07078	68	0		
	• Version without cylinder		1,200	1	1	07078	68	0	00	SH
	• Black painted knob • Knob disabled with the key • Nickel-plated cylinder • Non-removable key setting (optional) • FINISHES ON REQUEST: painted STEEL GREY (fin. B9) painted WHITE (fin. 45) painted GREY (fin. 97)	59001, 59011, 59016, 59051, 59061, 59066, 59301, 59311, 59316, 59801, 59816	0,800	1	1	07078	69	0		
	• Version without cylinder		0,850	1	1	07078	69	0	00	SH
	• Follower and adaptor for cylinder only installation		0,000	1	1	06198	70	0		
	• Additional locking point kit for versions 1.07078.36/38 for doors 80 mm to 130 mm • For versions 1.07078.68/69 for doors 100 mm to 130 mm		0,099	1	1	06316	04	0		




Technical features:
- Non-handed handle.
- Idle handle under no power input conditions.
- Key operated mechanical emergency system: the key will operate the handle. By removing the key the handle will be deactivated.
- Wiring system with connector for complete connection insulation.
- LED integral with handle body for door status visual indication.
- Nickel-plated steel case.
- Painted aluminum alloy cover.
- Electric hold-open device available.
- Powered through booster device
- Rated voltage 12/24 V ac/dc.
- Operating voltage min. 5 V, max 28 V.

Supplied as standard:
- Cylinder item 1.0G304.02.0.12.
- Booster module item 1.07022.01.0.
- 8/9 mm square spindle.

On request:
- Timer item 1.07022.20.0

Finishes:
- Black painted (RAL 9005).
- Grey painted (RAL 9006).

Type	Description	Facaplate	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Electrically enabled handle • Can be installed with panic exit devices series FAST and Cisa Prestige • Painted Black • STD SUPPLY: Booster device 1.07022.01.0 Connecting cable fixing screws • ON REQUEST: Timer device 1.07022.20.0		1,200	1	**1**	**07074**	**80**	**0**		




Technical features:
- To be coupled with panic exit devices with side latch
- Rated voltage :
  - 12 V ac CE
  - 12 and 24 V dc CE
- Zinc-plated steel case
- Lacquered aluminium alloy casing
- Chrome-plated aluminium alloy striker

Supplied as standard:
- Nylon spacers item 1.7089.02.0 (black standard)
- Fixing screws
- Instruction sheet

Finishes:
- STANDARD:
  black case casing
- ON REQUEST:
  stainless steel grey (fin. B9)
  white case cover (fin. 45)
  grey case cover (fin. 97)
- satin-finished stainless steel (fin. C2)

Hand:
0 = Non-handed


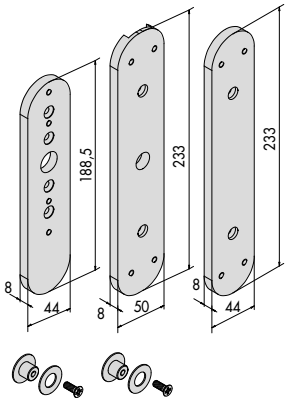

Type	Description	Facaplate	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Without hold-open catch mechanism • 12 V ac CE - Current absorption 0,25A		0,500	1	**1 07083 05 0**
	• Without hold-open catch mechanism • 12 V dc CE - Current absorption 0,2A		0,500	1	**1 07083 06 0**
	• Without hold-open catch mechanism • 24 V dc CE - Current absorption 0,15A		0,500	1	**1 07083 07 0**
	• Without hold-open catch mechanism • 1 microswitch • 12 V ac CE - Current absorption 0,25A		0,500	1	**1 07083 80 0**
	• Without hold-open catch mechanism • 1 microswitch • 12 V dc CE - Current absorption 0,2A		0,650	1	**1 07083 81 0**
	• Without hold-open catch mechanism • 1 microswitch • 24 V dc CE - Current absorption 0,15A		0,500	1	**1 07083 82 0**
	• With hold-open catch mechanism • 12 V ac CE - Current absorption 0,25A		0,628	1	**1 07083 90 0**
	• With live coils • 12 V dc - Current absorption 0,2A		0,634	1	**1 07083 40 0**
	• With live coils • 24 V dc - Current absorption 0,15A		0,500	1	**1 07083 41 0**






Technical features:
- Steel plates

Supplied as standard:
- Fixing screws
- Installation and maintenance instruction sheet

Finishes:
- Black painted
- PVD-treated satin lacquered stainless steel (fin. C2)

Type	Description	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Glass Kit for FAST panic exit devices • Painted black	1,140	1	1 07090 01 0
	• Glass Kit for FAST panic exit devices • satin-finished PVD-treated stainelss steel	1,300	1	1 07090 01 0 C2
	• Kit Glass for CISA Prestige panic exit devices • Black painted	0,200	1	1 07090 05 0
	• Kit Glass for CISA Prestige panic exit devices • PVD-treated satin lacquered stainless steel	1,850	1	1 07090 05 0 C2
	• Glass Kit for additional locking points • For FAST and Cisa Prestige panic exit devices • Painted black	2,580	1	1 07090 10 0
	• Glass Kit for additional locking points • For FAST and Cisa Prestige panic exit devices • satin-finished PVD-treated stainelss steel	2,600	1	1 07090 10 0 C2

KIT GLASS FOR ASSEMBLING PANIC EXIT DEVICES ON GLAZED DOORS

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Glass Kit for lateral striker • For FAST and Cisa Prestige panic exit devices • Painted black	0,100	1	1	07091	01	0		
	• Glass Kit for additional locking points For FAST and Cisa Prestige panic exit devices • satin-finished PVD-treated stainelss steel	0,100	1	1	07091	01	0	C2	
	• Glass Kit for top striker latch bolt version • For FAST and Cisa Prestige panic exit devices additional locking points • Painted black	0,100	1	1	07091	02	0		
	• Glass kit for top striker latch bolt version • For additional locking points for FAST and Cisa Prestige panic exit devices • satin-finished PVD-treated stainless steel	0,100	1	1	07091	02	0	C2	
	• Glass Kit for top striker deadbolt version • For FAST and Cisa Prestige panic exit devices additional locking points • Painted black	0,100	1	1	07091	03	0		








Technical features:
- Painted steel bar
- ABS inserts
- Can be shortened up to mm 600 (for Fast Touch) and mm 720 (for eFast)
- LED (120 lumen)
- Bar for FAST Touch rim and mortice panic exit devices and eFAST panic exit devices with LED lights powered by a special 12 V AC transformer.
- Two possible functions: emergency (the lights come on when power fails) and light (the lights are controlled by a switch).





Supplied as standard:
- Steel bar
- LED lights
- Wiring



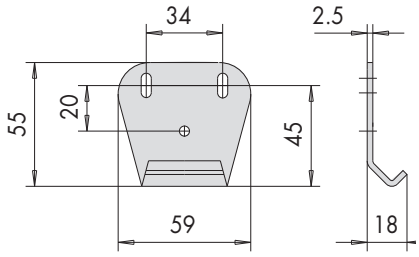
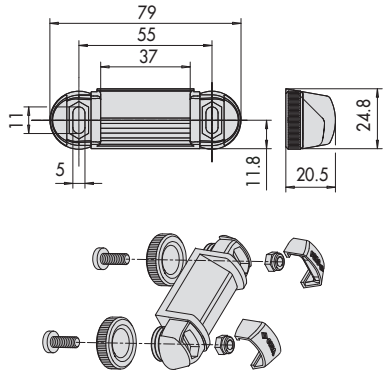
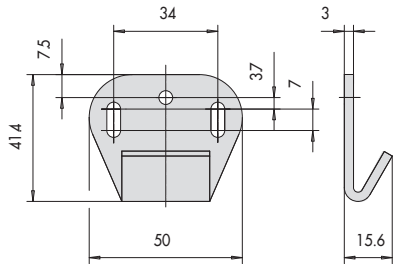
Finishes:
- Black Fin. 00
- Red Fin. 41
- White RAL 9010 Fin. 45
- Grey Fin. 97
- Green Fin. 43
- Yellow Fin. 42)
- Stainless steel grey Fin. B9
- PVD stainless steel Fin. C2

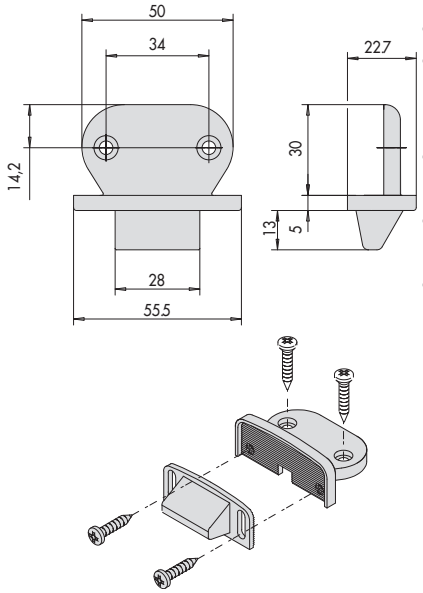
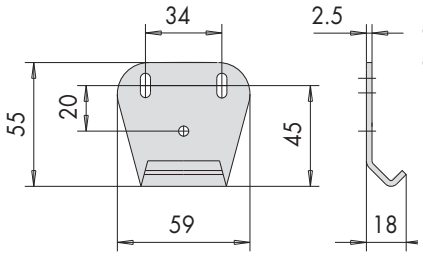


Polaris





Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Polaris kit containing bar, LEDs and wiring components. • To activate the emergency or light function, CISA Polaris must be connected to a special transformer (not supplied) with the characteristics indicated on the instruction sheet.		1,000	1	**1 06196 60 0**



Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Microswitch to be used with outside access devices for 1.07078.68/69 version		0,020	1	1 06195 10 0
	• Microswitch to be used with FAST Touch panic exit devices, rim and mortice versions	59811	0,020	1	1 06195 05 0
	• Microswitch to be used with FAST Push panic exit devices, rim version	59011	0,020	1	1 06195 06 0
	• Microswitch to be used with panic exit devices 59607, 59616, 59617		0,020	1	1 06195 09 0
	• Microswitch to be used with panic exit devices series CISA PRESTIGE		0,036	1	1 06195 07 0
	• Hold-open device	59301, 59311, 59316, 59351, 59361, 59366	0,080	1	1 07065 52 0
	• Top and lateral striker with spacers • Black painted steel • 2x1.5 mm spacer	59646	0,060	6	1 07072 11 0
	• Lateral striker for metal sections • Black painted alloy	07063, 59001, 59801	0,090	6	1 07072 14 0

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Black painted striker, complete with spacers • Black painted steel	1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 51 0, 1 07063 61 0, 1 07063 66 1, 1 07063 66 2, 59001, 59016, 59311, 59316, 59801, 59816	0,160	1	**1 07072 20 0**
	• Top lateral striker complete with spacers • Stainless steel • For stainless steel and C2 finish panic exit devices	1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 51 0, 1 07063 61 0, 1 07063 66 1, 1 07063 66 2, 59001, 59016, 59311, 59316, 59801, 59816	0,080	1	**1 07072 70 0**
	• Black painted striker, complete with spacers • Black painted steel	1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 51 0, 1 07063 61 0, 1 07063 66 1, 1 07063 66 2, 59001, 59016, 59311, 59316, 59801, 59816	0,190	1	**1 07072 21 0**
	• Lateral and top angle striker complete with spacers • Stainless steel • For stainless steel and C2 finish panic exit devices	1 07063 20 0, 1 07063 30 0, 1 07063 35 1, 1 07063 35 2, 1 07063 51 0, 1 07063 61 0, 1 07063 66 1, 1 07063 66 2, 59001, 59016, 59311, 59316, 59801, 59816	0,186	1	**1 07072 71 0**
	• Top/bottom striker • Black painted steel	1 07063 40 0, 1 07063 71 0	0,080	1	**1 07072 25 0**
	• Black painted striker, complete with spacers • Black painted steel	1 07063 40 0, 1 07063 71 0	0,080	1	**1 07072 26 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Black paintet steel floor striker, complete with spacers • Black painted steel	1 07063 30 0, 1 07063 61 0	0,080	1	**1 07072 27 0**
	• Top lateral striker complete with spacers • Stainless steel • For stainless steel and C2 finish panic exit devices	1 07063 31 0, 1 07063 61 0	0,080	1	**1 07072 77 0**
	• Black paintet steel floor striker, complete with spacers • Black painted steel	1 07063 30 0, 1 07063 61 0	0,126	1	**1 07072 28 0**
	• Floor striker complete with spacers • Stainless steel • For stainless steel and C2 finish panic exit devices	1 07063 31 0, 1 07063 61 0	0,124	1	**1 07072 78 0**
	• Lateral and top strike for PVC door frames • Black nylon	59300, 59315, 59318	0,020	6	**1 07072 30 0**
	• Adjustable striker for ALUMINIUM DOORS • ADJUSTMENTS: Coplanarity compensation from -8mm to +4mm • STANDARD SUPPLY Fixing screws • FINISHES: Standard painted black • ON REQUEST: painted WHITE (fin.45) painted GREY (fin.97)		0,141	6	**1 07072 31 0**
	• Adjustable striker FOR INDUSTRIAL DOORS • ADJUSTMENTS: Clearance compensation between door wing and frame up to 25 mm Coplanarity compensation from -4 mm to + 7mm • STANDARD SUPPLY Fixing screws • FINISHES: Standard painted black • ON REQUEST: painted WHITE (fin.45) painted GREY (fin.97)		0,080	6	**1 07072 32 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Adjustable striker for WOOD AND PVC DOORS • ADJUSTMENTS: Possible projecting installation on profiles with overlapping sections of 14 mm to 24 mm • STANDARD SUPPLY Fixing screws • FINISHES: Standard painted black • ON REQUEST: painted WHITE (fin.45) painted GREY (fin.97)		0,080	6	**1 07072 33 0**
	• Lateral and top striker for PVC doors • Black painted steel		0,080	1	**1 07072 34 0**
	• Outside plate • Black painted steel	59301, 59311, 59316	0,200	1	**1 07077 14 0**
	• Outside plate • satin-finished treated stainless steel	59351, 59361, 59366	0,200	1	**1 07077 14 0 C2**
	• Outside plate • Black painted steel	59301, 59311, 59316	0,200	1	**1 07077 15 0**
	• Outside plate • satin-finished treated stainless steel	59351, 59361, 59366	0,200	1	**1 07077 15 0 C2**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Closing selector for double doors with door closer • Chrome-plated steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM		0,808	1	**1 07084 10 0**
	• Closing selector for double doors with door closer • Stainless steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM • Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1158 standard		0,720	1	**1 07084 20 0**
	• Adjustable closing selector for double doors with door closer • Chrome-plated steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM		0,825	1	**1 07084 11 0**
	• Adjustable closing selector for double doors with door closer • Stainless steel • CE mark in compliance with the directive 89/106/CEE issued by ICIM • Voluntary ICIM certification issued by third party as provided for in the same UNI EN 1158 standard		0,702	1	**1 07084 21 0**
	• Spacer 2 mm. • Black nylon	1 07083 05 0, 1 07083 06 0, 1 07083 07 0, 1 07083 40 0 1 07083 41 0 1 07083 80 0, 1 07083 81 0, 1 07083 82 0, 1 07083 90 0	0,020	1	**1 07089 12 0**
	• Adapteur for round cylinder • For Cisa Prestige series panic exit devices	59301, 59311, 59351, 59361	0,030	1	**1 07165 21 0**
	• Hold-open device for use with FAST Touch panic exit devices painted GREY (fin. 97) painted WHITE (fin. 45)	59801, 59811, 59816	0,054	1	**1 07165 50 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Hold-open device for use with FAST Push panic exit devices painted WHITE (fin. 45) painted GREY (fin. 97) painted STEEL GREY (B9)	59001, 59011, 59016	0,178	1	**1 07165 51 0**
	• satin-finished treated stainless steel		0,178	1	**1 07165 51 0 C2**
	• Cover removal tool • For all FAST PUSH and FAST TOUCH series		0,000	1	**1 06198 75 0**

ALLEGION

CISA

Panic exit devices, mortice version



All round security

CISA panic exit device installation in combination with SikurExit, the multipoint, panic function lock for aluminum doors, with Exitlock, the panic function lock for armored doors, and with other panic function locks available from the CISA range ensures the greatest anti-burglary protection in heavy human traffic buildings, allowing at the same time quick exit from the building in case of danger.

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles	Single leaf door					
Manufacturer	**Series**	**Lock**	**Striker**	**Profile guard**	**Striker for divertor (2 pcs)**	**Cylinder Fin. 12**
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43725-35-0	06463-14-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43725-30-0	06463-14-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43725-35-0	06463-32-0		06465-22-0	0A310-27-0
	EXPORT 51 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EXPORT 68 TT Fin.	43725-35-0	06463-32-0		06465-22-0	0A310-41-0
	EXPORT 68 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-17-0
	SICURBLIN 65	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT	43725-40-0	06463-32-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43825-35-0	06463-14-0		06465-04-0	0A310-31-0
	PLANET 72 HT	43725-40-0	06463-32-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)	43725-40-0	06463-32-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID	43825-35-0	06461-35-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43825-35-0	06461-35-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43825-35-0	06461-35-0		06461-39-0	0A310-33-0
EKONAL	E 65	43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 65 con riporto	43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 75	43725-35-0	06461-30-0		06461-34-0	0A310-20-0
	E 75 con riporto	43725-35-0	06461-30-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50	43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	THERM TUR	43825-40-0	06461-07-0		06461-12-0	0A310-18-0
	UNICO	43825-35-0	06461-17-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43725-40-0	06463-31-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43825-30-0	06461-35-0		06461-39-0	0A310-17-0
	DOMAL TOP TB 65	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
IND INVEST	GOLD 500	43725-35-0	06463-32-0		06465-22-0	0A310-27-0
	GOLD 500 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto	43725-30-0	06463-14-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43725-35-0	06461-30-0		06461-34-0	0A310-18-0
JANSEN	Serie 50 ECONOMY	43825-35-0	06461-07-0		06461-12-0	0A310-07-0
	Serie 60	43825-35-0	06461-07-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT	43825-35-0	06461-07-0		06461-12-0	0A310-13-0

Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)
Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.
Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles	Single leaf door					
Manufacturer	Series	Lock	Striker	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
MERCURI	MERCURY 500 TT	43725-35-0	06463-32-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
METRA	NC 50 I Linea base	43825-35-0	06461-35-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43825-35-0	06461-35-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43825-35-0	06461-35-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43825-35-0	06461-35-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43825-30-0	06463-14-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	BASIC 65	43825-40-0	06461-30-0		06461-34-0	0A310-13-0
	TERMICH 65	43825-40-0	06461-30-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43825-35-0	06461-35-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43825-35-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT	43725-40-0	06463-32-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	PR 75 TT	43725-40-0	06463-31-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU DOOR 74 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-20-0
SAPA (ex Alcoa)	ALFIL 54 TT	43725-35-0	06461-30-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43725-35-0	06463-17-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43725-35-0	06463-31-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43725-40-0	06463-31-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43825-30-0	06461-35-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43825-30-0	06461-35-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43825-30-0	06463-14-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43825-35-0	06461-35-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43825-40-0	06461-35-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43825-40-0	06461-35-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43825-35-0	06461-35-0		06461-39-0	0A310-13-0
TO.MA	ATLANTIS 55 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43725-35-0	06463-32-0		06465-22-0	0A310-33-0

Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)
Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.
Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles	Double leaf door					
Manufacturer	**Series**	**Lock**	**Lock**	**Profile guard**	**Striker for divertor (2 pcs)**	**Cylinder Fin. 12**
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43725-35-0	43295-40-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43725-30-0	43295-30-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43725-35-0	43295-60-0		06465-22-0	0A300-27-0
	EXPORT 51 TT Porta	43825-30-0	43295-30-0		06465-04-0	0A300-09-0
	EXPORT 68 TT Fin.	43725-35-0	43295-60-0		06465-22-0	0A300-41-0
	EXPORT 68 TT Porta	43825-30-0	43295-30-0		06465-04-0	0A300-17-0
	SICURBLIN 65	43825-30-0	43295-40-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT	43725-40-0	43295-60-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43825-35-0	43295-60-0		06465-04-0	0A310-31-0
	PLANET 72 HT	43725-40-0	43295-60-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)	43725-40-0	43295-60-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)	43725-40-0	43295-60-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID	43825-35-0	43295-40-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43825-35-0	43295-40-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43825-35-0	43295-40-0		06461-39-0	0A310-33-0
EKONAL	E 65	43725-35-0	43295-40-0		06461-34-0	0A310-17-0
	E 65 con riporto	43725-35-0	43295-60-0		06461-34-0	0A310-17-0
	E 75	43725-35-0	43295-40-0		06461-34-0	0A310-20-0
	E 75 con riporto	43725-35-0	43295-60-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50	43825-40-0	43295-40-0		06461-12-0	0A310-07-0
	THERM TUR	43825-40-0	43295-40-0		06461-12-0	0A310-18-0
	UNICO	43825-35-0	43295-40-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43825-40-0	43295-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43825-35-0	43295-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43825-35-0	43295-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta	43825-35-0	43295-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43725-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43725-35-0	43295-60-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43725-40-0	43295-75-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.	43725-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43725-35-0	43295-40-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43825-30-0	43295-40-0		06461-39-0	0A310-17-0
	DOMAL TOP TB 65	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
IND INVEST	GOLD 500	43725-35-0	43295-60-0		06465-22-0	0A310-27-0
	GOLD 500 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto	43725-30-0	43295-60-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43725-40-0	43295-75-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43725-35-0	43295-40-0		06461-34-0	0A310-18-0
JANSEN	Serie 50 ECONOMY	43825-35-0	43295-40-0		06461-12-0	0A310-07-0
	Serie 60	43825-35-0	43295-40-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT	43825-35-0	43295-30-0		06461-12-0	0A310-13-0

Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
Bolts item 07088.-03.-0 (1 pc)
Automatic extension bolt closure restoring item 07089-52-0 (1 pc)
Manual extension bolt closure restoring item 06141-80-0 (1 pc)
Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "A" : WITHOUT EXTERNAL HANDLE (CYLINDER ONLY)

Profiles	Double leaf door					
Manufacturer	Series	Lock	Lock	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
MERCURI	MERCURY 500 TT	43725-35-0	43295-75-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43725-40-0	43295-75-0		06465-22-0	0A310-41-0
METRA	NC 50 I Linea base	43825-35-0	43295-40-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43825-35-0	43295-40-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43825-35-0	43295-30-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43825-35-0	43295-30-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43825-30-0	43295-60-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43825-40-0	43295-40-0		06461-34-0	0A310-07-0
	BASIC 65	43825-40-0	43295-40-0		06461-34-0	0A310-13-0
	TERMICH 65	43825-40-0	43295-40-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43825-40-0	43295-40-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43825-35-0	43295-40-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43825-35-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT	43725-40-0	43295-40-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43725-40-0	43295-60-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	PR 75 TT	43725-40-0	43295-75-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43725-35-0	43295-60-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EKU DOOR 74 TT Porta	43825-30-0	43295-40-0		06465-04-0	0A310-20-0
SAPA (ex Alcoa)	ALFIL 54 TT	43725-35-0	43295-60-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43725-35-0	43295-75-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43725-35-0	43295-75-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43725-40-0	43295-75-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43825-30-0	43295-60-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43825-30-0	43295-60-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43825-30-0	43295-40-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43825-35-0	43295-30-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43825-40-0	43295-30-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43825-40-0	43295-30-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43825-35-0	43295-30-0		06461-39-0	0A300-13-0
TO.MA	ATLANTIS 55 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43825-30-0	43295-60-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43725-35-0	43295-60-0		06465-22-0	0A310-33-0

Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
Bolts item 07088.-03.-0 (1 pc)
Automatic extension bolt closure restoring item 07089-52-0 (1 pc)
Manual extension bolt closure restoring item 06141-80-0 (1 pc)
Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles	Single leaf door					
Manufacturer	**Series**	**Lock**	**Striker**	**Profile guard**	**Striker for divertor (2 pcs)**	**Cylinder Fin. 12**
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43735-35-0	06463-14-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43735-30-0	06463-14-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43735-35-0	06463-32-0		06465-22-0	0A310-27-0
	EXPORT 51 TT Porta	43835-30-0	06463-14-0		06465-04-0	0A310-09-0
	EXPORT 68 TT Fin.	43735-35-0	06463-32-0		06465-22-0	0A310-41-0
	EXPORT 68 TT Porta	43835-30-0	06463-14-0		06465-04-0	0A310-17-0
	SICURBLIN 65	43835-30-0	06463-14-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT	43735-40-0	06463-32-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43735-40-0	06463-32-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43835-35-0	06463-14-0		06465-04-0	0A310-31-0
	PLANET 72 HT	43735-40-0	06463-32-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)	43735-40-0	06463-32-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)	43735-40-0	06463-32-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID	43835-35-0	06461-35-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43835-35-0	06461-35-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43835-35-0	06461-35-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43835-35-0	06461-35-0		06461-39-0	0A310-33-0
EKONAL	E 65	43735-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 65 con riporto	43735-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 75	43735-35-0	06461-30-0		06461-34-0	0A310-20-0
	E 75 con riporto	43735-35-0	06461-30-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50	43835-40-0	06461-07-0		06461-12-0	0A310-07-0
	THERM TUR	43835-40-0	06461-07-0		06461-12-0	0A310-18-0
	UNICO	43835-35-0	06461-17-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43835-40-0	06461-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43835-35-0	06461-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43735-40-0	06463-31-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43835-35-0	06461-35-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43835-35-0	06461-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta	43835-35-0	06461-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43735-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43735-35-0	06463-31-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43735-40-0	06463-31-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.	43735-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43835-30-0	06463-14-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43735-35-0	06463-32-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43835-30-0	06461-35-0		06461-39-0	0A310-17-0
	DOMAL TOP TB 65	43735-40-0	06463-32-0		06465-22-0	0A310-20-0
IND INVEST	GOLD 500	43735-35-0	06463-32-0		06465-22-0	0A310-27-0
	GOLD 500 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43735-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto	43735-30-0	06463-14-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43735-40-0	06463-32-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43735-35-0	06461-30-0		06461-34-0	0A310-18-0
JANSEN	Serie 50 ECONOMY	43835-35-0	06461-07-0		06461-12-0	0A310-07-0
	Serie 60	43835-35-0	06461-07-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT	43835-35-0	06461-07-0		06461-12-0	0A310-13-0
MERCURI	MERCURY 500 TT	43735-35-0	06463-32-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43735-40-0	06463-32-0		06465-22-0	0A310-41-0

Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)
Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.
External handle item 07070.-66-0-81 (1 pc)
Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles	Single leaf door					
Manufacturer	**Series**	**Lock**	**Striker**	**Profile guard**	**Striker for divertor (2 pcs)**	**Cylinder Fin. 12**
METRA	NC 50 I Linea base	43835-35-0	06461-35-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43835-35-0	06461-35-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43835-35-0	06461-35-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43835-35-0	06461-35-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43835-35-0	06461-35-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43835-30-0	06463-14-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43835-40-0	06461-30-0		06461-34-0	0A310-07-0
	BASIC 65	43835-40-0	06461-30-0		06461-34-0	0A310-13-0
	TERMICH 65	43835-40-0	06461-30-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43835-40-0	06461-07-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43835-35-0	06461-35-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43835-35-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT	43735-40-0	06463-32-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43735-40-0	06463-32-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43735-40-0	06463-31-0		06465-21-0	0A310-17-0
	PR 75 TT	43735-40-0	06463-31-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43835-30-0	06463-14-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43735-35-0	06463-32-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43735-40-0	06463-32-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU DOOR 74 TT Porta	43835-30-0	06463-14-0		06465-04-0	0A310-20-0
SAPA (ex Alcoa)	ALFIL 54 TT	43735-35-0	06461-30-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43735-35-0	06463-17-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43735-35-0	06463-31-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43735-40-0	06463-31-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43735-40-0	06463-31-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43835-30-0	06461-35-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43835-30-0	06461-35-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43835-30-0	06463-14-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43835-35-0	06461-30-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43835-35-0	06461-35-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43835-40-0	06461-35-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43835-40-0	06461-35-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43835-35-0	06461-35-0		06461-39-0	0A310-13-0
TO.MA	ATLANTIS 55 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43835-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43735-35-0	06463-32-0		06465-22-0	0A310-33-0

Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)
Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.
External handle item 07070.-66-0-81 (1 pc)
Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles	Double leaf door					
Manufacturer	Series	Lock	Lock	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43735-35-0	43295-40-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43735-30-0	43295-30-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43835-30-0	43295-40-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43735-35-0	43295-60-0		06465-22-0	0A300-27-0
	EXPORT 51 TT Porta	43835-30-0	43295-30-0		06465-04-0	0A300-09-0
	EXPORT 68 TT Fin.	43735-35-0	43295-60-0		06465-22-0	0A300-41-0
	EXPORT 68 TT Porta	43835-30-0	43295-30-0		06465-04-0	0A300-17-0
	SICURBLIN 65	43835-30-0	43295-40-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT	43735-40-0	43295-60-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43735-40-0	43295-60-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43835-35-0	43295-60-0		06465-04-0	0A310-31-0
	PLANET 72 HT	43735-40-0	43295-60-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)	43735-40-0	43295-60-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)	43735-40-0	43295-60-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID	43835-35-0	43295-40-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43835-35-0	43295-40-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43835-35-0	43295-40-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43835-35-0	43295-40-0		06461-39-0	0A310-33-0
EKONAL	E 65	43735-35-0	43295-40-0		06461-34-0	0A310-17-0
	E 65 con riporto	43735-35-0	43295-60-0		06461-34-0	0A310-17-0
	E 75	43735-35-0	43295-40-0		06461-34-0	0A310-20-0
	E 75 con riporto	43735-35-0	43295-60-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50	43835-40-0	43295-40-0		06461-12-0	0A310-07-0
	THERM TUR	43835-40-0	43295-40-0		06461-12-0	0A310-18-0
	UNICO	43835-35-0	43295-40-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43835-40-0	43295-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43835-35-0	43295-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43735-40-0	43295-75-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43835-35-0	43295-40-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43835-35-0	43295-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta	43835-35-0	43295-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta	43835-30-0	43295-30-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43735-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43735-35-0	43295-60-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43735-40-0	43295-75-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.	43735-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta	43835-30-0	43295-30-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43835-30-0	43295-40-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43835-30-0	43295-40-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43735-35-0	43295-40-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43835-30-0	43295-40-0		06461-39-0	0A310-17-0
	DOMAL TOP TB 65	43735-40-0	43295-60-0		06465-22-0	0A310-20-0
IND INVEST	GOLD 500	43735-35-0	43295-60-0		06465-22-0	0A310-27-0
	GOLD 500 Porta	43835-30-0	43295-30-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43735-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto	43735-30-0	43295-60-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43735-40-0	43295-75-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43735-35-0	43295-40-0		06461-34-0	0A310-18-0
JANSEN	Serie JANISOL 60 TT	43835-35-0	43295-30-0		06461-12-0	0A310-13-0
	Serie 50 ECONOMY	43835-35-0	43295-40-0		06461-12-0	0A310-07-0

Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
Bolts item 07088.-03.-0 (1 pc)
Automatic extension bolt closure restoring item 07089-52-0 (1 pc)
Manual extension bolt closure restoring item 06141-80-0 (1 pc)
External handle item 07070.-66-0-81 (1 pc)
Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "B" : WITH EXTERNAL HANDLE TO BE ENABLED WITH A KEY

Profiles	Double leaf door					
Manufacturer	Series	Lock	Lock	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
JANSEN	Serie 60	43835-35-0	43295-40-0		06461-12-0	0A310-13-0
MERCURI	MERCURY 500 TT	43735-35-0	43295-75-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43735-40-0	43295-75-0		06465-22-0	0A310-41-0
METRA	NC 50 I Linea base	43835-35-0	43295-40-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43835-35-0	43295-40-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43835-35-0	43295-40-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43835-35-0	43295-30-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43835-35-0	43295-30-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43835-30-0	43295-60-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43835-40-0	43295-40-0		06461-34-0	0A310-07-0
	BASIC 65	43835-40-0	43295-40-0		06461-34-0	0A310-13-0
	TERMICH 65	43835-40-0	43295-40-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43835-40-0	43295-40-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43835-35-0	43295-40-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43835-35-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43835-30-0	43295-40-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT	43735-40-0	43295-40-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43835-30-0	43295-40-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43735-40-0	43295-60-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43735-40-0	43295-75-0		06465-21-0	0A310-17-0
	PR 75 TT	43735-40-0	43295-75-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43835-30-0	43295-30-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43735-35-0	43295-60-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43735-40-0	43295-60-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EKU DOOR 74 TT Porta	43835-30-0	43295-40-0		06465-04-0	0A310-20-0
SAPA (ex Alcoa)	ALFIL 54 TT	43735-35-0	43295-60-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43735-35-0	43295-75-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43735-35-0	43295-75-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43735-40-0	43295-75-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43735-40-0	43295-75-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43835-30-0	43295-60-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43835-30-0	43295-60-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43835-30-0	43295-40-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)	43835-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43835-35-0	43295-40-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43835-35-0	43295-30-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43835-40-0	43295-30-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43835-40-0	43295-30-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43835-35-0	43295-30-0		06461-39-0	0A300-13-0
TO.MA	ATLANTIS 55 TT Porta	43835-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43835-30-0	43295-60-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43735-35-0	43295-60-0		06465-22-0	0A310-33-0

Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
Bolts item 07088.-03.-0 (1 pc)
Automatic extension bolt closure restoring item 07089-52-0 (1 pc)
Manual extension bolt closure restoring item 06141-80-0 (1 pc)
External handle item 07070.-66-0-81 (1 pc)
Square spindle, 8 mm item 07206.-00.-0 (2 pc)

FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

Profiles	Single leaf door					
Manufacturer	**Series**	**Lock**	**Striker**	**Profile guard**	**Striker for divertor (2 pcs)**	**Cylinder Fin. 12**
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43725-35-0	06463-14-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43725-30-0	06463-14-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43725-35-0	06463-32-0		06465-22-0	0A310-27-0
	EXPORT 51 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EXPORT 68 TT Fin.	43725-35-0	06463-32-0		06465-22-0	0A310-41-0
	EXPORT 68 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-17-0
	SICURBLIN 65	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT	43725-40-0	06463-32-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43825-35-0	06463-14-0		06465-04-0	0A310-31-0
	PLANET 72 HT	43725-40-0	06463-32-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)	43725-40-0	06463-32-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID	43825-35-0	06461-35-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43825-35-0	06461-35-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43825-35-0	06461-35-0		06461-39-0	0A310-33-0
EKONAL	E 65	43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 65 con riporto	43725-35-0	06461-30-0		06461-34-0	0A310-17-0
	E 75	43725-35-0	06461-30-0		06461-34-0	0A310-20-0
	E 75 con riporto	43725-35-0	06461-30-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50	43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	THERM TUR	43825-40-0	06461-07-0		06461-12-0	0A310-18-0
	UNICO	43825-35-0	06461-17-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43725-40-0	06463-31-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.	43725-35-0	06463-31-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43825-30-0	06461-35-0		06461-39-0	0A310-17-0
	DOMAL TOP TB 65	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
IND INVEST	GOLD 500	43725-35-0	06463-32-0		06465-22-0	0A310-27-0
	GOLD 500 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto	43725-30-0	06463-14-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43725-35-0	06461-30-0		06461-34-0	0A310-18-0
JANSEN	Serie 50 ECONOMY	43825-35-0	06461-07-0		06461-12-0	0A310-07-0
	Serie 60	43825-35-0	06461-07-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT	43825-35-0	06461-07-0		06461-12-0	0A310-13-0
MERCURI	MERCURY 500 TT	43725-35-0	06463-32-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0

Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)
Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.
External handle item 07070.-66-0-81 (1 pc)
Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

Profiles	Single leaf door					
Manufacturer	Series	Lock	Striker	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
METRA	NC 50 I Linea base	43825-35-0	06461-35-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43825-35-0	06461-35-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43825-35-0	06461-35-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43825-35-0	06461-35-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43825-35-0	06461-35-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43825-30-0	06463-14-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43825-40-0	06461-30-0		06461-34-0	0A310-07-0
	BASIC 65	43825-40-0	06461-30-0		06461-34-0	0A310-13-0
	TERMICH 65	43825-40-0	06461-30-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43825-40-0	06461-07-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43825-35-0	06461-35-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43825-35-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT	43725-40-0	06463-32-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43725-40-0	06463-32-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	PR 75 TT	43725-40-0	06463-31-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43825-30-0	06463-14-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43725-35-0	06463-32-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43725-40-0	06463-32-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	EKU DOOR 74 TT Porta	43825-30-0	06463-14-0		06465-04-0	0A310-20-0
SAPA (ex Alcoa)	ALFIL 54 TT	43725-35-0	06461-30-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43725-35-0	06463-17-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43725-35-0	06463-31-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43725-40-0	06463-31-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43725-40-0	06463-31-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43825-30-0	06461-35-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43825-30-0	06461-35-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43825-30-0	06463-14-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43825-35-0	06461-30-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43825-35-0	06461-35-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43825-40-0	06461-35-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43825-40-0	06461-35-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43825-35-0	06461-35-0		06461-39-0	0A310-13-0
TO.MA	ATLANTIS 55 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43825-30-0	06463-14-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43725-35-0	06463-32-0		06465-22-0	0A310-33-0

Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (1 pc)
Panic exit devices FAST Push item 59607-10-0 (1 pc) + Horizontal bar item 07007-XX-0 (1 pc), refer to special panic exit device section.
External handle item 07070.-66-0-81 (1 pc)
Square spindle, 8 mm item 07206.-00.-0 (1 pc)

FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

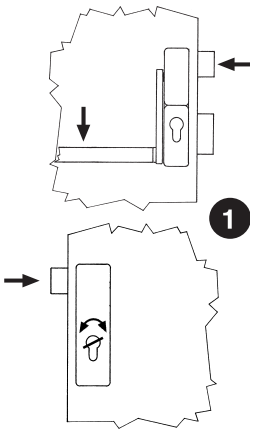
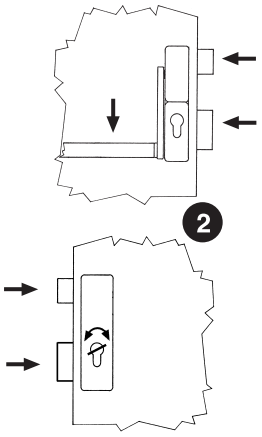
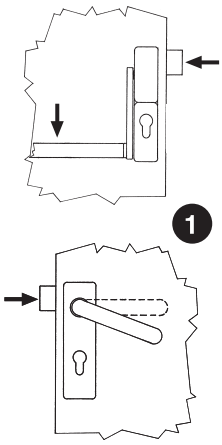
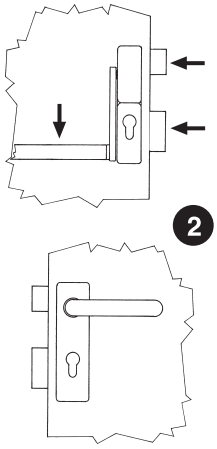
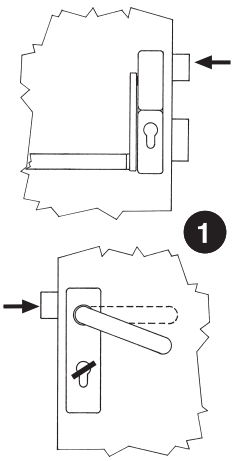
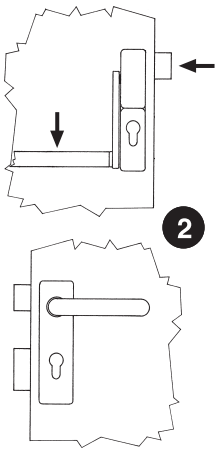
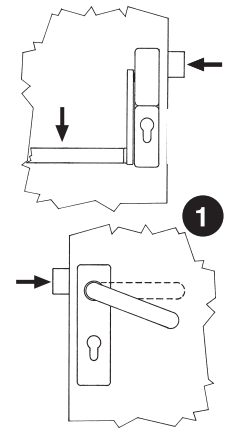
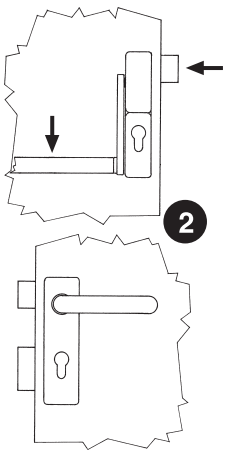
Profiles	Double leaf door					
Manufacturer	**Series**	**Lock**	**Lock**	**Profile guard**	**Striker for divertor (2 pcs)**	**Cylinder Fin. 12**
AGNELLI/ALEXIA	ESEDRA Doors shops 56	43725-35-0	43295-40-0		06465-04-0	0A310-10-0
	ESEDRA Doors shops 56 TT	43725-30-0	43295-30-0		06465-04-0	0A310-10-0
ALL.CO	ALL.CO 5 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-05-0
	ALL.CO 5 T Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EXPORT 51 TT Fin.	43725-35-0	43295-60-0		06465-22-0	0A300-27-0
	EXPORT 51 TT Porta	43825-30-0	43295-30-0		06465-04-0	0A300-09-0
	EXPORT 68 TT Fin.	43725-35-0	43295-60-0		06465-22-0	0A300-41-0
	EXPORT 68 TT Porta	43825-30-0	43295-30-0		06465-04-0	0A300-17-0
	SICURBLIN 65	43825-30-0	43295-40-0		06465-04-0	0A310-13-0
AL-SISTEM	PLANET 50 TT	43725-40-0	43295-60-0		06465-22-0	0A310-27-0
	PLANET 62 TT	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	PLANET ELITE DOOR TT	43825-35-0	43295-60-0		06465-04-0	0A310-31-0
	PLANET 72 HT	43725-40-0	43295-60-0		06465-22-0	0A310-24-0
ALLUSISTEMI	CX 600 (camera europea)	43725-40-0	43295-60-0		06465-22-0	0A310-33-0
	CX 700 (camera europea)	43725-40-0	43295-60-0		06465-22-0	0A310-41-0
ALU-K	ALU-K 56 ID	43825-35-0	43295-40-0		06461-39-0	0A310-12-0
	ALU-K 63 ID	43825-35-0	43295-40-0		06461-39-0	0A310-27-0
	ALU-K 67 ID	43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	ALU-K 70 ID	43825-35-0	43295-40-0		06461-39-0	0A310-33-0
EKONAL	E 65	43725-35-0	43295-40-0		06461-34-0	0A310-17-0
	E 65 con riporto	43725-35-0	43295-60-0		06461-34-0	0A310-17-0
	E 75	43725-35-0	43295-40-0		06461-34-0	0A310-20-0
	E 75 con riporto	43725-35-0	43295-60-0		06461-34-0	0A310-20-0
FORSTER	PRESTO 50	43825-40-0	43295-40-0		06461-12-0	0A310-07-0
	THERM TUR	43825-40-0	43295-40-0		06461-12-0	0A310-18-0
	UNICO	43825-35-0	43295-40-0		06461-22-0	0A310-18-0
GASTALDELLO	EUROLINE 50 N Porta	43825-40-0	43295-30-0		06461-34-0	0A310-07-0
	EUROLINE 60 TT Porta	43825-35-0	43295-30-0		06461-34-0	0A310-11-0
	EUROLINE NT 65 TT Sorm.	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	EUROLINE EL 65 TT Porta	43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	EUROLINE 72 TT Porta	43825-35-0	43295-30-0		06461-34-0	0A310-33-0
	EUROLINE NS72 TT Porta	43825-35-0	43295-30-0		06461-34-0	0A310-33-0
GASTAL/PONZIO	NEW-TEC 50 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-06-0
	NEW-TEC 52 TT Sorm.	43725-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 52 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	NEW-TEC 60 TT Sorm.	43725-35-0	43295-60-0		06465-21-0	0A310-11-0
	NEW-TEC 60 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	NEW-TEC 65 TT Sorm.	43725-40-0	43295-75-0		06465-21-0	0A310-13-0
	NEW-TEC 65 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	NEW-TEC 68 TT Sorm.	43725-35-0	43295-60-0		06465-21-0	0A310-17-0
	NEW-TEC 68 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
HYDRO ALLUMINIO	DOMAL STOPPER PG 52 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	DOMAL STOPPER PG 63 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-12-0
	DOMAL BREAK PA 52 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-09-0
	DOMAL BREAK PA 63 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	DOMAL BREAK PA 70S Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	DOMAL SHOPS	43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	DOMAL EXTRATHERMIC 62	43725-35-0	43295-40-0		06465-22-0	0A310-17-0
	DOMAL BRIGHT PA 70 S Porta	43825-30-0	43295-40-0		06461-39-0	0A310-17-0
	DOMAL TOP TB 65	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
IND INVEST	GOLD 500	43725-35-0	43295-60-0		06465-22-0	0A310-27-0
	GOLD 500 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-26-0
	GOLD 600 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-27-0
	GOLD 600 HCE fin.	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	GOLD 600 HC Porta con riporto	43725-30-0	43295-60-0		06465-04-0	0A310-27-0
	PLATHINA 69 TT	43725-40-0	43295-75-0		06465-22-0	0A310-41-0
	PLATHINA 69 TT PORTA	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	VIP DOOR 69 TT	43725-35-0	43295-40-0		06461-34-0	0A310-18-0
JANSEN	Serie 50 ECONOMY	43825-35-0	43295-40-0		06461-12-0	0A310-07-0
	Serie 60	43825-35-0	43295-40-0		06461-12-0	0A310-13-0
	Serie JANISOL 60 TT	43825-35-0	43295-30-0		06461-12-0	0A310-13-0

Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
Bolts item 07088.-03.-0 (1 pc)
Automatic extension bolt closure restoring item 07089-52-0 (1 pc)
Manual extension bolt closure restoring item 06141-80-0 (1 pc)
External handle item 07070.-66-0-81 (1 pc)
Square spindle, 8 mm item 07206.-00.-0 (2 pc)

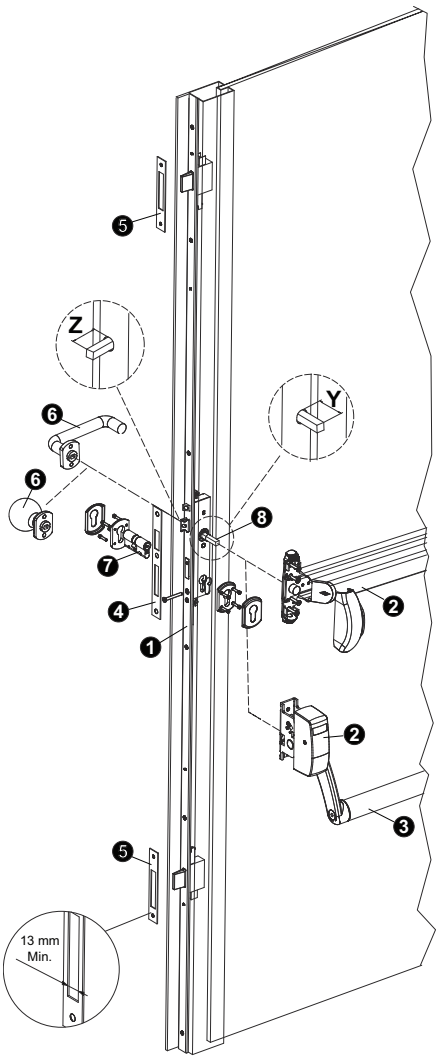
FUNCTION "D" : WITH PERMANENTLY ACTIVE EXTERNAL HANDLE

Profiles	Double leaf door					
Manufacturer	Series	Lock	Lock	Profile guard	Striker for divertor (2 pcs)	Cylinder Fin. 12
MERCURI	MERCURY 500 TT	43725-35-0	43295-75-0		06465-22-0	0A310-11-0
	MERCURY 700 TT	43725-40-0	43295-75-0		06465-22-0	0A310-41-0
METRA	NC 50 I Linea base	43825-35-0	43295-40-0		06461-39-0	0A310-07-0
	NC 50 STH Porta	43825-35-0	43295-40-0		06461-39-0	0A310-06-0
	NC 65 STH. Porta - 65 mm.	43825-35-0	43295-40-0		06461-39-0	0A310-17-0
	NC 68 STH Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	NC 72 STH. Porta - 72 mm.	43825-35-0	43295-30-0		06461-39-0	0A310-33-0
	AELLE 80 STH	43825-35-0	43295-30-0		06461-39-0	0A310-30-0
	SUPERBLINDO	43825-30-0	43295-60-0		06465-04-0	0A310-20-0
MOGS	BASIC 50	43825-40-0	43295-40-0		06461-34-0	0A310-07-0
	BASIC 65	43825-40-0	43295-40-0		06461-34-0	0A310-13-0
	TERMICH 65	43825-40-0	43295-40-0		06461-34-0	0A310-13-0
PALLADIO PASSERINI	Serie 50	43825-40-0	43295-40-0		06461-12-0	0A310-07-0
	EKIP TH 73 Porta (aria 16)	43825-35-0	43295-40-0		06461-39-0	0A310-20-0
	EKIP TH 73 Porta (aria 22)	43825-35-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
	EKIP MAAS. 53 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-09-0
	EKIP MAAS.TH 60 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-27-0
	EKIP MAAS.TH 68 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
	EKIP MAAS.STH 76 Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-20-0
PONZIO	WINDSTOP 55 TT	43725-40-0	43295-40-0		06465-22-0	0A310-17-0
	WINDSTOP 55 TT PORTA	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-12-0
	WINDSTOP 60 Porta	43825-30-0	43295-40-0		06465-04-0	0A310-13-0
	WINDSTOP 65 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
	WINDSTOP 73 TT	43725-40-0	43295-60-0		06465-22-0	0A310-41-0
	WINDSTOP 73 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-33-0
PREDIERI	PR 58 Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	PR 66 TT	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	PR 75 TT	43725-40-0	43295-75-0		06465-21-0	0A310-20-0
PROFILATI	EKU 53 Porta	43825-30-0	43295-30-0		06465-04-0	0A310-05-0
	EKU 53 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-08-0
	EKU 64 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-11-0
	EKU 72 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-17-0
	EKU 52 TT Fin. (ex EKU 60 TT)	43725-35-0	43295-60-0		06465-22-0	0A310-17-0
	EKU 66 TT (ex EKU 80 TT)	43725-40-0	43295-60-0		06465-22-0	0A310-20-0
	EKU DOOR 60 TT Porta	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	EKU DOOR 74 TT Porta	43825-30-0	43295-40-0		06465-04-0	0A310-20-0
SAPA (ex Alcoa)	ALFIL 54 TT	43725-35-0	43295-60-0	06141-79-0	06461-34-0	0A310-17-0
	R 50	43725-35-0	43295-75-0		06465-07-0	0A310-07-0
	R 50 T.T. Barra Continua	43725-35-0	43295-75-0		06465-21-0	0A310-06-0
	R 62 T.T. Sormonto	43725-40-0	43295-75-0		06465-21-0	0A310-12-0
	R 72 T.T. Sormonto	43725-40-0	43295-75-0		06465-21-0	0A310-17-0
	R 62 TT PORTA	43825-30-0	43295-60-0		06461-39-0	0A310-19-0
	R 72 TT PORTA	43825-30-0	43295-60-0		06461-39-0	0A310-32-0
	Tekno WIN 62 Porta (ex F50)	43825-30-0	43295-40-0		06465-04-0	0A310-11-0
	Tekno WIN 62 TT Porta (ex F50 TT)	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-11-0
	Tekno WIN 70 TT Porta (ex F60 TT)	43825-30-0	43295-40-0	06141-79-0	06465-04-0	0A310-17-0
SCHUCO	ADS 50 (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-06-0
	ADS 60 (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-11-0
	ADS 65 - 65 HD (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-17-0
	ADS 70 HD - 70 HI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-33-0
	ADS 75 HD/HI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-20-0
	ADS 75 SI (fuga 11)	43825-35-0	43295-40-0		06461-34-0	0A310-20-0
SECCO	SISTEMA ACCIAIO ELEG.C 55	43825-35-0	43295-30-0		06461-39-0	0A310-10-0
	SECCO - EBE 65 TT	43825-40-0	43295-30-0		06461-39-0	0A310-18-0
	SECCO - EBE 85 TT	43825-40-0	43295-30-0		06461-39-0	0A310-32-0
	SECCO SECURITY SYSTEM 20/10	43825-35-0	43295-30-0		06461-39-0	0A300-13-0
TO.MA	ATLANTIS 55 TT Porta	43825-30-0	43295-30-0	06141-79-0	06465-04-0	0A310-06-0
	ATLANTIS 68 TT Porta	43825-30-0	43295-60-0	06141-79-0	06465-04-0	0A310-33-0
	ATLANTIS WOOD 72 TT Porta	43725-35-0	43295-60-0		06465-22-0	0A310-33-0

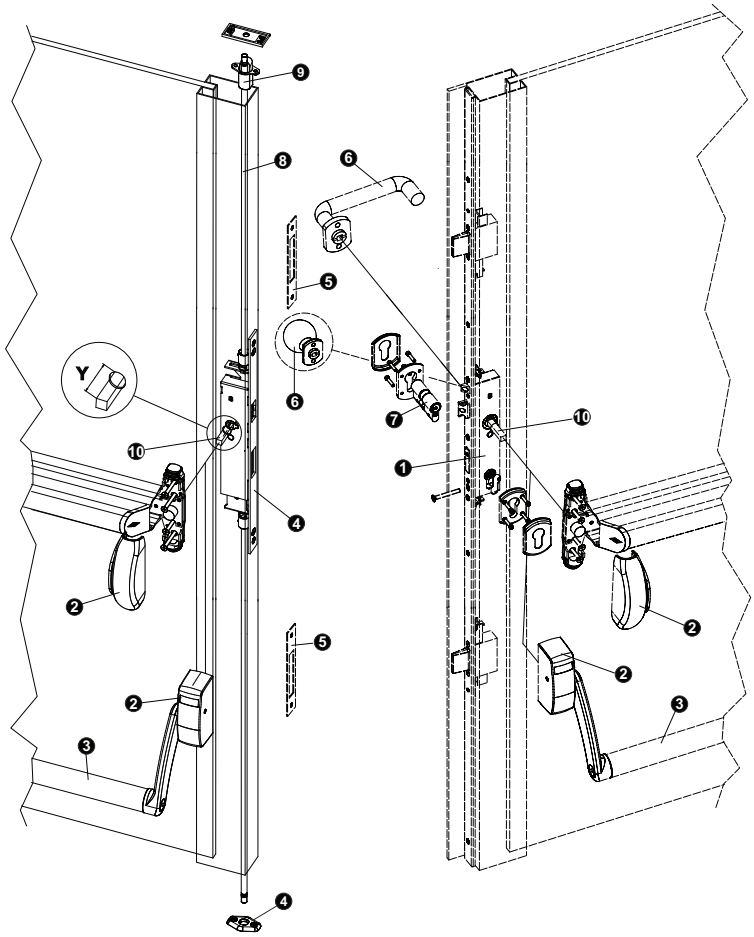
Shared components:
Panic exit devices FAST Touch item 59711-00/01-0 (2 pc)
Panic exit devices FAST Push item 59607-10-0 (2 pc) + Horizontal bar item 07007-XX-0 (2 pc), refer to special panic exit device section.
Bolts item 07088.-03.-0 (1 pc)
Automatic extension bolt closure restoring item 07089-52-0 (1 pc)
Manual extension bolt closure restoring item 06141-80-0 (1 pc)
External handle item 07070.-66-0-81 (1 pc)
Square spindle, 8 mm item 07206.-00.-0 (2 pc)

TYPE	CONTROLS	OPERATION	
A **OUTSIDE ENTRANCE BY KEY** For doors which have to be opened with the key from the outside by authorised personnel only	**INSIDE** - Panic exit device to open. - Key to close with deadbolt. **OUTSIDE** - The key operates latch and deadbolt.	 1 Outside entrance by key only.  2	Locking with the deadbolt, outside entrance is possible only with the use of the key.
B **OUTSIDE HANDLE ACTIVATED OR DISACTIVATED** For doors that open outwards and places where it is necessary to provide free entrance.	**INSIDE** - Panic exit device to open. - Key to close with deadbolt and activate or disactivate the outside handle. **OUTSIDE** - The key operates the deadbolt and activates or disactivates the outside handle for latch operation.	 1 The outside handle is activated by rotating the key in the lock-opening direction as far as it will go (the handle remains activated when the key is removed).  2	Closing with the deadbolt disactivates the outside handle; the latter remains disactivated even after the door has been opened with the panic exit device.
C **OUTSIDE HANDLE AUTOMATICALLY DISACTIVATED** For doors that must be opened from the outside only by authorised persons.	**INSIDE** - Panic exit device to open. - Key to close with deadbolt. **OUTSIDE** - The key operates the throw and activates the handle.	 1 The outside handle is activated by rotating the key in the lock-opening direction as far as it will go, after first withdrawing the deadbolt.  2	Removing the key automatically disactivates the outside handle.
D **OUTSIDE HANDLE ALWAYS ACTIVATED** For doors that partition throughways (e.g. corridors).	**INSIDE** - Panic exit device to open. - Key to close with deadbolt. **OUTSIDE** - The key operates the deadbolt. The handle, with the deadbolt withdrawn, engages for latch operation.	 1 The outside handle is always activated when the deadbolt is withdrawn.  2	Entry is after using the panic exit device, always possible from the outside as long as the deadbolt is not activated by the key.

Single leaf door



Double leaf door



Single leaf door

❶		❷ EN1125	❸	❹	❺	❻	❼	❽
43725-XX-0 43825-XX-0	A	59607-10-0	07007-XX-0	06463-14-0 06463-16-0	06465-04-0 06465-06-0	07070-56-0-B1	CISA	07206-00-0
43735-XX-0 43835-XX-0	B			06463-17-0 06463-31-0	06465-07-0 06465-21-0	07070-66-0-B1		
43725-XX-0 43825-XX-0	D			06463-32-0 06463-33-0	06465-22-0 06465-23-0	07070-66-0-B1		
43725-XX-0 43825-XX-0	A	59711-00-0 59711-01-0		06463-34-0 06463-35-0	06465-24-0 06465-25-0	07070-56-0-B1		
43735-XX-0 43835-XX-0	B			06461-07-0 06461-17-0	06461-12-0 06461-22-0	07070-66-0-B1		
43725-XX-0 43825-XX-0	D			06461-30-0 06461-35-0	06461-34-0 06461-39-0	07070-66-0-B1	DIN	

Double leaf door

❶		❷ EN1125	❸	❹	❺	❻	❼	❽	❾	❿
43725-XX-0 43825-XX-0	A	59607-10-0	07007-XX-0	43295-XX-0	06465-04-0 06465-06-0	07070-56-0-B1	CISA	07088-03-0	07089-52-0 06141-80-0	07206-00-0
43735-XX-0 43835-XX-0	B				06465-07-0 06465-21-0	07070-66-0-B1				
43725-XX-0 43825-XX-0	D				06465-22-0 06465-23-0	07070-66-0-B1				
43725-XX-0 43825-XX-0	A	59711-00-0 59711-01-0			06465-24-0 06465-25-0	07070-56-0-B1				
43735-XX-0 43835-XX-0	B				06461-12-0 06461-22-0	07070-66-0-B1				
43725-XX-0 43825-XX-0	D				06461-34-0 06461-39-0	07070-66-0-B1	DIN			

The Sikurexit system certification is only valid if the components contained in this itemized list are installed (certified system) - applicable standards EN1125 and EN179.

The system certification will no longer be valid if even just one unlisted component is installed:
- Only for the external drives and square spindle: the standard EN1125 is not binding in terms of listed component installation.
- Only for the square spindle: standard EN179 is not binding in terms of listed component installation.



SikurExit

Technical features:
- Steel case with zinc coating
- Top/bottom-adjustable stainless steel faceplate
- Adjustable nickel-plated anti-picking latchbolt and bolt
- Nickel-plated deadbolt
- Square spindle, 8 mm
- DIN holes for handle plate installation

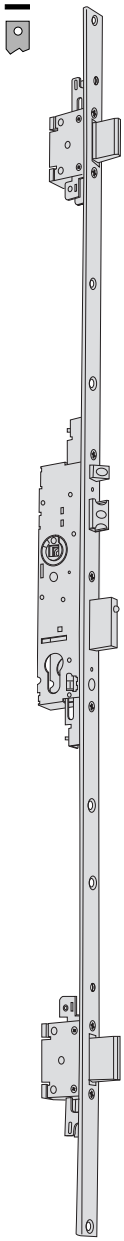
On request:
- European profile cylinder
- Adjustable metal striker
- Cylinder protective rose item 1.06460-05-0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-00/01
- For emergency exit (UNI EN 179)
- Handle item 1.07070.66.0.B1
- Safety lock series 43295 for double leaf doors
- Electric handle item 1.07074-71-0 (A function only)
- Rose item 1.06473-20/30-0-B1
- Square spindle, 8 mm item 1.07206-00.-0 (L=100 mm)
- Electric strikers series 15100, 15200

Standards:
- UNI EN 179
- UNI EN 1129
- pr EN 15685:14
- Suitable for doors certified to EN 1627:2011 up to WK/RC 4 resistance class
- EN 12209:16 (1 locking point)
- prEN15685:14 (3 locking point)

Hand:
0 = Non-handed

Cylinder to be ordered separately





- FOR 1- AND 2-LEAF DOORS
- Stainless steel adjustable flat faceplate, 24x3 mm - height 2,300 mm
  - top adjustment 350 mm
  - bottom adjustment 150 mm
- Adjustable latch bolt (11 to 17 mm) with antipicking system
- 3 lateral deadbolts
- Hold-open device in the version 43725
- Pair of nylon roses item 1.06012-01-0
- Lock, rose and cylinder fixing screws
- Plug for closing the deadbolt hole on 1-leaf door
- Instruction sheet
- 3 certificates

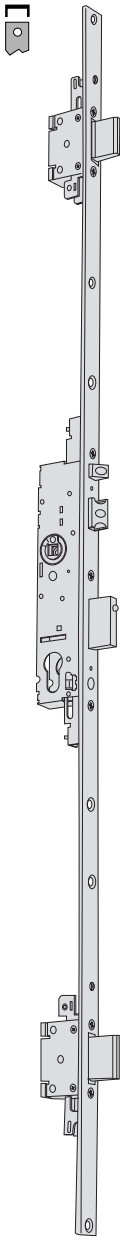
- FUNCTION TYPE A
- Inside:
  Panic exit device to open
  Key to close with the deadbolt
- Outside:
  Key to operate the latch and the deadbolt

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
		8	3	2	92	24	30	3,440	1	1	43725	30	0	
		8	3	2	92	24	35	3,440	1	1	43725	35	0	
		8	3	2	92	24	40	3,440	1	1	43725	40	0	
		8	3	2	92	24	45	3,440	1	1	43725	45	0	

- FUNCTION TYPE D
- Inside:
  Panic exit device to open
  key to close with the deadbolt
- Outside:
  - Key to close with the deadbolt
  -The handle can operate the latch bolt, with the deadbolt withdrawn

- FUNCTION TYPE B
- Inside:
  Panic exit device to open
  Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt
- Outside:
  Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
		8	3	2	92	24	30	3,440	1	1	43735	30	0	
		8	3	2	92	24	35	3,440	1	1	43735	35	0	
		8	3	2	92	24	40	3,440	1	1	43735	40	0	
		8	3	2	92	24	45	3,440	1	1	43735	45	0	



- FOR 1- AND 2-LEAF DOORS
- Stainless steel adjustable flat faceplate, 24x5 mm - height 2,300 mm
  - top adjustment 350 mm
  - bottom adjustment 150 mm
- Adjustable latch bolt (11 to 17 mm) with antipicking system
- 3 lateral deadbolts
- Hold-open device in the version 43825
- Pair of nylon roses item 1.06012-01-0
- Lock, rose and cylinder fixing screws
- Plug for closing the deadbolt hole on 1-leaf door
- Instruction sheet
- 3 certificates

- FUNCTION TYPE A
- Inside:
  Panic exit device to open
  Key to close with the deadbolt
- Outside:
  Key to operate the latch and the deadbolt

FUNCTION TYPE D
- Inside:
  Panic exit device to open
  key to close with the deadbolt
- Outside:
  - Key to close with the deadbolt
  -The handle can operate the latch bolt, with the deadbolt withdrawn

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		8	3	2	92	24	30	3,440	1	1	43825	30	0		
		8	3	2	92	24	35	3,440	1	1	43825	35	0		
		8	3	2	92	24	40	3,440	1	1	43825	40	0		
		8	3	2	92	24	45	3,440	1	1	43825	45	0		


- FUNCTION TYPE B
- Inside:
  Panic exit device to open
  Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt
- Outside:
  Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt

		8	3	2	92	24	30	3,440	1	1	43835	30	0		
		8	3	2	92	24	35	3,440	1	1	43835	35	0		
		8	3	2	92	24	40	3,440	1	1	43835	40	0		
		8	3	2	92	24	45	3,440	1	1	43835	45	0		



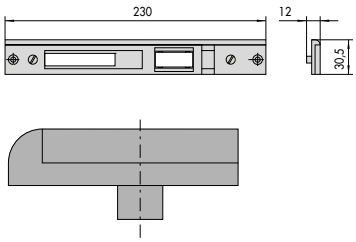
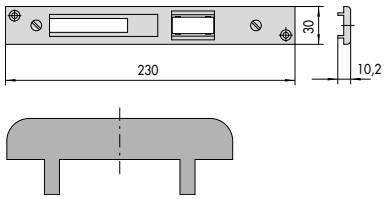
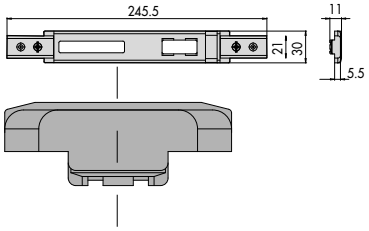

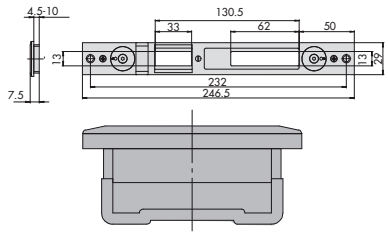
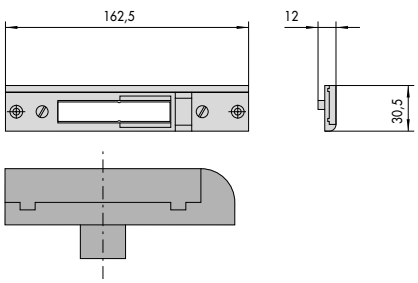
- FOR 1- AND 2-LEAF DOORS
- Stainless steel flat faceplate 24x3 mm
- Adjustable latch bolt (11 to 17 mm) with antipicking system
- 1 lateral deadbolts
- Pair of nylon roses item 1.06012-01-0
- 8 mm nylon spacers (2 3 mm pcs and 1 2 mm pc)
- Fixing screws for lock, roses and cylinder
- Plug for closing the deadbolt hole on 1-leaf door
- Instruction sheet
- 3 certificates

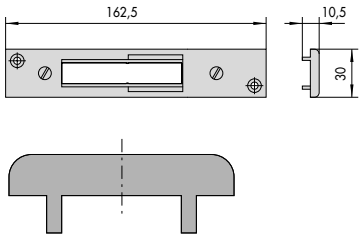


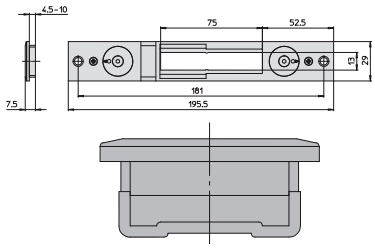
Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• FUNCTION TYPE A • Inside: Panic exit device to open Key to close with the deadbolt • Outside: Key to operate the latch and the deadbolt	8	1	2	92	24	30	0,770	1	1	43225	30	0		
		8	1	2	92	24	35	0,800	1	1	43225	35	0		
		8	1	2	92	24	40	0,830	1	1	43225	40	0		
		8	1	2	92	24	45	0,860	1	1	43225	45	0		
	FUNCTION TYPE D • Inside: Panic exit device to open key to close with the deadbolt • Outside: - Key to close with the deadbolt -The handle can operate the latch bolt, with the deadbolt withdrawn														
	• FUNCTION TYPE B • Inside: Panic exit device to open Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt • Outside: Key to close with the deadbolt and enable/disable the outside handle to operate the latch bolt	8	1	2	92	24	30	0,770	1	1	43235	30	0		
		8	1	2	92	24	35	0,800	1	1	43235	35	0		
		8	1	2	92	24	40	0,830	1	1	43235	40	0		
		8	1	2	92	24	45	0,860	1	1	43235	45	0		
	• FUNCTION TYPE C • 30/40/45 backsets are replaced by series 43661 • Inside: Panic exit device to open Key to close with the deadbolt and enable/disable the outside handle to operate the latch • Outside: - Key to close with the deadbolt and enable/disable the outside handle to operate the latch - The handle is always enabled while the key is in the hole, the handle is disabled when the key is removed	8	1	2	92	24	35	0,800	1	1	43236	35	0		



- SECONDARY DOOR SAFETY LOCK FOR USE WITH PANIC FUNCTION MULTIPOINT LOCKS
- A lock series 43725/43735/43835/43225/43235/43236 is installed on the primary door
- Stainless steel faceplate 24x3
- Extension bolt connector adjustable by 20 mm in the horizontal direction
- Deadbolt feeler pin adjustable by 5.5 mm
- Automatic or manual extension bolt closing
- No. 1 5 mm nylon spacer for profiles type "R" and no. 2 3mm nylon spacers for "DOOR" type profiles
- Teflon-coated floor striker item 1.06142.85.0
- Safety lock fixing screws
- Instruction sheet
- FUNCTIONS
- Inside:
  - With panic exit device
- Outside:
  - No operation
- ON REQUEST:
  - Threaded internal extension bolts item 1.07088-03-0
- Fast Push panic exit devices series 59607 + bar series 07007 or Fast Touch panic exit devices item 1.59711.00/01-0
- Automatic device for extension bolt closure restoring item 1.07089.52-0 complete with spacers item 1.06141-81-0 (1 2 mm spacer and 1 2.5 mm spacer) and with top nylon striker item 1.06141-80-0
- Square spindle 8 mm item 1.7206.00.0 (L=100 mm)
- Kit of spacers for safety lock item 1.06141-88-0

Type	Description	Spindle hole	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
		8	2		92	24	30	0,875	1	**1 43295**	**30**	**0**		
		8	2		92	24	40	0,940	1	**1 43295**	**40**	**0**		
		8	2		92	24	60	1,100	1	**1 43295**	**60**	**0**		
		8	2		92	24	75	1,100	1	**1 43295**	**75**	**0**		

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0		0,180	12	1 06463 16 0
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0		0,170	12	1 06463 17 0
	• Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. • ON REQUEST: nickel-plated (fin. 12)		0,230	12	1 06463 31 0
	• REPLACES ITEM 1.06463.18.0 • Lateral adjustment 4 mm • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0		0,145	12	1 06463 32 0
	• IDEM • Central part in stainless steel		0,141	12	1 06463 33 0
	• REPLACING ITEM 1.06463.14.0 • Lateral adjustment 2.5 mm • 4.5 to 10 mm adjustable thickness. • For roller locks, use nylon insert item 1.06141.70.0	19000, 49000, 43200, 43700, 43800	0,158	12	1 06463 34 0
	• IDEM • Central part in stainless steel		0,141	12	1 06463 35 0
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0		0,122	12	1 06465 06 0

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Lateral adjustment 2,5 mm • For roller locks use nylon insert item 1.06141.70.0		0,117	12	**1 06465 07 0**
	• Lateral adjustment 8 mm • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R40, R50TT, NEW TEC 52 SOR TT, etc. • ON REQUEST: nickel-plated (fin. 12)		0,140	12	**1 06465 21 0**
	• REPLACES ITEM 1.06465.02.0 • Lateral adjustment 4 mm • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0		0,112	12	**1 06465 22 0**
	• IDEM • Central part in stainless steel		0,112	12	**1 06465 23 0**
	• REPLACING ITEM 1.06463.04.0 • Lateral adjustment 2.5 mm • 4.5 to 10 mm adjustable thickness. • For roller locks, use nylon insert item 1.06141.70.0	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 19000, 43700, 43800, 46200, 46210, 46220, 46420, 46520, 49000, 17300, 56300, 57300, 43700, 43800	0,125	12	**1 06465 24 0**
	• AS ABOVE • Stainless steel		0,112	12	**1 06465 25 0**



Technical features:
- Steel case with zinc coating
- Stainless steel faceplate
- Latchbolt, nickel-plated steel
- Reversible latch/bolt
- Square spindle, 8 mm
- CE 12V AC voltage
- Absorbed current 3.1 A


Supplied as standard:
- Set of faceplate spacers item 1.06141.65.0
- Fixing screws lock and cylinder
- Instruction sheet

On request:
- Special striker plates (see Vademecum)
- Cylinder protective rose item 1.06460.00.0
- Mechanical control button item 1.06110.15.0
- Safety lock series 43295 for double leaf doors

Standards:
- UNI EN 179
- UNI EN 1125
- EN 12209:16 and EN 14846:08

Hand:
0 = Non-handed

Cylinder to be ordered separately
0E300 (ASIX) series

Type	Description	Fin.	Spindle hole	Locking points	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• For panic doors • 10.5 to 16.5 mm adjustable latch and deadbolt • Pair of nylon roses item 1.06012.01.0 • Use with panic exit devices in compliance with EN 1125: - 59607.10.0 - 59711.00/01.0 • Use with handle in compliance with EN 179: - 07070.66.0.B1	-				85	22	25	0,764	1	1	16605	25	0	
		-				85	22	30	0,788	1	1	16605	30	0	
		-				85	22	35	0,833	1	1	16605	35	0	



Exitlock

Technical features:
- Steel case and cover.
- Nickel-plated steel deadbolts.
- Nickel-plated steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:
- Striker plate series 06220.

On request:
- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric strikerst series 15300

- For additional locking points Divertor item series 06433.00/01/11 Pair of bolts item 06425.06.0 Striker plates item 06220.28/29.0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-10/11
- For emergency exits (UNI EN 179) Handle item 1.07070.50.0 Pair of handles item 1.07070.60.0


Finishes:
- Zinc aluminum.

Standards:
- UNI EN 179
- UNI EN 1125
- UNI EN 12209

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	DEAD-BOLTS No.	Projection	Centre Distance	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Deadbolt and latch • pre-set for additional locking points • FUNCTION TYPE A • Inside: The panic exit device and/or the handle to open The key to close with the deadbolt • Outside: The key to close with the deadbolt.	4	3,5	27	2	85	64	2,650	1	1	56917	27	0			
		4	3,5	28	2	85	64	2,650	1	1	56917	28	0			
		3	3,5	38	2	85	64	2,650	1	1	56917	38	0			
		4	3,5	27	2	85	64	2,550	5	1	56917	47	0			
		4	3,5	28	2	85	64	2,550	5	1	56917	48	0			
		3	3,5	38	2	85	64	2,550	5	1	56917	58	0			
	• FUNCTION TYPE D • Inside: The panic exit device and/or the handle to open The key to close with the deadbolt • Outside: The key to close with the deadbolt. When the deadbolt is withdrawn, the handle is activated and can operate the latch															
	• FUNCTION TYPE B • Inside: Panic exit device and/or handle to open Key to close with deadbolt and enable or disable the outside handle when latch is operated • Outside: Key to close with deadbolt and enable or disable the outside handle when latch is operated	4	3,5	27	2	85	64	2,650	1	1	56916	27	0			
		4	3,5	28	2	85	64	2,650	1	1	56916	28	0			
		3	3,5	38	2	85	64	2,650	1	1	56916	38	0			
		4	3,5	27	2	85	64	2,550	5	1	56916	47	0			
		4	3,5	28	2	85	64	2,550	5	1	56916	48	0			
		3	3,5	38	2	85	64	2,550	5	1	56916	58	0			



Exitlock

Technical features:
- Steel case and cover.
- Nickel-plated steel faceplate
- Nickel-plated steel deadbolts.
- Nickel-plated steel non-handed latch.
- Anti-crush plates for screw fixing.
- Steel active pins.
- 1 pc or 5 pcs packages (industrial packaging)

Supplied as standard:
- Striker plate series 06220.

On request:
- Cylinder protective roses series 06460; 06480; 06485.
- Inside escutcheons series 06473.
- Electric strikerst series 15300
- For additional locking points
  Divertor item series 06433.00/01/11
  Pair of bolts item 06425.06.0
  Striker plates item 06221.28/29.0
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-10/11
- For emergency exits (UNI EN 179) Handle item 1.07070.50.0
  Pair of handles item 1.07070.60.0


Finishes:
- Zinc aluminum.

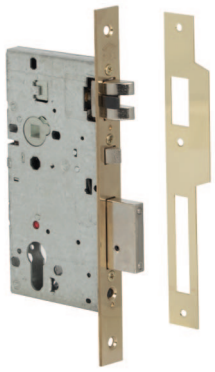
Standards:
- UNI EN 179
- UNI EN 1125
- UNI EN 12209

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	DEADBOLTS No.	Projection	Centredistance	Throws	Centre Distance	Faceplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt and latch • Pre-setting for additional locking points • FUNCTION TYPE A • Inside: The panic exit device and/or the handle to open The key to close with the deadbolt • Outside: The key to close with the deadbolt.	4	28	2	85	35	67	2,800	1	1	**56937**	**28**	**0**		
		4	28	2	85	35	67	2,650	5	1	**56937**	**48**	**0**		
	• FUNCTION TYPE D • Inside: The panic exit device and/or the handle to open The key to close with the deadbolt • Outside: The key to close with the deadbolt. When the deadbolt is withdrawn, the handle is activated and can operate the latch														
	• FUNCTION TYPE B • Inside: Panic exit device and/or handle to open Key to close with deadbolt and enable or disable the outside handle when latch is operated • Outside: Key to close with deadbolt and enable or disable the outside handle when latch is operated	4	28	2	85	35	67	2,800	1	1	**56936**	**28**	**0**		
		4	28	2	85	35	67	2,650	5	1	**56936**	**48**	**0**		



Technical features:
- Laquered polished brass removable faceplate and striker
- Zinc-plated steel case
- Reversible, nickel-plated silent action latch
- Nickel-plated bolt for latch dead-locking (if provided)
- Nickel-plated cut-resistant deadbolt, with a 25 mm. protrusion
- Anti-corrosion galvanised internal components

Supplied as standard:
- Striker
- Fixing screws
- Instruction sheet




On request:
- Satin stainless steel faceplate and striker (fin 20)
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-00/01
- For emergency exit (UNI EN 179)
- Handle series 30200






Standards:
- Locks with satin stainless steel faceplate and striker (finish 20), are certified fire-resistant by the American Underwrite Laboratories (UL LISTED R 14945(N)
- CE mark in compliance with the directive 89/106/CEE, only for item with (fin. 20)
- Standard reference:
- UNI EN 179
- UNI EN 1125
- UNI EN 12209

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• FUNCTION TYPE B: • Latch only with antipicking device • Split square spindle • Reversible panic function • The outside handle can be disactivated with the key • Outside: the latch can be operated with the handle, the key activates/disactivates the handle • Inside: the latch can be operated with the handle or the panic exit device, the key activates/disactivates the outside handle • Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains disactivated after the door is closed (in stand-by)		85	22	60	0,900	1	1	52760	60	0		
			85	22	70	0,950	1	1	52760	70	0		
			85	22	90	1,050	1	1	52760	90	0		
	• FUNCTION TYPE B: • Latch only with antipicking device • Split square spindle • Reversible panic function • The outside handle can be disactivated with the key • Outside: the latch can be operated with the handle, the key activates/disactivates the handle • Inside: the latch can be operated with the handle or panic exit device, the key activates/disactivates the outside handle • Note: when the door is opened from the inside with the handle or the panic exit device, the outside handle remains disactivated after the door is closed (in stand-by)		85	22	60	0,900	1	1	52761	60	0		
			85	22	70	0,950	1	1	52761	70	0		
			85	22	80	1,000	1	1	52761	80	0		
			85	22	90	1,050	1	1	52761	90	0		
	• FUNCTION TYPE A: Through square spindle • The deadbolt is automatically released when closing the the door • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device	1	85	22	60	0,950	1	1	52840	60	0		
		1	85	22	70	1,000	1	1	52840	70	0		
		1	85	22	80	1,050	1	1	52840	80	0		
		1	85	22	90	1,100	1	1	52840	90	0		

Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• FUNCTION TYPE A: Through square spindle • The deadbolt is automatically released when closing the the door • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device	1	85	22	60	0,950	1	1	52860	60	0	
		1	85	22	70	1,000	1	1	52860	70	0	
		1	85	22	80	1,050	1	1	52860	80	0	
		1	85	22	90	1,100	1	1	52860	90	0	
	• FUNCTION TYPE A: • Latch and deadbolt with antipicking device • Through square spindle • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device	1	85	22	60	0,950	1	1	52842	60	0	
		1	85	22	70	1,000	1	1	52842	70	0	
		1	85	22	80	1,050	1	1	52842	80	0	
		1	85	22	90	1,100	1	1	52842	90	0	
	• FUNCTION TYPE A: • Latch and deadbolt with antipicking device • Through square spindle • Outside: latch and deadbolt are operated only with the key • Inside: latch and deadbolt are operated with the key, the handle or the panic exit device	1	85	22	60	0,950	1	1	52862	60	0	
		1	85	22	70	1,000	1	1	52862	70	0	
		1	85	22	80	1,050	1	1	52862	80	0	
		1	85	22	90	1,100	1	1	52862	90	0	
	• FUNCTION TYPE D: • Split square spindle • Reversible panic function • Outside:the latch can be operated with the handle • Inside: latch and deadbolt are operated with the handle or the panic exit device • The key operates only the deadbolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the deadbolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open)	1	85	22	60	0,950	1	1	52844	60	0	
		1	85	22	70	1,000	1	1	52844	70	0	
		1	85	22	80	1,050	1	1	52844	80	0	
		1	85	22	90	1,100	1	1	52844	90	0	
	• FUNCTION TYPE D: • Split square spindle • Reversible panic function • Outside:the latch can be operated with the handle • Inside: latch and deadbolt are operated with the handle or the panic exit device • The key operates only the deadbolt from either side • Note: when the door is opened from the inside with the handle or the panic exit device, the deadbolt remains withdrawn after closing the door and the outside handle remains activated and can withdraw the latch (door open)	1	85	22	60	0,950	1	1	52864	60	0	
		1	85	22	70	1,000	1	1	52864	70	0	
		1	85	22	80	1,050	1	1	52864	80	0	
		1	85	22	90	1,100	1	1	52864	90	0	



Technical features:
- Satin lacquered brass faceplate and striker
- Semi-matt black lacquered steel case
- Reversible, nickel-plated latch
- Nickel-plated, antipicking bolt (if provided)
- Nickel-plated deadbolt
- Can be fitted with: escutcheons, roses, handle plates and through screws
- Through-spindle

Supplied as standard:
- Striker
- Striker and cylinder fixing screws



On request:
- Satin lacquered chrome-plated finish (fin. 18)
- For panic exit doors (UNI EN 1125) panic exit device series 59607 + bar series 07007 or 59711-00/01
- For emergency exit (UNI EN 179) Handle series 30200

Standards:
- Standard reference
  UNI EN 179
  UNI EN 1129
  UNI EN 12209

Hand:
0 = Non-handed

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Facaplate	Backset	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• FUNCTION TYPE A: • Deadbolt and dead-locking latch • SUPPLIED AS STANDARD: striker item 1.06106.01.0 • ON REQUEST: Faceplate 18x240 (spec. AG) Without antipicking bolt (suffix AF)	1	85	22	40	0,720	1	1 52810	40	1		
		1	85	22	40	0,720	1	1 52810	40	2		
		1	85	22	45	0,760	1	1 52810	45	0		
		1	85	22	50	0,780	1	1 52810	50	0		
		1	85	22	60	0,840	1	1 52810	60	0		
		1	85	22	70	0,920	1	1 52810	70	0		
	• FUNCTION TYPE A: • Deadbolt and dead-locking latch • SUPPLIED AS STANDARD: striker item 1.06106.05.0 • ON REQUEST: Faceplate 18x240 (spec. AG) Without antipicking bolt (suffix AF)	1	85	22	40	0,720	1	1 52830	40	1		
		1	85	22	40	0,720	1	1 52830	40	2		
		1	85	22	45	0,760	1	1 52830	45	0		
		1	85	22	50	0,780	1	1 52830	50	0		
		1	85	22	60	0,840	1	1 52830	60	0		
		1	85	22	70	0,920	1	1 52830	70	0		



FAST Touch

Technical features:
- Painted aluminum alloy/aluminum cover
- Painted steel bar, adjustable in length down to 300 mm on all models
- Galvanized steel internal components suitable for fire doors




Supplied as standard:
- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:
- Internal and external plates
- Version with microswitch (spec. LA)
- Fire door version (FR spec.).

Standards:
- Cover: black bar: red
- ON REQUEST (only item 1.59711-00/10-0):
- Cover: red bar: black (fin. 41)
- Cover: yellow bar: black (fin. 42)
- Cover: geen bar: black (fin. 43)
- Cover: black bar: black (fin. 44)
- Cover: white bar: white (fin. 45)
- Cover: gray bar: gray (fin. 97)
- Carter and bar painted steel grey (fin. B9)
- PVD treatment: satin-finished stainless steel (fin. C2)

Standards:
- CE marking in compliance with the Construction Products Regulation 303/2011 issued by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

Type	Description	Spindle hole	L	Unit weight Kg	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830	8/9	1200	3,366	1	1	59711	00	0		
		8/9	840	2,592	1	1	59711	01	0		
	• satin-finished PVD-treated stainless steel	8/9	1200	3,366	1	1	59711	00	0	C2	
	• Can be combined with panic function locks series Exitlock and Sicur Panic	8/9	1200	3,360	1	1	59711	10	0		
		8/9	840	2,592	1	1	59711	11	0		
	• satin-finished PVD-treated stainless steel	8/9	1200	3,366	1	1	59711	10	0	C2	
	• SUPPLIED WITHOUT PUSH BAR VERSION • Can be combined with panic function locks series Sikurexit, Heavy Duty and 52810, 52830	8/9	1200	2,366	1	1	59711	00	0	00	SB
	• Can be combined with panic function locks series Exitlock and Sicur Panic	8/9	1200	2,360	1	1	59711	10	0	00	SB
	• Bar • May be combined with panic exit devices series 1.59711.00.0.00.SB - 1.59711.10.0.00.SB • BAR COLOR OPTIONS: satin-finished anodised aluminium (fin. 62) Anodised bronze (fin. 64) Brass-plated (fin. A1) Matt black (fin. 00) Red (fin. 41) Yellow (fin. 42)| Green (fin. 43) White (fin. 45)| Grey (fin. 97)			1,000	1	1	06196	43	0		

CISA



FAST Push

Technical features:
- Painted aluminum alloy/aluminum cover (59607 serie)
- Galvanized steel internal components suitable for fire doors

Supplied as standard:
- Fixing screws
- ICIM and CE certificates of compliance
- Installation and maintenance Instructions

On request:
- Internal and external plates
- Version with microswitch (spec. LA)
- Fire door version (FR spec.).

Finishes:
- STANDARD:
  Painted black
- ON REQUEST:
  Painted red (fin. 41)
  Painted yellow (fin. 42)
  Painted green (fin. 43)
  Painted white (fin. 45)
  Painted gray (fin. 97)
  Painted steel grey (fin. B9)
  PVD treatment: satin-finished stainless steel (fin. C2)





Standards:
- CE marking in compliance with the Construction Products Regulation 305/2011 issued by ICIM
- Voluntary product certification granted by the independent certifying body ICIM according to the standard UNI EN 1125

Hand:
0 = Non-handed

Bar to be ordered separately



series 07007

Type	Description	Spindle hole	L	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Can be combined with panic function locks	8/9		1,900	1	1 59607 10 0
	• satin-finished PVD-treated stainless steel	8/9		1,650	1	1 59607 10 0 C2
	• Black nylon casing • Can be combined with panic function locks centre distance 92	8/9		1,820	1	1 59617 12 0
	• Can be combined with panic function locks centre distance 72	8/9		1,820	1	1 59617 00 0
	• Red painted steel oval shaped bar • AVAILABLE FINISHES (extra price): yellow painted (fin. 42) green painted (fin. 43) black painted (fin. 44) white painted (fin. 45) grey painted (fin. 97) painted steel grey (fin. B9 only version .13 e .14)		900	0,800	1	1 07007 13 0
			1200	1,054	1	1 07007 14 0
			1500	1,440	1	1 07007 15 0
	• Stainless steel oval shaped horizontal bar		900	0,800	1	1 07007 60 0
			1200	1,070	1	1 07007 61 0
			1500	1,400	1	1 07007 62 0



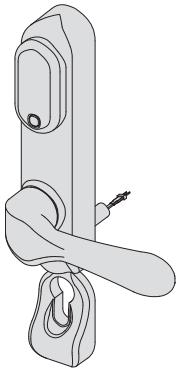

Technical features:
- Non-handed handle.
- Idle handle under no power input conditions.
- Key operated mechanical emergency system: the key will operate the handle. By removing the key the handle will be deactivated.
- Wiring system with connector for complete connection insulation.
- LED integral with handle body for door status visual indication.
- Nickel-plated steel case.
- Painted aluminum alloy cover.
- Electric hold-open device available.
- Power input through supplied Booster device.
- Rated voltage 12/24 V ac/dc.
- Operating voltage min. 5 V, max 28 V.


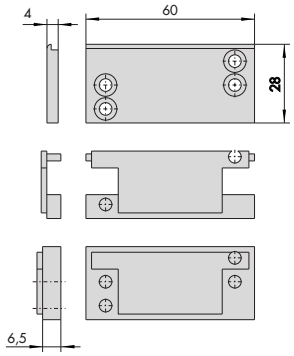
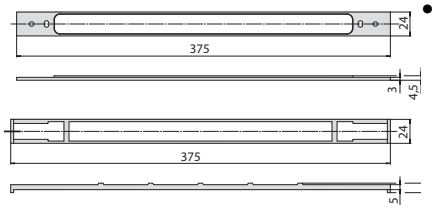



Supplied as standard:
- 8/9 mm square spindle.










On request:
- European profile cylinder.
- Timer item 1.07022.20.0.






Finishes:
- Black painted (RAL 9005).
- Grey painted (RAL 9006).



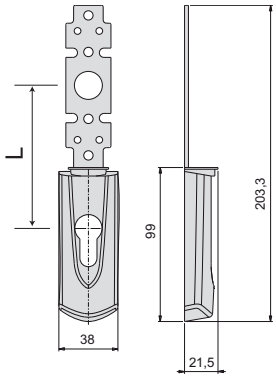
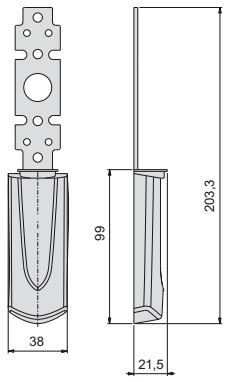

Hand:
0 = Non-handed

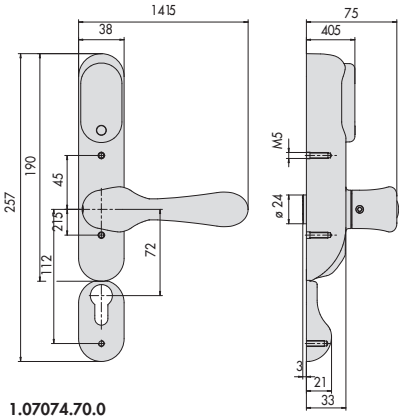
Type	Description	Facaplate	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Electrically enabled handle (A function only) • Can be installed with locks series 43225, 43250, 43725, 43825, 52840, 52860, 52842, 52862, 52810, 52830, 56917, 56937 • Handle to cylinder distance 92 mm • STANDARD SUPPLY: Connecting cable Fixing screws • ON REQUEST: Timer device 07022.20.0		1,150	1	**1**	**07074**	**71**		**0**	
	• Multiple scale timer		0,100	1	**1**	**07022**	**20**		**0**	

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Nylon cover for thermal cut profiles • For outward opening doors	1 06141 40 0, 1 06285 36 0, 1 06463 24 0, 1 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 24 0, 1 06465 25 0,	0,019	25	**1 06141 79 0**
	• Upper striker for extension bolt • Black nylon	1 07089 52 0	0,022	25	**1 06141 80 0**
	• Nylon faceplate spacer	43295	0,020	12	**1 06141 88 0**
	• Nylon cover for thermal cut aluminium profiles for outward opening doors (lip height from 3 to 7.5 mm)	1 06463 24 0, 1 25 0, 1 06463 34 0, 1 06463 35 0, 1 06465 24 0, 1 06465 25 0	0,019	25	**1 06141 89 0**
	• Pair of floor strikers		0,060	12	**1 06142 85 0**
	• Stainless steel flat striker 24 x 1.5 mm.		0,053	12	**1 06461 07 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Stainless steel flat striker 24 x 1.5 mm.		0,034	12	1 06461 12 0
	• Stainless steel flat striker 36x2 mm for FORSTER "UNICO"		0,080	12	1 06461 17 0
	• Stainless steel flat striker 36x2 mm for FORSTER "UNICO"		0,046	12	1 06461 22 0
	• Stainless steel flat striker 24 x 3 mm		0,093	12	1 06461 30 0
	• Stainless steel flat striker 24 x 3 mm		0,065	12	1 06461 34 0
	• Stainless steel U-shaped striker 24 x 6 mm.		0,098	12	1 06461 35 0
	• Stainless steel U-shaped striker 24 x 6 mm.		0,065	12	1 06461 39 0
	• Thumb turn to install with SikurExit • Finishes: nickel-plated, chrome-plated and satin-finished • For EN 179:2008 the handle item 1.07070.66.0.B1 should also be ordered	43225, 43235, 43236, 43295, 43725, 43735, 43825, 43835	0,200	1	1 07070 56 0 B1
	• Handle to install with SikurExit • Finishes: nickel-plated, chrome-plated and satin-finished • For EN 179:2008 2 pieces should be ordered	43225, 43235, 43236, 43295, 43725, 43735, 43825, 43835	0,400	1	1 07070 66 0 B1

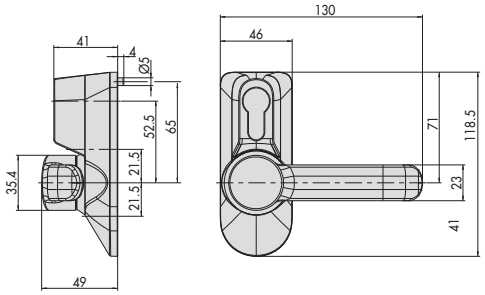
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Pair of handles to install with Exit lock • AVAILABLE FINISHES: Anodised bronze (fin. 00) satin-finished nickel-plated chrome (fin. B1)	56915, 56935	0,400	1	1 07070 50 0
	• Handle and fixed thumb turn to install with Exit lock • AVAILABLE FINISHES: Anodised bronze (fin. 00) satin-finished nickel-plated chrome (fin. B1)	56916, 56917, 56936, 56937	0,400	1	1 07070 60 0
	• Black painted inside plate • Can be installed with panic exit devices • To be combined with European profile cylinder protective roses on armoured doors • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fing. 45) painted grey (fin. 97)		0,106	6	1 07076 70 0
	• satin-finished PVD-treated stainless steel		0,106	6	1 07076 70 0 C2
	• Black painted inside plate • Can be installed with mortice version panic exit devices • To be combined with European profile cylinder protective roses on armoured doors • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fing. 45) painted grey (fin. 97)		0,106	6	1 07076 71 0
	• satin-finished PVD-treated stainless steel		0,106	6	1 07076 71 0 C2
	• Steel split splindle		0,100	1	1 07085 77 0

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc plated extension bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2)		0,600	12	1 **07088 03 0**
	• Steel dogging device, complete with: Spacers item 1.06141.81.0 Upper striker item 1.06141.80.0	43295	0,060	1	1 **07089 52 0**
	• Black painted outside plate • Can be installed with Fast Touch panic exit devices series 59711 • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97) L=72 (dim. 61) L=85 (dim. 62) L=92 (dim. 63)		0,110 0,110 0,110	6 6 6	1 **07176 61 0** 1 **07176 62 0** 1 **07176 63 0**
	• satin-finished PVD-treated stainless steel		0,110 0,110 0,110	6 6 6	1 **07176 61 0 C2** 1 **07176 62 0 C2** 1 **07176 63 0 C2**
	• Black painted outside plate • Can be installed with Fast Touch panic exit devices series 59711 • FINISHES ON REQUEST: painted red (fin. 41) painted yellow (fin. 42) painted green (fin. 43) painted white (fin. 45) painted grey (fin. 97)		0,110	6	1 **07176 66 0**
	• satin-finished PVD-treated stainless steel		0,110	6	1 **07176 66 0 C2**
	• Steel split splindle		0,050	6	1 **07206 00 0**



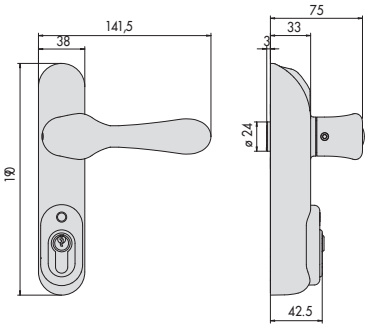
1.07074.70.0

1



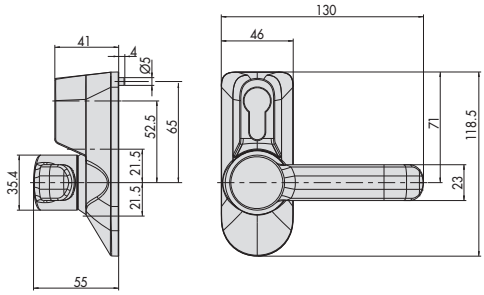
1.07078.36.0

4




1.07074.80.0

2



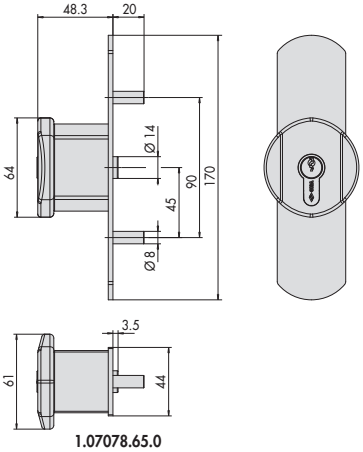
1.07078.38.0

5



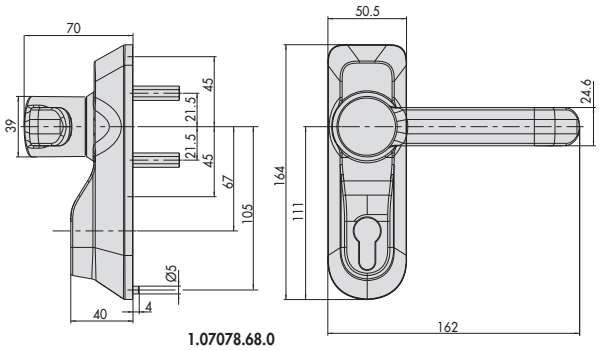
1.07078.35.0

3



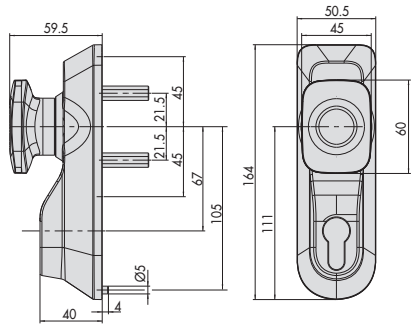
1.07078.65.0

6




1.07078.68.0

7



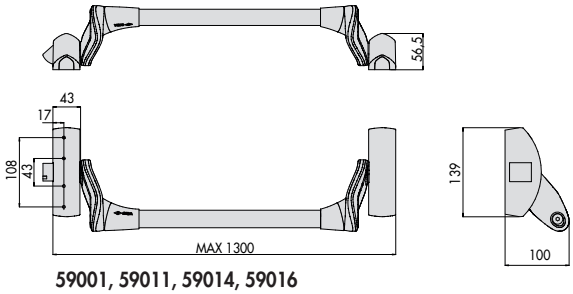
1.07078.69.0

8

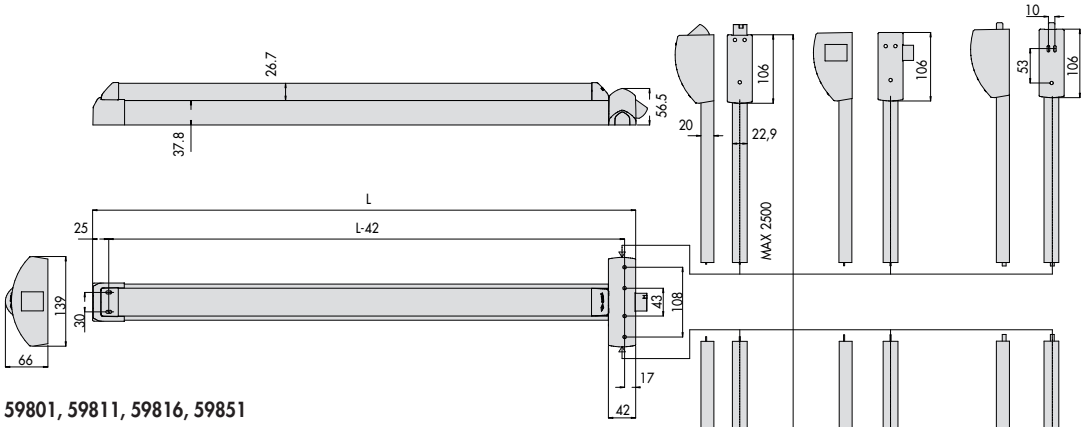


1.07083.05/06/07/40/41/80/81/82/90


9



59001, 59011, 59014, 59016



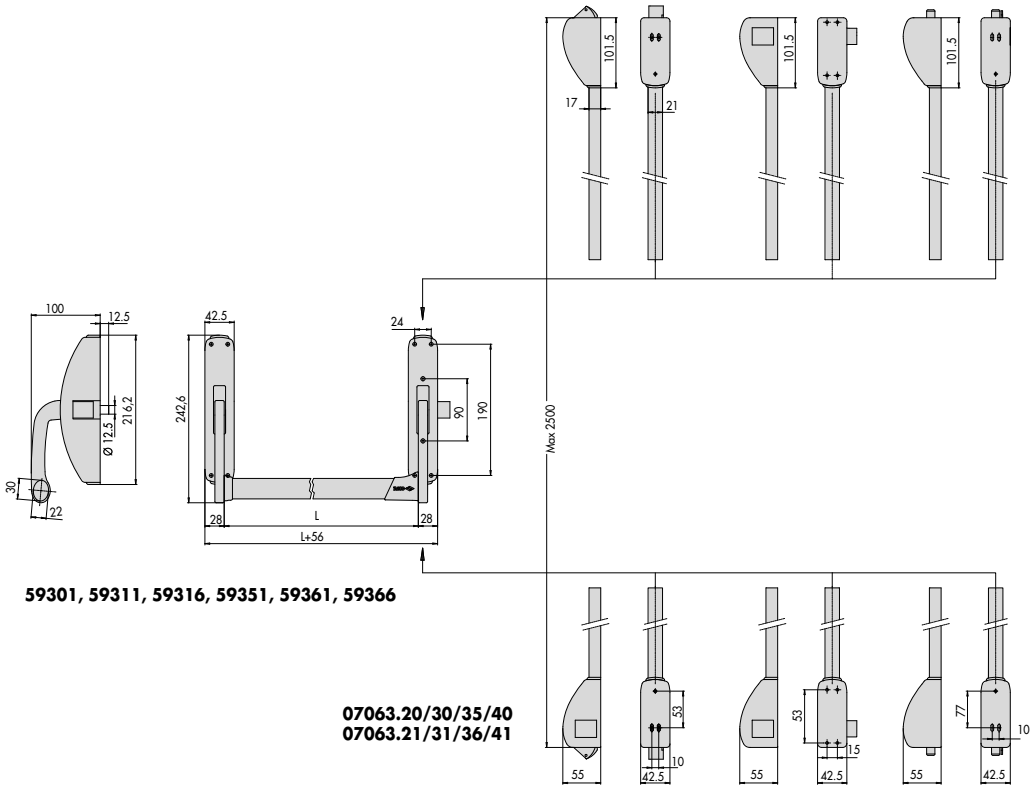
59801, 59811, 59816, 59851



59051, 59091, 59066

07063.26/35/36/37
59014

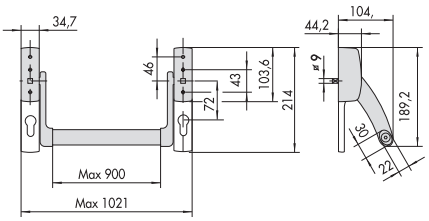
10



59301, 59311, 59316, 59351, 59361, 59366

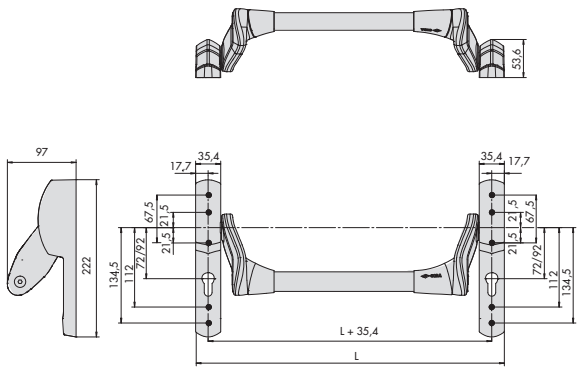
07063.20/30/35/40
07063.21/31/36/41

11



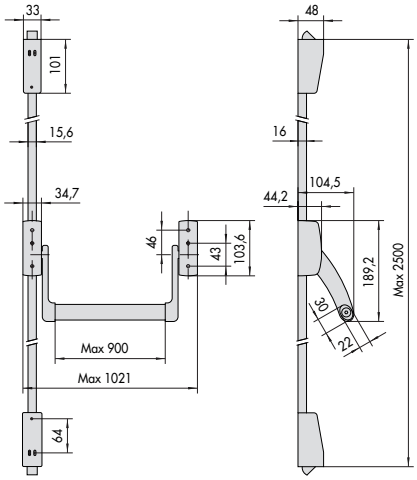
59616

12



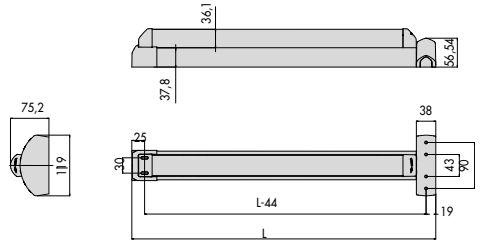
59607 - 59617

13



59647

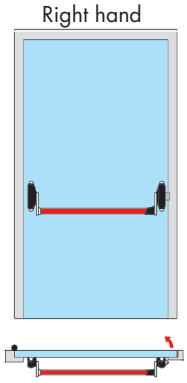
14



59711

15

Right hand



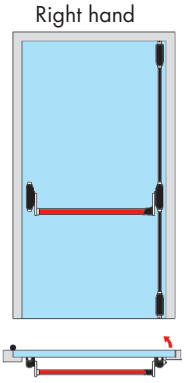
Series CISA PRESTIGE
59301
59351

Series FAST PUSH
59001
59011

Series FAST TOUCH
59801

Serie eFAST
59851

Right hand



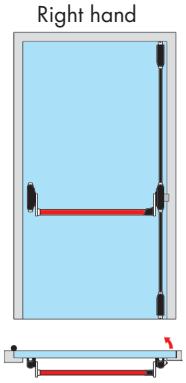
Series CISA PRESTIGE
59311+1-07063-30-0
59316+1-07063-30-0
59351+1-07063-31-0
59366+1-07063-31-0

Series FAST PUSH
59016+1-07063-61-0
59011+1-07063-61-0

Series FAST TOUCH
59816+1-**07063-61-0**
59811+1-**07063-61-0**

Series FAST FLOW
59014

Right hand



Series CISA PRESTIGE
59311+1-07063-30-0
59351+1-07063-31-0

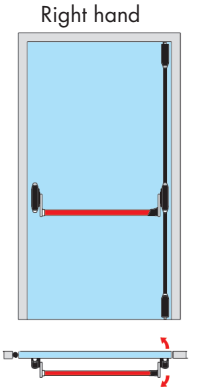
Series FAST PUSH
59011+1-07063-61-0

Series FAST TOUCH
59816+1-**07063-61-0**

Serie eFAST
59851+1-07063-61-0

Series FAST FLOW
59014

Right hand

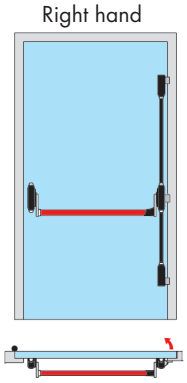


Series CISA PRESTIGE
59316+1-07063-40-0
59366+1-07063-41-0

Series FAST PUSH
59016+1-07063-71-0

Series FAST TOUCH
59816+1-**07063-71-0**

Right hand



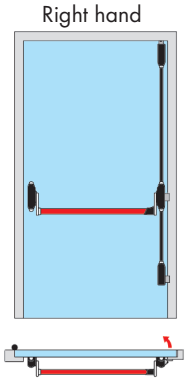
Series CISA PRESTIGE
59311+1-07063-20-0
59316+1-07063-20-0
59351+1-07063-21-0
59366+1-07063-21-0

Series FAST PUSH
59011+1-07063-51-0
59016+1-07063-51-0

Series FAST TOUCH
59811+1-**07063-51-0**
59816+1-**07063-51-0**

Serie eFAST
59851+1-07063-51-0

Right hand



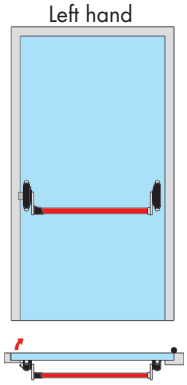
Series CISA PRESTIGE
59311+1-07063-35-1
59316+1-07063-35-1
59351+1-07063-36-1
59366+1-07063-36-1

Series FAST PUSH
59011+1-**07063-66-1**
59016+1-**07063-66-1**

Series FAST TOUCH
59811+1-**07063-66-1**
59816+1-**07063-66-1**

Series FAST FLOW
59014

Left hand



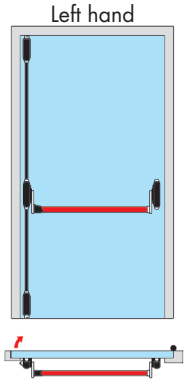
Series CISA PRESTIGE
59301
59351

Series FAST PUSH
59001
59011

Series FAST TOUCH
59801
59811

Serie eFAST
59851

Left hand



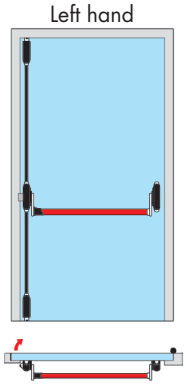
Series CISA PRESTIGE
59311+1-07063-30-0
59316+1-07063-30-0
59351+1-07063-31-0
59366+1-07063-31-0

Series FAST PUSH
59016+1-07063-61-0
59011+1-07063-61-0

Series FAST TOUCH
59816+1-**07063-61-0**
59811+1-**07063-61-0**

Series FAST FLOW
59014

Left hand



Series CISA PRESTIGE
59311+1-07063-30-0
59351+1-07063-31-0

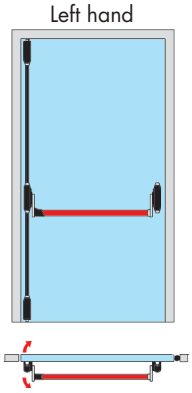
Series FAST PUSH
59011+1-07063-61-0

Series FAST TOUCH
59816+1-**07063-61-0**

Serie eFAST
59851+1-07063-61-0

Series FAST FLOW
59014

Left hand

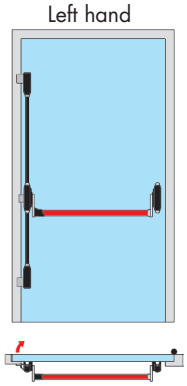


Series CISA PRESTIGE
59316+1-07063-40-0
59366+1-07063-41-0

Series FAST PUSH
59016+1-07063-71-0

Series FAST TOUCH
59816+1-**07063-71-0**

Left hand



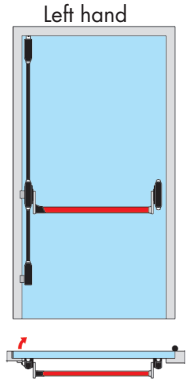
Series CISA PRESTIGE
59311+1-07063-20-0
59316+1-07063-20-0
59351+1-07063-21-0
59366+1-07063-21-0

Series FAST PUSH
59011+1-07063-51-0
59016+1-07063-51-0

Series FAST TOUCH
59811+1-**07063-51-0**
59816+1-**07063-51-0**

Serie eFAST
59851+1-07063-51-0

Left hand

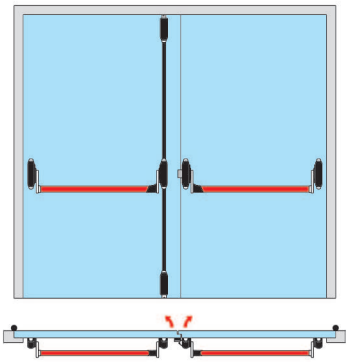


Series CISA PRESTIGE
59311+1-07063-35-2
59316+1-07063-35-2
59351+1-07063-36-2
59366+1-07063-36-2

Series FAST PUSH
59011+1-**07063-66-2**
59016+1-**07063-66-2**

Series FAST TOUCH
59811+1-**07063-66-2**
59816+1-**07063-66-2**

Series FAST FLOW
59014

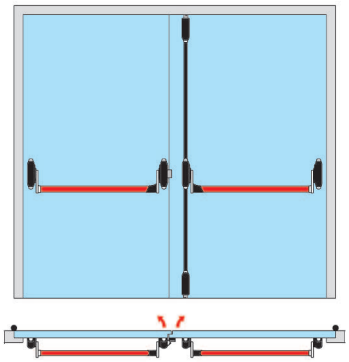


Series CISA PRESTIGE
59301 + 1-07063-30-0 + 59316
59311 + 1-07063-30-0 + 59311
59351 + 1-07063-31-0 + 59366
59361 + 1-07063-31-0 + 59361

Series FAST PUSH
59016 + 1-07063-61-0+ 59001
59011 + 1-07063-61-0 + 59011

Series FAST TOUCH
59816 + 1-07063-61-0 + 59801
59811 + 1-07063-61-0 + 59816

Series FAST FLOW
59014 + 59001

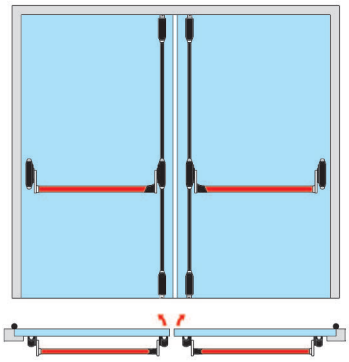


Series CISA PRESTIGE
59301 + 1-07063-30-0 + 59316
59311 + 1-07063-30-0 + 59311
59351 + 1-07063-31-0 + 59366
59361 + 1-07063-31-0 + 59361

Series FAST PUSH
59001 + 1-07063-61-0 + 59016
59011 + 1-07063-61-0 + 59011

Series FAST TOUCH
59801 + 1-07063-61-0 + 59816
59811 + 1-07063-60-0 + 59816

Series FAST FLOW
59014 + 59001

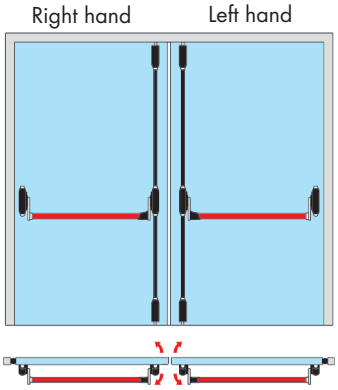


Series CISA PRESTIGE
59311+1-07063-30-0+59301+1-07063-30-0
59316+1-07063-30-0+59316+1-07063-30-0
59351+1-07063-31-0+59351+1-07063-31-0
59366+1-07063-31-0+59366+1-07063-31-0

Series FAST PUSH
59011+1-07063-61-0+59001+1-07063-61-0
59016+1-07063-61-0+59016+1-07063-61-0

Series FAST TOUCH
59811+1-07063-61-0+59811+1-07063-61-0
59816+1-07063-61-0+59816+1-07063-61-0

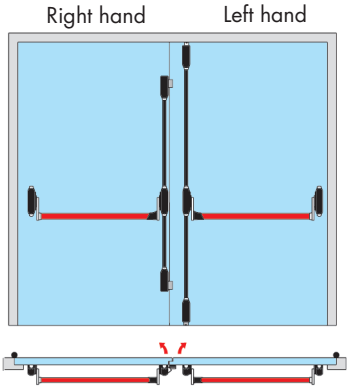
Series FAST FLOW
59014 + 59014



Series CISA PRESTIGE
59311+1-07063-40-0+59301+1-07063-40-0
59361+1-07063-41-0+59366+1-07063-41-0

Series FAST PUSH
59011+1-07063-71-0+59001+1-07063-71-0
59016+1-07063-71-0+59016+1-07063-71-0

Series FAST TOUCH
59811+1-07063-61-0+59811+1-07063-61-0
59816+1-07063-61-0+59816+1-07063-61-0

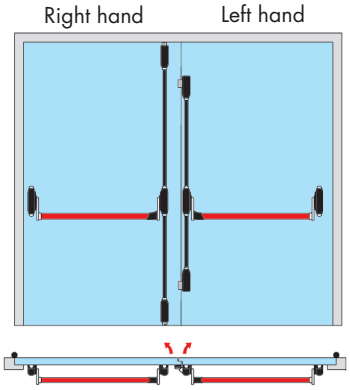


Series CISA PRESTIGE
59311+1-07063-30-0+59316+1-07063-20-0
59351+1-07063-31-0+59366+1-07063-21-0

Series FAST PUSH
59011+1-07063-51-0+59016+1-07063-61-0

Series FAST TOUCH
59811+1-07063-51-0+59816+1-07063-61-0

Series FAST FLOW
59011 + 107063.51.0+59014



Series CISA PRESTIGE
59316+1-07063-30-0+59311+1-07063-20-0
59366+1-07063-31-0+59361+1-07063-21-0

Series FAST PUSH
59016+1-07063-61-0+59011+1-07063-51-0

Series FAST TOUCH
59816+1-07063-51-0+59811+1-07063-61-0

Series FAST FLOW
59014 + 59011 + 107063.51.0

NOTE:

Standard version CISA Panic exit devices can be installed on doors 70 mm max thickness, 2500 mm max height, 1300 mm max width.
On request they are also available for larger size doors.



Door closers

Door closers D5200 series 551
Coordinator for Cisa D5200 door closers 552
Cam action door closers D6200 series 553
Door closers D7200 series 554
Cam action door closers D8200 series 555
Door closer PROFESSIONAL PLUS 2 series 556
Door closers SMART PLUS 2 series 558
Accessories for door closers Smart Plus and Professional Plus series 559
Door closers 601/T series 562
Accessories for door closers 601 series 563
Gate closer 564
Dimensional drawings 566

Door closers D5200 series





CISA D5200 series asymmetric rack and pinion door closers - easy opening and a compact design

Easy opening, reliable closing

In contrast to conventional door closers, asymmetric rack and pinion technology ensures maximum opening efficiency. The initial opening power decreases rapidly, allowing even children and the elderly to open the door easily.

The CISA D5200 series is CE marked to EN1154 and fire tested to EN1634 – 1 with a 2-hour fire rating on wooden doors (installation with plate 1.07153.15.0 mandatory).



Technical features:
- Steel sliding arm with or without hold open device
- Adjustment valve with thermostatic device.

Operation:
- Adjustable closing speed and end stroke
- Adjustable strength
- Backcheck (opening brake)



Supplied as standard:
- Screws
- Adhesive templates

On request:
- Mounting plates
- Replacement arm with or without hold open

Finishes:
- SUPPLIED AS STANDARD:
  - Aluminum (fin. 97)
- FINISH OPTIONS:
  - Black (fin. 44)
  - White (fin. 45)
  - White (fin. 88)

Standards:
- CE marking in compliance with EN 1154 standard

D5200

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• For inward/outward opening doors • Without hold open	1÷4	1100	80	2,200	1	1 D5200 03 0 97
CE	• For inward/outward opening doors • With hold open	1÷4	1100	80	2,304	1	1 D5210 03 0 97
	• Slide track without hold open item D5200				0,600	1	1 07157 10 0 97
	• Slide track with hold open item D5210				0,700	1	1 07157 11 0 97
	• Mounting plate item D5200 for installation on fire doors				0,300	1	1 07153 15 0 97



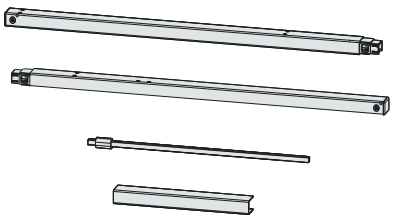
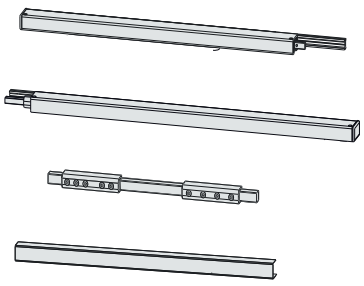
Technical features:
- Ensures double doors always shut in the right sequence
- Can be installed with CISA D5200 door closers, **to be ordered separetely**
- Assembly kit
- Installation instructions
- Anticipatore per porte porte di emergenza con maniglione antipanico

Finishes:

Standard:
- Silver Fin 97

On request:
- Black Fin 44
- White Fin 45
- Dark brown Fin 88

Standards:
- CE mark in compliance with the directive 89/106/CEE issued by ICIM
- CE marking in compliance with UNI EN 1154 and UNI EN 1158 standard

Type	Description	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	**Version for right and left hand pull doors** • Side of active leaf (right /left) can be chosen at installation • Maximum opening angle 175° (depending on the door profile and frame used) • Minimum width of inactive leaf 360 mm • Distance between the hinges 1495 mm - 2640 mm. • For smaller distances (1370 mm - 1490 mm), the profile of the active leaf can be reduced to 130 mm. • The device can be installed directly onto the door or using the plates supplied.	2,000	1	**1 07158 00 0 97**
	**Version for right hand push doors** • Maximum opening angle 110° (depending on the door profile and frame used) • Minimum width of inactive leaf 600 mm • Distance between the hinges 1440 mm – 2500 mm.	2,000	1	**1 07158 01 0 97**
	Version for left hand push doors • Maximum opening angle 110° (depending on the door profile and frame used) • Minimum width of inactive leaf 600 mm • Distance between the hinges 1440 mm – 2500 mm.	2,000	1	**1 07158 02 0 97**



Technical features:
- Steel sliding arm with or without hold open device
- Cam operated.
- Adjustment valve with thermostatic device.



Operation:
- Adjustable closing speed and end stroke
- Adjustable strength
- Backcheck (opening brake)

Supplied as standard:
- Screws
- Adhesive templates

Finishes:
- SUPPLIED AS STANDARD:
  - Aluminum (fin. 97)
- FINISH OPTIONS:
  - Black (fin. 44)
  - White (fin. 45)
  - Champagne (fin. 87)
  - Brown (fin. 88)
  - Matt black (fin. 90)

Standards:
- CE marking in compliance with EN 1154 standard

D6200

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• For inward opening doors (door closer body installed on the door leaf and arm on the door frame) • Standard track arm	2÷4	1100	80	2,300	1	1	D6200	03	0	97	
	• For outward opening doors (door closer body installed on the door leaf and arm installed on the frame) • Standard track arm	2÷4	1100	80	2,300	1	1	D6210	03	0	97	
	• Hold open unit for D6200 series	-	-	-	-	1	1	07209	02	0		



D7200



Technical features:
- Cast iron pressed body
- Steel slider arm with or without stop
- Cam-controlled operation
- Adjustment valves with thermostatic device.

Operation:
- Closing rate
- End stroke
- Closure delay
- Opening brake
- Actuating force
- Stop position

Supplied as standard:
- Pre-assembly plate
- Screws
- Adhesive templates

Finishes:
- STANDARD:
  - Aluminum (fin. 97)
- FINISHING OPTIONS:
  - Black (fin. 44)
  - White (fin. 45)
  - Champagne (fin. 87)
  - Dark brown (fin. 88)
  - Dark bronze (fin. 99)
  - Satin-finished stainless steel (fin. C2)

Standards:
- CE mark according to the EN 1154 standard

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• For inward opening doors (door closer body installed on the door leaf and arm on the door frame) • Standard track arm	2÷5	1250	100	6,000	1	**1 D7200 04 0 97**
	• For outward opening doors (door closer body installed on the door arm installed on the frame) • Standard track arm	2÷5	1250	100	6,000	1	**1 D7210 04 0 97**
	• Hold open unit for D7200 series door closers	5	1250	100	6,000	1	**1 07210 00 0**



Technical features:
- Cast iron pressed body
- Steel slider arm with or without stop
- Cam-controlled operation
- Adjustment valves with thermostatic device.






Operation:
- Adjustable closing speed and end stroke
- Adjustable strength

Supplied as standard:
- Screws
- Adhesive templates

Finishes:
- STANDARD:
  - Aluminum (fin. 97)

Standards:
- CE mark according to the EN 1154 standard

D8200

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• For inward opening doors (door closer body mounted on the door leaf; slide track mounted on the door frame) • Without hold open device	2÷4	1100	80	1,900	1	1	D8200	03	0	97	
	• Hold open device for D8200 series	-	-	-	-	1	1	07209	00	0		
	• Hold-open device	-	-	-	-	1	1	07209	01	0		
	• Protectiion kit for installation on fire doors	-	-	-	-	1	1	07209	21	0		
	• Mounting kit for aluminium door frames	-	-	-	-	1	1	07209	25	0		
	• Replacement arm for item D8200	-	-	-	-	1	1	07209	20	0	97	



Professional Plus 2







Technical features:
- Adjustable steel arm with hold open device
- Solid aluminium body with slide-on cover



Operation:
- Closing strength:
- multiple strength version with adjustable position of body and arm hinge mechanism (C15 model)
- Adjustable strength version: adjusted via the screw on the body side (C16 and C21 models)
- Closing strength and and end stroke adjustment valves for easier access. Valves protection cover to avoid any unauthorised adjustment
- Adjustable closing strength from 180° to 15° via the valve (closing)
- Adjustment of the end stroke from 15° to 0° via the valve (latch)
- Adjustable backcheck (opening brake) to reduce the risk of damaging the door and the adjacent walls
- Adjustment of stop position up to 130° (function not suitable for fire doors)

Supplied as standard:
- Fixing screws
- Template and installation instructions

Finishes:
- SUPPLIED AS STANDARD:
  - Grey (fin. 97)
- FINISH OPTIONS:
  - Black (fin. 44)
  - White (fin. 45)
  - Champagne (fin. 87)
  - Brown (fin. 88)
  - Matt black (fin. 90)

Standards:
- CE marking in accordance with (UE) no. 305/2011 regulation

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• MULTISTRENGTH • Arm without hold open device	2÷4	850÷1100	40÷80	2,300	1	1	C1510	03	0	97	
	• MULTISTRENGTH • With hold open device on arm	2÷4	850÷1100	40÷80	2,300	1	1	C1511	03	0	97	
	• ADJUSTABLE STRENGTH • Without hold-open • Backcheck (opening brake)	2÷4	850÷1100	40÷80	3,100	1	1	C1610	03	0	97	
	• ADJUSTABLE STRENGTH • Arm with hold-open • Backcheck (opening brake)	2÷4	850÷1100	40÷80	3,100	1	1	C1611	03	0	97	
	• ADJUSTABLE STRENGTH • Without hold-open • Backcheck (opening brake)	2÷6	850÷1260	40÷120	3,500	1	1	C1610	05	0	97	
	• ADJUSTABLE STRENGTH • Arm with hold-open • Backcheck (opening brake)	2÷6	850÷1250	40÷120	3,500	1	1	C1611	05	0	97	

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Slide track • Arm with hold-open	3	950	60	2,600	1	1	C2010	03	0	97	
	• ADJUSTABLE STRENGTH VERSION • Slide track • Without hold-open • Backcheck (opening brake)	2÷4	850÷1100	40÷80	3,700	1	1	C2110	03	0	97	



Smart Plus 2



Technical features:
- Steel arm with hold-open device.
- Solid body in die-cast aluminium alloy
- Rack-and-pinion mechanism in hardened steel for smooth, efficient operation
- Removable ABS cover








Operation:
- Multi-strength version with adjustable position of body and arm hinge mechanism, strength 2 and 3 (ENn54), strength 3 (CE)
- Independent closing speed and end stroke adjustment valves.
- Closing strength adjustable from 180° to 15° via the valve (1).
- End stroke adjustable from 15° to 0° via the valve (2).
- Adjustment of stop position up to 130° (function not suitable for fire doors)

Supplied as standard:
- Fixing screws
- Template and installation instructions








Finishes:
- Standard
  - Aluminium (fin. 97)
- Finish options
  - Champagne (fin. 87)
  - Brown (fin. 88)
  - Black (fin. 44)
  - Matt black (fin. 90)
  - White (fin. 45)



Standards:
- CE marking in accordance with
- (UE) no. 305/2011 regulation

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• MULTISTRENGTH • Arm without hold open device • CE mark according to Directive 89/106/CEE	3	950	60	1,800	1	1	C1415	03	0	97	
	• MULTISTRENGTH • With hold open device on arm	2÷4	850÷1100	40-80	1,800	1	1	C1416	03	0	97	

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
The required finish must always be specified in the order (where necessary)	• Finishes available: - Champagne colour (fin. 87) - Dark brown colour (fin .88) - Aluminium colour (fin. 97) - Black colour (fin. 44) - Matt black colour (fin. 90) - Dark bronze colour (fin. 99) - White colour (fin. 45)								
	• Steel angle backplate parallel arm steel angle backplate for C1415 and C1416 series	0,230	1	1	07141	01	0	97	
	• Steel backplate door closers steel plate for C1510 03 and C1511 03 series		1	1	07142	01	0	97	
	• Steel backplate door closers steel plate for C1510 03 and C1511 03 series		1	1	07153	02	0	97	
	• Steel backplate door closers steel plate for C1610 03 and C1611 03 series		1	1	07153	03	0	97	
	• Steel backplate door closers steel plate for C1610 03 and C1611 03 series		1	1	07153	04	0	97	
	• Steel backplate door closers steel plate for C1610 05 and C1611 05 series		1	1	07153	05	0	97	
	• Steel backplate door closers steel plate for C1610 05 and C1611 05 series		1	1	07153	06	0	97	

CISA

Type	Description	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Steel sliding arm without hold-open device • For Smart Plus 2 door closers	0,460	1	1	07155	10	0	12	
	• Steel sliding arm with hold-open device • For Smart Plus 2 door closers	0,460	1	1	07155	11	0	97	
	• Steel sliding arm without hold-open device • For Smart Plus 2 Closing Force 3 door closers	0,460	1	1	07155	12	0	97	
	• Steel sliding arm without hold-open device • For Smart Plus 2 Closing Force 5 door closers	0,460	1	1	07155	14	0	97	
	• Steel sliding arm with hold-open device • For Smart Plus 2 Closing Force 3 door closers	0,900	1	1	07155	13	0	97	
	• Steel sliding arm with hold-open device • For Smart Plus 2 Closing Force 5 door closers	0,900	1	1	07155	15	0	97	
	• Steel sliding arm with aluminium slide track • For Professional Plus 2 door closers, C2010 series	0,700	1	1	07155	20	0	97	



Type	Description	Unit weight	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
	• Steel sliding arm with aluminium slide track • For Professional Plus 2 door closers, C2110 series	0,800	1	1 07155 21 0 97	
	• Closer hold-open device with sliding arm for C2010 03 and C2011 03 series		1	1 07210 01 0	





Technical features:
- Solid cast iron body
- Steel arm, with or without hold open device
- ADJUSTMENTS:
  Closing speed adjusting valve

Supplied as standard:
- Fixing screws
- Installation template

Finishes:
- The required finish must always be specified in the order
- Finishes available:
  aluminium colour (fin. 97)
  gold colour (fin. 98)

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Arm without hold-open device	1	750	30	2,392	2	**1 60130 01 0 98**
		2	830	45	3,167	2	**1 60140 02 0 98**
		3	930	60	3,717	2	**1 60150 03 0 98**
		4	1030	80	4,900	2	**1 60160 04 0 98**
	• Arm with hold-open device	1	750	30	2,480	2	**1 60131 01 0 98**
		2	830	45	3,205	2	**1 60141 02 0 98**
		3	930	60	3,705	2	**1 60151 03 0 98**
		4	1030	80	5,025	2	**1 60161 04 0 98**

Type	Description	For series/item	L	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
The required finish must always be specified in the order (where necessary)	• Finishes available - aluminium colour (fin. 97) - gold colour (fin. 98) - dark bronze colour (fin. 99)								
	• Steel arm without hold-open device	60130, 60170	200,0	0,420	1	1	07132	00	0 97
		60140, 60150, 60160, 60180, 60190	240,0	0,475	1	1	07134	00	0 97
	• Steel arm with hold-open device	60131, 60171	200,0	0,515	1	1	07133	00	0 97
		60141, 60151, 60161, 60181, 60191	240,0	0,595	1	1	07135	00	0 97



Technical features:
- Pressure die-cast aluminium case and cover, painted and anti-corrosion treatment (resists more than 500 hours in salt spray)
- Stainless steel adjusters
- Zinc-plated fixing screws
- Zinc-plated steel springs
- Tested for 200,000 opening and closing cycles







Operation:
- For use on gates up to
- 1200 mm and weighing a maximum of 55 kg
- Completely mechanical operation with no fluids (operates irrespective of outdoor temperature).
- Adjustable opening / closing force
- Adjustable closing speed
- Possibility of hold open between 90° and 100°
- Maximum opening of gate 100°
- Courtesy opening function
- Possibility of inverting operation from "gate closer" to "gate opener"


Supplied as standard:
- Zinc-plated adjustable corner mounting plate item 1.07155.01.0.
- Fixing screws
- Instruction sheet

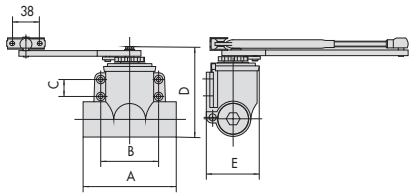
On request:
- Plates for installation on different kinds of gates items 1.07155.02.0, 1.07155.03.0.

Finishes:
- Black
- Silver grey

Standards:
- Patented system A000790 of 2013

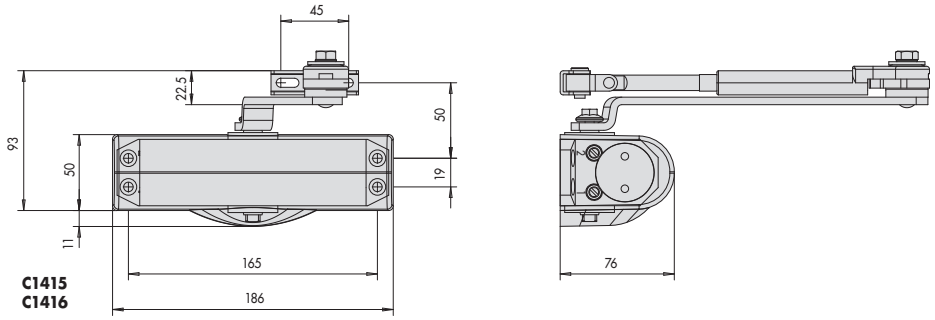
Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• BLACK gate closer		1200		1,500	1	**1 C1310 01 0**
	• GREY gate closer		1200		1,500	1	**1 C1310 01 0 97**
	• Lower hinge		1200		0,260	1	**1 07155 04 0**
	• Corner plate (supplied as standard)		1200		0,540	1	**1 07155 01 0**
	• Flat plate		1200		0,540	1	**1 07155 02 0**
	• Plate for retrofitting		1200		0,260	1	**1 07155 03 0**
	• Standard arm		1200		0,540	1	**1 07155 05 0**

Type	Description	Closing strength	Max. door width	Max. door weight	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
	• Sliding arm		1200		0,540	1	**1**	**07155**	**06**	**0**
	• Kit of spare springs		1200		0,050	1	**1**	**07156**	**03**	**0**



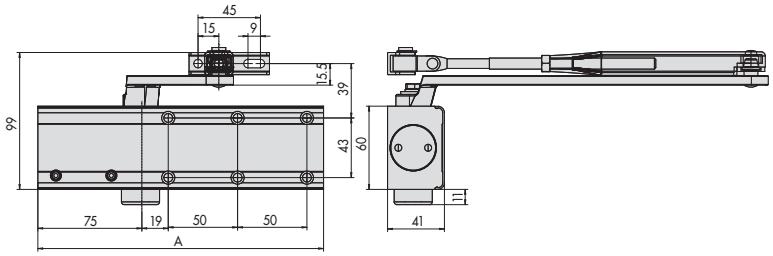
	A	B	C	D	E
1.60130.01	132	75,5	19	144	68
1.60131.01	132	75,5	19	144	68
1.60140.02	137	82	24	124	73
1.60141.02	137	82	24	124	73
1.60150.03	147	92	29	140	81
1.60151.03	147	92	29	140	81
1.60160.04	150	105	31	156	96
1.60161.04	150	105	31	156	96

1



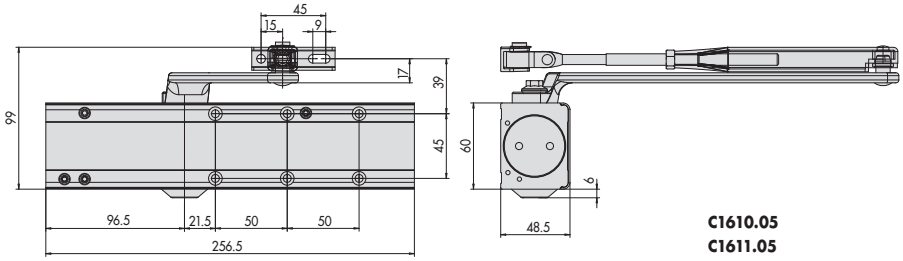
C1415
C1416

2



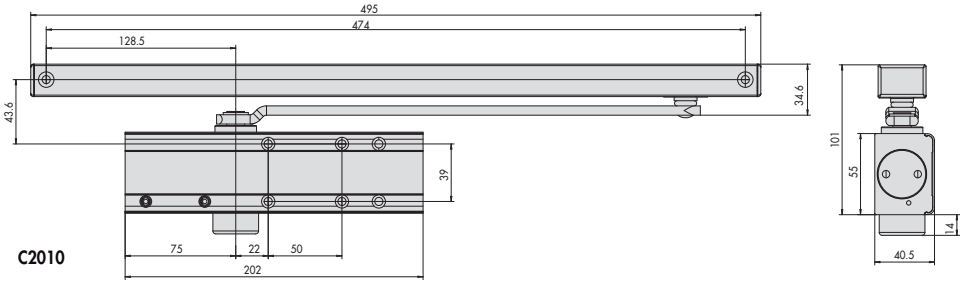
	A
C1510.03.0	206
C1511.03.0	206
C1610.03.0	236
C1611.03.0	236

3



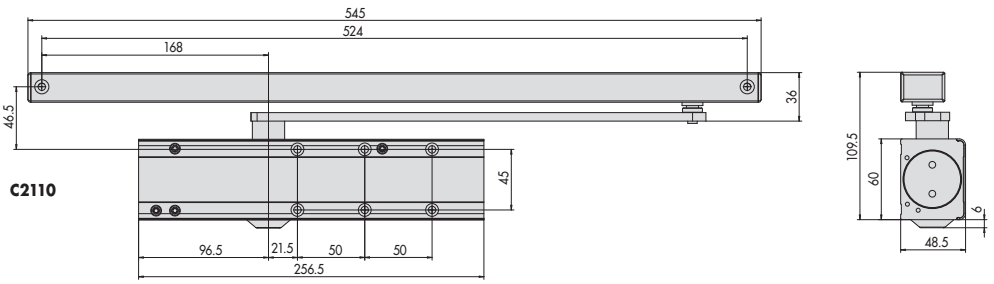
C1610.05
C1611.05

4



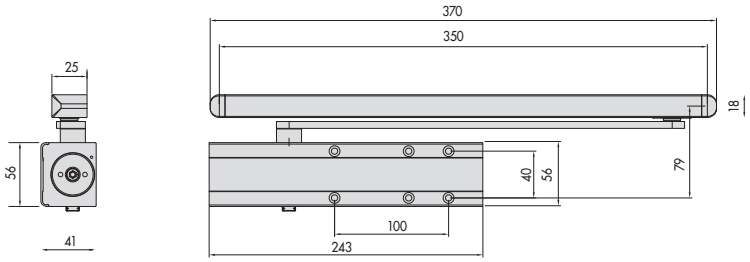
C2010

5



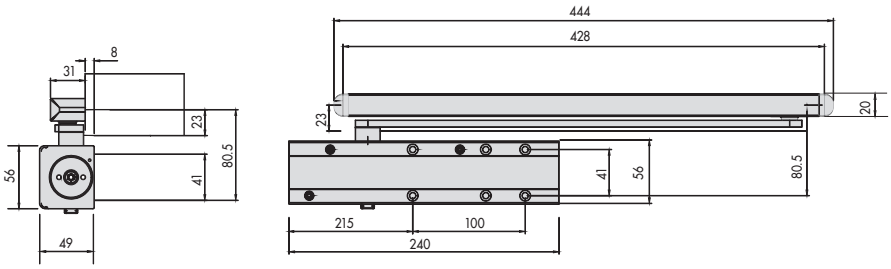
C2110

6



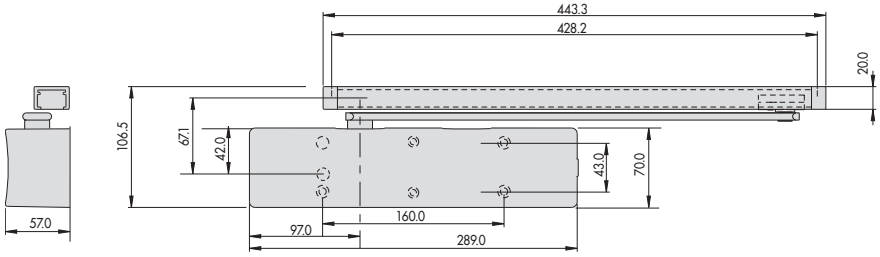
D5200

7



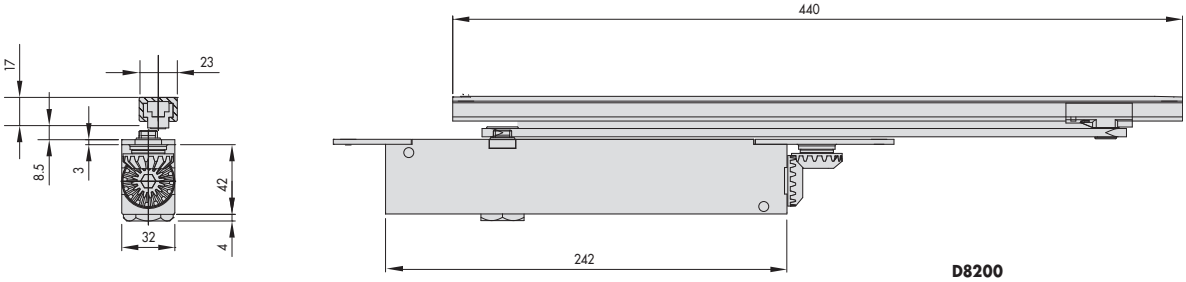
D6200
D6210

8



D7200

9



D8200

10

Safes




Wall safes with electronic combinator - Digit vision..... 571
Wall safes with key 572
Wall safes, with mechanical combinator..... 573
Darwin series modular wall safes..... 574
Wall safes, 1 star key 575
Standing safes with electronic combinator - Digit vision 576
CASH Standing safes with electronic combinator 577
Standing safes with key 578
Standing safes with mechanical combinator..... 579
Standing safes, 1 star key 580
Hotel safes - Digit Plus 581
Spare parts and accessories for safes 582
Safes display stand..... 588
Dimensional drawing..... 589



Technical features:
- Lit keypad.
- 10 mm thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:
- Power cable
- Shelves (where these are provided for)
- Use and maintenance instructions
- Installation instructions.

DGT Vision




- Back-lit alphanumeric keypad
- Electronic combinator
- Internal light
- 1.5 V alkaline thin battery operation
- Removable door
- Laser welded sealing parts assembly
- Sound and visual indications
- Tamper-proof lock

Type	Description	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
		*	360	240	150	10		2	1	14,400	1	1	82710 30 0
		*	360	240	200	10		2	1	15,400	1	1	82710 31 0
		*	360	240	250	10		2	1	16,700	1	1	82710 32 0
		*	420	300	200	10	2	2	1	21,600	1	1	82710 40 0
		*	420	300	250	10	2	2	1	23,100	1	1	82710 41 0
			420	300	300	10	2	2	1	24,900	1	1	82710 42 0
		*	490	360	200	10	2	2	1	28,950	1	1	82710 50 0
		*	490	360	250	10	2	2	1	30,000	1	1	82710 51 0
			490	360	300	10	2	2	1	31,750	1	1	82710 52 0
			360	490	200	10	2	4	2	29,350	1	1	82710 70 0
			360	490	250	10	2	4	2	31,000	1	1	82710 71 0
			360	490	300	10	2	4	2	32,700	1	1	82710 72 0
			420	550	200	12	2	4	2	39,700	1	1	82710 80 0
			420	550	250	12	2	4	2	39,700	1	1	82710 81 0
			420	550	300	12	2	4	2	39,700	1	1	82710 82 0
			490	620	200	12	2	4	2	51,000	1	1	82710 90 0
			490	620	250	12	2	4	2	51,000	1	1	82710 91 0
			490	620	300	12	2	4	2	51,000	1	1	82710 92 0



Technical features:
- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled through automated welding
- Nickel-plated steel deadbolts (diameter 22 mm.)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:
- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions




- Key only version
- 2 keys item 1.00101.00.2

	Type	Description	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
				260	170	150	10		2	-	8,300	1	1 82010	10	0	
				260	170	200	10		2	-	9,300	1	1 82010	11	0	
*				310	190	150	10		2	1	10,600	1	1 82010	20	0	
*				310	190	200	10		2	1	11,400	1	1 82010	21	0	
				360	240	150	10		2	1	14,550	1	1 82010	30	0	
*				360	240	200	10		2	1	15,600	1	1 82010	31	0	
				360	240	250	10		2	1	16,900	1	1 82010	32	0	
*				420	300	200	10	2	2	1	21,600	1	1 82010	40	0	
*				420	300	250	10	2	2	1	25,000	1	1 82010	41	0	
				420	300	300	10	2	2	1	24,500	1	1 82010	42	0	
				490	360	200	10	2	2	1	33,000	1	1 82010	50	0	
*				490	360	250	10	2	2	1	30,500	1	1 82010	51	0	
				490	360	300	10	2	2	1	31,700	1	1 82010	52	0	
				360	490	200	10	2	4	2	32,200	1	1 82010	70	0	
				360	490	250	10	2	4	2	34,400	1	1 82010	71	0	
				360	490	300	10	2	4	2	35,700	1	1 82010	72	0	
				420	550	200	12	2	4	2	39,700	1	1 82010	80	0	
				420	550	250	12	2	4	2	41,300	1	1 82010	81	0	
				420	550	300	12	2	4	2	43,500	1	1 82010	82	0	
				490	620	200	12	2	4	2	51,000	1	1 82010	90	0	
				490	620	250	12	2	4	2	52,800	1	1 82010	91	0	
				490	620	300	12	2	4	2	54,800	1	1 82010	92	0	




Technical features:
- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm.)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:
- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions



- Key and 3-knob combinator version
- 2 keys item 1.00101.00.2

	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
		310	190	150	10		2	1	11,000	1	1 82210 20 0	
		310	190	200	10		2	1	12,000	1	1 82210 21 0	
		360	240	150	10		2	1	15,000	1	1 82210 30 0	
*		360	240	200	10		2	1	15,850	1	1 82210 31 0	
		360	240	250	10		2	1	12,900	1	1 82210 32 0	
*		420	300	200	10	2	2	1	22,200	1	1 82210 40 0	
		420	300	250	10	2	2	1	23,500	1	1 82210 41 0	
		420	300	300	10	2	2	1	24,750	1	1 82210 42 0	
		490	360	200	10	2	2	1	28,700	1	1 82210 50 0	
		490	360	250	10	2	2	1	30,500	1	1 82210 51 0	
		490	360	300	10	2	2	1	32,000	1	1 82210 52 0	
		360	490	200	10	2	4	2	29,400	1	1 82210 70 0	
		360	490	250	10	2	4	2	30,950	1	1 82210 71 0	
		360	490	300	10	2	4	2	36,150	1	1 82210 72 0	
		420	550	200	12	2	4	2	40,000	1	1 82210 80 0	
		420	550	250	12	2	4	2	42,850	1	1 82210 81 0	
		420	550	300	12	2	4	2	43,900	1	1 82210 82 0	
		490	620	200	12	2	4	2	51,000	1	1 82210 90 0	
		490	620	250	12	2	4	2	52,800	1	1 82210 91 0	
		490	620	300	12	2	4	2	55,250	1	1 82210 92 0	



- 3-knob combinator only version




	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
		310	190	150	10		2	1	10,800	1	1 82410 20 0	
		310	190	200	10		2	1	11,700	1	1 82410 21 0	
		360	240	150	10		2	1	14,700	1	1 82410 30 0	
*		360	240	200	10		2	1	15,800	1	1 82410 31 0	
		360	240	250	10		2	1	17,300	1	1 82410 32 0	
		420	300	200	10	2	2	1	22,000	1	1 82410 40 0	
		420	300	250	10	2	2	1	23,150	1	1 82410 41 0	
		420	300	300	10	2	2	1	24,500	1	1 82410 42 0	
		490	360	200	10	2	2	1	28,950	1	1 82410 50 0	
		490	360	250	10	2	2	1	30,700	1	1 82410 51 0	
		490	360	300	10	2	2	1	35,000	1	1 82410 52 0	
		360	490	200	10	2	4	2	29,500	1	1 82410 70 0	
		360	490	250	10	2	4	2	31,000	1	1 82410 71 0	
		360	490	300	10	2	4	2	35,700	1	1 82410 72 0	
		420	550	200	12	2	4	2	40,700	1	1 82410 80 0	
		420	550	250	12	2	4	2	42,000	1	1 82410 81 0	
		420	550	300	12	2	4	2	44,000	1	1 82410 82 0	
		490	620	200	12	2	4	2	50,700	1	1 82410 90 0	
		490	620	250	12	2	4	2	53,000	1	1 82410 91 0	
		490	620	300	12	2	4	2	54,500	1	1 82410 92 0	



Technical features:
- Modular front and safe compartment
- 10 mm. thick steel front
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:
- Frame edge cover
- Shelf
- Bolts for fixing the compartment
- Instruction sheet
- Installation instructions


Darwin

Type	Description	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
	• Safe compartment with temporary cover	*	470	336	200				-	10,650	1	1	83000	40	0	
			470	336	250				-	12,000	1	1	83000	41	0	
	• Faceplate with key • Two keys item 1.00101.00.2 • To be combined with item 83000.40/41		420	300		10	2	2	1	19,400	1	1	83010	40	0	
	• Back-lit alphanumeric keypad • Faceplate with electronic combinator • Internal light • To be combined with item 83000.40/41 • 1.5 V alkaline thin battery operation • Laser welded sealing parts assembly • SUPPLIED AS STANDARD: • Power cable • Shelf	*	420	300		10	2	2	1	18,300	1	1	83710	40	0	



Technical features:
- 8 mm. thick steel doors with laser cut between the frame and door
- Nickel-plated steel anti-sawing rolling deadbolts (diameter 22 mm.)
- Seals are assembled through automated welding
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door

Supplied as standard:
- Shelves (where these are provided for)
- Installation instructions
- Instruction sheet



- Key only version
- 2 keys item 1.00100.00.2


Type	Description	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
		*	310	190	145	8		2	1	9,400	1	1 8A010	20	0			
		*	310	190	195	8		2	1	10,300	1	1 8A010	21	0			
		*	360	240	145	8		2	1	12,650	1	1 8A010	30	0			
		*	360	240	195	8		2	1	13,700	1	1 8A010	31	0			
		*	420	300	195	8		2	1	18,100	1	1 8A010	40	0			
		*	420	300	245	8		2	1	20,000	1	1 8A010	41	0			



Technical features:
- Lit keypad.
- 10 mm thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:
- Power cable
- Shelves (where these are provided for)
- Use and maintenance instructions
- Installation instructions.

DGT Vision



- Back-lit alphanumeric keypad
- Electronic combinator
- Internal light
- 1.5 V alkaline thin battery operation
- Removable door
- Laser welded sealing parts assembly
- Sound and visual indications
- Tamper-proof lock


Type	Description	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
		*	360	240	300	10		2	1	28,200	1	1	82750	34	0	
		*	420	300	350	10	2	2	1	40,500	1	1	82750	43	0	
			490	360	350	10	2	2	1	51,000	1	1	82750	53	0	
			360	490	400	10	2	4	2	55,650	1	1	82750	74	0	
			420	550	450	12	2	4	2	75,000	1	1	82750	85	0	
			490	620	450	12	2	4	2	92,000	1	1	82750	95	0	



Technical features:
- Lit keypad.
- 10 mm thick, steel front
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:
- Window sticker
- Power cable
- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

DGT Cash




- Back-lit alphanumeric keypad
- Slot to introduce money or papers
- Opening delay programmable between 1 and 99 minutes
- Electronic combinator
- Internal light
- 1.5 V alkaline battery powered
- Removable door
- Laser welded sealing part assembly

Type	Description	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand	Fin.	Pers.	Spec.
			360	270	300	10		2	1	22,200	1	1	82751	35	0	
			360	520	400	10	2	4	2	52,400	1	1	82751	75	0	



Technical features:
- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:
- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions




- Key only version
- Two keys item 1.00101.00.2

Type	Description	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand	Fin.	Pers. Spec.
			360	240	300	10		2	1	28,300	1	1	82050	34	0
			420	300	350	10	2	2	1	40,900	1	1	82050	43	0
			490	360	350	10	2	2	1	54,000	1	1	82050	53	0
			360	490	400	10	2	4	2	54,900	1	1	82050	74	0
			420	550	450	12	2	4	2	75,500	1	1	82050	85	0
			490	620	450	12	2	4	2	92,000	1	1	82050	95	0




Technical features:
- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:
- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions



- Key and 3-knob combinator version
- Two keys item 1.00101.00.2

Type	Description	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
			360	240	300	10		2	1	28,600	1	1	82250	34	0		
			420	300	350	10	2	2	1	42,800	1	1	82250	43	0		
			490	360	350	10	2	2	1	55,000	1	1	82250	53	0		
			360	490	400	10	2	4	2	59,000	1	1	82250	74	0		
			420	550	450	12	2	4	2	75,750	1	1	82250	85	0		
			490	620	450	12	2	4	2	93,080	1	1	82250	95	0		




- 3-knob combinator only version

Type	Description	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
			360	240	300	10		2	1	28,600	1	1	82450	34	0		
			420	300	350	10	2	2	1	42,200	1	1	82450	43	0		
			490	360	350	10	2	2	1	53,800	1	1	82450	53	0		
			360	490	400	10	2	4	2	58,700	1	1	82450	74	0		
			420	550	450	12	2	4	2	75,600	1	1	82450	85	0		
			490	620	450	12	2	4	2	92,500	1	1	82450	95	0		



Technical features:
- 8 mm thick, steel front
- Seals are assembled using tough welds
- Nickel-plated rolling steel deadbolts (diameter 22 mm)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.

Supplied as standard:
- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions



- Key only version
- 2 keys item 1.00100.00.2

Type	Description	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight (Kg)	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers. Spec.
			310	190	250	8		2	1	13,200	1	1	8A050	23	0	
			360	240	300	8		2	1	19,600	1	1	8A050	34	0	
			420	300	350	8		2	1	27,350	1	1	8A050	43	0	




Technical features:
- Door laser cut
- Audit trail can be stored to an SD card
- Automatic interior lighting
- Easy-to-read ADA-compliant keypad
- 7-digit led display
- Size to place a 15" laptop inside
- 2-level service Master Code
- Motorised lock
- Emergency mechanical override

Supplied as standard:
- 4x AARL6 batteries
- Interior carpet
- Emergency key
- Interior lighting









On request:
- Internal power socket
- Left hand opening
- AP3 S protected duplication emergency key

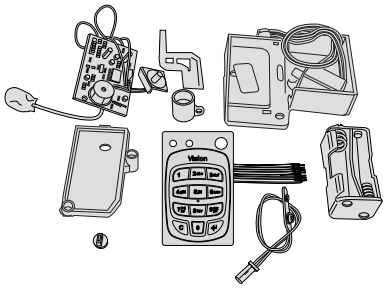

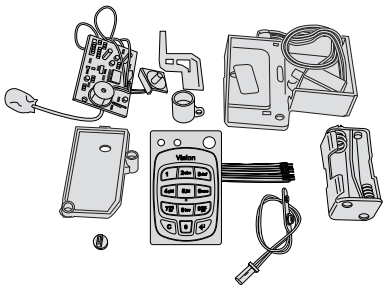

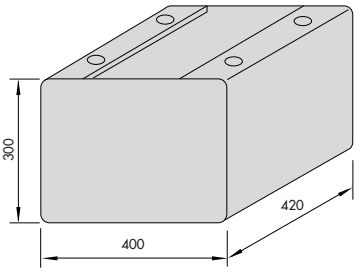

Finishes:
- Supplied as standard:
  Dark grey Grafite" (RAL 7015)
- On request:
  Light grey Silicon (RAL 7032)





CISA eSIGNO





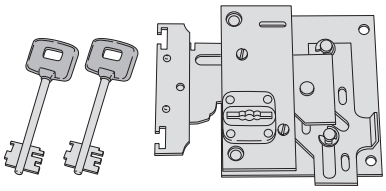



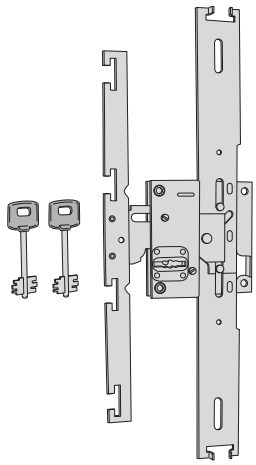
Type	Description	Prompt delivery	Outside dim. L	H	P	Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• C2000 cylinder for mechanical emergency override • Finish: silica gray	DX	190	430	350	5		2	-	11,600	1	1	A0L02	01	0		
		SX	190	430	350	5		2	-	11,600	1	1	A0L02	01	4		
	• C2000 cylinder for mechanical emergency override • Finish: graphite gray	DX	190	430	350	5		2	-	11,600	1	1	A0L02	01	0	93	
		SX	190	430	350	5		2	-	11,600	1	1	A0L02	01	4	93	
	• C2000 cylinder for mechanical emergency override • Finish: silica gray • Power supply socket	DX	190	430	350	5		2	-	11,600	1	1	A0L02	31	0		
		SX	190	430	350	5		2	-	11,600	1	1	A0L02	31	4		
	• C2000 cylinder for mechanical emergency override • Finish: graphite gray • Power supply socket	DX	190	430	350	5		2	-	11,600	1	1	A0L02	31	0	93	
		SX	190	430	350	5		2	-	11,600	1	1	A0L02	31	4	93	
	• AP3 S cylinder for mechanical emergency override • Finish: silica gray	DX	190	430	350	5		2	-	11,600	1	1	A0L01	01	0		
		SX	190	430	350	5		2	-	11,600	1	1	A0L01	01	4		
	• AP3 S cylinder for mechanical emergency override • Finish: graphite gray	DX	190	430	350	5		2	-	11,600	1	1	A0L01	01	0	93	
		SX	190	430	350	5		2	-	11,600	1	1	A0L01	01	4	93	
	• AP3 S cylinder for mechanical emergency override • Finish: silica gray • Power supply socket	DX	190	430	350	5		2	-	11,600	1	1	A0L01	31	0		
		SX	190	430	350	5		2	-	11,600	1	1	A0L01	31	4		
	• AP3 S cylinder for mechanical emergency override • Finish: graphite gray • Power supply socket	DX	190	430	350	5		2	-	11,600	1	1	A0L01	31	0	93	
		SX	190	430	350	5		2	-	11,600	1	1	A0L01	31	4	93	


Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Combinator dial and plate	1 58010 00 0	0,200	1	**1 07095 00 0**
	• Set of 3 knobs and combinator changing key	1 58011 00 0	0,150	1	**1 07108 00 0**
	• Lock operating knob	1 57424 30 1, 1 57429 30 1	0,160	1	**1 07109 00 0**
	• Changing key for safes with combinator	1 58010 00 0, 82310, 82350, 82510, 82550	0,020	1	**1 07109 01 0**
	• Changing key set for safes with 3-knob combinator	1 58011 00 0, 82210, 82250, 82410, 82450	0,040	0	**1 07109 03 0**
	• 9V battery holder	82610, 82650	0,030	1	**1 07114 00 0**
	• Electronic board 6V master code		0,035	1	**1 07114 12 0**
	• Electronic board for Digit Vision safe	82710, 82750	0,035	1	**1 07114 15 0**
	• 6V battery holder	82610, 82650, 82710, 82750	0,030	1	**1 07114 05 0**
	• Solenoide plate group 6V		0,250	0	**1 07114 06 0**

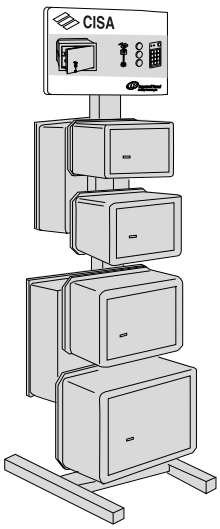
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Kit to convert from safes Digit to safes Digit Vision Master Code		0,370	1	**1 07114 11 0**
	• Key pad for Digit Vision safe		0,005	1	**1 07114 16 0**
	• Kit to convert from safes Digit to safes Digit Vision		0,370	1	**1 07114 17 0**
	• Lacquered steel support for furniture safes	1 82050 74 0, 1 82250 74 0, 1 82350 74 0, 1 82450 74 0, 1 82550 74 0, 1 82650 74 0	16,650	1	**1 07125 00 0**
	• Lacquered steel support for furniture safes	1 82050 85 0, 1 82050 95 0, 1 82250 85 0, 1 82250 95 0, 1 82350 85 0, 1 82350 95 0, 1 82450 85 0, 1 82450 95 0, 1 82550 85 0, 1 82550 95 0	17,950	1	**1 07125 01 0**
	• 9V external power supply cable	82610, 82650, 82651	0,030	1	**1 07430 31 0**

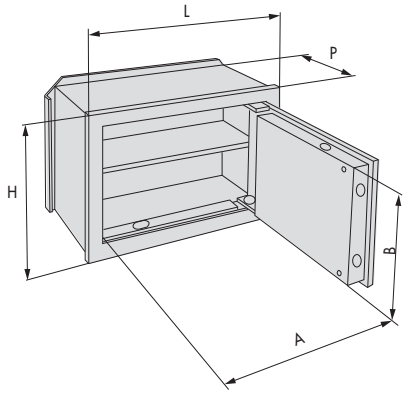
Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• 6V external power supply cable	82710, 82750, 82751	0,030	1	1	07430	32	0		
	• Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR KEY-OPERATED SAFES: item 1.82010.10.0 item 1.82010.11.0		0,426	1	1	57409	30	1		
	• Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR SAFES OPERATED EITHER BY KEY ONLY OR KEY AND MECHANICAL COMBINATOR: Series 82010.20 ÷ 32 Series 82050.34 Series 82210.20 ÷ 32 Series 82250.34 Series 82310.30 ÷ 32 Series 82350.34		0,460	1	1	57411	30	1		
	• Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR 1 STAR SAFES OPERATED BY KEY ONLY: Series 8A010.20 ÷ 41		0,460	1	1	57411	31	1		
	• Zinc plated steel lock • Three locking points • Two keys item 1.00101.00.2 • FOR SAFES OPERATED EITHER BY KEY ONLY OR KEY AND MECHANICAL COMBINATOR: Series 82010.40 ÷ 92 Series 82050.43 ÷ 95 Series 82210.40 ÷ 92 Series 82250.43 ÷ 95 Series 82310.40 ÷ 92 Series 82350.43 ÷ 95 Series 83010.40		0,620	1	1	57416	30	1		
	• Zinc plated steel lock • Three locking points • Two keys item 1.00101.00.2 • FOR 1 STAR SAFES OPERATED BY KEY ONLY: Series 8A010.50/51		0,620	1	1	57416	31	1		

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Zinc plated single throw steel lock • Three locking points • FOR SAFES OPERATED EITHER BY MECHANICAL OR ELECTRONICAL COMBINATOR: Series 82410.40 ÷ 92 Series 82450.43 ÷ 95 Series 82510.40 ÷ 92 Series 82550.43 ÷ 95 Series 82610.40 ÷ 72 Series 82650.43 ÷ 74 Series 83610.40		0,500	1	1 57424 30 1
	• Zinc plated single throw steel lock • One locking point • FOR SAFES OPERATED EITHER BY MECHANICAL OR ELECTRONICAL COMBINATOR: Series 82410.20 ÷ 32 Series 82450.34 Series 82510.30 ÷ 32 Series 82550.34 Series 82610.30 ÷ 32 Series 82650.34		0,400	1	1 57429 30 1
	• Combinator dial	82310, 82315, 82350, 82510, 82515, 82550	0,400	1	1 58010 00 0
	• 3-knob combinator	82210, 82250, 82410, 82450	0,430	1	1 58011 00 0
	• Steel lock with zinc coating • One locking point • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts	1 82010 10 0, 1 82010 11 0, 1 82010 20 0, 1 82010 21 0, 1 82210 20 0, 1 82210 21 0	0,426	1	1 B7409 30 1
			0,426	1	1 B7410 30 1
	• Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts	1 82010 40 0, 1 82010 41 0, 1 82010 42 0, 1 82050 43 0, 1 82210 40 0, 1 82210 41 0, 1 82210 42 0, 1 82250 43 0	0,426	1	1 B7412 30 1
	• Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts	1 82010 50 0, 1 82010 51 0, 1 82010 52 0, 1 82050 53 0	0,426	1	1 B7414 30 1

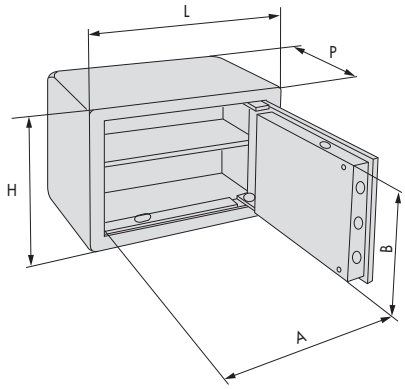
Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Steel lock with zinc coating • One locking point • Suitable for safes with turning deadbolts	1 82410 20 0, 1 82410 21 0, 1 82410 30 0, 1 82410 31 0, 1 82410 32 0, 1 82450 34 0, 1 82710 30 0, 1 82710 31 0, 1 82710 32 0, 1 82750 34 0, 1 82751 35 0	0,426	1	1 **B7411 30 1**
	• Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts	1 82410 50 0, 1 82410 51 0, 1 82410 52 0, 1 82450 53 0, 1 82710 50 0, 1 82710 51 0, 1 82710 52 0, 1 82750 53 0	0,426	1	1 **B7415 30 1**
	• Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts	1 82210 41 0, 1 82410 40 0, 1 82410 42 0, 1 82450 43 0, 1 82710 40 0, 1 82710 41 0, 1 82710 42 0, 1 82750 43 0	0,426	1	1 **B7413 30 1**
	• Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts	1 82010 70 0, 1 82010 71 0, 1 82010 72 0, 1 82050 74 0, 1 82210 70 0, 1 82210 71 0, 1 82210 72 0, 1 82250 74 0	0,426	1	1 **B7424 30 1**
	• Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts	1 82010 80 0, 1 82010 81 0, 1 82010 82 0, 1 82050 85 0, 1 82210 80 0, 1 82210 81 0, 1 82210 82 0, 1 82250 85 0	0,426	1	1 **B7426 30 1**
	• Steel lock with zinc coating • Three locking points • Two keys item 1.00101.00.2 • Suitable for safes with turning deadbolts	1 82010 90 0, 1 82010 91 0, 1 82010 92 0, 1 82050 95 0, 1 82210 90 0, 1 82210 91 0, 1 82210 92 0, 1 82250 95 0	0,426	1	1 **B7428 30 1**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts	1 82410 70 0, 1 82410 71 0, 1 82410 72 0, 1 82450 74 0, 1 82710 70 0, 1 82710 71 0, 1 82710 72 0, 1 82750 74 0, 1 82751 75 0	0,426	1	**1**	**B7425**	**30**	**1**		
	• Steel lock with zinc coating • Three locking points • Suitable for safes with turning deadbolts	1 82410 90 0, 1 82410 91 0, 1 82410 92 0, 1 82450 95 0, 1 82710 90 0, 1 82710 91 0, 1 82710 92 0, 1 82750 95 0, 1 82750 95 0	0,426	1	**1**	**B7429**	**30**	**1**		

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers.	Spec.
	• DISPLAY FOR WALL SAFES • WITH ADJUSTABLE SUPPORTS • FOR WALL AND STANDING SAFES		15,000	1	1	06610	50	0	

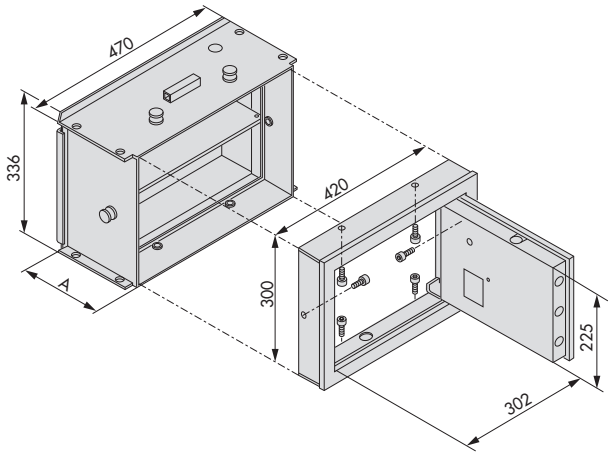


ITEM	DIMENSIONS (mm) Outside L	H	P	Inside L	H	P	A	B	Rear Outside	Deadbolt	Shelfes	Weight Kg
1-8A010-20	310	190	150	292	172	100	192	115	340 210	2	1	12,9
1-8A010-21	"	"	200	"	"	150	192	115	340 210	2	1	13,6
1-8A010-30	360	240	150	342	222	100	242	165	390 260	2	1	17,5
1-8A010-31	"	"	200	"	"	150	242	165	390 260	2	1	18,4
1-8A010-40	420	300	200	402	282	150	302	225	450 320	2	1	24,7
1-8A010-41	"	"	250	"	"	200	302	225	450 320	2	1	25,8
1-82010-10	260	170	150	242	152	100	142	95	290 190	2	-	7,3
1-82010-11	"	"	200	"	"	150	142	95	290 190	2	-	8,0
1-82010-20 1-82210-20 1-82410-20	310	190	150	292	172	100	192	115	340 210	2	1	12,9
1-82010-21 1-82210-21 1-82410-21	"	"	200	"	"	150	192	115	340 210	2	1	13,6
1-82010-22 1-82210-22 1-82410-22	"	"	250	"	"	200	192	115	340 210	2	1	14,4
1-82010-30 1-82210-30 1-82410-30 1-82710-30	360	240	150	342	222	100	242	165	390 260	2	1	17,5
1-82010-31 1-82210-31 1-82410-31 1-82710-31	"	"	200	"	"	150	242	165	390 260	2	1	18,4
1-82010-32 1-82210-32 1-82410-32 1-82710-32	"	"	250	"	"	200	242	165	390 260	2	1	19,3
1-82010-40 1-82210-40 1-82410-40 1-82710-40	420	300	200	402	282	150	302	225	450 320	4+2	1	24,7
1-82010-41 1-82210-41 1-82410-41 1-82710-41	"	"	250	"	"	200	302	225	450 320	4+2	1	25,8
1-82010-42 1-82210-42 1-82410-42 1-82710-42	"	"	300	"	"	250	302	225	450 320	4+2	1	26,9
1-82010-50 1-82210-50 1-82410-50 1-82710-50	490	360	200	472	342	150	372	285	520 380	4+2	1	33,1
1-82010-51 1-82210-51 1-82410-51 1-82710-51	"	"	250	"	"	200	372	285	520 380	4+2	1	34,4
1-82010-52 1-82210-52 1-82410-52 1-82710-52	"	"	300	"	"	250	372	285	520 380	4+2	1	35,7
1-82010-70 1-82210-70 1-82410-70 1-82710-70	360	490	200	342	472	150	242	415	390 510	4+2	2	33,1
1-82010-71 1-82210-71 1-82410-71 1-82710-71	"	"	250	"	"	200	242	415	390 510	4+2	2	34,4
1-82010-72 1-82210-72 1-82410-72 1-82710-72	"	"	300	"	"	250	242	415	390 510	4+2	2	35,7
1-82010-80 1-82210-80 1-82410-80 1-82710-80	420	550	200	402	532	150	302	475	450 570	4+2	2	39,7
1-82010-81 1-82210-81 1-82410-81 1-82710-81	"	"	250	"	"	200	302	475	450 570	4+2	2	41,3
1-82010-82 1-82210-82 1-82410-82 1-82710-82	"	"	300	"	"	250	302	475	450 570	4+2	2	42,9
1-82010-90 1-82210-90 1-82410-90 1-82710-90	490	620	200	472	602	150	372	545	520 640	4+2	2	51,0
1-82010-91 1-82210-91 1-82410-91 1-82710-91	"	"	250	"	"	200	372	545	520 640	4+2	2	52,8
1-82010-92 1-82210-92 1-82410-92 1-82710-92	"	"	300	"	"	250	372	545	520 640	4+2	2	54,6



ITEM	DIMENSIONS (mm) Outside L	H	P	Inside L	H	P	A	B	Deadbolt	Shelfes	Weight Kg
1-8A050-23	360	240	300	350	230	245	242	165	2	1	13,2
1-8A050-34	420	300	350	410	290	295	302	225	2	1	19,6
1-8A050-43	490	360	350	480	350	295	372	285	2	1	22,5
1-82050-34 1-82250-34 1-82450-34 1-82750-34	360	240	300	350	230	245	242	165	2	1	25,5
1-82050-43 1-82250-43 1-82450-43 1-82750-43	420	300	350	410	290	295	302	225	4+2	1	38,7
1-82050-53 1-82250-53 1-82450-53 1-82750-53	490	360	350	480	350	295	372	285	4+2	1	49,5
1-82050-74 1-82250-74 1-82450-74 1-82750-74	360	490	400	350	480	345	242	415	4+2	2	54,2
1-82050-85 1-82250-85 1-82450-85 1-82750-85	420	550	450	410	540	395	302	475	4+2	2	69,4
1-82050-95 1-82250-95 1-82450-95 1-82750-95	490	620	450	480	610	395	372	545	4+2	2	84,5
1-82751-34	360	240	300	350	230	245	242	165	2	1	27,2
1-82751-74	360	490	400	350	480	345	242	415	4+2	2	52,4
1-A0L01-01	430	190	350	427	185	295	131	365	1		11,6
1-A0L01-31	430	190	350	427	185	295	131	365	1		11,6
1-A0L02-01	430	190	350	427	185	295	131	365	1		11,6
1-A0L02-31	430	190	350	427	185	295	131	365	1		11,6

2



	DIMENSIONS (mm) Esterne L	H	P	Inside L	H	P	Outside A	B	Rear outside		Deadbolt	Shelfes	Weight Kg
SAFES COMPARTMENT													
1-83000-40	470	336	200	420	300	200	-	-	450	320	-	-	15,2
1-83000-41	"	"	250	"	"	250	-	-	"	"	-	-	16,3
FRONTAL													
1-83010-40	420	300	-	-	-	-	302	225	-	-	2+2	-	19,4
1-83710-40	"	"	-	-	-	-	"	"	-	-	2+2	-	19,7

3



Keying components for cylinders and padlocks 592
Keying components for double-bit key locks..... 593
Assembling tools for cylinders and padlocks 605

Cylinders and padlocks are available in **SEMI-ASSEMBLED** or **UNASSEMBLED** versions :

- "**SEMI - ASSEMBLED**"(ready for keying)
- "**UNASSEMBLED**" (completely unassembled)

In both cases, keys, pins, drivers, springs, pin hole plugs, circlips, are to be ordered separately.

CYLINDERS	SEMI-ASSEMBLED 90			UNASSEMBLED 91				
	STD	C2000	SP	STD	C2000	SP	Astral Astral-S	Astral Tekno
• Euro profile double cylinders	TO BE DISCONTINUED	TO BE DISCONTINUED	TO BE DISCONTINUED	●	●	TO BE DISCONTINUED	●	●
• Euro profile single cylinders				●	●		●	●
• Euro profile thumb turn cylinders				-	●		●	●
• Rim cylinders, cam locks, furniture cylinders				-	●		●	●
• Rim cylinder set				-	●		●	●
• Hardened steel padlock cylinders				-	-		●	●








BRASS PADLOCKS	SEMI-ASSEMBLED 90	
	STANDARD	LIM
• 22010-30/40	●	See PP
• 22010-50/60	●	









HARDENED STEEL PADLOCKS in "**UNASSEMBLED**" version 91







- Hardened steel padlocks in **UNASSEMBLED** version are supplied without cylinder and without the cylinder and padlock drill resistant plate
  When ordering the padlock cylinder you must specify separately the relevant padlock drill resistant plate (the cylinder drill resistant plate is supplied as standard).






HARDENED STEEL PADLOCKS	
• 28050-55/56/57, 28350-62	●
• 28050-70/71/72, 28350-73, 28550-66/67/75/84/85	●








CISA®






Type	Description	Bitting	H	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Bronze pin for cylinders and padlocks with key item 00401, 01310, 01320, 01330 • root depth: 0.65 mm.	1	5,20	0,305	1000	1 07551 01 0
		2	5,85	0,340	1000	1 07551 02 0
		3	6,50	0,370	1000	1 07551 03 0
		4	7,15	0,384	1000	1 07551 04 0
		5	7,80	0,430	1000	1 07551 05 0
		6	8,45	0,480	1000	1 07551 06 0
	• Bronze pin for cylinders and padlocks with key item 00500 and 00450 • root depth: 0.5 mm.		4,00	0,235	1000	1 07551 11 0
		1	4,50	0,250	1000	1 07551 12 0
		2	5,00	0,250	1000	1 07551 13 0
		3	5,50	0,315	1000	1 07551 14 0
		4	6,00	0,330	1000	1 07551 15 0
		5	6,50	0,365	1000	1 07551 16 0
		6	7,00	0,400	1000	1 07551 17 0
		7	7,50	0,480	1000	1 07551 18 0
	• Bronze pin for C2000 cylinders with key item 01070 • root depth: 0.44 mm.	1	5,20	0,305	1000	1 07551 01 0
		2	5,64	0,285	1000	1 07551 41 0
		3	6,07	0,330	1000	1 07551 42 0
		4	6,50	0,370	1000	1 07551 03 0
		5	6,94	0,365	1000	1 07551 43 0
		6	7,37	0,400	1000	1 07551 44 0
		7	7,80	0,430	1000	1 07551 05 0
		8	8,25	0,460	1000	1 07551 45 0
	• Bronze pin for ASTRAL and ASIX cylinders with key item 1.00620.01.0, 1.00620.90.0, 1.00670.01.0 • root depth: 0.48 mm.	1	5,05	0,255	1000	1 07551 71 0
		2	5,53	0,185	1000	1 07551 72 0
		3	6,01	0,290	1000	1 07551 73 0
		4	6,49	0,185	1000	1 07551 74 0
		5	6,97	0,185	1000	1 07551 75 0
		6	7,45	0,185	1000	1 07551 76 0
	• Bronze pin for padlocks with key item 01410, 01420, 01425, 01430 • root depth: 0.65 mm.	1	4,45	0,206	1000	1 07551 51 0
		2	5,10	0,250	1000	1 07551 52 0
		3	5,75	0,260	1000	1 07551 53 0
		4	6,40	0,300	1000	1 07551 54 0
		5	7,05	0,322	1000	1 07551 55 0
		6	7,70	0,350	1000	1 07551 56 0
	• Hardened steel upper passive pin ASTRAL		5,80	0,241	1000	1 07551 79 0
	• Brass driver for cylinders and padlocks with key item 00401, 00450, 00500, 01310, 01320, 01330, 01070		3,00	0,295	1000	1 07552 01 0
			4,00	0,226	1000	1 07552 02 0
			5,00	0,305	1000	1 07552 03 0









Type	Description	Bitting	H	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Brass driver for cylinders and padlocks with key item 01410, 01420, 01425, 01430		3,85	0,215	1000	1 07552 51 0
	• Brass driver for padlocks item 1.22010.30.0		3,4	0,215	1000	1 07552 04 0
	• Mushroom brass driver for ASTRAL cylinders with key item 1.00620.01.0, 1.00620.90.0	1	8,00	0,410	1000	1 07552 71 0
		2	7,50	0,410	1000	1 07552 72 0
		3	7,00	0,410	1000	1 07552 73 0
		4	6,50	0,410	1000	1 07552 74 0
		5	6,00	0,410	1000	1 07552 75 0
	• Brass driver for ASTRAL and ASIX cylinders with key item 1.00620.01.0, 1.00620.90.0, 1.00670.00.0	6	5,50	0,410	1000	1 07552 76 0
	• Brass driver for ASTRAL and ASIX rim cylinders with key item 1.00620.01.0, 1.00620.90.0, 1.00670.01.0	1	5,50	0,410	1000	1 07552 81 0
		2	0,00	0,410	1000	1 07552 82 0
		3	4,50	0,410	1000	1 07552 83 0
		4	3,95	0,410	1000	1 07552 84 0
		5	3,30	0,410	1000	1 07552 85 0
		6	2,65	0,410	1000	1 07552 86 0
	• Mushroom brass driver for cylinders and padlocks with key item 00401, 00450, 00500, 01310, 01320, 01330, 01070		3,00	0,255	1000	1 07553 01 0
			4,00	0,212	1000	1 07553 02 0
			5,00	0,228	1000	1 07553 03 0
	• Mushroom brass driver for cylinders and padlocks with key item 01410, 01420, 01425, 01430		3,85	0,170	1000	1 07553 51 0
	• Mushroom brass driver for padlocks item 1.22010.30.0		3,4	0,170	1000	1 07553 04 0
	• Brass spring for cylinders series 02500 and 06500		13,50	0,095	1000	1 07554 01 0
	• Brass spring for cylinders series 02550, 02552, 06200		10,50	0,080	1000	1 07554 02 0
	• Brass spring for: Cylinders series C2000, 08300, 08700, 08800 Padlocks item 1.22010.50/60 and 1.26010.50/60		15,50	0,094	1000	1 07554 03 0
	• Brass spring for cylinders series 07573		10,70	0,102	1000	1 07554 05 0
	• Brass spring for padlocks item 1.22010.30/40		9,00	0,080	1000	1 07554 51 0







Type	Description	Bitting	H	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Bronze spring for ASTRAL SIGILLO cylinders		9,50	0,078	1000	1 07554 71 0
	• Bronze spring for ASTRAL ASIX cylinders		12,00	0,065	1000	1 07554 72 0
	• Bronze spring for ASTRAL and ASIX rim cylinders		10,00	0,102	1000	1 07554 73 0
	• Steel spring for snap resistant cylinders SIGILLO		9,50	0,078	1000	1 07554 91 0
	• Steel spring for mortice cylinders		12,00	0,065	1000	1 07554 92 0
	• Brass master pin for cylinders and padlocks with key item 00401, 01310, 01320, 01330, 01070 • root depth: 0,65 mm.	1	0,55	0,070	1000	1 07555 01 0
		2	1,20	0,100	1000	1 07555 02 0
		3	1,85	0,145	1000	1 07555 03 0
		4	2,50	0,177	1000	1 07555 04 0
		5	3,15	0,213	1000	1 07555 05 0
	• Brass master pin for cylinders and padlocks with key item 00401, 01310, 01320, 01330, 01070 • root depth: 0,65 mm.	1	0,65	0,078	1000	1 07555 11 0
		2	1,30	0,100	1000	1 07555 12 0
		3	1,95	0,145	1000	1 07555 13 0
		4	2,65	0,175	1000	1 07555 14 0
	• Brass master pin for cylinders and padlocks with key item 00450, 00500 • root depth: 0,5 mm.	2	1,00	0,095	1000	1 07555 21 0
		3	1,50	0,120	1000	1 07555 22 0
		4	2,00	0,130	1000	1 07555 23 0
		5	2,50	0,185	1000	1 07555 24 0
		6	3,00	0,170	1000	1 07555 25 0
		7	3,50	0,230	1000	1 07555 26 0
	• Additional brass master pin for complex systems with ASTRAL, ASIX, C3000, TEKNO and AP4 cylinders • root depth 0,48 mm.	2	0,96	0,078	1000	1 07555 31 0
		3	1,44	0,078	1000	1 07555 32 0
		4	1,92	0,078	1000	1 07555 39 0
		5	2,40	0,078	1000	1 07555 40 0
	• Brass master pin for ASTRAL, ASIX,C3000, TEKNO and AP4 cylinders • root depth: 0,48 mm.	2	0,88	0,213	1000	1 07555 33 0
		3	1,36	0,213	1000	1 07555 34 0
		4	1,84	0,213	1000	1 07555 35 0
		5	2,32	0,213	1000	1 07555 36 0
		6	2,80	0,213	1000	1 07555 37 0
		7	3,28	0,213	1000	1 07555 38 0
	• Brass master pin for cylinders and padlocks with key item 01410, 01420, 01425, 01430 • root depth: 0,65 mm.	1	0,55	0,067	1000	1 07555 51 0
		2	1,20	0,095	1000	1 07555 52 0
		3	1,85	0,125	1000	1 07555 53 0
		4	2,50	0,153	1000	1 07555 54 0
		5	3,15	0,170	1000	1 07555 55 0
	• Additional brass master pin for complex systems with key item 01410, 01420, 01425, 01430 • root depth: 0,65 mm.	1	0,65	0,073	1000	1 07555 61 0
		2	1,30	0,097	1000	1 07555 62 0
		3	1,95	0,121	1000	1 07555 63 0
		4	2,60	0,154	1000	1 07555 64 0







Type	Description	Bitting	H	Unit weight (Kg)	Pieces	ITEM Type	Dim. Hand	Fin.	Pers.	Spec.
	• Brass plug retaining pin for padlocks item 1.22010.30.0		11,6	0,165	250	1	07556	03	0	
	• Brass plug retaining pin for padlocks item 1.22010.40.0		16,8	0,270	250	1	07556	04	0	
	• Brass plug retaining pin for padlocks item 1.22010.50.0		21,2	0,313	250	1	07556	05	0	
	• Brass plug retaining pin for padlocks item 1.22010.60.0		26,1	0,360	250	1	07556	06	0	
	• Brass pin hole plug for padlocks item 1.22010.50.0		4,50	0,323	1000	1	07557	01	0	
	• Brass pin hole plug for padlocks item 1.22010.60.0		9,50	0,630	1000	1	07557	02	0	
	• Brass pin hole plug for cylinders series C2000, 08300, 08700, 08800		5,5	0,295	1000	1	07557	11	0	
	• Pin hole plug for padlocks item 1.22010.40.0		5,50	0,322	1000	1	07557	52	0	
	• Pin hole plug for padlocks item 1.22010.30.0		2,6	0,322	1000	1	07557	03	0	
	• Brass plug retaining circlip for rim cylinders			0,195	250	1	07558	01	0	
	• Brass circlip for rim cylinders			0,275	250	1	07558	02	0	
	• Brass plug retaining circlip for cylinders series 07573			0,275	250	1	07558	03	0	
	• Steel circlip for rim cylinders			0,275	250	1	07558	05	0	







Type	Description	Bitting	H	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Hardened steel pin for cylinders and padlock with key item 00401, 01310, 01320, 01330	1	5,20	0,220	1000	**1 07571 01 0**
		2	5,85	0,265	1000	**1 07571 02 0**
		3	6,50	0,300	1000	**1 07571 03 0**
		4	7,15	0,335	1000	**1 07571 04 0**
		5	7,80	0,370	1000	**1 07571 05 0**
		6	8,45	0,400	1000	**1 07571 06 0**
	• Hardened steel pin for cylinders and padlocks with key item 00450 and 00500		4,00	0,400	1000	**1 07571 11 0**
		1	4,50	0,400	1000	**1 07571 12 0**
		2	5,00	0,400	1000	**1 07571 13 0**
		3	5,50	0,295	1000	**1 07571 14 0**
		4	6,00	0,400	1000	**1 07571 15 0**
		5	6,50	0,400	1000	**1 07571 16 0**
		6	7,00	0,400	1000	**1 07571 17 0**
		7	7,50	0,400	1000	**1 07571 18 0**
	• Hardened steel pin for C2000 cylinders a with key item 01070 • root depth: 0.44 mm.	1	5,20	0,220	1000	**1 07571 01 0**
		2	5,64	0,220	1000	**1 07571 41 0**
		3	6,07	0,265	1000	**1 07571 42 0**
		4	6,50	0,300	1000	**1 07571 03 0**
		5	6,94	0,300	1000	**1 07571 43 0**
		6	7,37	0,335	1000	**1 07571 44 0**
		7	7,80	0,370	1000	**1 07571 05 0**
		8	8,25	0,435	1000	**1 07571 45 0**
	• Hardened steel pin for ASTRAL, ASIX, C3000 and AP4 cylinders with key item 1.00430.00.1, 1.00810.00.0, 1.00620.01.0, 1.00620.90.0 1.00670.01.0, • root depth: 0,48 mm.	0	4,57	0,155	1000	**1 07571 70 0**
		1	5,05	0,155	1000	**1 07571 71 0**
		2	5,53	0,155	1000	**1 07571 72 0**
		3	6,01	0,155	1000	**1 07571 73 0**
		4	6,49	0,155	1000	**1 07571 74 0**
		5	6,97	0,155	1000	**1 07571 75 0**
		6	7,45	0,155	1000	**1 07571 76 0**
		7	7,93	0,155	1000	**1 07571 80 0**
	• Hardened steel driver for cylinders and padlocks with key item 00401, 00450, 00500, 01313, 01320, 01330		2,50	0,235	1000	**1 07572 01 0**
			3,50	0,235	1000	**1 07572 02 0**
			5,00	0,272	1000	**1 07572 03 0**
	• Steel driver for rim and various cylinders from the ASTRAL and ASIX series	1	5,50	0,380	1000	**1 07572 71 0**
		2	5,00	0,380	1000	**1 07572 72 0**
		3	4,50	0,380	1000	**1 07572 73 0**
		4	3,95	0,380	1000	**1 07572 74 0**
		5	3,30	0,380	1000	**1 07572 75 0**
		6	2,65	0,380	1000	**1 07572 76 0**
	• Steel driver for mortice-single cylinders	1	8,00	0,410	1000	**1 07572 81 0**
		2	7,50	0,410	1000	**1 07572 82 0**
		3	7,00	0,410	1000	**1 07572 83 0**
		4	6,50	0,410	1000	**1 07572 84 0**







Type	Description	Bitting	H	Unit weight	Pieces	ITEM Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Steel driver for mortice-single cylinders	5-6	5,50	0,380	1000	1	07572 87	0			
	• Hardened steel driver for key notch detection for SIGILLO cylinders	1	7,00	0,410	1000	1	07572 83	0			
		2	6,50	0,410	1000	1	07572 84	0			
		3	6,00	0,410	1000	1	07572 85	0			
		4	5,50	0,410	1000	1	07572 88	0			
	• Steel driver for snap resistant SIGILLO cylinders	5-6	4,50	0,410	1000	1	07572 89	0			
	• Hardened steel upper passive pin		5,80	0,241	1000	1	07551 79	0			
	• BKP steel driver assembly • CISA patented system		8,00	0,155	1000	1	07572 90	0			
		1	7,00	0,155	1000	1	07572 91	0			
		2-3	6,50	0,155	1000	1	07572 92	0			



Type	Description	Bitting	H	Unit weight	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
	• Hardened steel pin for ASTRAL TEKNO cylinders • Root depth: 0.48 mm.	1	5,05	0,155	1000	1 07571 71 0	
		2	5,53	0,155	1000	1 07571 72 0	
		3	6,01	0,155	1000	1 07571 73 0	
		4	6,49	0,155	1000	1 07571 74 0	
		5	6,97	0,155	1000	1 07571 77 0	
		6	7,45	0,155	1000	1 07571 78 0	
	• Hardened steel driver for European profile ASTRAL TEKNO cylinders	1	8,00	0,410	1000	1 07572 93 0	
		2	7,50	0,410	1000	1 07572 94 0	
		3	7,00	0,410	1000	1 07572 95 0	
		4	6,50	0,410	1000	1 07572 96 0	
	• Hardened steel pin driver for European profile ASTRAL TEKNO cylinders	5/6	5,50	0,410	1000	1 07572 87 0	
	• Hardened steel pin driver for cylinders notch position detection for European profile ASTRAL TEKNO cylinders	-	5,50	0,410	1000	1 07572 88 0	
	• Steel driver for rim and various from ASTRAL TEKNO cylinders	1	5,50	0,380	1000	1 07572 71 0	
		2	5,00	0,380	1000	1 07572 72 0	
		3	4,50	0,380	1000	1 07572 73 0	
		4	4,00	0,380	1000	1 07572 77 0	
		5/6	3,30	0,380	1000	1 07572 78 0	
	• Hardened steel pin driver for cylinders notch position detection for rim and various ASTRAL TEKNO cylinders	-	3,3	0,380	1000	1 07572 75 0	
	• Hardened steel pin for key notch detection for ASTRAL TEKNO cylinders	-	5,30	0,241	1000	1 07571 93 0	
	• Hardened steel pin for key back detection for ASTRAL TEKNO cylinders	-	4,70	0,241	1000	1 07571 94 0	







Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers.	Spec.
	• Set of steel levers • 3 keys item 1.00102.00.1	57010, 57014, 57015, 57019, 57028, 57033	0,180	6	1	07590	01	0	
	• Set of steel levers • 3 keys item 1.00102.00.1	57020, 57024	0,255	6	1	07590	05	0	
	• Set of steel levers • 3 keys item 1.00102.00.1	57210, 57211, 57215, 57217, 57800	0,120	6	1	07590	12	0	
	• Set of steel levers • 3 keys item 1.00102.00.1	1 57410 30 1, 1 57415 30 1, 57220, 57223, 57225, 57226	0,120	6	1	07590	15	0	
	• Set of steel levers • 3 keys item 1.00102.00.1	57230	0,170	6	1	07590	18	0	
	• Set of steel levers • 3 keys item 1.00102.00.1	57250, 57251, 57254, 57255, 57256, 57259, 57260, 57265	0,160	6	1	07590	21	0	









Type	Description	For series/item	Unit weight	Pieces	ITEM
					Type Dim. Hand Fin. Pers. Spec.
	• Set of steel levers • 3 keys item 1.00100.00.1	17352, 17353, 17357, 17358, 57013, 57016, 57030, 57035, 57312, 57313, 57317, 57318, 57320, 57325, 57330, 57333, 57335, 57336, 57352, 57353, 57357, 57358, 57360, 57365, 57370, 57375	0,142	6	**1 07590 23 0**
	• Set of steel levers • 3 keys item 1.00121.00.2	57121	0,170	6	**1 07590 24 0**
	• Set of steel levers • 3 keys item 1.00120.00.1	1 57115 60 1, 1 57125 60 1, 1 57135 60 1, 57500, 57502, 57505, 57507, 57510, 57512, 57515, 57517, 57520, 57525, 57530, 57535	0,185	6	**1 07590 25 0**
	• Set of steel levers • 3 keys item 1.00120.00.1	1 57110 60 1, 1 57120 60 1, 1 57130 60 1	0,185	6	**1 07590 26 0**
	• Set of steel levers • 3 keys item 1.00120.00.2	1 57110 60 2, 1 57120 60 2, 1 57130 60 2	0,195	6	**1 07590 27 0**
	• Set of steel levers • 3 keys item 1.00120.00.2	1 57115 60 2, 1 57125 60 2, 1 57135 60 2	0,170	6	**1 07590 28 0**









Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand Fin. Pers. Spec.
	• Set of steel levers • 3 keys item 1.00123.00.1 • 1 service key item 1.00120.00.1	57501, 57506, 57511, 57516, 57518, 57521, 57526, 57536	0,213	6	1	07590 29 0
	• Set of steel levers • 3 keys item 1.00123.00.1 • 1 construction key item 1.00120.00.1	57501, 57506, 57511, 57516, 57518, 57520, 57521, 57526, 57536	0,210	6	1	07590 30 0
	• Set of steel levers • 3 keys item 1.00125.00.1	1 57155 60 1, 1 57165 60 1, 1 57175 60 1, 1 57500 08 0, 1 57505 08 0, 1 57510 08 0, 1 57515 08 0	0,210	6	1	07590 35 0
	• Set of steel levers • 3 keys item 1.00125.00.1	1 57150 60 1, 1 57160 60 1, 1 57170 60 1	0,200	6	1	07590 36 0
	• Set of steel levers • 3 keys item 1.00125.00.2	1 57150 60 2, 1 57160 60 2, 1 57170 60 2	0,233	6	1	07590 37 0
	• Set of steel levers • 3 keys item 1.00125.00.2	1 57155 60 2, 1 57165 60 2, 1 57175 60 2	0,212	6	1	07590 38 0

Type	Description	For series/item	Unit weight	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Set of steel levers • 2 keys item 1.00101.00.2	1 57409 30 1, 1 57411 30 1, 1 57416 30 1	0,100	6	**1 07590 45 0**
	• Set of steel levers • 3 keys item 1.00100.00.1	57010, 57015	0,152	6	**1 07591 01 0**
	• Set of steel levers • 3 keys item 1.00100.00.1	57020	0,246	6	**1 07591 05 0**
	• Set of steel levers • 3 keys item 1.00100.00.1	57210, 57211, 57215, 57800 57218, 57298	0,100	6	**1 07591 12 0**
	• Set of steel levers • 3 keys item 1.00100.00.1	1 57410 30 1, 1 57415 30 1, 57219, 57220, 57223, 57225, 57226, 57299	0,100	6	**1 07591 15 0**
	• Set of steel levers • 3 keys item 1.00100.00.1	57250, 57255, 57260, 57265	0,154	6	**1 07591 21 0**

Type	Description	For series/item	Unit weight	Pieces	ITEM Type	Dim. Hand	Fin.	Pers.	Spec.
	• Set of steel levers • 3 keys item 1.00122.00.1	57500, 57505, 57510, 57515, 57517, 57520, 57525, 57535	0,202	6	1	07591	29	0	
	• Set of steel levers • 3 keys item 1.00122.00.1 • 1 service key item 1.00121.00.1	57501, 57506, 57511, 57516, 57518, 57521, 57526, 57536	0,100	6	1	07591	39	0	

Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Assembly kit for: European profile cylinders Rim cylinders Padlocks item 1.22010.50/60 and 1.26020.50/60 • Pins diameter 2.8 mm.	0G300, 08300, 08700	3,370	1	**1 07550 01 0**
	• Assembly kit for: Padlocks item 1.22010.30/40 • Pins diameter 2.8 mm.	1 22010 30 0, 1 22010 40 0	2,400	1	**1 07550 02 0**
	• Assembly kit for: Steel padlocks series 28050, 28350, 28550 Brass padlocks item 1.22010.50/60 and 1.26020.50/60 • Pins diameter 2.8 mm.	1 22010 50 0, 1 22010 60 0, 1 26020 50 0, 1 26020 60 0, 28050, 28350, 28550	2,500	1	**1 07550 04 0**
	• Assembly kit for: European profile cylinders Rim cylinders • Pins diameter 2.5 mm.	0N300, 0E300 0A3S1, 0M3T1 0P3S1	3,170	1	**1 07550 13 0**
	• Dummy plug • Holes spacing: 4 mm.	0G300, 02500, 08310, 08710	0,660	1	**1 07559 01 0**
	• Spring retaining shoe	0G300, 08310, 08710	0,030	1	**1 07559 02 0**
		0A300, 0E300, 0M300	0,015	1	**1 07559 62 0**

Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Spring pressing blade		0,050	1	1 07559 03 0
		0A300, 0E300, 0M300	0,018	1	1 07559 63 0
	• Circlip pliers		0,190	1	1 07559 04 0
	• Circlip pliers Astral Tekno cylinders		0,190	1	1 07559 42 0
	• Tweezers		0,010	1	1 07559 05 0
	• Spring retaining bar for rim cylinders		0,105	1	1 07559 06 0
	• Testing tool	1 22010 50 0	0,025	1	1 07559 07 0
	• Set of depth keys item 01310 (6 pieces)		0,061	1	1 07559 09 0
	• Testing tool	1 22010 40 0	0,025	1	1 07559 11 0
	• Set of depth keys item 01410 (6 pieces)		0,046	1	1 07559 12 0
	• Pin gauge (increment 0.65 mm.)	01310, 01410	0,035	1	1 07559 13 0
	• Pin gauge (increment 0,44 mm.)	01070	0,035	1	1 07559 48 0
	• Dummy plug • Holes spacing: 3.5 mm.	08810, 08815	0,660	1	1 07559 19 0
	• Pin gauge (increment 0.5 mm.)	08810, 08815	0,015	1	1 07559 22 0
	• Set of depth keys item 00450 (8 pieces)	08810, 08815	0,150	1	1 07559 23 0

Type	Description	For series/item	Unit weight (Kg)	Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
	• Butterfly-type spring retaining shoe for cylinders with knob		0,050	1	**1 07559 24 0**
	• Ball assembling tool for cylinders with knob		0,050	1	**1 07559 25 0**
	• Knob assembling tool for cylinders with knob		0,050	1	**1 07559 26 0**
	• Set of depth keys item 01070 (8 pieces)	0G300	0,081	1	**1 07559 28 0**
	• Spring positioning tool	0A300, 0E300, 0M300	0,055	1	**1 07559 80 0**
	• Dummy plug	0A300, 0E300, 0M300	2,750	1	**1 07559 81 0**
	• Set of depth keys Astral item 00620	0A300	0,061	1	**1 07559 83 0**
	• Key bitting check kit, for Astral cylinder keys	0A300	0,015	1	**1 07559 84 0**
	• Spring positioning tool	0G300, 08310, 08710	0,080	1	**1 07559 85 0**

N. B.:

- The products listed have all the characteristics indicated in the technical descriptions of CISA's catalogue, and it is advised to use them only as indicated.CISA does not guarantee any characteristics or use other than indicated.
  For special security needs the end-user should contact the retailer / installer of such products, or contact CISA directly to agree on specific variations to best meet the user's needs.
- The measurements are given in millimetres.
- Weights refer to unit item, not to the package.
- To download the product certifications click on www.cisa.com

CISA S.p.A. reserves the right to modify products here illustrated without prior notice.

About Allegion

Allegion (NYSE: ALLE) is a global pioneer in seamless access, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion secures people and assets with a range of solutions for homes, businesses, schools and institutions. Allegion had $2.9 billion in revenue in 2019 and sells products in almost 130 countries.

For more, visit **allegion.com**.

AXA ■ BRICARD ■ Briton ■ CISA ■ interflex
KRYPTONITE ■ NORMBAU ■ SimonsVoss technologies ■ TRELOCK

© 2020 Allegion PCA312 Ed. 1/2020

CISA SpA
Via Oberdan 42
48018 Faenza (RA) Italy

Ph. +39 0546 677111
Fax +39 0546 677150

Customer Service and Technical Support
+39 0546 188 0070

cisa.com
cisa.sales@allegion.com

ALLEGION