



CISA[®]



ALLEGION[™]

MULTITOP
MATIC
EXIT

**The panic system
for single and double-leaf doors.**



EXIT

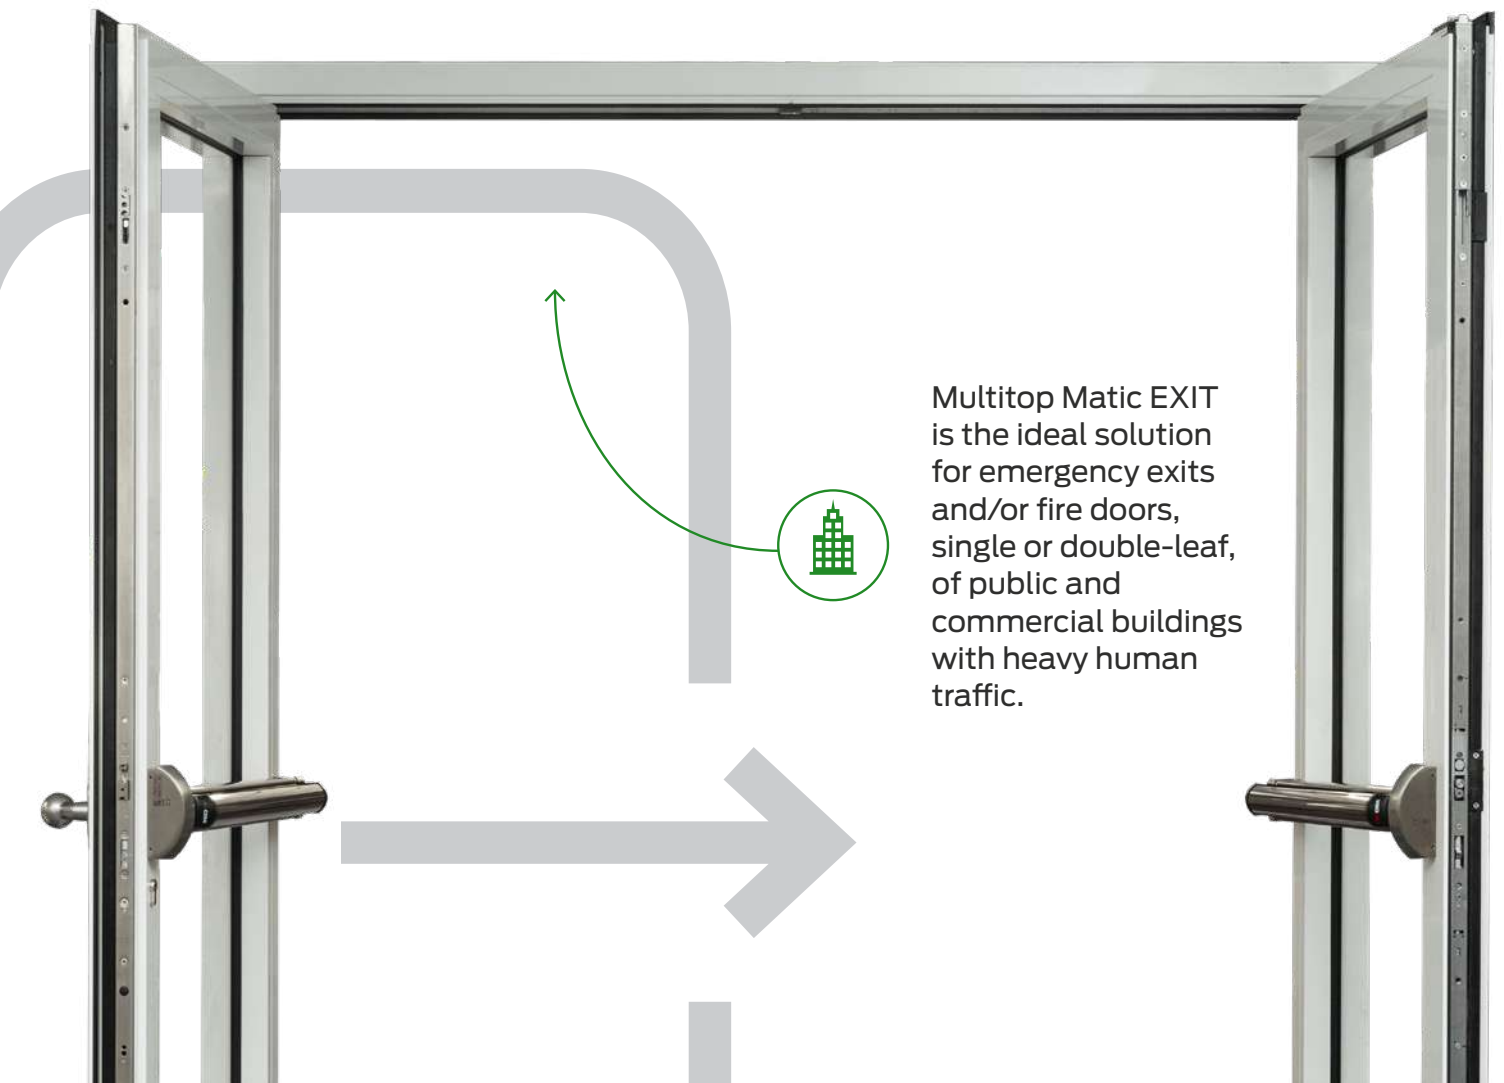
Automatic locking system for single and double-leaf aluminium and steel emergency exit doors.

Multitop Matic EXIT ensures **maximum protection against forced entry** and guaranteed quick exit in emergency situations.

Thanks to **automatic engagement of the deadbolts**, the door is always securely locked, without having **to use a key**. In the event of an emergency, **the door can be immediately opened from inside**, by simply pressing the panic bar.

Installed with a **safety lock**, the **Matic EXIT system offers a complete solution for double-leaf doors**, keeping security features intact.

When Multitop Exit is combined with the **CISA MOTOR**, the door can also be opened remotely.



Multitop Matic EXIT.

Maximum protection against forced entry.
Guaranteed quick exit in emergencies.






Multitop Matic EXIT lock

Its strengths are your advantages.



AUTOMATIC LOCKING, ALWAYS SECURE



When the door is pushed shut, the 3 latchbolts and 3 deadbolts automatically engage. You no longer have to manually lock all the emergency exits at the end of the day.

-  the door is securely locked without having to use the key
-  the door is always locked at 6 points
-  comfort and security



SAFE EXIT GUARANTEED AT ALL TIMES




The Multitop EXIT system guarantees safe exit in an emergency, even when the door is automatically locked. So you no longer have to manually unlock all the emergency exits at the start of the day.

-  free egress at all times
-  security



3 LATCHBOLTS ALWAYS ENGAGED




With the three latchbolts always engaged, the door is hermetically closed and the deadbolts slide freely.

-  energy saving
-  better sound insulation
-  effective automatic locking (when the 3 latchbolts engage in the strikers, the 3 deadbolts move without sticking).



RETROFITTING

The Multitop Matic EXIT system can be retrofitted to the SikurExit system already present/installed on the market. Installation is quick and easy, as no additional work is required on the door. Multitop Matic Exit allows you to use the same recesses on the profile for all the locks belonging to the Multitop family.

-  easy to replace
-  reduced stock
-  the lock can be chosen even after the recesses have been prepared on the door



CISA MOTOR

The CISA MOTOR allows you to open the Multitop EXIT lock remotely. This accessory can be installed on request and is unique for the entire range of Multitop MATIC and Matic EXIT locks



Multitop Matic EXIT

Automatic secure locking.
Immediate exit in case of emergency.

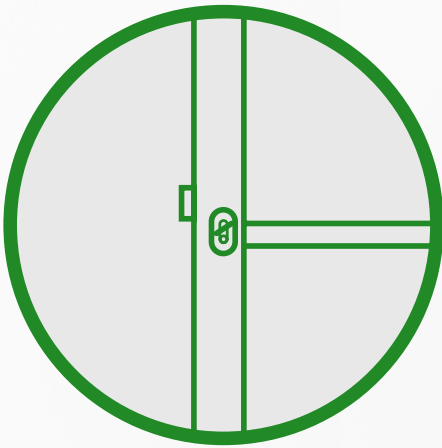


Antipanic functions

Multitop Matic EXIT is available with two different antipanic functions.

↳ **Function A** = without handle on outside, latchbolt and deadbolt are activated by the key.


↳ **Function B** = with handle on the outside. The key activates/deactivates the handle which withdraws the latchbolt and deadbolt.



Function A

From inside: opens with the panic exit device

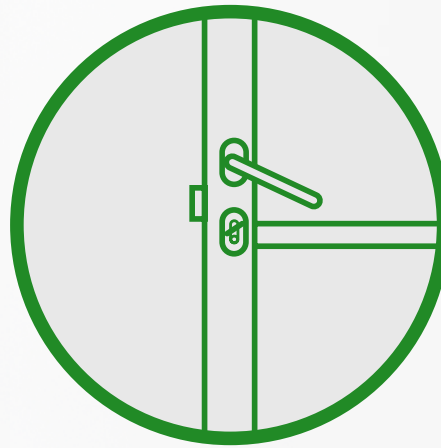From outside: opens with the key to activate the latchbolt and deadbolt



Function B

From inside: panic exit device to open, key to activate or deactivate the outside handle

From outside: key to activate or deactivate the outside handle to control the latchbolt

Other functions

Just like Multitop MATIC, Multitop EXIT provides two specific functions when a special accessory is installed (06120 series).

↳ Semi-automatic function, **door locked with only the latchbolts engaged** can be activated directly on the lock faceplate in position 1: the deadbolts are deactivated and the door remains locked with only the 3 latchbolts engaged.

↳ **Door always open** function can be activated directly on the lock faceplate in position 2: both the deadbolts and the latchbolts are deactivated.




CISA MOTOR



REMOTE OPENING

The CISA MOTOR allows the Multitop Matic EXIT lock to be opened remotely even when the door is securely locked with 6 locking points. Opening can be controlled using any credentials (intercom, keypad, transponder, card, telephone, etc.).



EASY-TO-MOUNT ACCESSORY

The CISA MOTOR can motorise all the locks in the Multitop Matic EXIT series and can be installed directly on the faceplate quickly and easily.



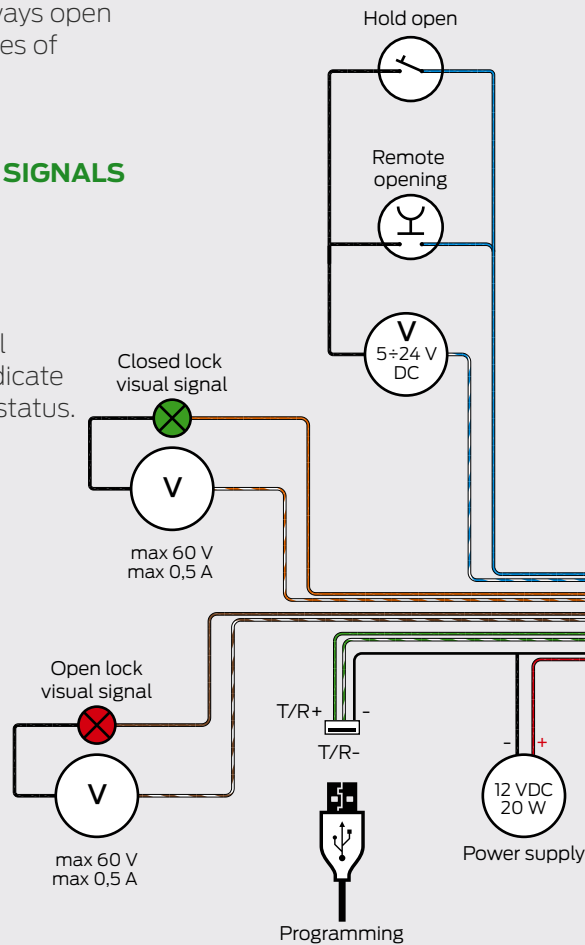
ELECTRIC HOLD OPEN DEVICE

Thanks to the CISA MOTOR, it is possible to activate the hold open function (door always open at pre-defined times of the day).



SOUND/VISUAL SIGNALS

The CISA MOTOR is fitted with a sound signal and can be supplied with a visual signal (on request) to indicate opened or closed status.



Opening credentials

The system is open and flexible, allowing the use of any opening credential available on the market by connecting it to the dry contact.



intercom



keypad



transponder



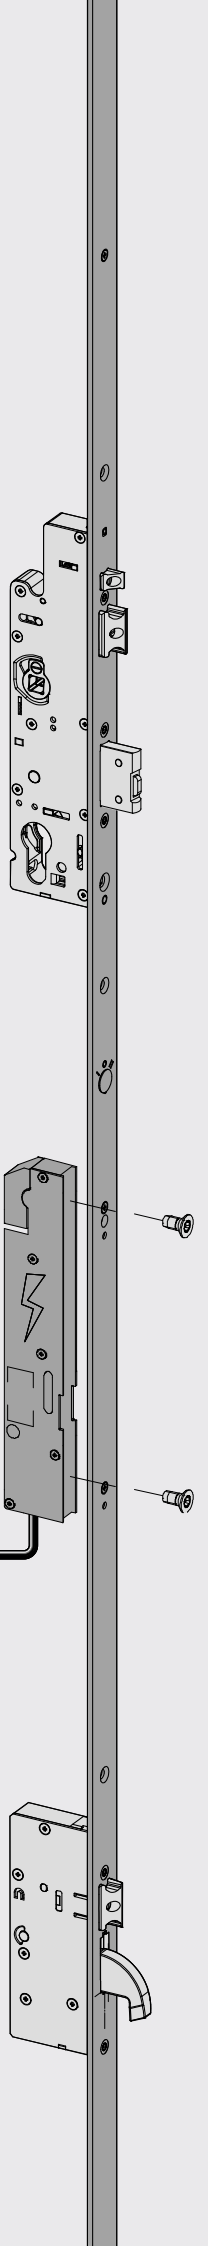
card



smartphone



fingerprint



Multitop Matic EXIT safety lock for installation on double-leaf doors

The only multipoint lock with a long faceplate.



AUTOMATIC RESET

The automatic reset ensures immediate secure locking of the secondary leaf. The device's installation does not weaken the corners of the profiles. CISA's solution is ideal to provide a high level of security on emergency exits.



EASY TO INSTALL AND ADJUST

The multipoint safety lock with long faceplate is quick and easy to install, thanks to adjustable strikers integral to the faceplate. It is also fitted with a convenient and effective system that facilitates adjustment of the top and bottom extension bolt rod tips.



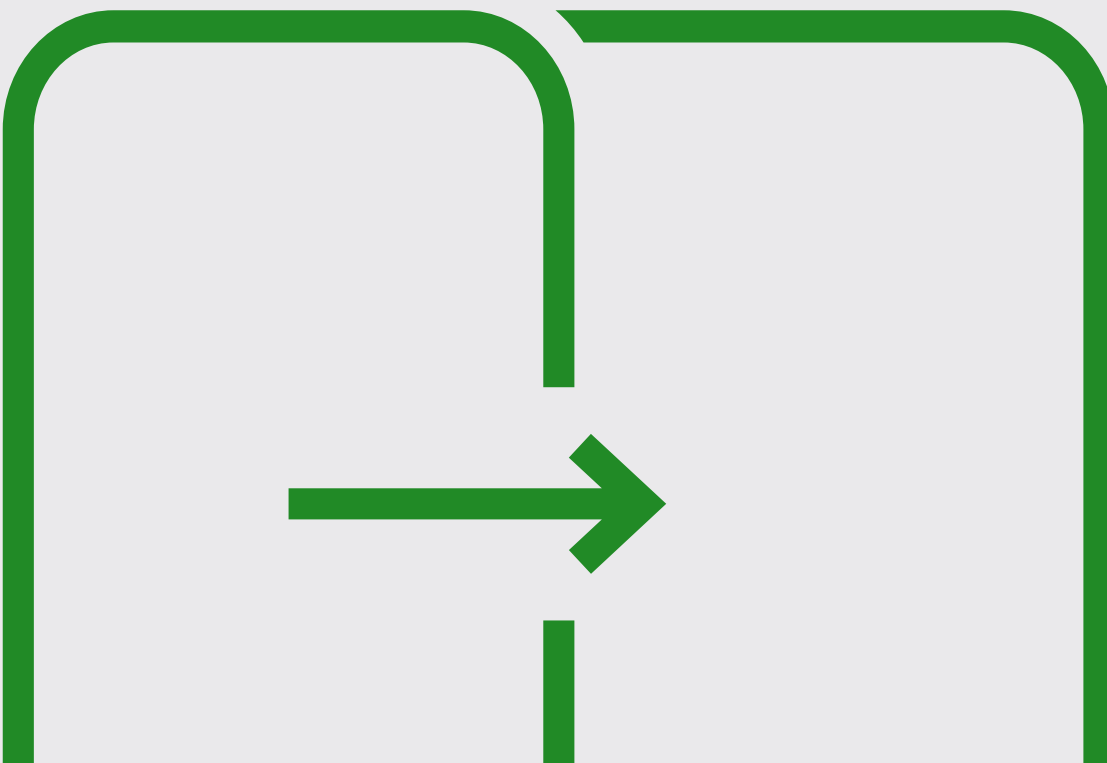
EFFORTLESS MOVEMENTS

Secure locking of the door is achieved effortlessly thanks to the rounded strikers that facilitate latchbolt engagement.



RETROFITTING

The Multitop Matic EXIT system can be retrofitted to the SikurExit system already present/installed on the market. Installation is quick and easy, as no additional work is required on the door.




Multitop Matic EXIT

Automatic panic locking system for double-leaf doors.



TYPE	DESCRIPTION	FUNCTION	SQUARE SPINDLE	LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT	NO. PCS	ITEM				
											TYPE	DIM.	HAND	FIN.	CAR.

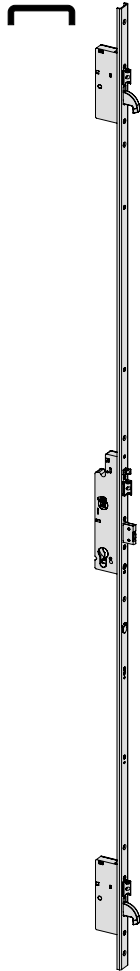

- **Centre distance 92 mm**
- **'U'-shaped adjustable faceplate 24 x 5 mm**
In stainless steel, height 2300 mm
- top adjustment 350 mm
- bottom adjustment 150 mm
- 10 to 16 mm adjustable central lock deadlocking latchbolt
- 9 to 15 mm adjustable lateral locking point 2 latchbolts
- 8 to 14 mm adjustable "automatic reset" sensor
- 2 hooks in hardened steel

SUPPLIED AS STANDARD

- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

ON REQUEST

- CISA MOTOR item 1.E0000.00.0
- Hold open device item 1.06120.00.0
- Microswitch item 1.06195.08.0
- Cylinder protective rose item 1.06460.05.0
- Protective plates item 1.06436.12/13.0 for function A and item 1.06436.10/13.0 for function B

A	8	6	2	92	24	35	3.640	1	1	4P110	35	0
A	8	6	2	92	24	40	3.700	1	1	4P110	40	0
A	8	6	2	92	24	45	4.300	1	1	4P110	45	0
B	8	6	2	92	24	35	3.640	1	1	4P130	35	0
B	8	6	2	92	24	40	3.700	1	1	4P130	40	0
B	8	6	2	92	24	45	4.300	1	1	4P130	45	0

- **Centre distance 92 mm**
- **'U'-shaped adjustable faceplate 24 x 7 mm**
In stainless steel, height 2300 mm
- top adjustment 350 mm
- bottom adjustment 150 mm
- 10 to 16 mm adjustable central lock deadlocking latchbolt
- 9 to 15 mm adjustable lateral locking point 2 latchbolts
- 8 to 14 mm adjustable "automatic reset" sensor
- 2 hooks in hardened steel

SUPPLIED AS STANDARD

- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

ON REQUEST

- CISA MOTOR item 1.E0000.00.0
- Hold open device item 1.06120.00.0
- Microswitch item 1.06195.08.0
- Cylinder protective rose item 1.06460.05.0
- Protective plates item 1.06436.12/13.0 for function A and item 1.06436.10/13.0 for function B

A	8	6	2	92	24	35	3.640	1	1	4P210	35	0
A	8	6	2	92	24	40	3.700	1	1	4P210	40	0
A	8	6	2	92	24	45	4.300	1	1	4P210	45	0
B	8	6	2	92	24	35	3.640	1	1	4P230	35	0
B	8	6	2	92	24	40	3.700	1	1	4P230	40	0
B	8	6	2	92	24	45	4.300	1	1	4P230	45	0

Components available upon request to configure the emergency exit door

- FAST Push panic exit devices item 1.59607-10.0 and 1.59617-12.0 + panic bar series 07007 or FAST Touch item 1.59711. 00/01.0
- Protective rose item 1.06473. 20/30.0.B1
- Square spindle item 1.07085.79.0 (**for function A**)
- Square spindle item 1.07206.00.0 (**for function B**)


▪ **FUNCTION A**

Internal: - panic exit device to open
External: - key to activate latchbolt and deadbolt

▪ **FUNCTION B**

Internal: - panic exit device to open
- key to activate or deactivate the outside handle to control the latchbolt
External: - key to activate or deactivate the outside handle to control the latchbolt

TYPE	DESCRIPTION	FUNCTION	SQUARE SPINDLE	LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT	NO. PCS	ITEM				
											TYPE	DIM.	HAND	FIN.	CAR.



- Centre distance 92 mm
- **"Flat" adjustable faceplate 24 x 3 mm**
In stainless steel, height 2300 mm
- top adjustment 350 mm
- bottom adjustment 150 mm
- 10 to 16 mm adjustable central lock deadlocking latchbolt
- 9 to 15 mm adjustable lateral locking point 2 latchbolts
- 8 to 14 mm adjustable "automatic reset" sensor
- 2 hooks in hardened steel


SUPPLIED AS STANDARD

- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

ON REQUEST

- CISA MOTOR item 1.E0000.00.0
- Hold open device item 1.06120.00.0
- Microswitch item 1.06195.08.0
- Cylinder protective rose item 1.06460.05.0
- Protective plates item 1.06436.12/13.0 for function A and item 1.06436.10/13.0 for function B

A	8	6	2	92	24	35	3.640	1	1	4P010	35	0
A	8	6	2	92	24	40	3.700	1	1	4P010	40	0
A	8	6	2	92	24	45	4.300	1	1	4P010	45	0
B	8	6	2	92	24	35	3.640	1	1	4P030	35	0
B	8	6	2	92	24	40	3.700	1	1	4P030	40	0
B	8	6	2	92	24	45	4.300	1	1	4P030	45	0



- Centre distance 92 mm
- Stainless steel faceplate 24 x 3 mm
- Deadbolt and latchbolt
- 10 to 16 mm adjustable deadlocking latchbolt
- 8 to 14 mm adjustable "automatic reset" sensor

SUPPLIED AS STANDARD

- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

ON REQUEST

- Cylinder protective rose item 1.06460.05.0

A	8	6	2	92	24	35	1130	1	1	4P310	35	0
A	8	6	2	92	24	40	1190	1	1	4P310	40	0
A	8	6	2	92	24	45	1300	1	1	4P310	45	0
B	8	6	2	92	24	35	1130	1	1	4P330	35	0
B	8	6	2	92	24	40	1190	1	1	4P330	40	0
B	8	6	2	92	24	45	1300	1	1	4P330	45	0

Components available upon request to configure the emergency exit door

- FAST Push panic exit devices item 1.59607-10.0 and 1.59617-12.0 + panic bar series 07007 or FAST Touch item 1.5971100/0101.0
- Protective rose item 1.06473. 20/30.0.B1
- Square spindle item 1.07085.79.0 (**for function A**)
- Square spindle item 1.07206.00.0 (**for function B**)


FUNCTION A

- Internal: - panic exit device to open
- External: - key to activate latchbolt and deadbolt

FUNCTION B

- Internal: - panic exit device to open
- key to activate or deactivate the outside handle to control the latchbolt
- External: - key to activate or deactivate the outside handle to control the latchbolt

TYPE	DESCRIPTION	FUNCTION KEY	SQUARE SPINDLE	LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT	NO. PCS	ITEM				
											TYPE	DIM.	HAND	FIN.	CAR.



- Centre distance 92 mm
- Stainless steel faceplate 24 x 3 mm
- Deadbolt and latchbolt
- 10 to 16 mm adjustable deadlocking latchbolt
- 8 to 14 mm adjustable “automatic reset” sensor
- The CISA MOTOR, which comes with the lock, allows remote electric opening
 - CE 12V DC voltage
 - Absorbed current 2A


SUPPLIED AS STANDARD

- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- power supply cable item 1.07030.40.0 (L = 4 m)
- Instruction sheet

ON REQUEST

- Adjustable metal strikers items 1.06463.05/16/67/68/82/83/84/85.0, 1.06461.07/17/30/35
- Cylinder protective rose item 1.06460.05.0
- Nylon profile covers item 1.06141.79.
- Accessory to activate the semi-automatic function (deadbolts deactivated) item 1.0612000.0)

A	8	6	2	92	24	35	1.700	1	1	1P310	35	0
A	8	6	2	92	24	40	1.760	1	1	1P310	40	0
A	8	6	2	92	24	45	1.820	1	1	1P310	45	0
B	8	6	2	92	24	35	1.700	1	1	1P330	35	0
B	8	6	2	92	24	40	1.760	1	1	1P330	40	0



- Centre distance 92 mm
- ‘U’-shaped stainless steel faceplate 24 x 5 mm
- Deadbolt and latchbolt
- 10 to 16 mm adjustable deadlocking latchbolt
- 8 to 14 mm adjustable “automatic reset” sensor
- The CISA MOTOR, which comes with the lock, allows remote electric opening
 - CE 12V DC voltage
 - Absorbed current 2A

SUPPLIED AS STANDARD

- Pair of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- power supply cable item 1.07030.40.0 (L = 4 m)
- Instruction sheet

ON REQUEST

- Adjustable metal strikers items 1.06463.05/16/67/68/82/83/84/85.0, 1.06461.07/17/30/35
- Cylinder protective rose item 1.06460.05.0
- Nylon profile covers item 1.06141.79.
- Accessory to activate the semi-automatic function (deadbolts deactivated) item 1.0612000.0)

A	8	6	2	92	24	35	1.700	1	1	1P410	35	0
A	8	6	2	92	24	40	1.760	1	1	1P410	40	0
B	8	6	2	92	24	35	1.700	1	1	1P430	35	0
B	8	6	2	92	24	40	1.760	1	1	1P430	40	0

Components available upon request to configure the emergency exit door

- FAST Push panic exit devices item 1.59607-10.0 and 1.59617-12.0 + panic bar series 07007 or FAST Touch item 1.59711. 00/01.0
- Protective rose item 1.06473. 20/30.0.B1
- Square spindle item 1.07085.79.0 (for function A)
- Square spindle item 1.07206.00.0 (for function B)


FUNCTION A

- Internal: - panic exit device to open
- External: - key to activate latchbolt and deadbolt

FUNCTION B

- Internal: - panic exit device to open
 - key to activate or deactivate the outside handle to control the latchbolt
- External: - key to activate or deactivate the outside handle to control the latchbolt

TYPE	DESCRIPTION	FUNCTION	SQUARE SPINDLE	LOCKING POINTS	THROWS	CENTRE DISTANCE	FACEPLATE	BACKSET	UNIT WEIGHT kg	NO. PCS	ITEM				
											TYPE	DIM.	HAND	FIN.	CAR.



Short faceplate 24 x 3

- Adjustable latchbolt and deadbolt feeler pins

-	8	2	92	24	40	-	1	1	4D295	40	0			
-	8	2	92	24	60	-	1	1	4D295	60	0			
-	8	2	92	24	75	-	1	1	4D295	75	0			

SUPPLIED AS STANDARD

- Nylon spacers item 1.06141.88.
- Floor striker item 1.06142.95.0

ON REQUEST

- Extension bolts item 1.07088.03.0
- Top slotted striker item 1.06141.00.0
- Top nylon striker item 1.06141.80.0
- Automatic reset sensor item 1.07089.52/53.0



Long faceplate 24X3x2600

- Adjustable latchbolt and deadbolt feeler pins

-	8	2	92	24	40	-	1	1	4D395	40	0			
-	8	2	92	24	60	-	1	1	4D395	60	0			
-	8	2	92	24	75	-	1	1	4D395	75	0			

Long faceplate 24X6x2600

- Adjustable latchbolt and deadbolt feeler pins

-	8	2	92	24	40	-	1	1	4D695	40	0			
-	8	2	92	24	60	-	1	1	4D695	60	0			

SUPPLIED AS STANDARD

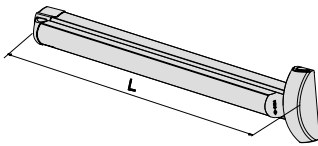
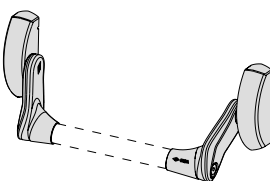
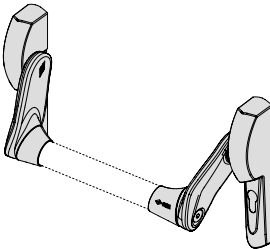




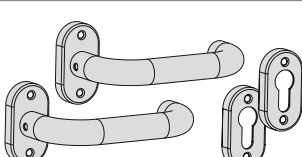
- Floor striker item 1.06142.95.0
- Top/bottom rod tips for door profile item 1.06449.20.0
- Top/bottom rod tips for "European groove" profile item 1.06449.21.0













ON REQUEST














- Top slotted striker item 1.06141.00.0
- Automatic reset sensor item 1.07089.63.0
- Bottom striker item 1.07072.75.0

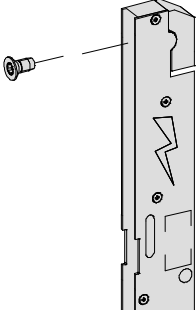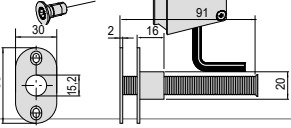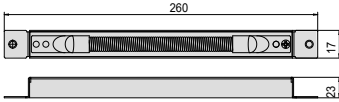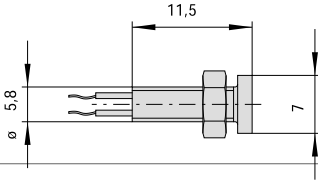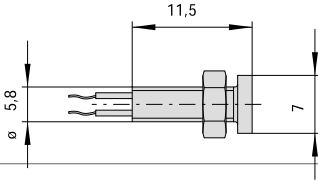Components available upon request to configure the emergency exit door

- FAST Push panic exit devices item 1.59607-10.0 and 1.59617-12.0 + panic bar series 07007 or FAST Touch item 1.59711. 00/01.0
- Square spindle item 1.07085.79.0

TYPE	DESCRIPTION	L	S. SPINDLE	UNIT WEIGHT kg	NO. PCS	ITEM				
						TYPE	DIM.	HAND	FIN.	PEPS. SPEC.
	FAST Touch panic exit device	1200	8/9	3.100	1	1	59711	00	0	
	<ul style="list-style-type: none"> May be combined with MULTITOP EXIT panic function locks 	840	8/9	3.800	1	1	59711	01	0	
	<ul style="list-style-type: none"> As above with PVD satin-finished stainless steel treatment 	1200	8/9	3.360	1	1	59711	00	0	C2
	FAST Push panic exit device painted black		8/9	2.500	1	1	59607	10	0	
	<ul style="list-style-type: none"> May be combined with MULTITOP EXIT panic function locks As above with PVD satin-finished stainless steel treatment 		8/9	2.500	1	1	59607	10	0	C2
	FAST Push panic exit device painted black		8/9	2.500	1	1	59617	12	0	
	<ul style="list-style-type: none"> May be combined with MULTITOP EXIT panic function locks Centre distance 92 mm 									
	Oval steel panic bar painted red	900		0.800	1	1	07007	13	0	
	Finishes on request:	1200		1.054	1	1	07007	14	0	
	<ul style="list-style-type: none"> Painted grey (fin. 97) Painted white (fin. 45) Painted stainless steel grey (fin. B9) 	1500		1.352	1	1	07007	15	0	
	Oval stainless steel horizontal panic bar	900		0.800	1	1	07007	60	0	
		1200		1.070	1	1	07007	61	0	
		1500		0.900	1	1	07007	62	0	
	<ul style="list-style-type: none"> Fixed knob, to use with Multitop Exit Finish: nickel-plated, chrome-plated and satin-finished 			0.200	1	1	07070	56	0	B1
	<ul style="list-style-type: none"> Handle to use with Multitop Exit Finish: nickel-plated, chrome-plated and satin-finished 			0.200	1	1	07070	66	0	B1
	<ul style="list-style-type: none"> Pair of handles to use with Multitop Exit Finish: satin-finished AISI 304 stainless steel Supplied as standard: pair of protective roses for Euro profile cylinder for EN 179:2008 			0.200	1	1	07070	80	0	

TYPE	DESCRIPTION	FOR SERIES / ITEM	ITEM		
			UNIT WEIGHT	NO. PCS	TYPE DIM. HAND
	<ul style="list-style-type: none"> CISA MOTOR for installation on all multipoint Multitop MATIC locks Allows remote electric opening <ul style="list-style-type: none"> - CE 12V DC voltage - Absorbed current 2A <p>SUPPLIED AS STANDARD</p> <ul style="list-style-type: none"> - Power supply cable item 1.07030.40.0 (L = 4 m) - 2 fixing screws - Instruction sheet 	4P010-4P030-4P110) 4P130-4P210-4P230	0.400	1	1 E0000 00 0
	<ul style="list-style-type: none"> Concealed cable guard 		0.058	6	1 06515 00 0
	<ul style="list-style-type: none"> Internal cable guard with spring 		0.325	6	1 06515 15 0
	<ul style="list-style-type: none"> External cable guard with spring (L=300) 		0.100	10	1 06515 20 0
	<ul style="list-style-type: none"> External cable guard with spring (L=600) 		0.100	10	1 06515 21 0
	<ul style="list-style-type: none"> Red LED 		0.005	1	1 07126 01 0
	<ul style="list-style-type: none"> Green LED 		0.019	1	1 07126 02 0
	<ul style="list-style-type: none"> Cabled keypad for individual access control by PIN code, for E0000 CISA MOTOR series. Polished black finish. <p>AVAILABLE FINISHES</p> <ul style="list-style-type: none"> - Satin-finished chrome (fin. B1) 	E0000	0.500	1	1 06525 77 0
	<ul style="list-style-type: none"> Power supply cable length 4 m 		0.600	1	1 07030 40 0
	<ul style="list-style-type: none"> Power supply cable length 10 m 		1.500	1	1 07030 42 0
	<ul style="list-style-type: none"> Programming cable 		0.019	1	1 07030 41 0
	<ul style="list-style-type: none"> Power supply <ul style="list-style-type: none"> - Input 110-240 Vac 50/60Hz 0.7A - Output 12Vcc 2.5 A class 2 output - UL listed certificate 		0.250	1	1 07060 10 0

TYPE	DESCRIPTION	FOR SERIES	UNIT WEIGHT		ITEM			
			kg	NO.PCS	TYPE	DIM.	HAND	FIN.
	<ul style="list-style-type: none"> Hold open device for Multitop EXIT locks, only used with function A, 4P010, 4P110 and 4P210 series with 2 different positions: <ul style="list-style-type: none"> - hold open (latchbolts and deadbolts withdrawn); - semi-automatic function (only with deadbolts withdrawn). 		0.020	1	1	06120	00	0
	<ul style="list-style-type: none"> Top slotted striker in stainless steel 	4D295 4D395 4D695	-	1	1	06141	00	0
	<ul style="list-style-type: none"> Teflon slotted floor striker 	4D295 4D395 4D695	-	1	1	06142	95	0
	<ul style="list-style-type: none"> Set of top/bottom rod toothed tips for door profile 	4D695	-	-	1	06449	20	0
	<ul style="list-style-type: none"> Set of top/bottom rod toothed tips for "European groove" profile 	4D395	-	1	1	06449	21	0
	<ul style="list-style-type: none"> Stainless steel floor striker 	4D395 4D695	-	1	1	07072	75	0
	<ul style="list-style-type: none"> Pair of zinc-plated internal extension bolts dia. 8 mm with one-piece rod tip 	4D295	0.567	12	1	07088	03	0
	<ul style="list-style-type: none"> Zinc plated steel pin connector 		0.016	12	1	06291	20	0
	<ul style="list-style-type: none"> OFFSET zinc-plated steel dogging device, complete with spacers and top striker For safety locks with internal extension bolt rods May be combined with extension bolts set item 1.07088.03.0 	4D295	0.060	1	1	07089	52	0
	<ul style="list-style-type: none"> ALIGNED automatic reset sensor For safety locks with internal extension bolt rods May be combined with extension bolts set item 1.07088.03.0 	4D295	-	1	1	07089	53	0
	<ul style="list-style-type: none"> Automatic dogging device For safety locks with external extension bolt rods 	4D395 4D695		1	1	07089	63	0
	<ul style="list-style-type: none"> Steel square spindle 		0.050	6	1	07206	00	0
	<ul style="list-style-type: none"> Steel square spindle 		0.050	6	1	07085	79	0



NOX

EN 1125:2008
377A1422BA

CE
0425

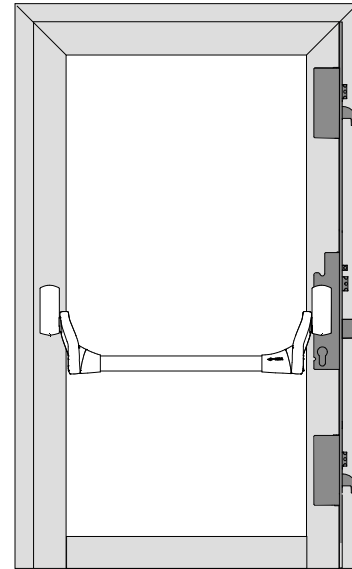
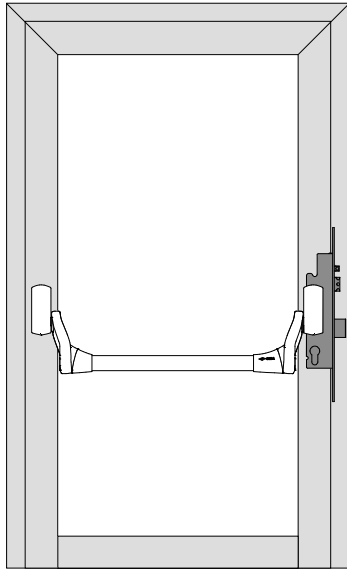


CISA

CISA

5210

Configuration diagram for single-leaf doors



MAIN LOCK "EUROPEAN GROOVE"

ITEM	CODE	FUNCTION
Lock	14P310xx0 14P330xx0	Function A Function B
Nylon roses (supplied)	-	
Main lock strikers	106463820 106463830	
Fast Touch panic exit device	15971100/010	
Fast Push panic exit device	159607100	
Fast Push bar	107007xx0	
Square spindle	107085770	
Cylinder (optional)	10Q311xx012	
Handle (optional)	107070660B1	Function B
Thumb turn on outside (optional)	107070560B1	Function A

MULTIPOINT LOCK "EUROPEAN GROOVE"

ITEM	CODE	FUNCTION
Lock	14P010xx0 14P030xx0	Function A Function B
Nylon roses (supplied)	-	
Main lock strikers	106463820 106463830	
Divertor strikers	106465720 106465720	
Fast Touch panic exit device	15971100/010	
Fast Push panic exit device	159607100	
Fast Push bar	107007xx0	
Square spindle	107085-70	
Cylinder (optional)	10Q311XX012	
Handle (optional)	107070660B1	Function B
Thumb turn on outside (optional)	107070560B1	Function A



MAIN LOCK DOOR PROFILE

ITEM	CODE	FUNCTION
Lock	14P310xx0 14P330xx0	Function A Function B
Nylon roses (supplied)	-	
Main lock strikers	106463840 106463850	
Fast Touch panic exit device	15971100/010	
Fast Push panic exit device	159607100	
Fast Push bar	107007xx0	
Square spindle	107085770	
Cylinder (optional)	10Q311xx012	
Handle (optional)	107070660B1	Function B
Thumb turn on outside (optional)	107070560B1	Function A

MULTIPOINT LOCK DOOR PROFILE

ITEM	CODE	FUNCTION
Lock	14P110xx0 14P130xx0	Function A Function B
Nylon roses (supplied)	-	
Main lock strikers	106463840 106463850	
Divertor strikers	106465740 106465750	
Fast Touch panic exit device	15971100/010	
Fast Push panic exit device	159607100	
Fast Push bar	107007xx0	
Square spindle	107085-70	
Cylinder (optional)	10Q311XX012	
Handle (optional)	107070660B1	Function B
Thumb turn on outside (optional)	107070560B1	Function A

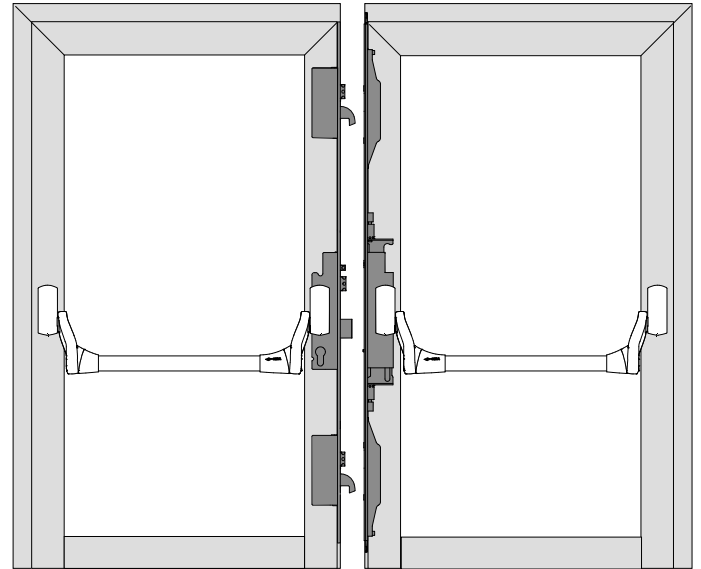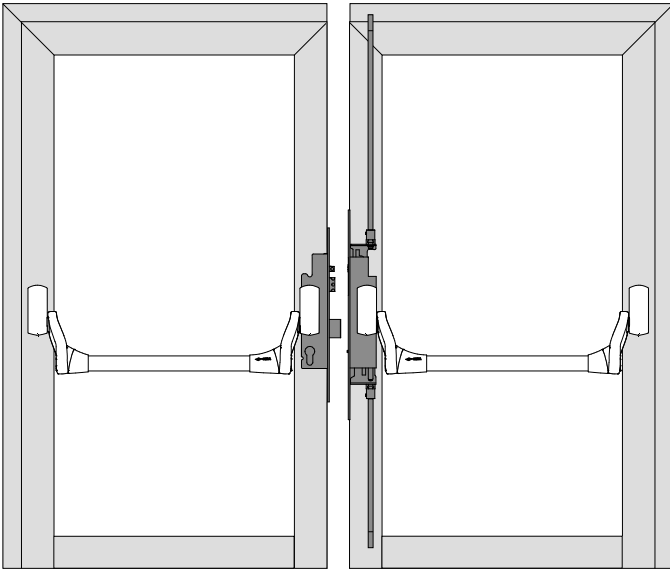Configuration diagram dor double leaf doors



MAIN LOCK "EUROPEAN GROOVE"

ITEM	CODE	FUNCTION
------	------	----------

Lock	14P310xx0 14P330xx0	Function A Function B
Secondary lock Nylon roses (supplied)	14D295xx0	
Teflon floor striker (supplied)		
Threaded internal rods with tip Nylon top striker	107088030 106141800	
Automatic reset	10708952/530	
Divertor strikers	106465720 106465720	
Fast Touch panic exit device	15971100/010	
Fast Push panic exit device	159607100	
Fast Push bar	107007xx0	
Square spindle	107085770	
Handle (optional)	107070660B1	Function B
Thumb turn on outside (optional)	107070560B1	Function A

MAIN LOCK DOOR PROFILE

ITEM	CODE	FUNCTION
------	------	----------

Lock	14P310xx0 14P330xx0	Function A Function B
Secondary lock Nylon roses (supplied)	14D295xx0	
Teflon floor striker (supplied as standard)		
Threaded internal rods with tip Nylon top striker	107088030 106141800	
Automatic reset	10708952/530	
Divertor strikers	106465740 106465750	
Fast Touch panic exit device	15971100/010	
Fast Push panic exit device	159607100	
Fast Push bar	107007XX0	
Square spindle	107085770	
Handle (optional)	107070660B1	Function B
Thumb turn on outside (optional)	107070560B1	Function A

MULTIPOINT LOCK "EUROPEAN GROOVE"









ITEM	CODE	FUNCTION
------	------	----------

Lock	14P010xx0 14P030xx0	Function A Function B
Secondary lock Rod tips (supplied)	14D395xx0	
Teflon floor striker (supplied)		
Adjustable top striker Automatic reset	106141000 107089630	
Fast Touch panic exit device	15971100/010	
Fast Push panic exit device	159607100	
Fast Push bar	107007xx0	
Square spindle	107085770	
Handle (optional)	107070660B1	Function B
Thumb turn on outside (optional)	107070560B1	Function A

MULTIPOINT LOCK DOOR PROFILE

ITEM	CODE	FUNCTION
------	------	----------

Lock	14P110xx0 14P130xx0	Function A Function B
Secondary lock Rod tips (supplied)	14D695xx0	
Teflon floor striker (supplied)		
Adjustable top striker Automatic reset	106141000 107089630	
Fast Touch panic exit device	15971100/010	
Fast Push panic exit device	159607100	
Fast Push bar	107007xx0	
Square spindle	107085770	
Handle (optional)	107070660B1	Function B
Thumb turn on outside (optional)	107070560B1	Function A

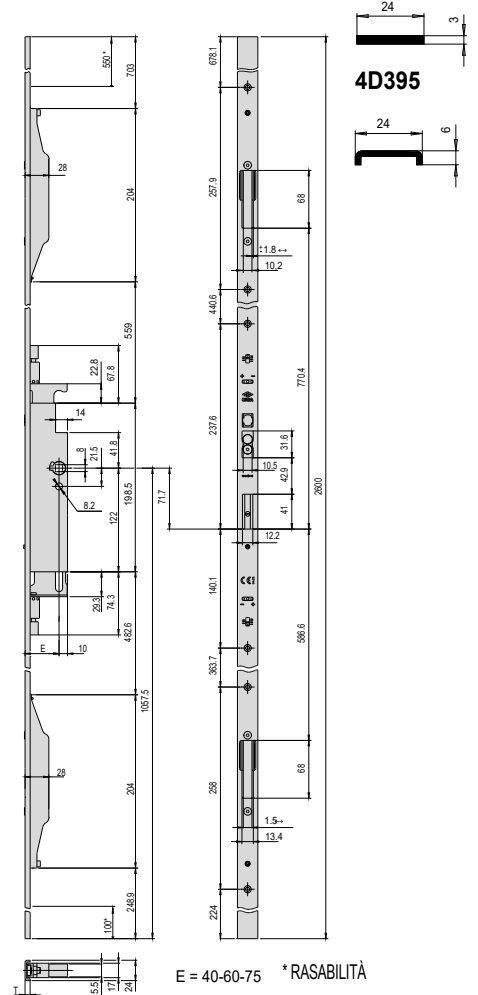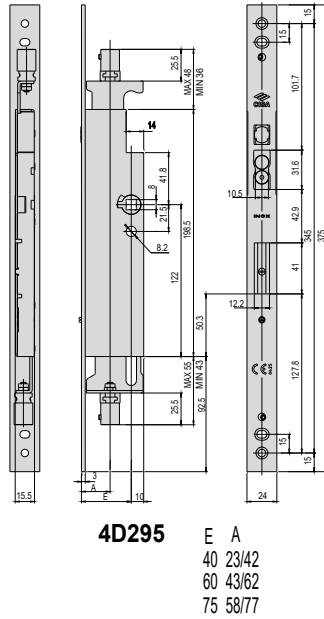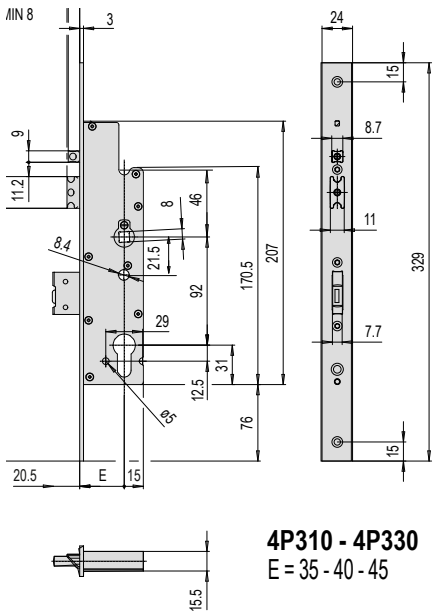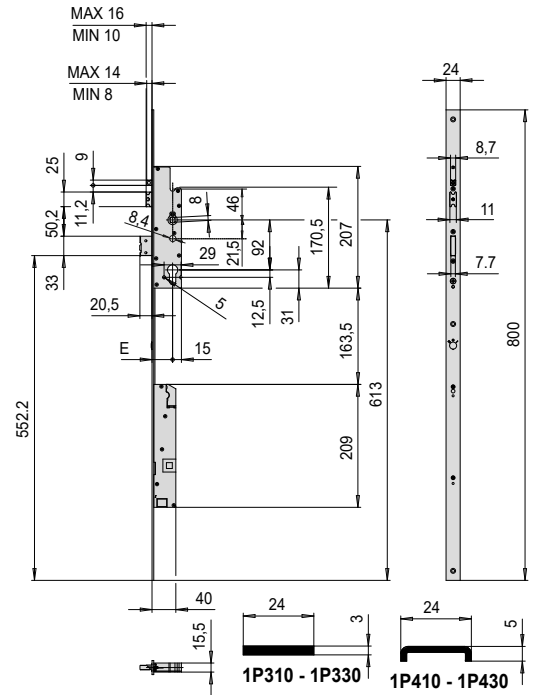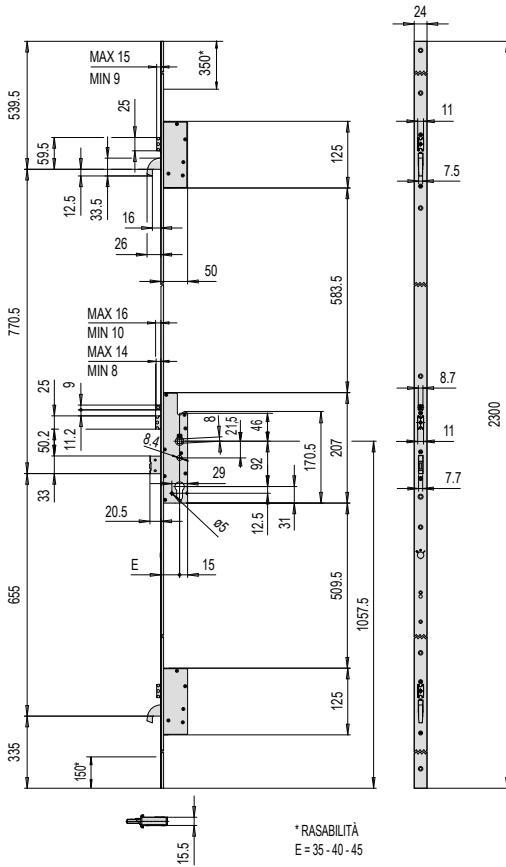



TECHNICAL FEATURES

MULTITOP MATIC EXIT LOCK

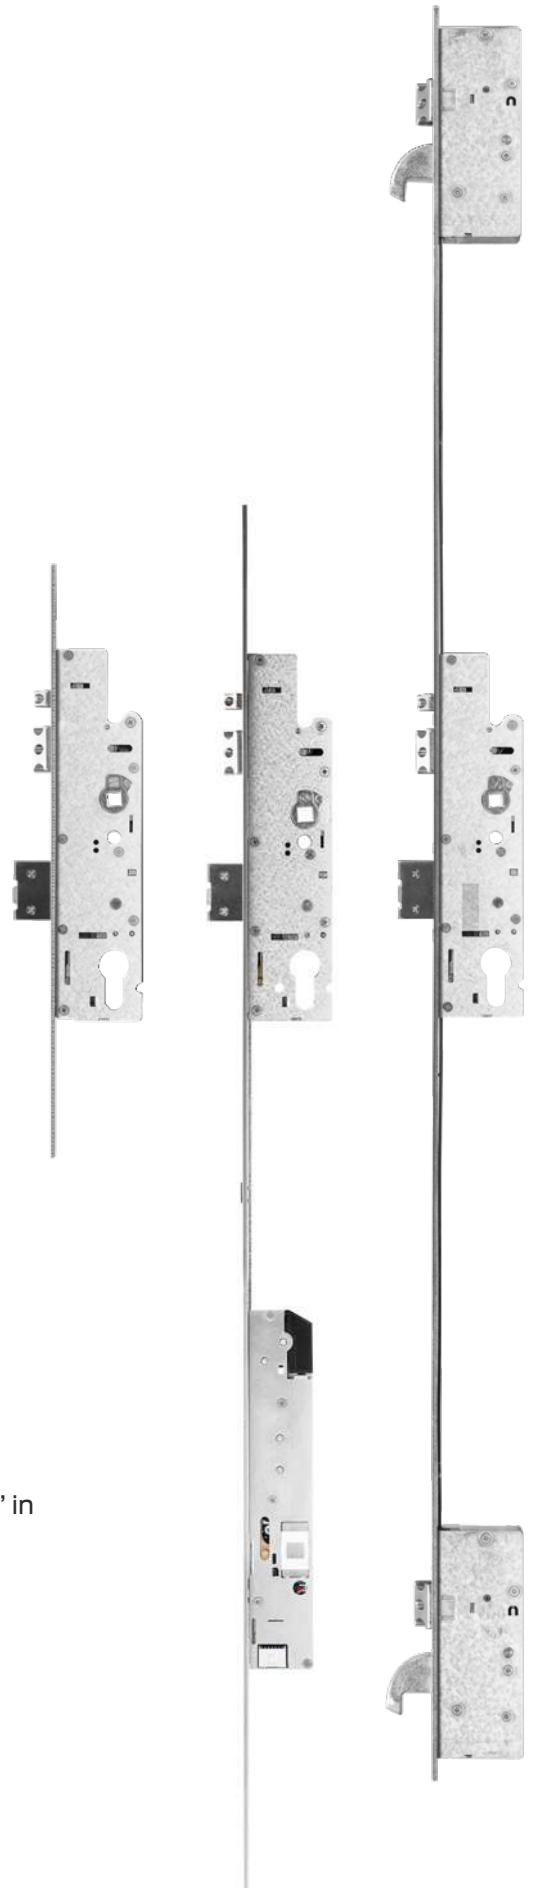
- Panic locking system for single and double-leaf doors installed with a safety lock.
- Function A and Function B.
- Centre distance 92 mm
- Backsets 35-40-45 mm.
- Case thickness 15.5 mm.
- Closed case.
- Case in pressure die-cast metal.
- Steel cover.
- Top and bottom adjustable faceplate (multipoint locks).
- Central steel latchbolt.
- 3 x 10 to 16 mm adjustable latchbolts (multipoint locks).
- 8 to 14 mm adjustable automatic reset sensor.
- Feeler pin for automatic reset “embedded” in the main deadbolt.
- 8 mm thick divertor hooks with 25 mm protrusion in hardened steel (multipoint locks).
- Protective plate for grade 7 item 1.06436.12/13.0 (multipoint lock).
- Pre-set for installation of microswitch on the top and bottom locking point case (multipoint lock).
- 8 mm square spindle.
- DIN holes to fix the handle plate.
- Non-handed.

CISA MOTOR

- 12V DC power supply, absorbed current 2A.
- Sound signal to indicate open status.
- Sound signal to indicate any installation errors (for more details, please refer to the instruction sheet).



Feeler pin for automatic reset “embedded” in the lock main deadbolt: ensures the highest degree of safety.



TECHNICAL FEATURES

MULTITOP MATIC EXIT SAFETY LOCK

- Panic locking system for single and double-leaf doors to be installed with the lock.
- Backsets 40-60-75 mm (75 mm backset for Euro groove door profiles)
- Case thickness 15.5 mm.
- Closed case.
- Case in pressure die-cast metal.
- Steel cover.
- Top and bottom adjustable faceplate (multipoint locks).
- Adjustable latchbolt and deadbolt feeler pins
- Adjustable strikers integral to the faceplate

CERTIFICATIONS

The CISA Multitop Matic Exit system for double-leaf doors is in compliance with European standards:

- Grade 6 Security to prEN 15685:19 and EN12209:16 (mechanics) and EN 14846:08 (mechanics + motor)
- Grade 7 Security to prEN 15685:19 (mechanics) and EN 14846:08 (mechanics + motor), using protective plates item 1 06436 12/13 0 for the lock and the top and bottom locking points
- Suitable for doors certified to EN1627:11 up to resistance class WK/RC4.
- System CE-certified in accordance with Regulation (EU) no. 305/2011. Regulatory reference documents:
 - EN 1125:08 for emergency exits with a panic exit device
 - EN 179:08 for emergency exits with a handle
- Fire resistant in accordance with EN1634





About Allegion

Allegion (NYSE: Allegion (NYSE: ALLE) is a global pioneer in seamless access, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion secures people and assets with a range of solutions for homes, businesses, schools and institutions.

For more, visit allegion.com.



 CISA SpA
Via Oberdan 42
48018 Faenza (RA) Italy

 Ph. +39 0546 677111
Fax +39 0546 677150

 Customer Service and Technical Support
+39 0546 188 0070

    cisa.com
cisa.vendite@allegion.com